


GNSS observation file monitoring for 0516


Last RINEX file: 05162371.220
RINEX version: 3.02
Marker: 1033
Receiver: 516 TRIMBLE NETR9 5.52
Antenna: 516 TRM57971.00 NONE

Epochs

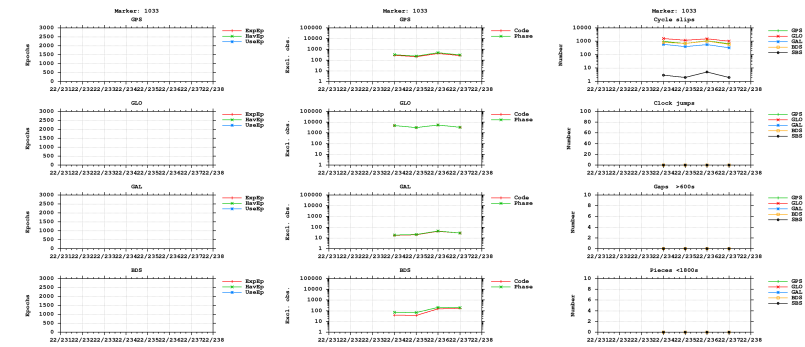



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

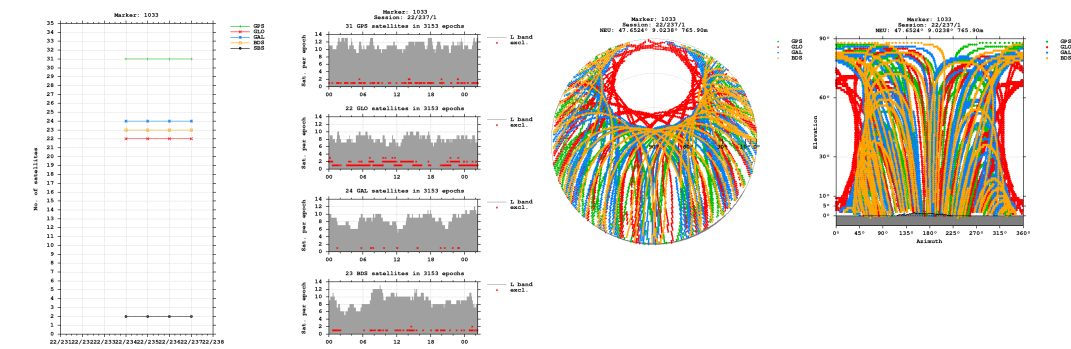


Bands

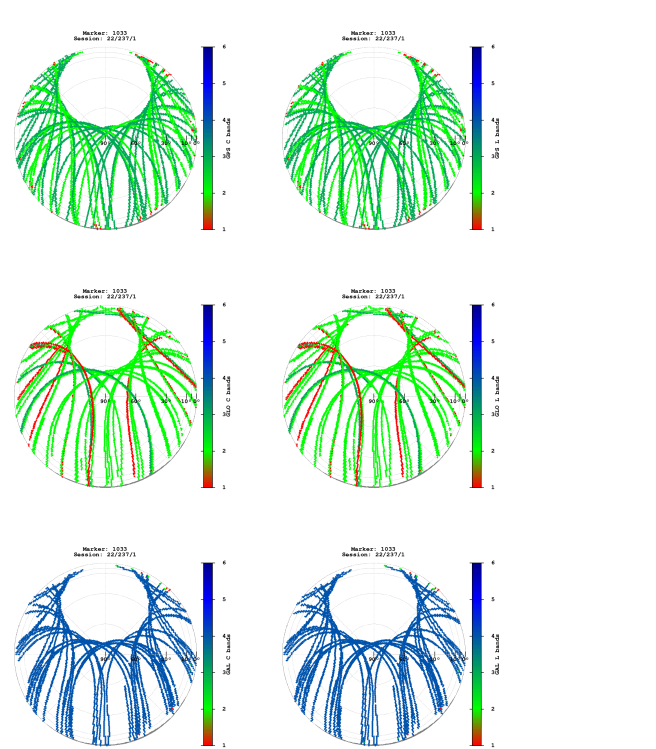


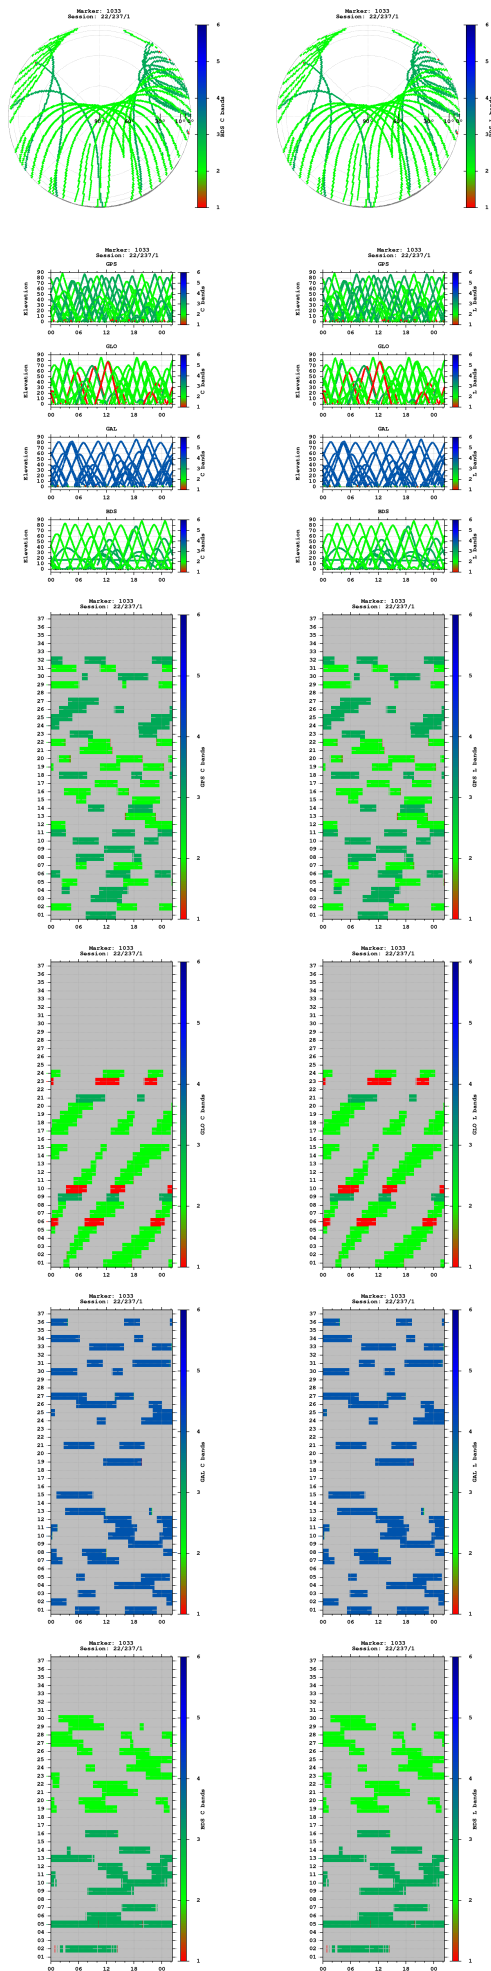


Observations

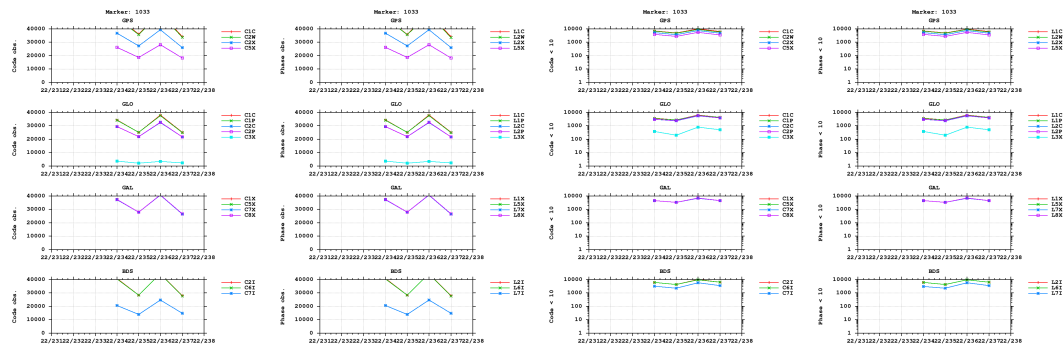


Multipath

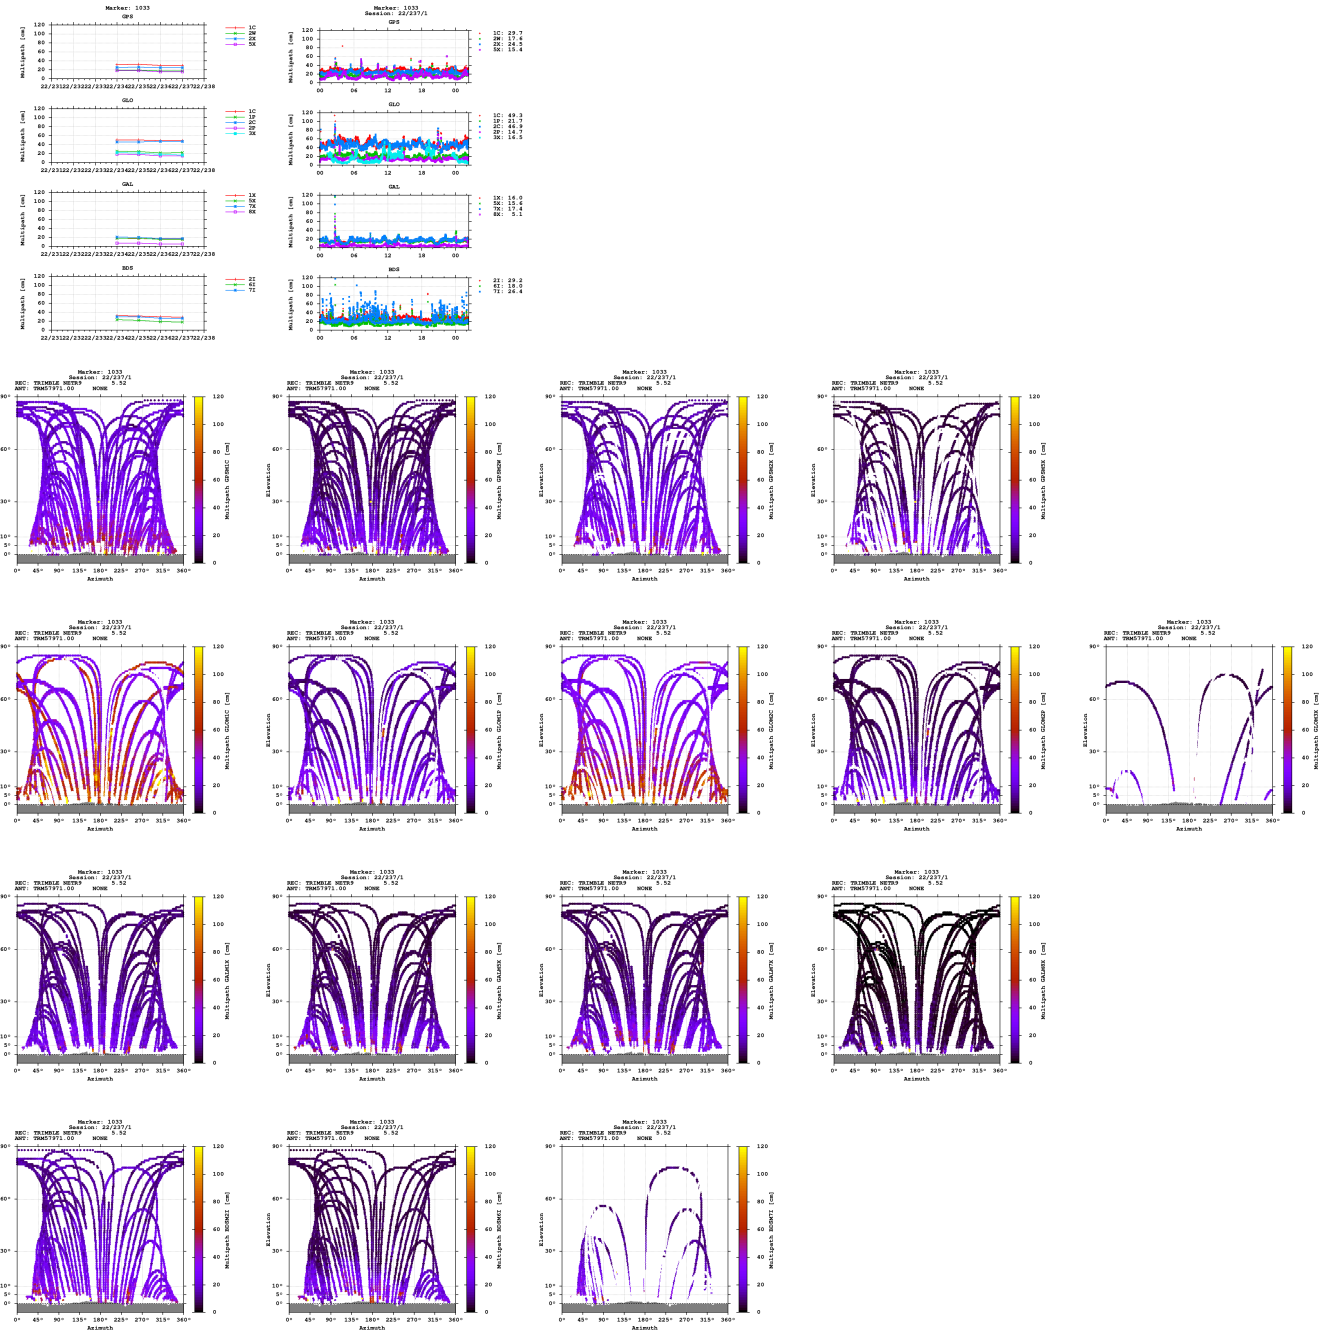


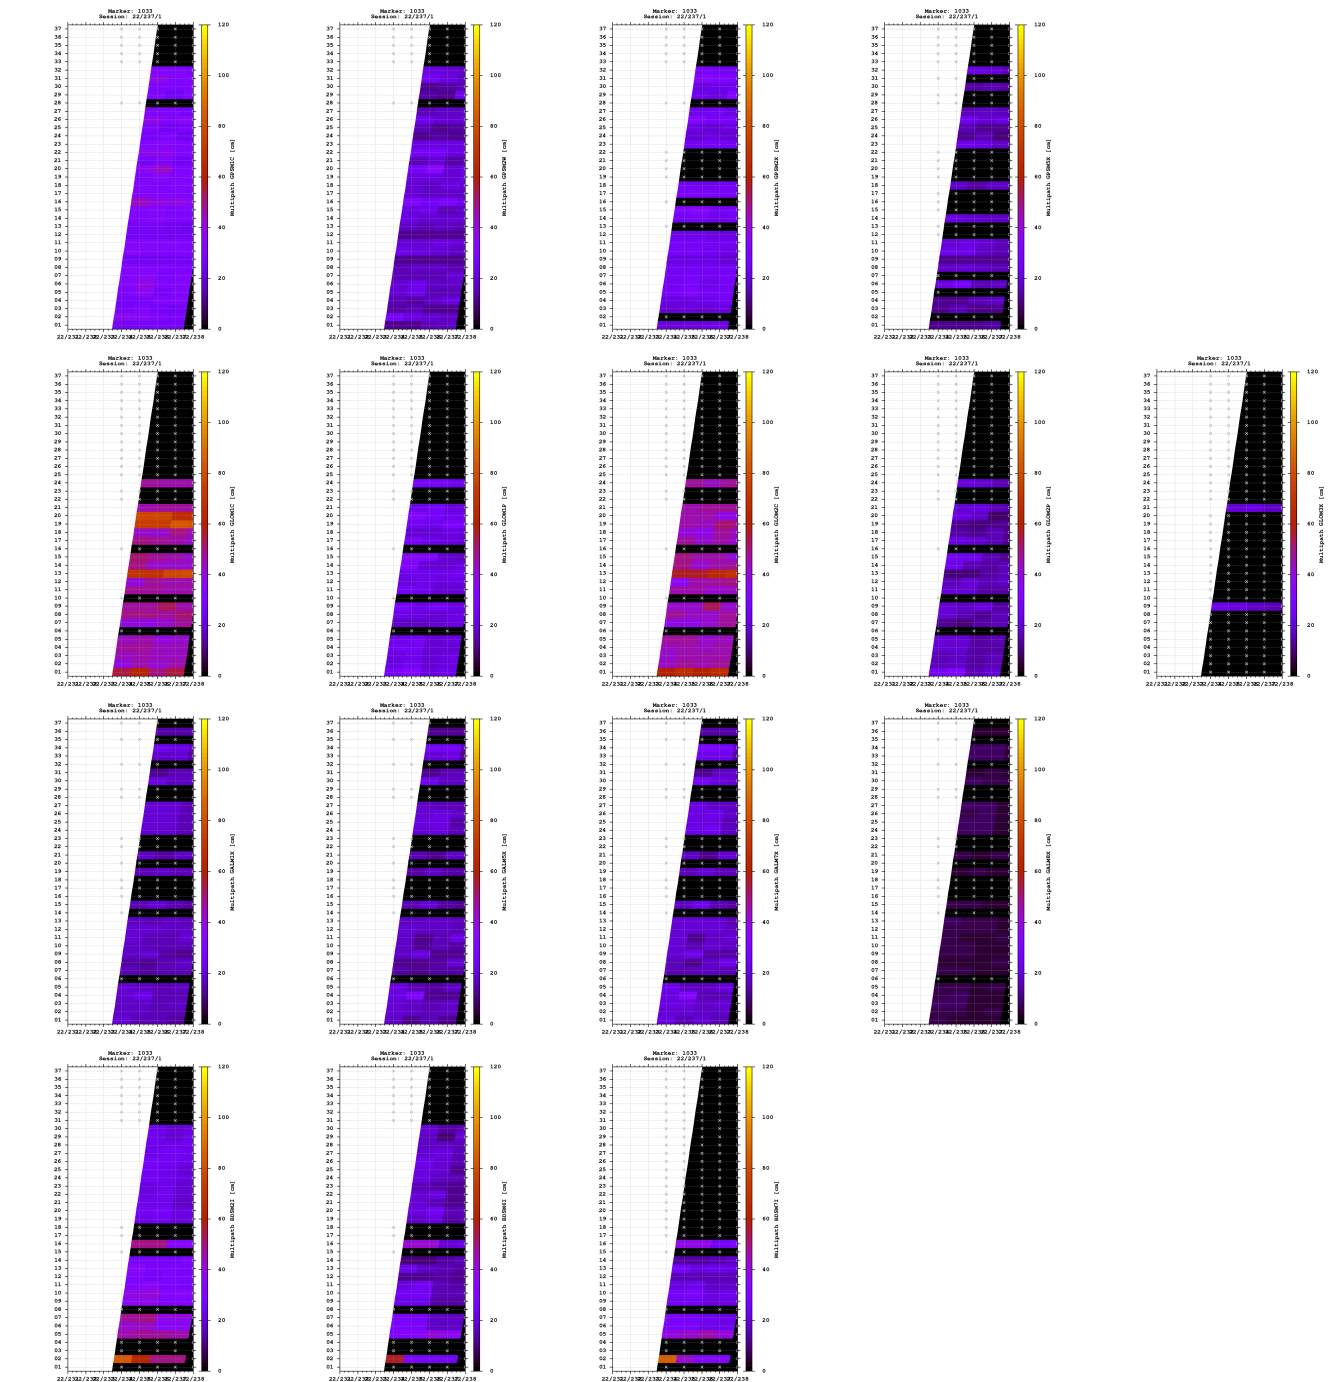


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

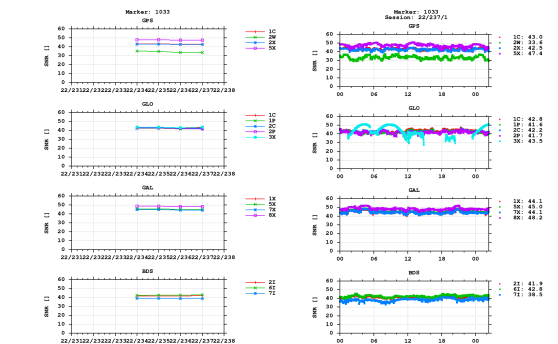


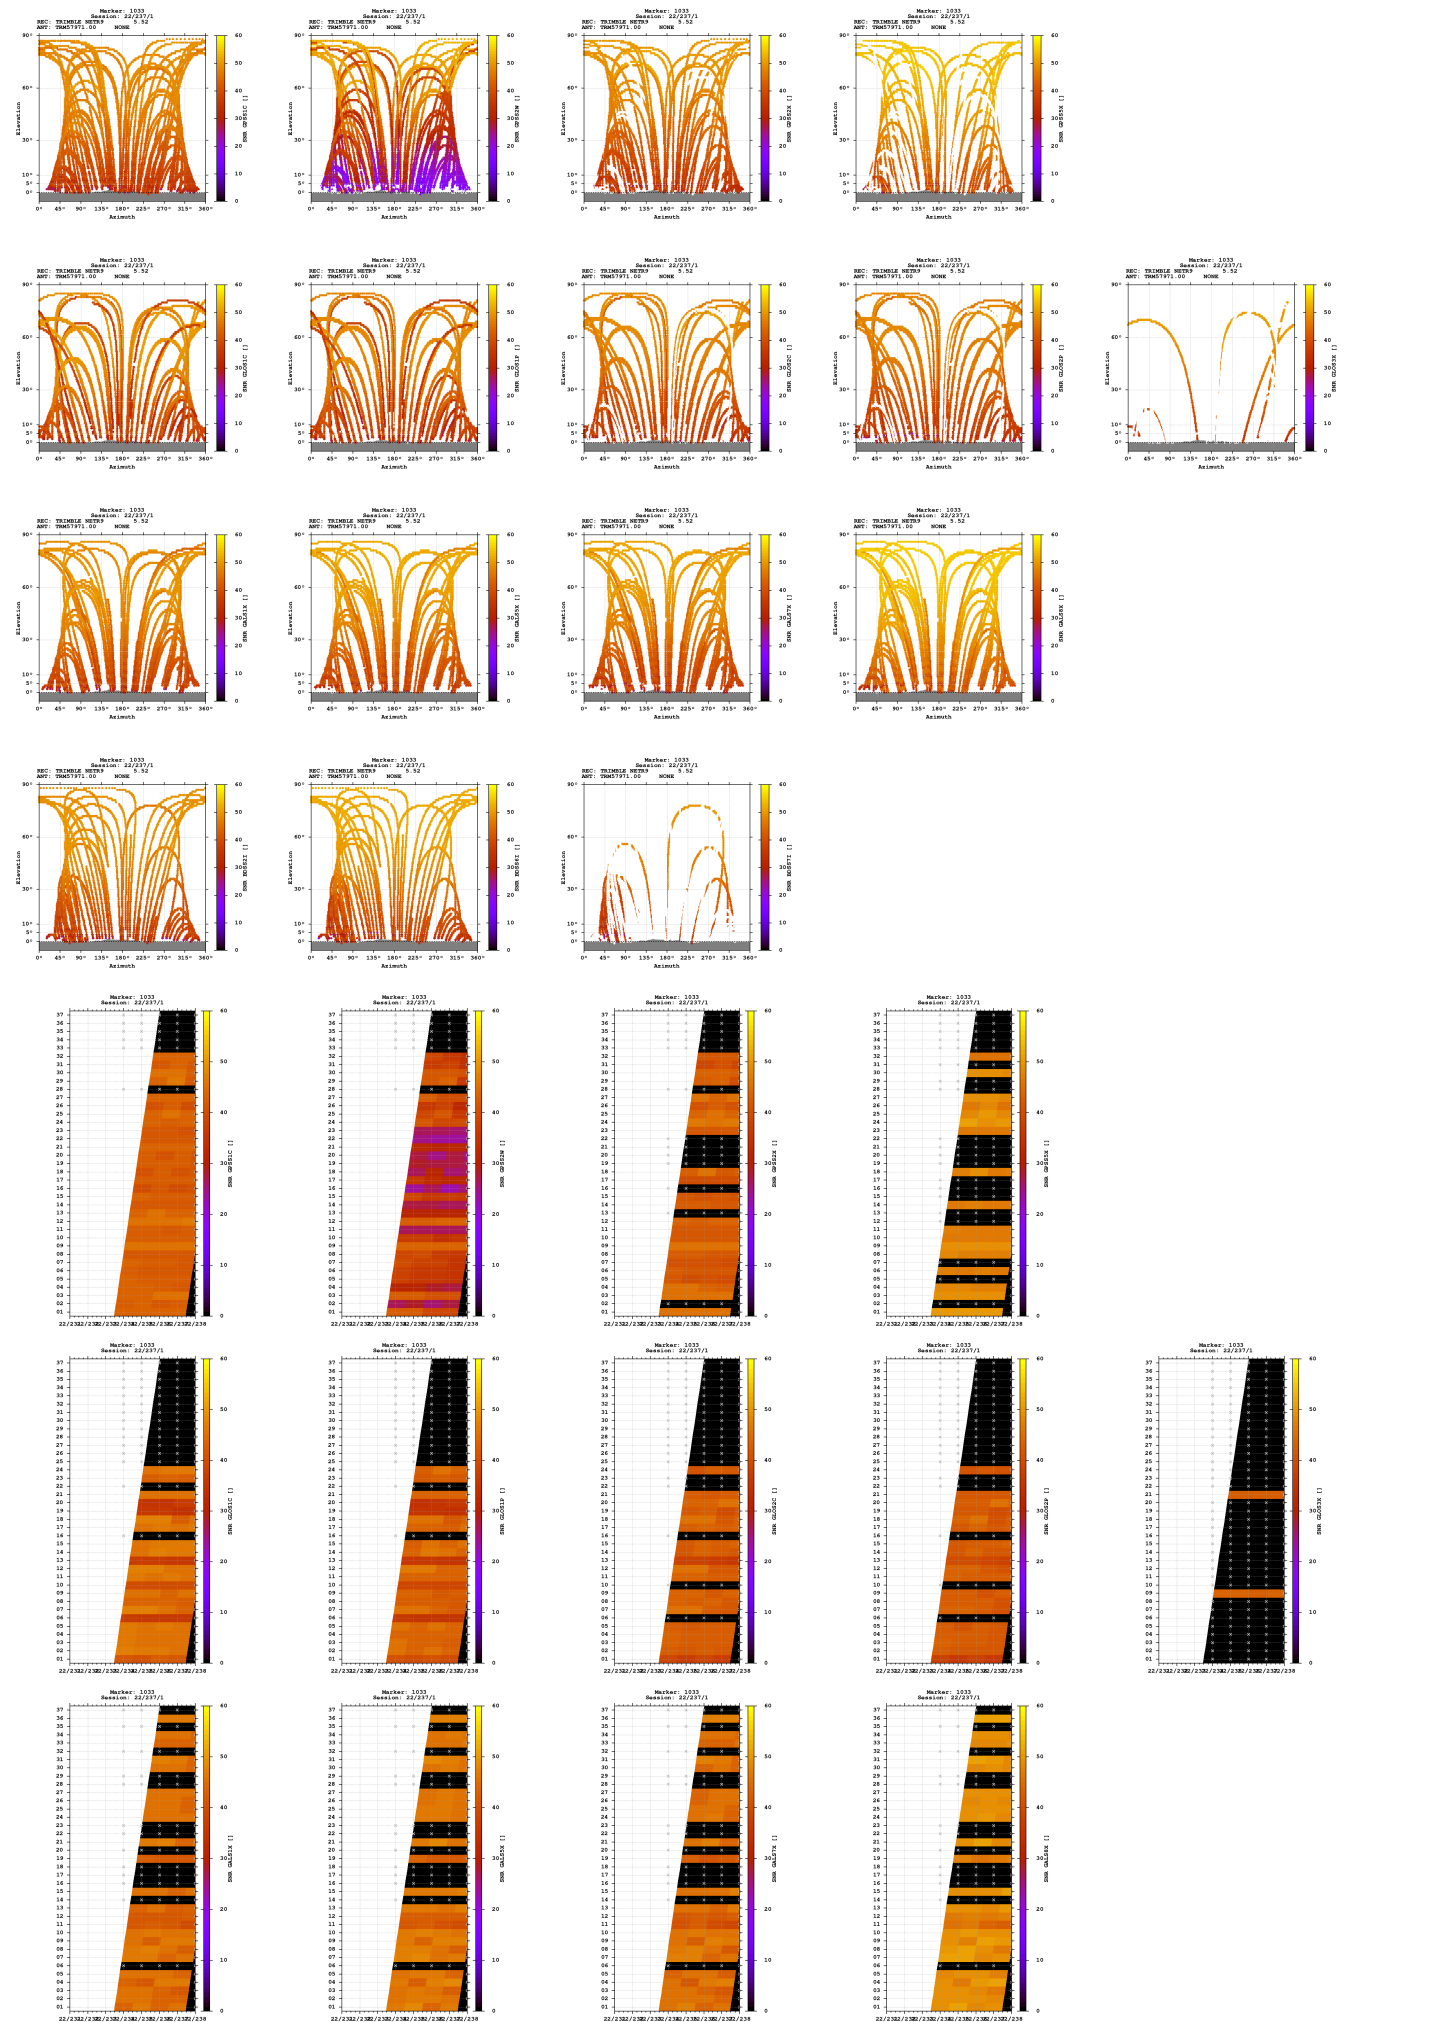

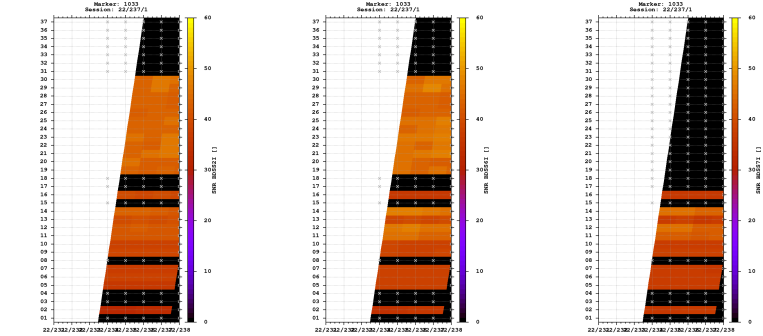


Estimates

2022-08-24 07:50:00	GPS	4251594.4978	675199.5854	4691495.7858	47.652417474	9.023835300	765.9045
2022-08-24 07:50:00	GLO	4251594.4714	675199.3714	4691495.4453	47.652415808	9.023832542	765.6127
2022-08-24 07:50:00	GAL	4251594.3873	675199.6781	4691495.5427	47.652416630	9.023836749	765.6611
2022-08-24 07:50:00	BDS	4251594.3612	675199.8023	4691497.8941	47.652430917	9.023838437	767.3948

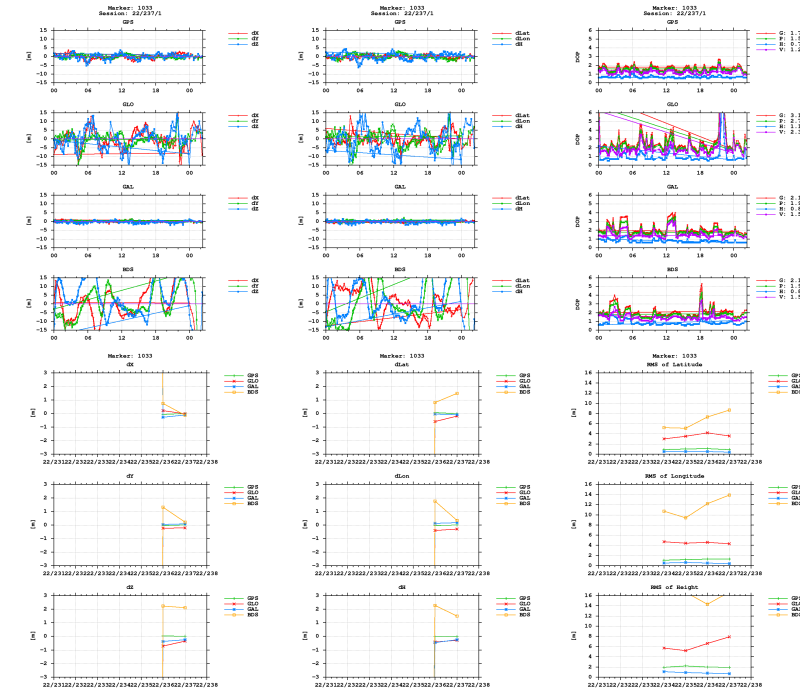

BNC



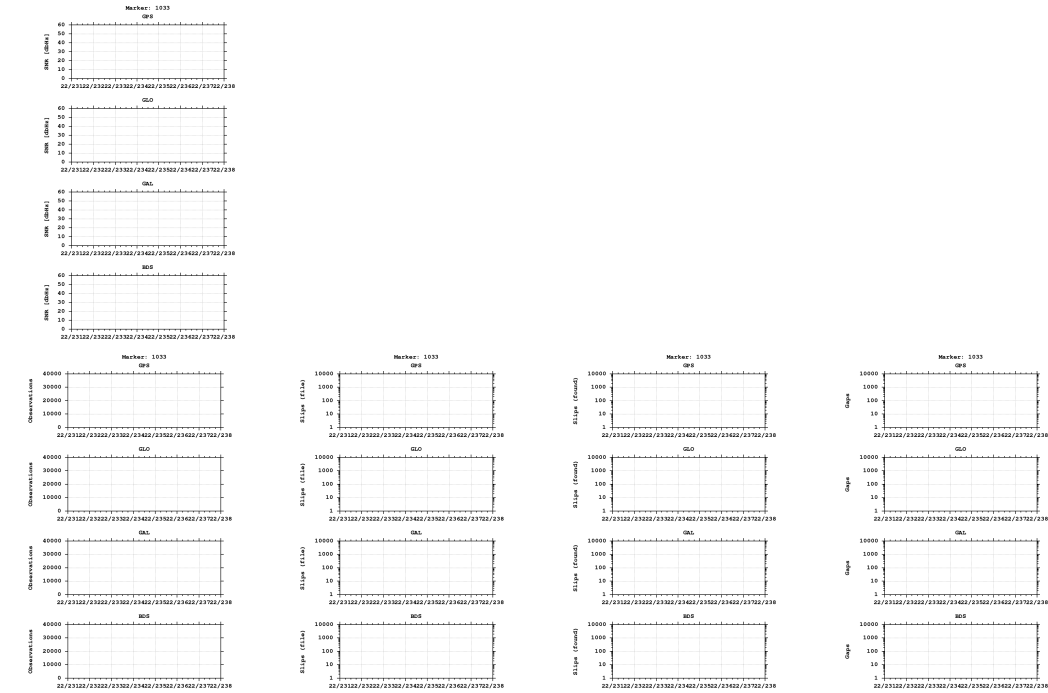

Equipment

2022-08-22 00:00:00 TRIMBLE NETR9 5.52 516 TRM57971.00 NONE 516

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)