

GNSS observation file monitoring for 0516

Last RINEX file: 05162411.220

RINEX version: 3.02

Marker: 1012

Receiver: 516

Antenna: 516


TRIMBLE NETR9

5.52

TRM57971.00


NONE

Epochs

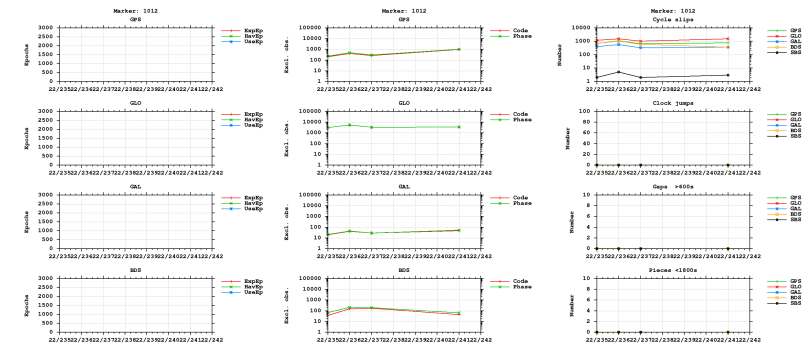



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

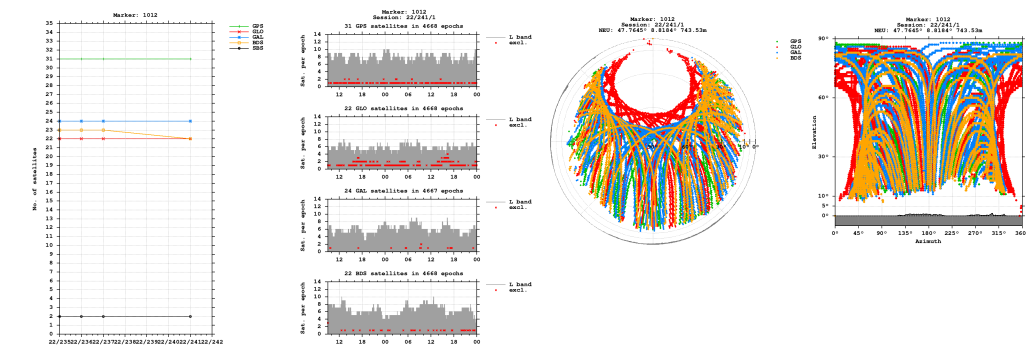


Bands

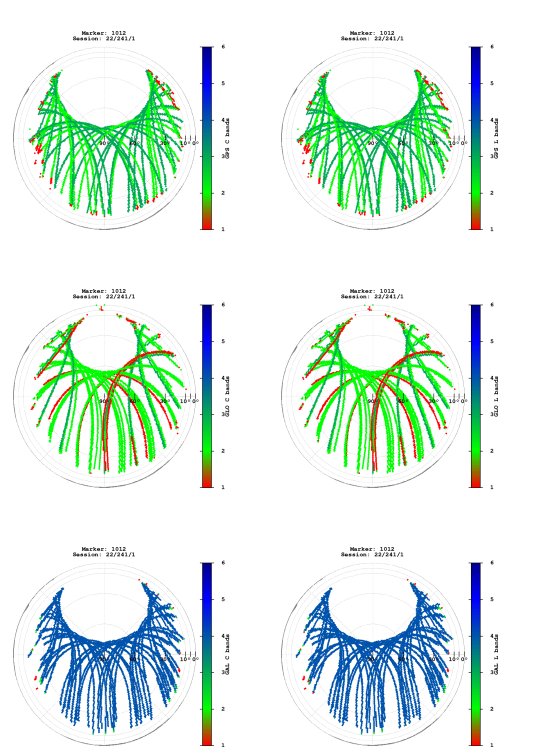


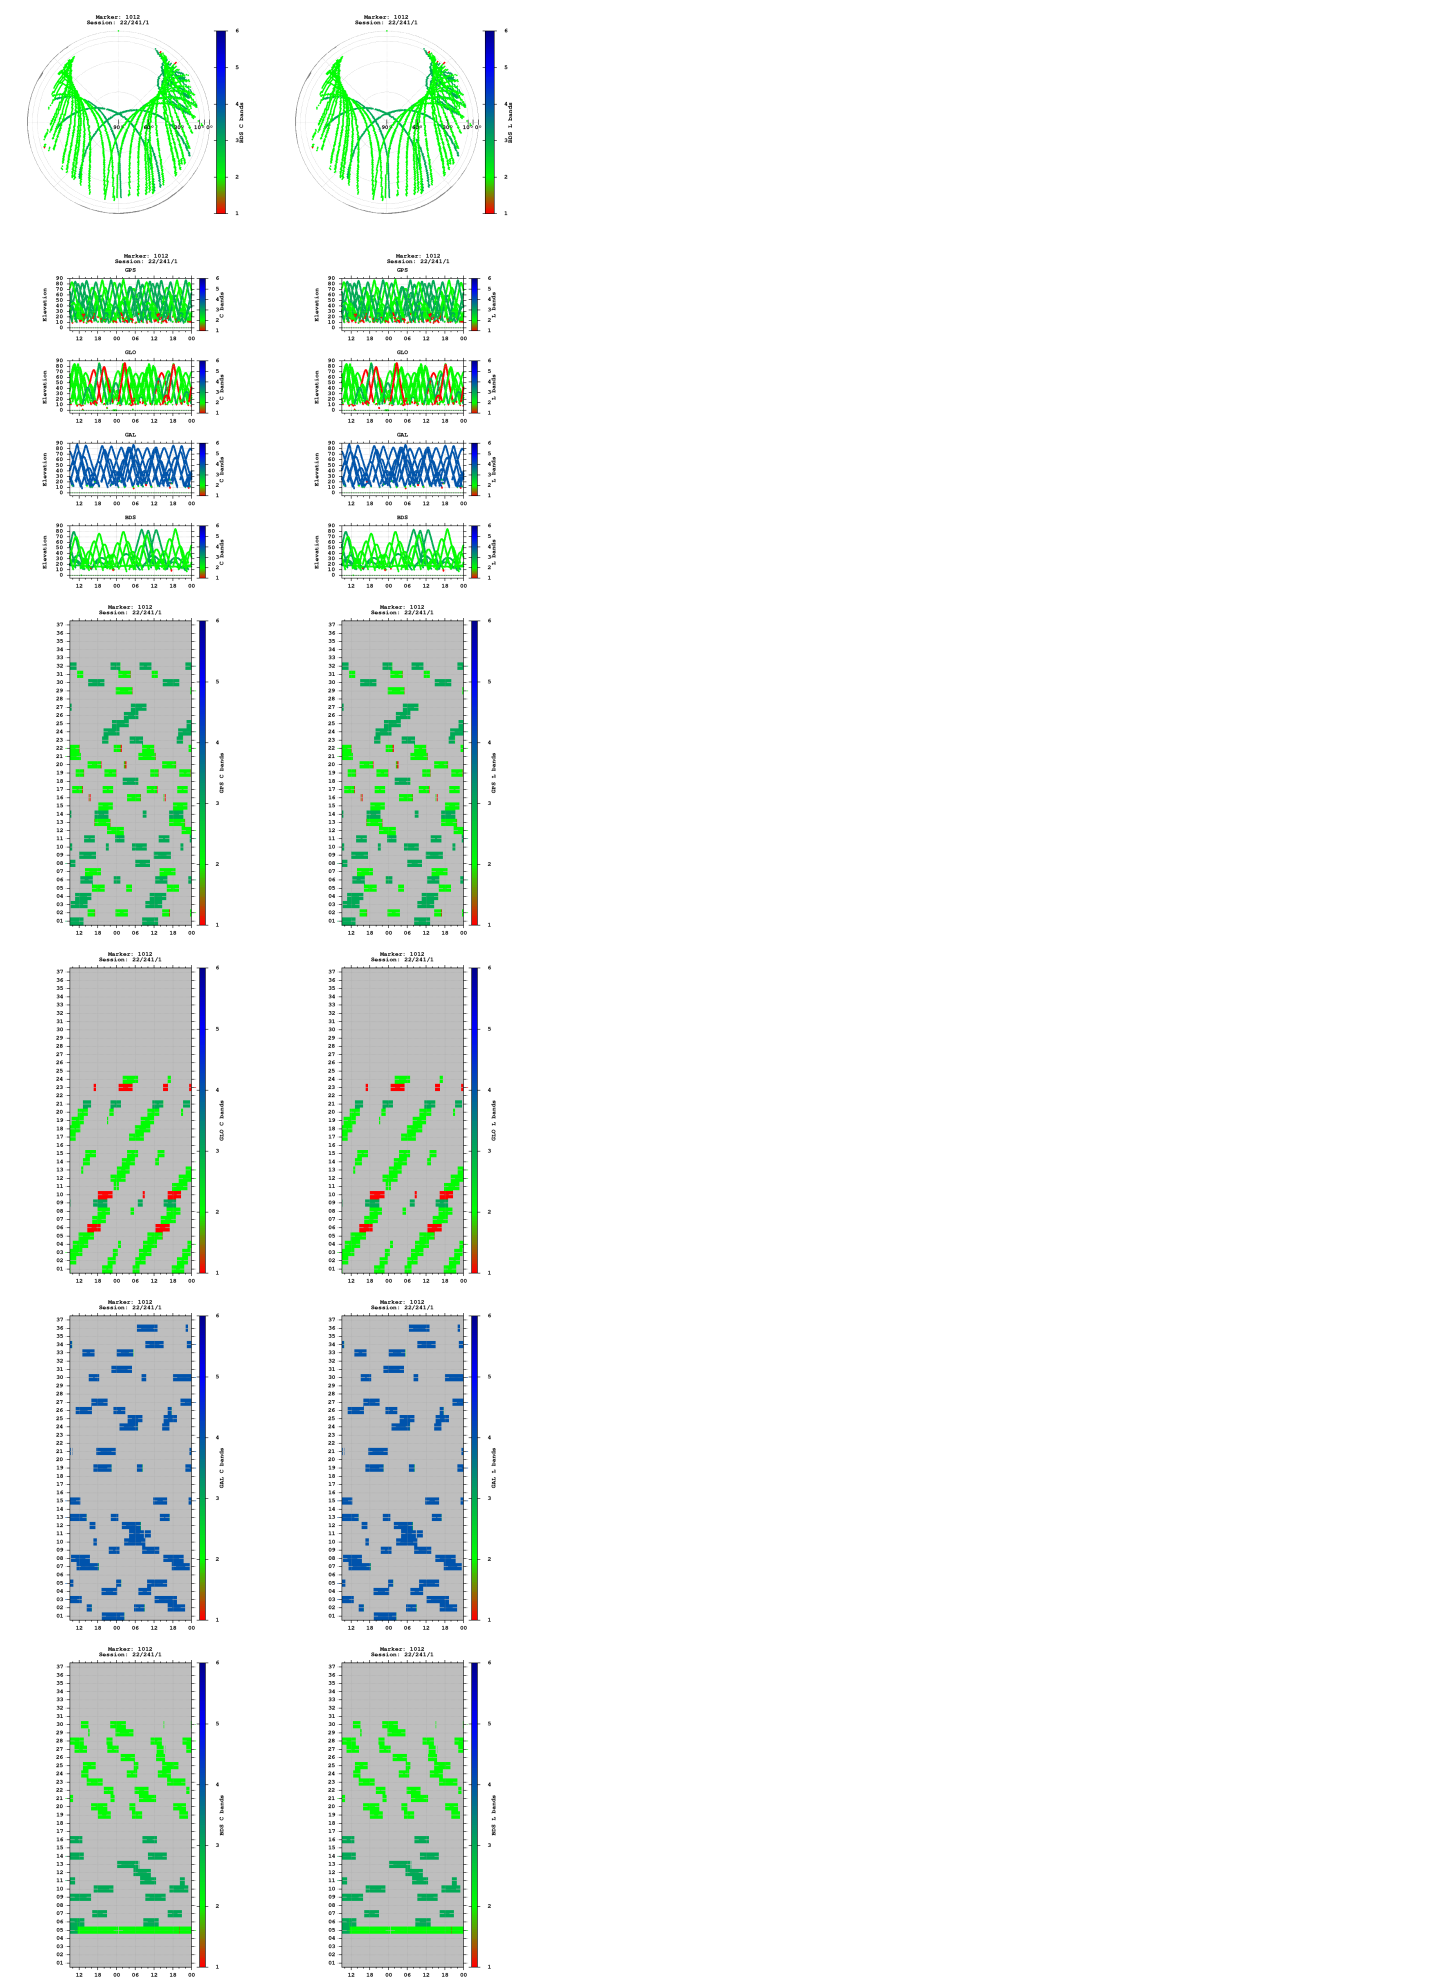


Observations

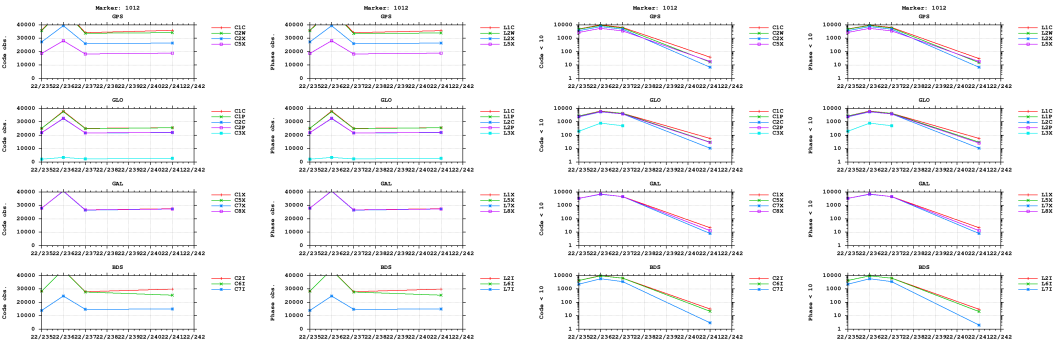


Multipath

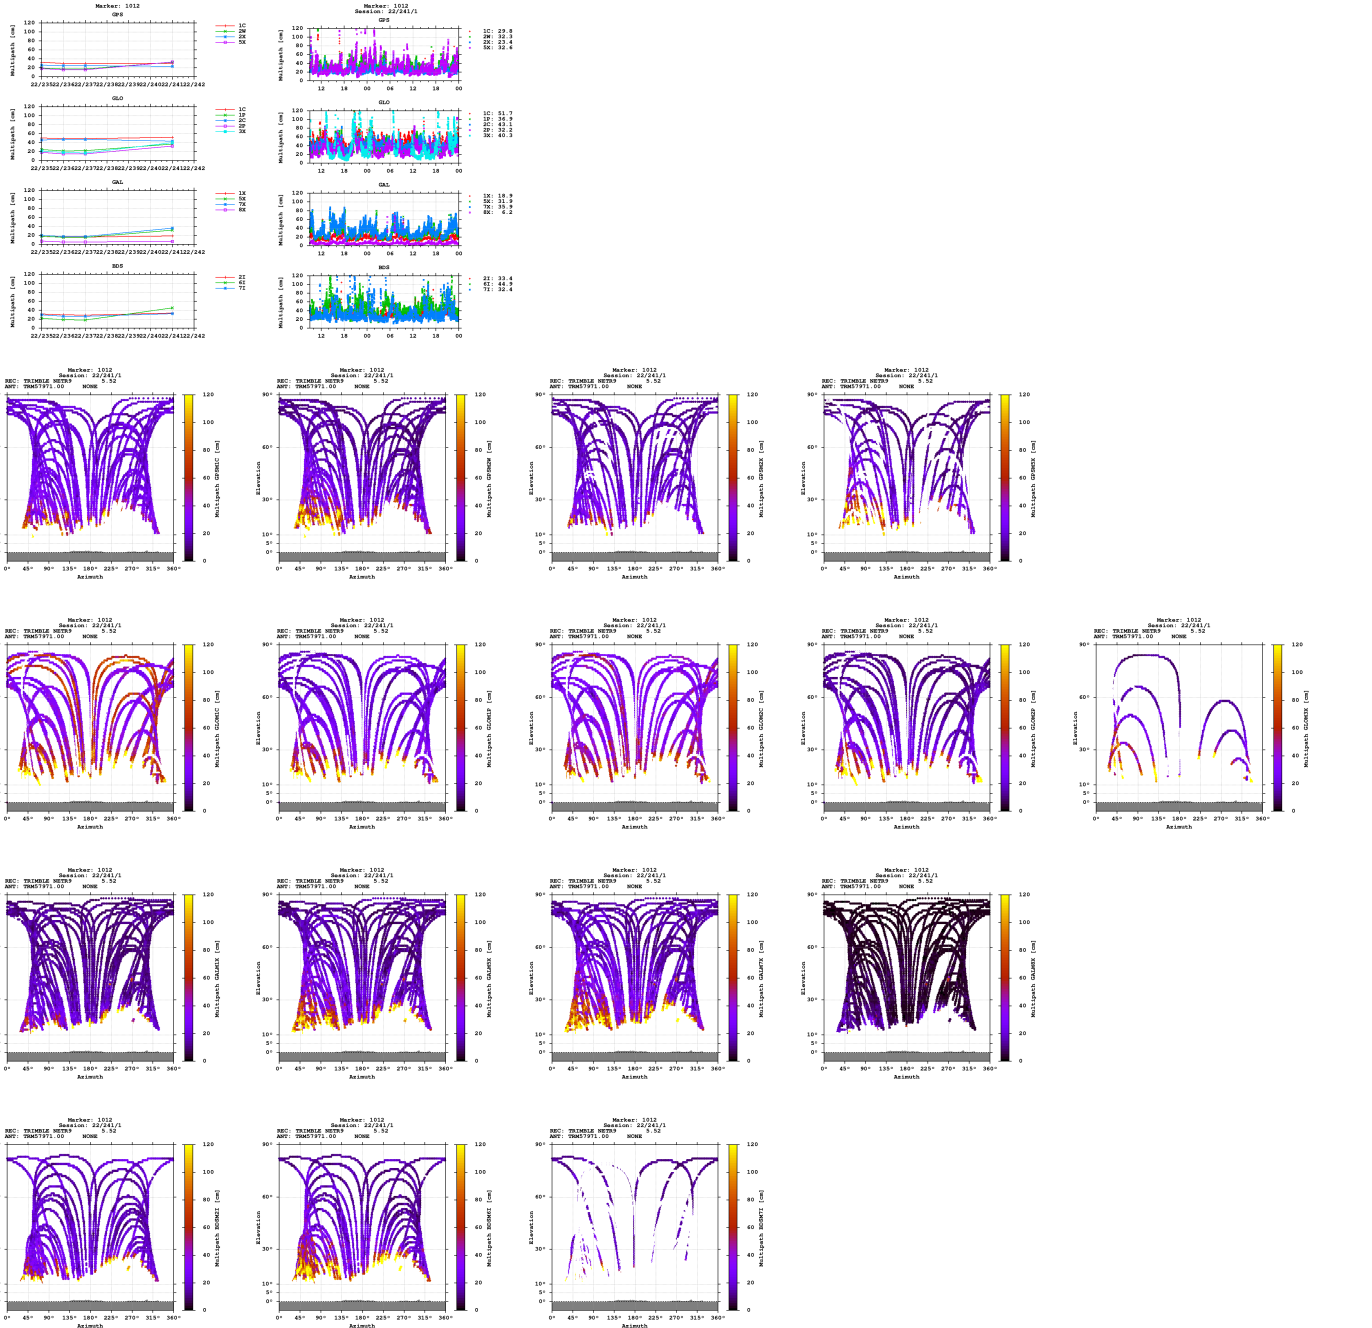


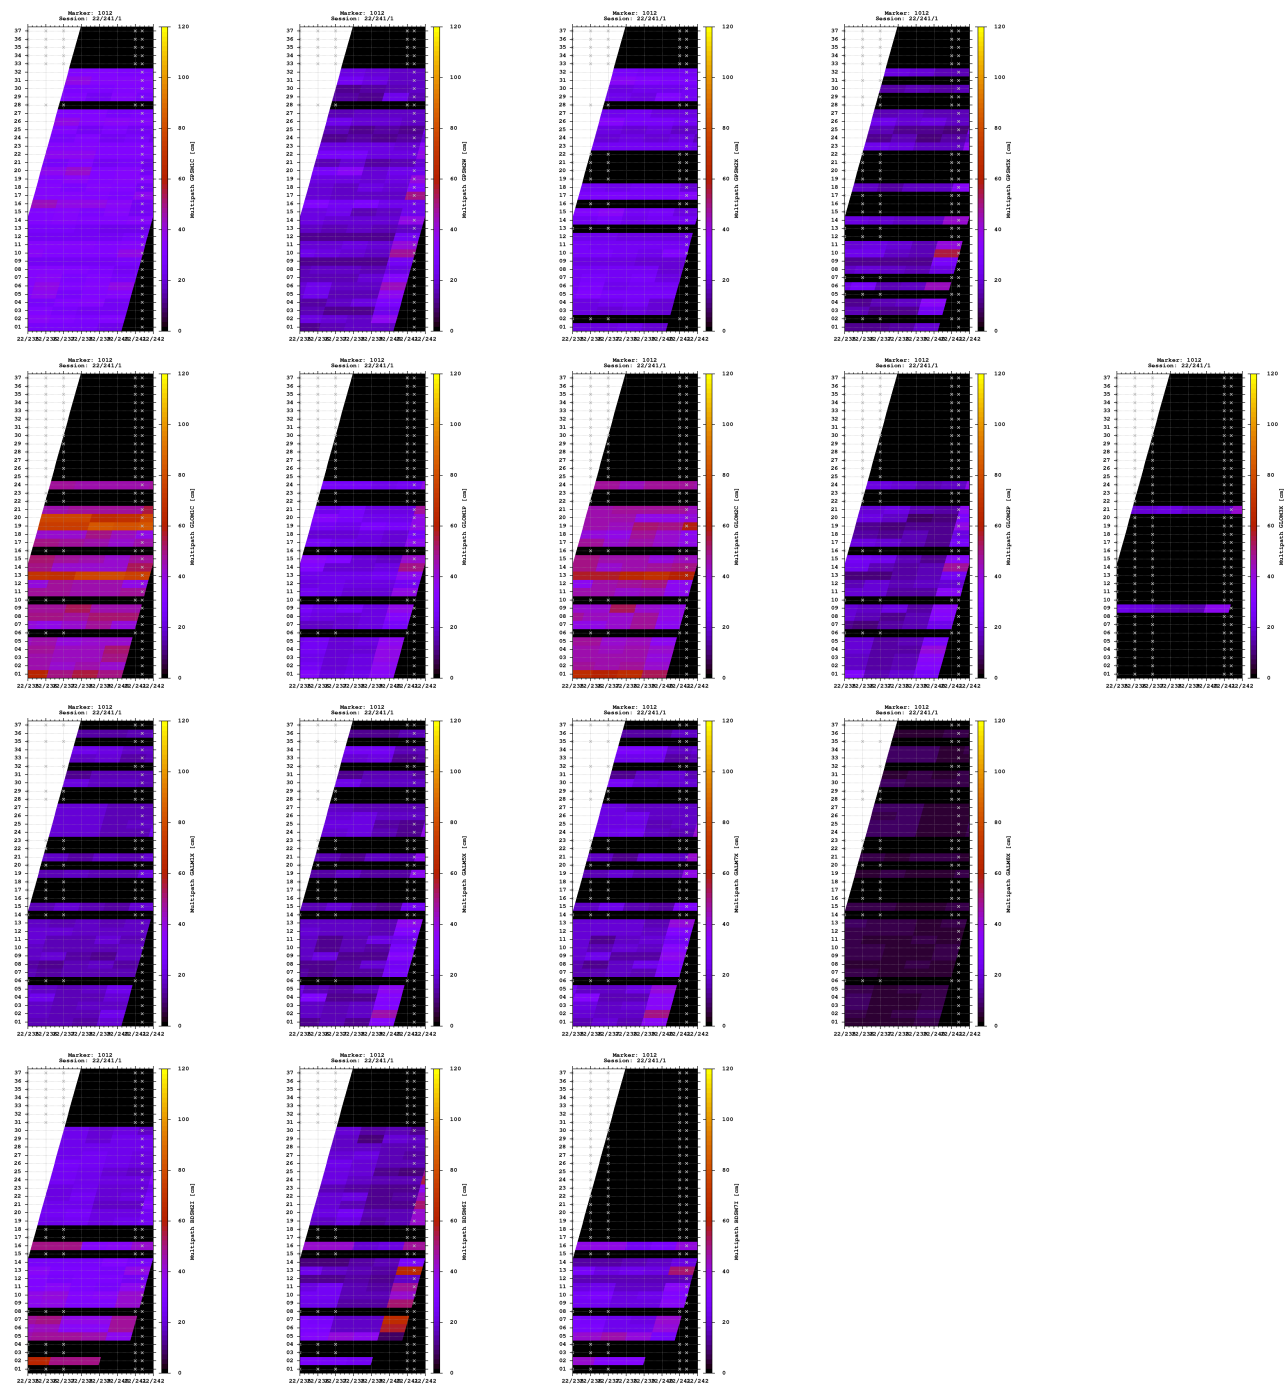


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

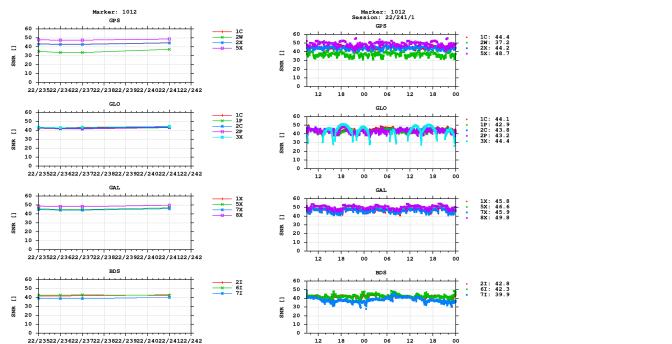


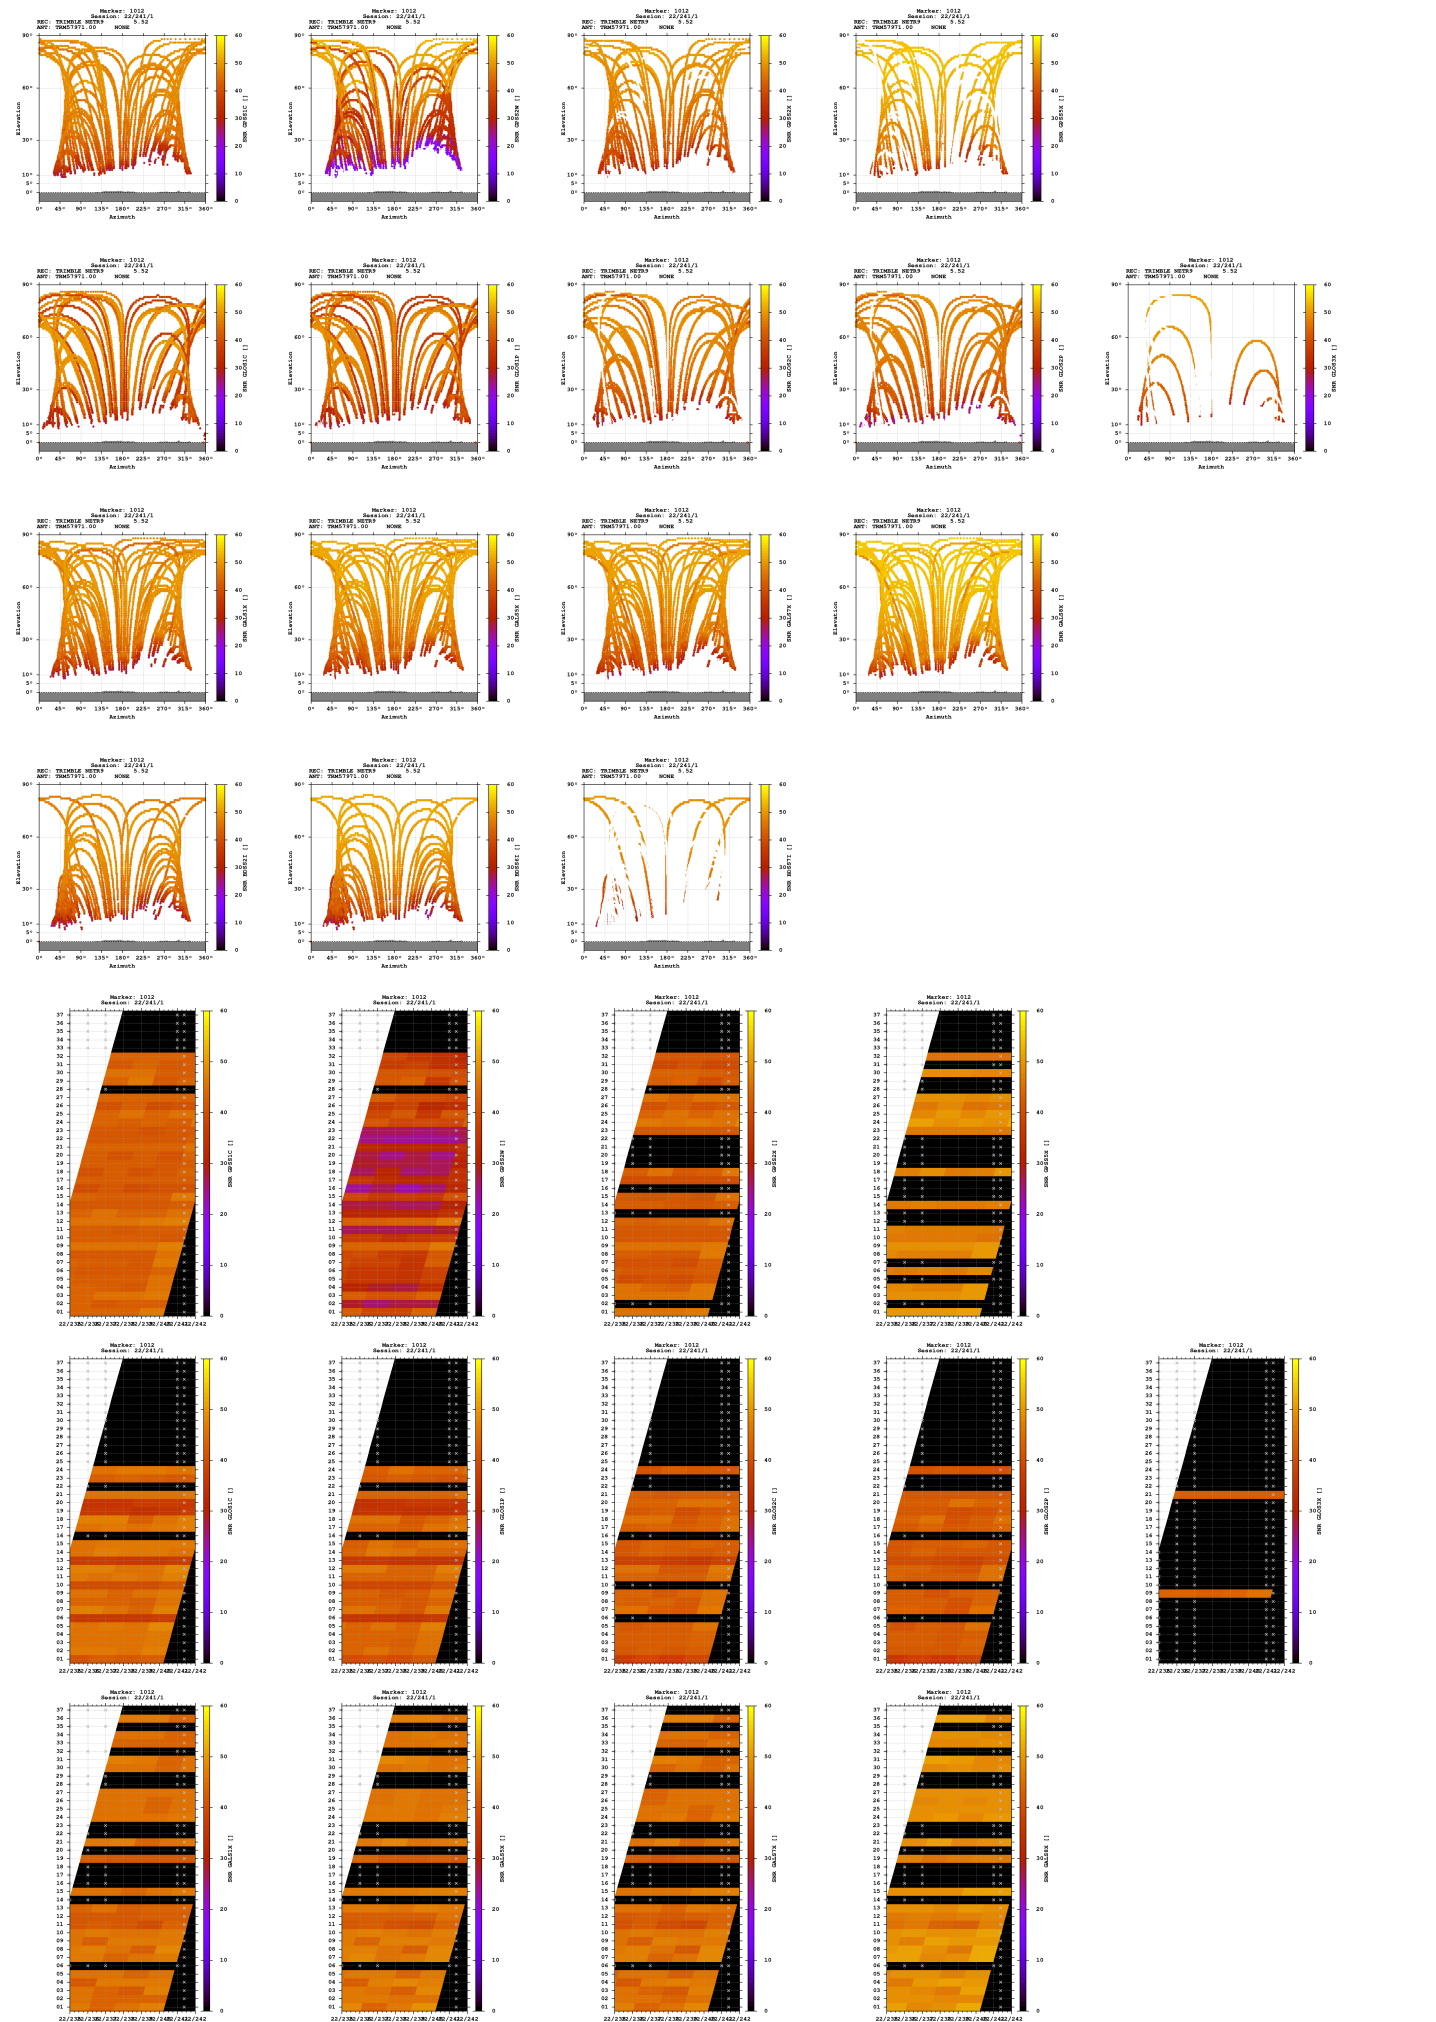

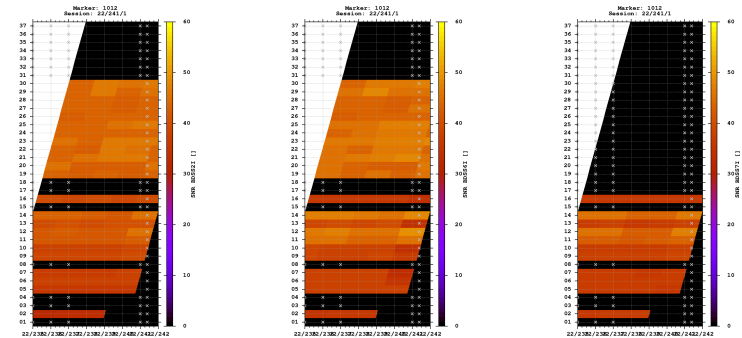



Estimates

2022-08-29 09:02:00	GPS	4244860.6767	658534.7498	4699867.7624	47.764525568	8.818395539	743.5301
2022-08-29 09:02:00	GLO	4244862.8261	658534.6280	4699868.5980	47.764516602	8.818389539	745.5640
2022-08-29 09:02:00	GAL	4244862.2525	658535.6360	4699868.1540	47.764516664	8.818403997	744.9581
2022-08-29 09:02:00	BDS	4244862.3145	658532.9614	4699858.7279	47.764462006	8.818368618	737.7448

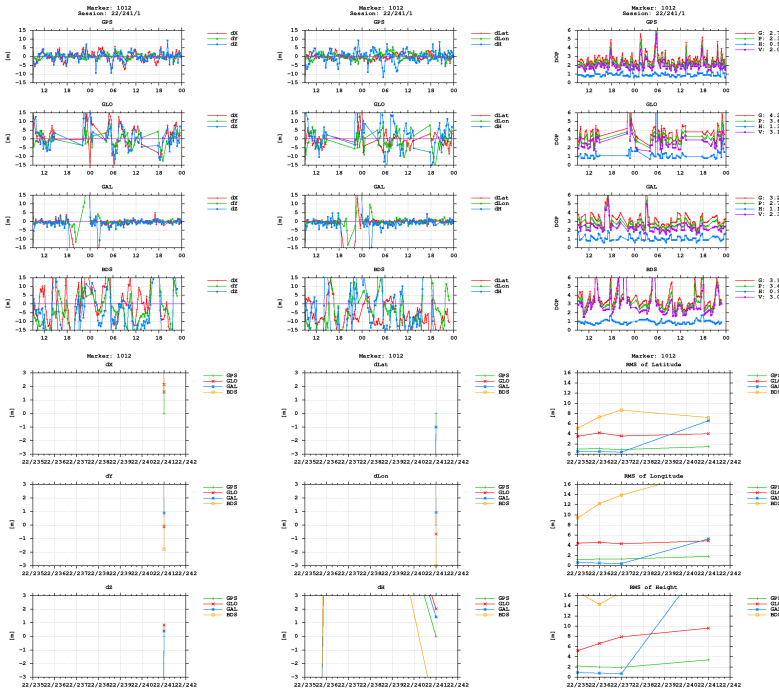

BNC

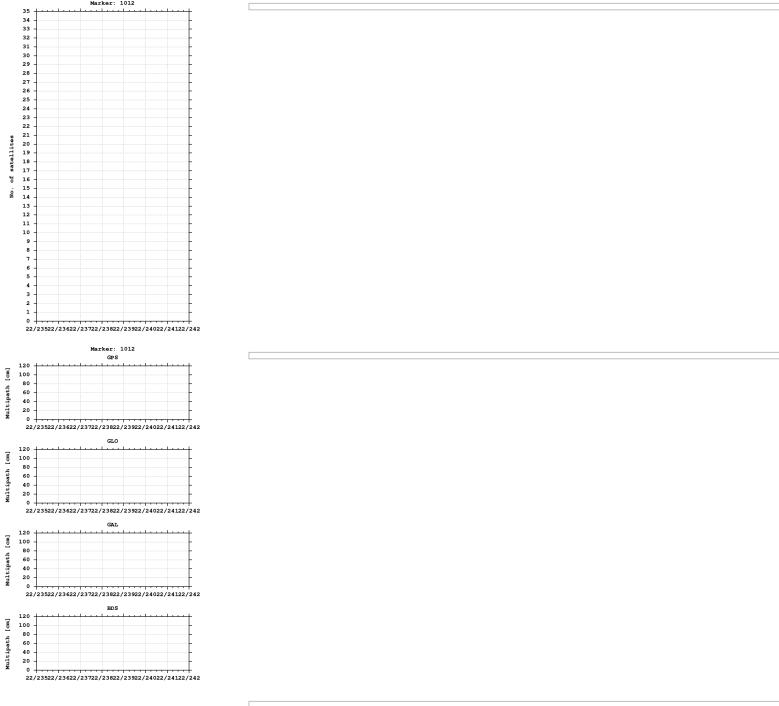

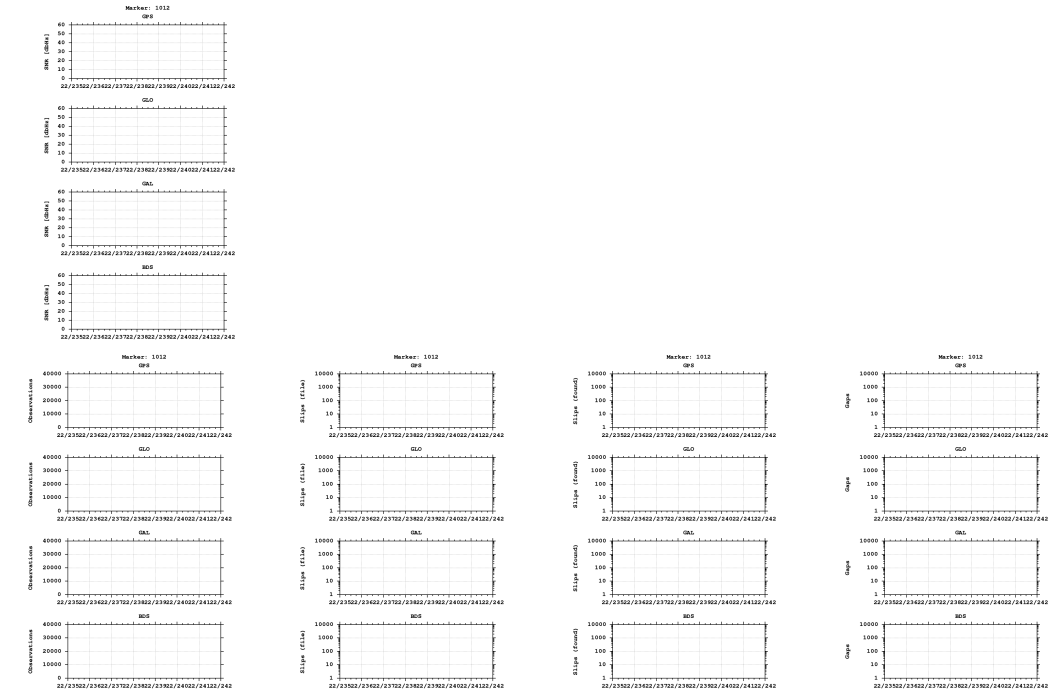

Equipment

2022-08-22 00:00:00 TRIMBLE NETR9 5.52 516 TRM57971.00 NONE 516

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)