

GNSS observation file monitoring for 0516

Last RINEX file: 05162431.220

RINEX version: 3.02

Marker: 1032

Receiver: 516

Antenna: 516


TRIMBLE NETR9

5.52

TRM57971.00


NONE

Epochs

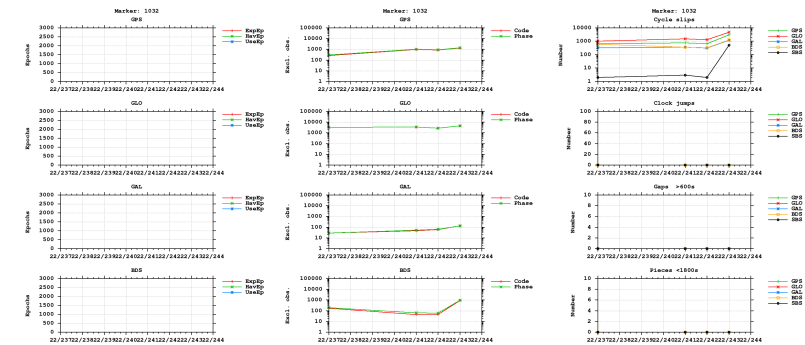



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

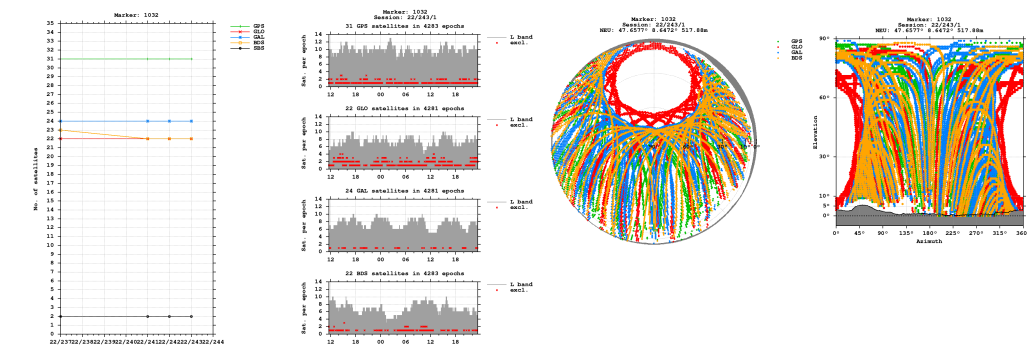


Bands

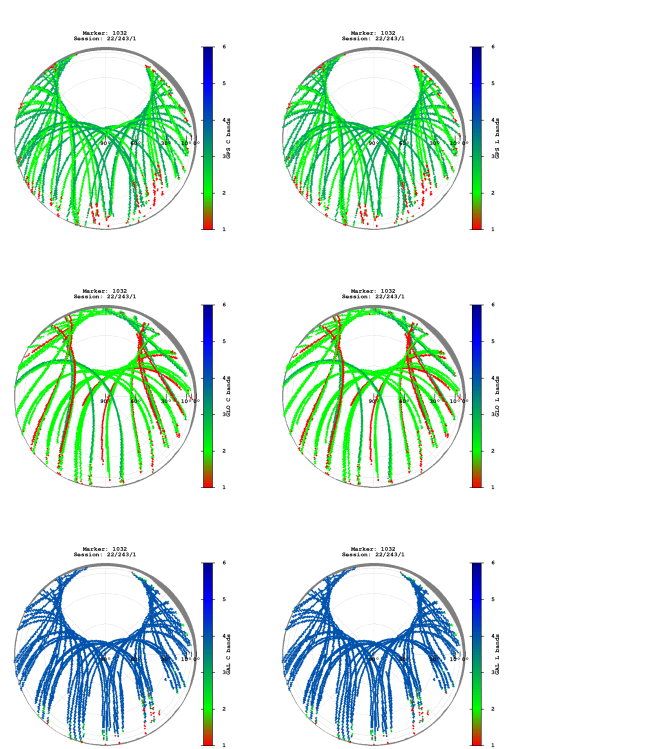


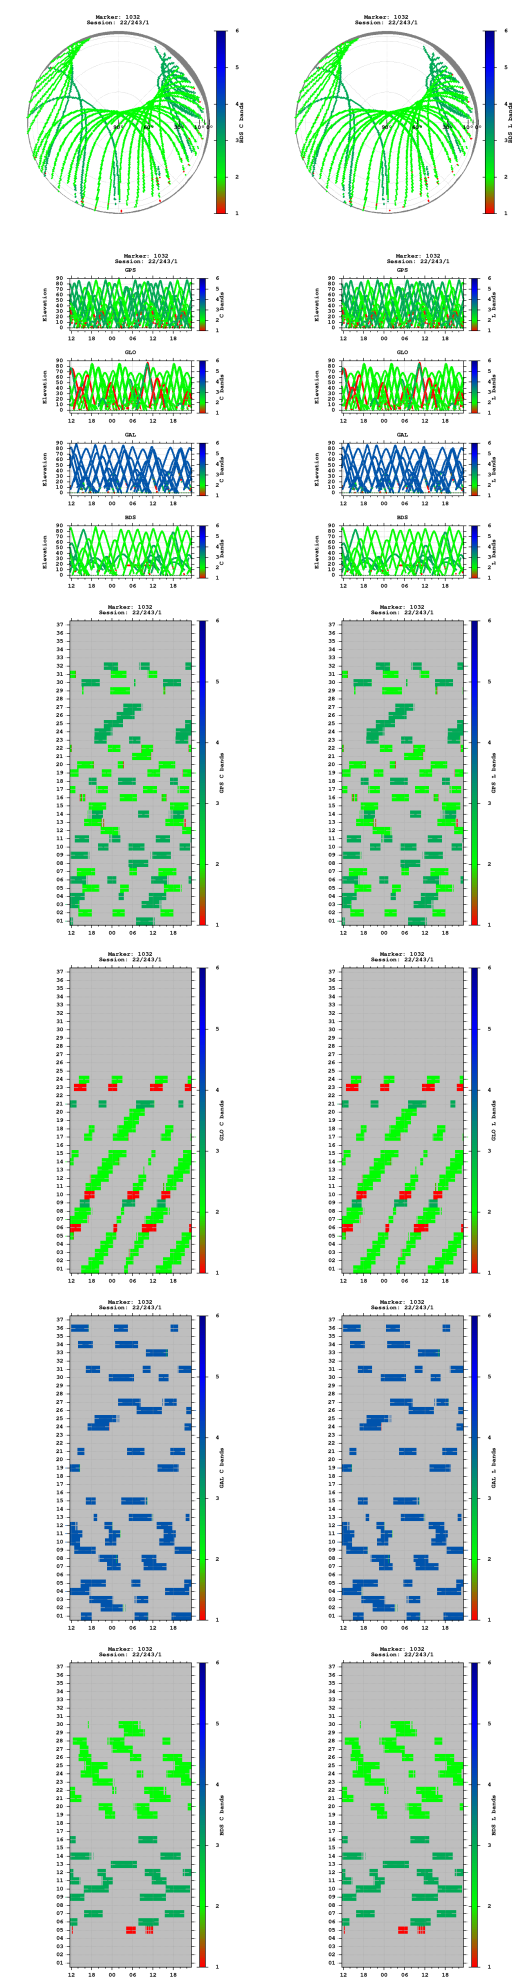


Observations

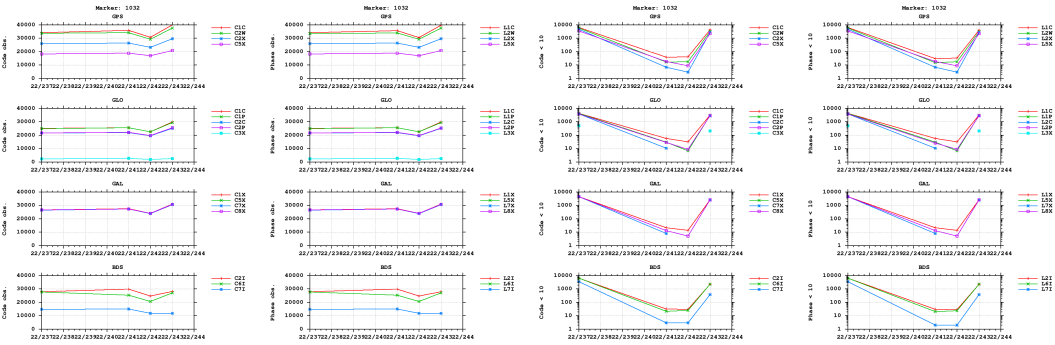


Multipath

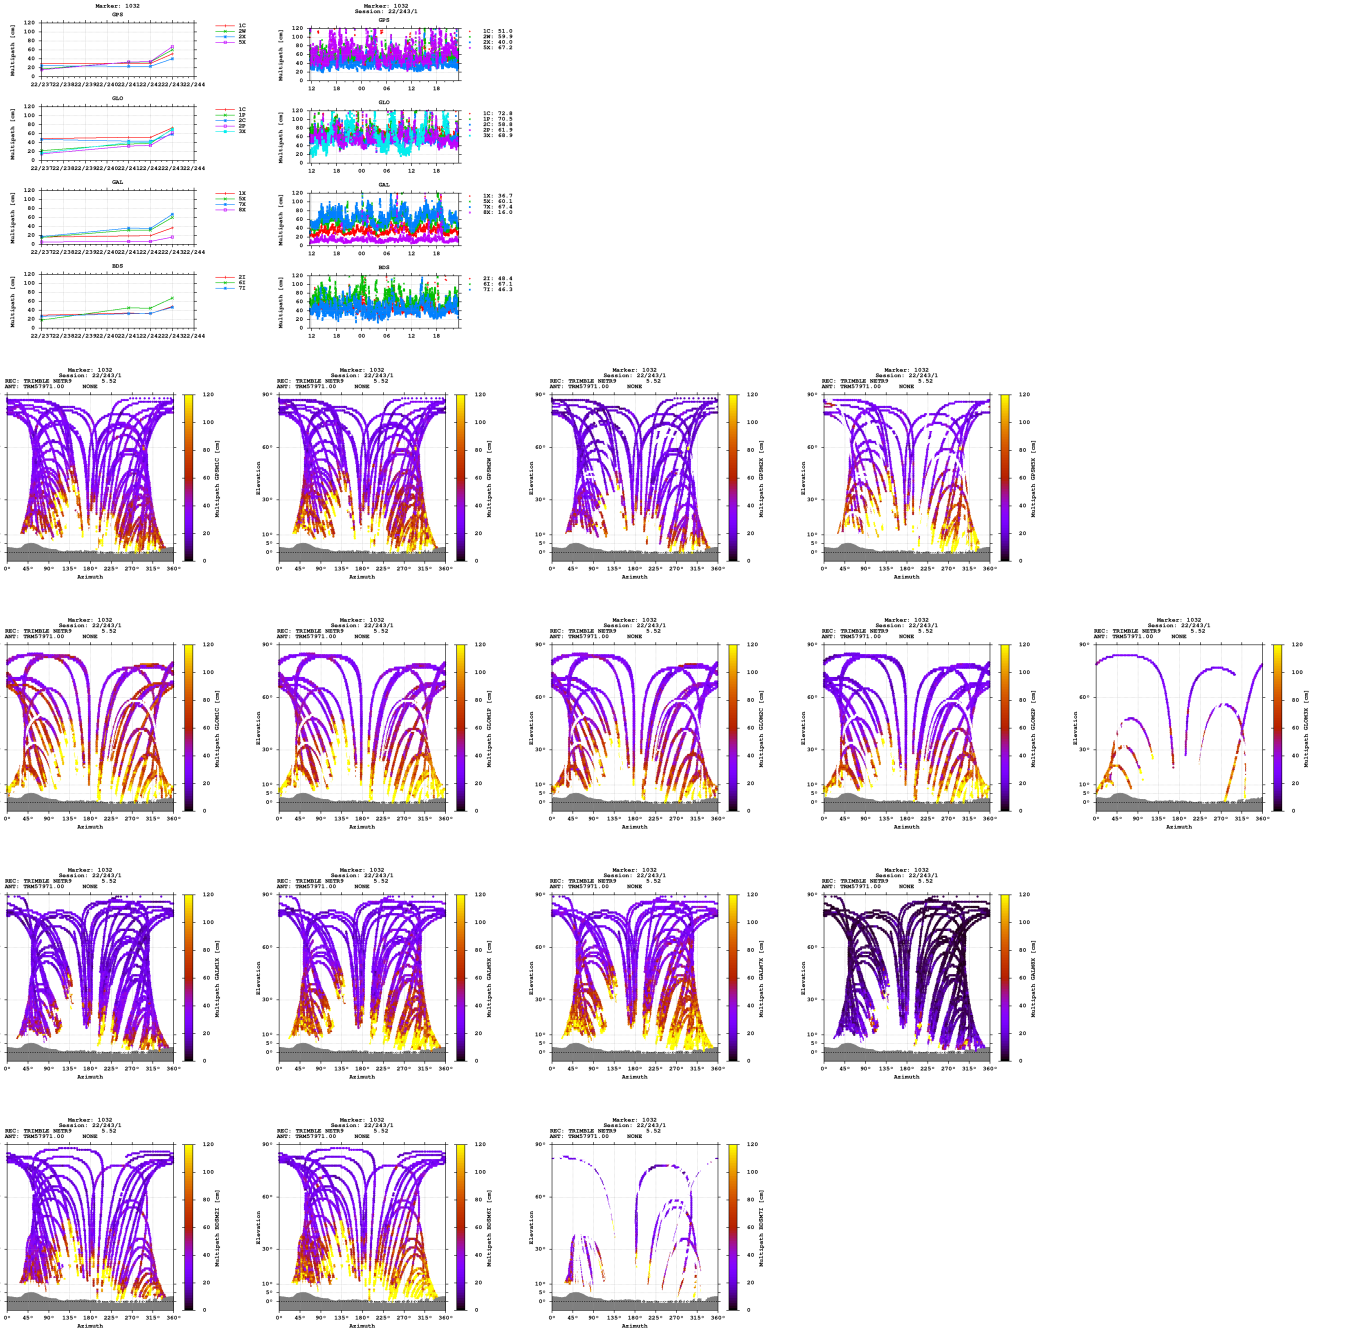


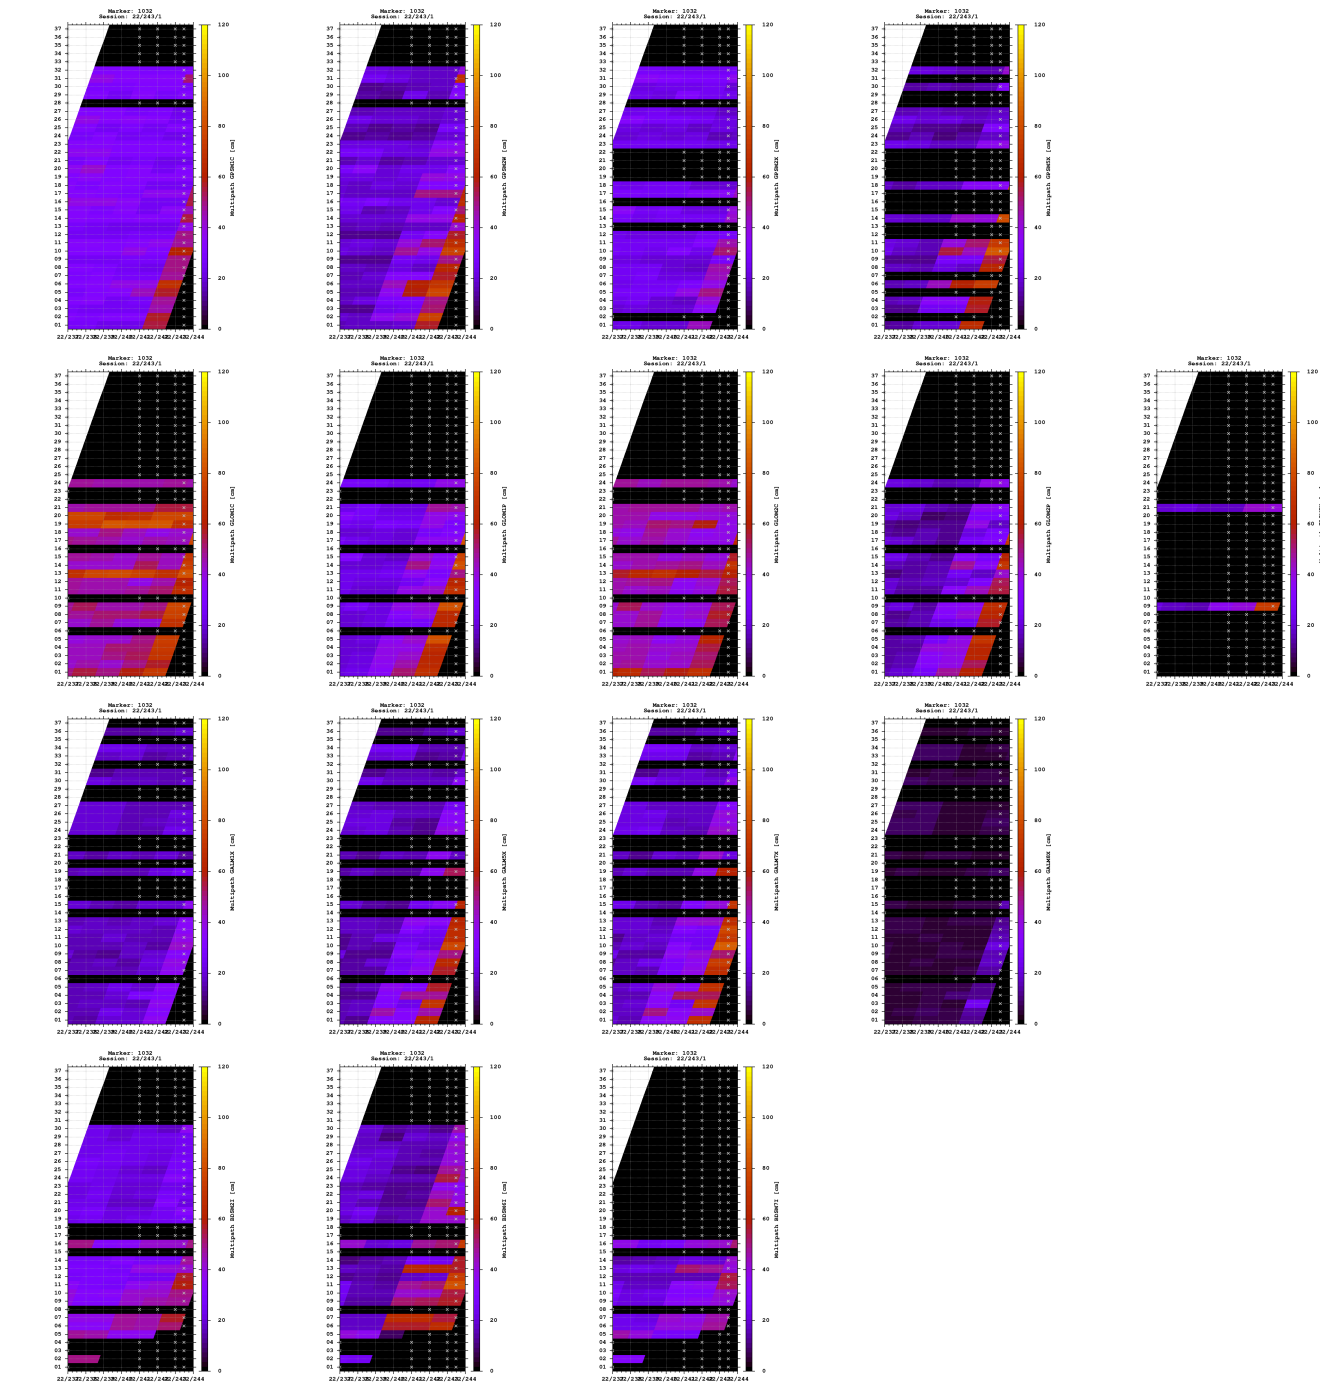


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

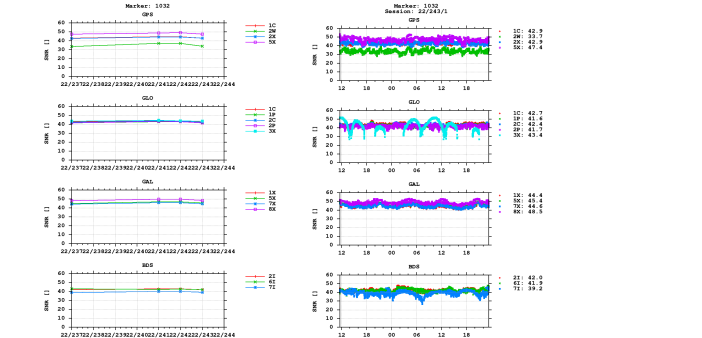


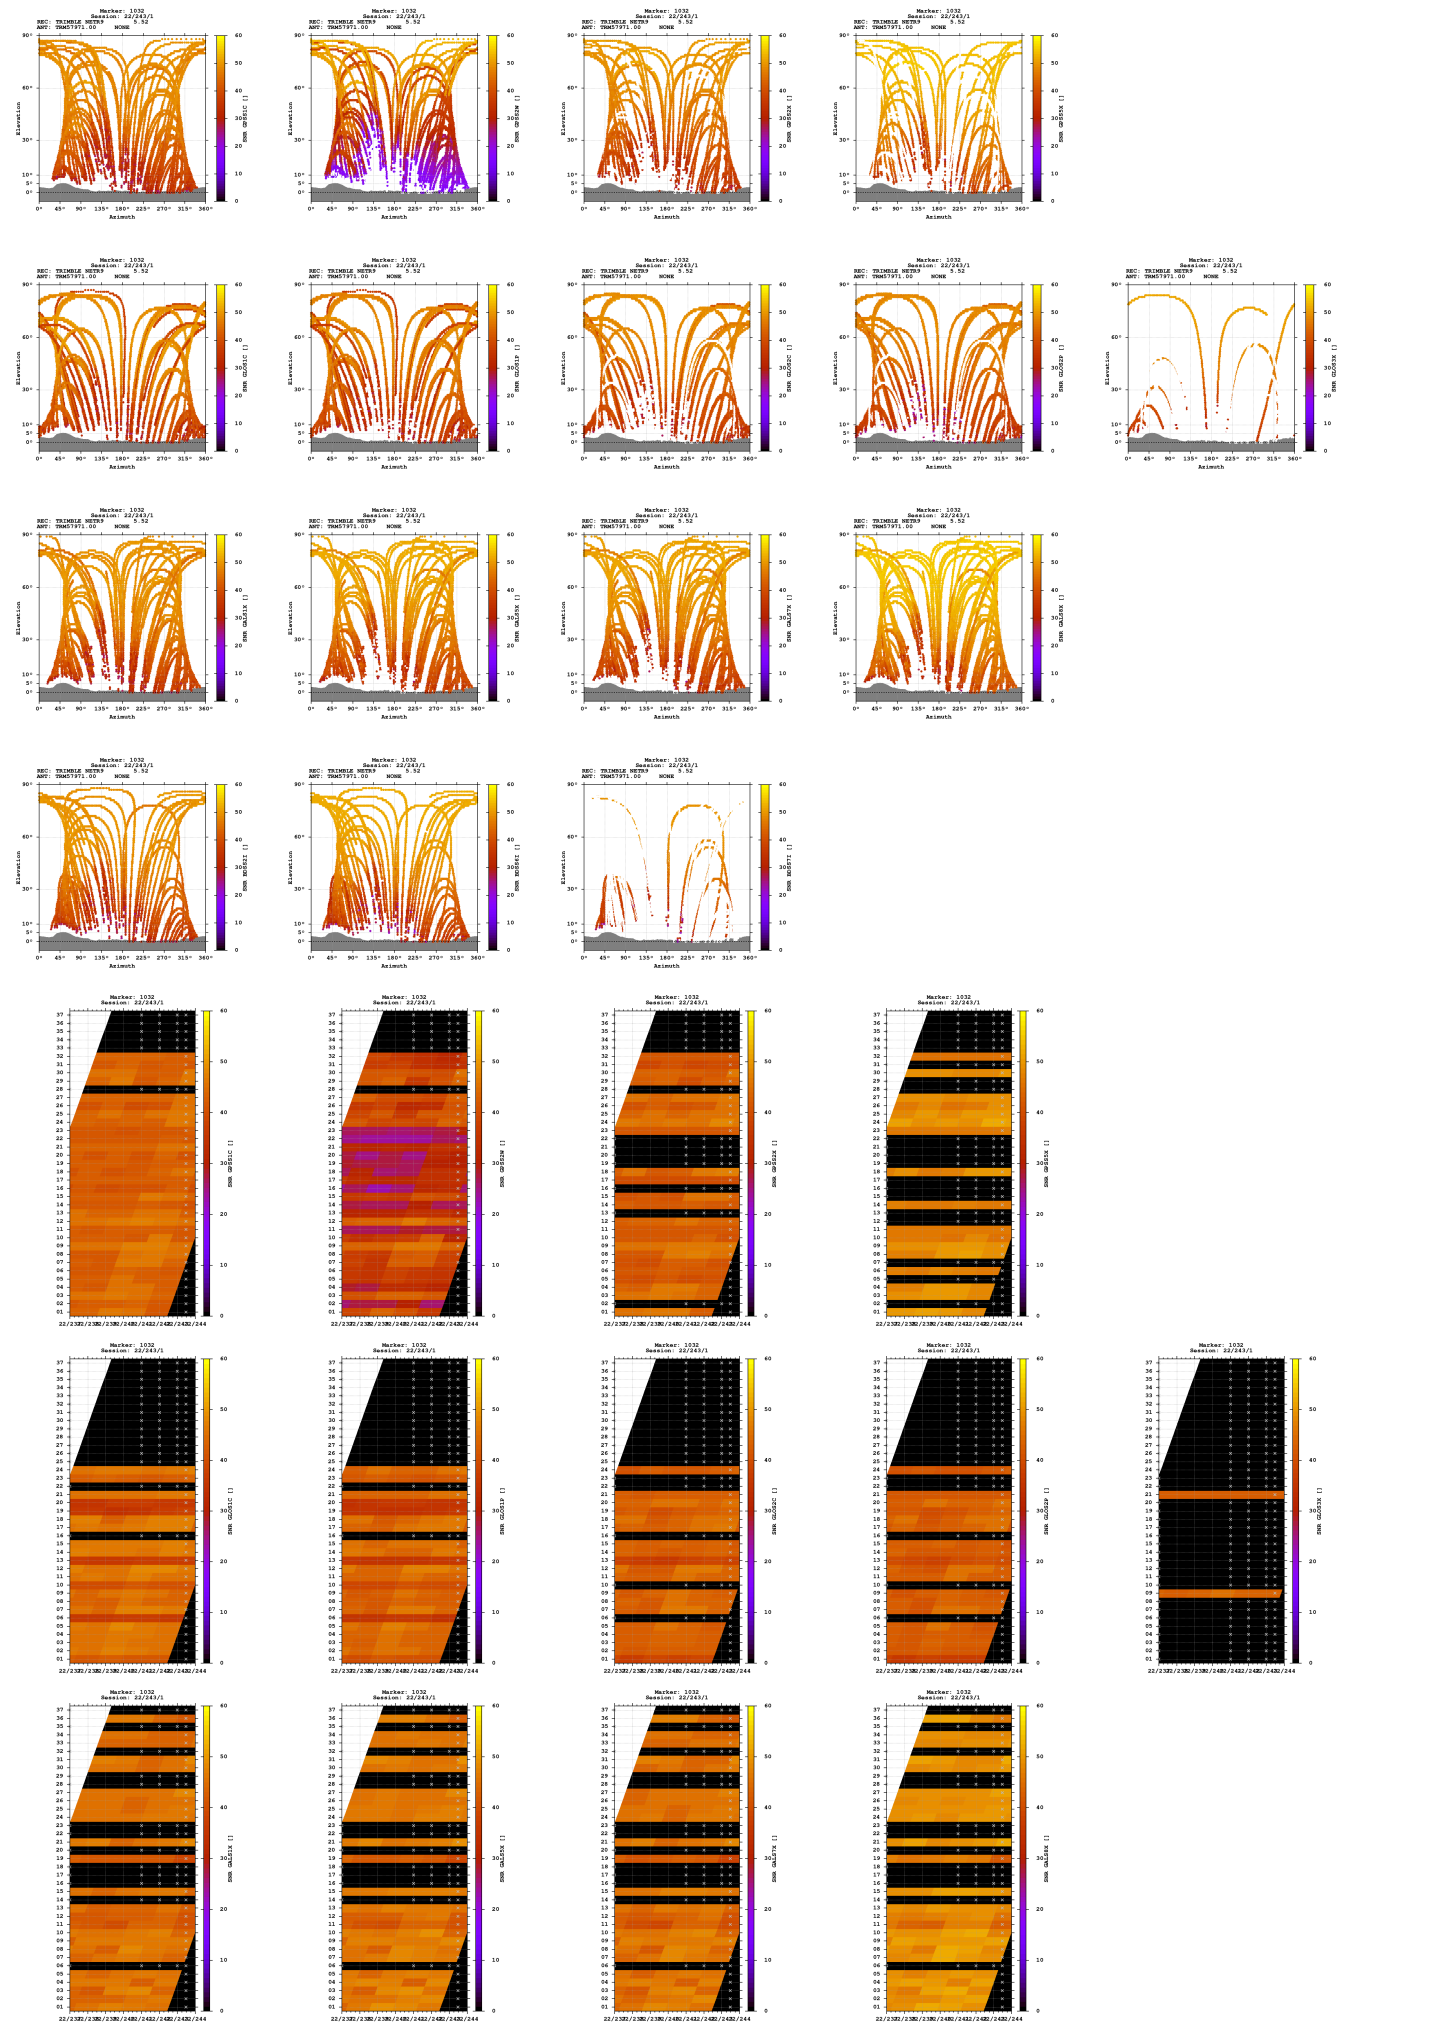

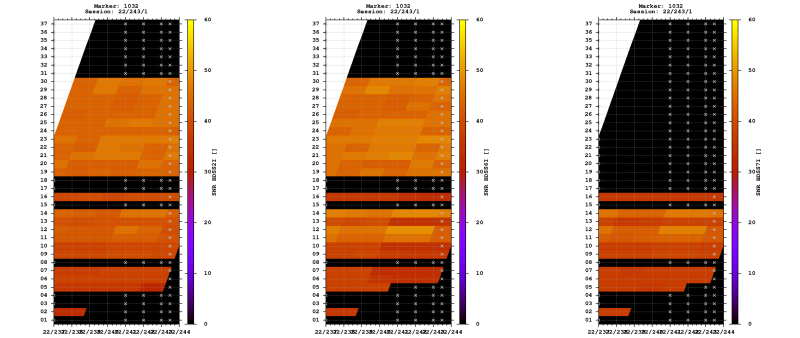


Estimates

2022-08-31 11:36:00	GPS	4255349.8470	647144.5471	4691705.5825	47.657666007	8.647163481	517.8761
2022-08-31 11:36:00	GLO	4255351.3804	647144.5919	4691706.9527	47.657664186	8.647161002	519.9145
2022-08-31 11:36:00	GAL	4255349.5910	647144.6176	4691705.4240	47.657666660	8.647164920	517.5956
2022-08-31 11:36:00	BDS	4255358.7965	647146.4209	4691710.2336	47.657633495	8.647170229	527.4631

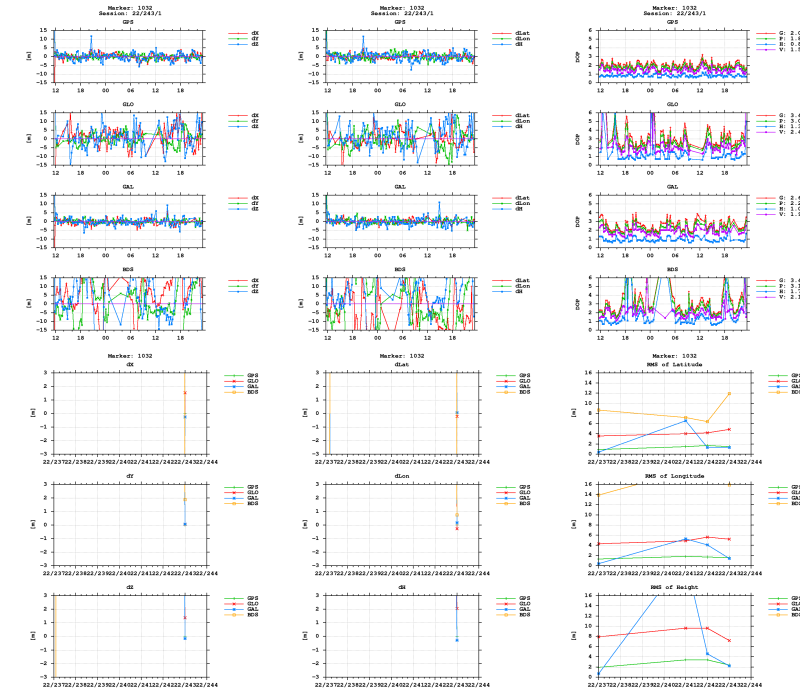

BNC



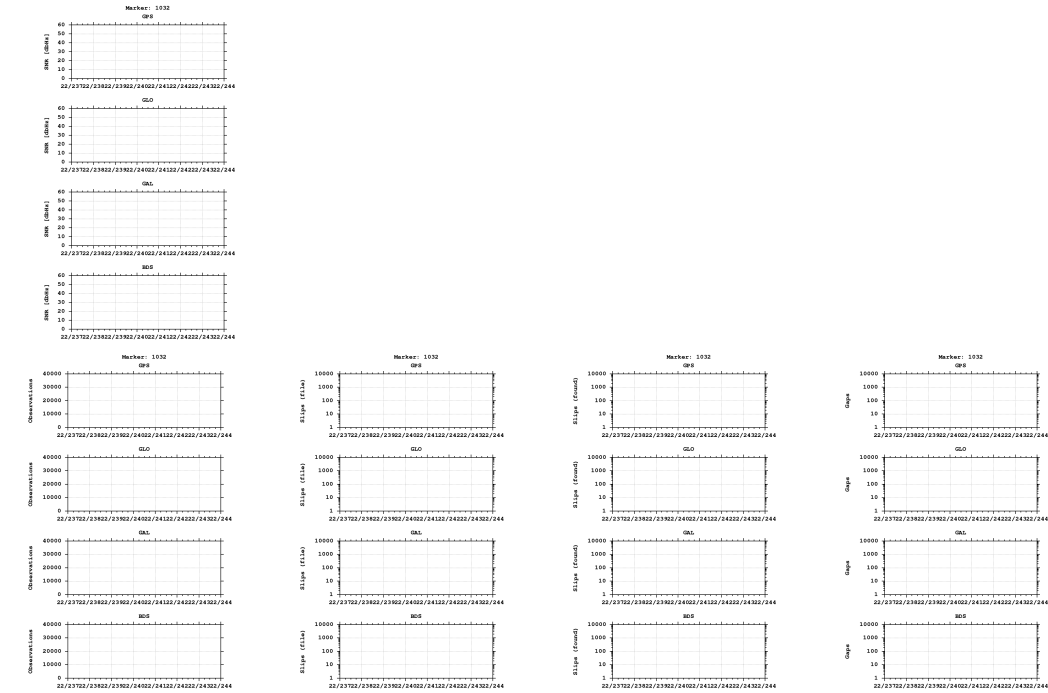

Equipment

2022-08-22 00:00:00 TRIMBLE NETR9 5.52 516 TRM57971.00 NONE 516

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)