


GNSS observation file monitoring for 0517


Last RINEX file: 05172341.22O
RINEX version: 3.02
Marker: 1093
Receiver: 517 TRIMBLE NETR9 5.52
Antenna: 517 TRM57971.00 NONE


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

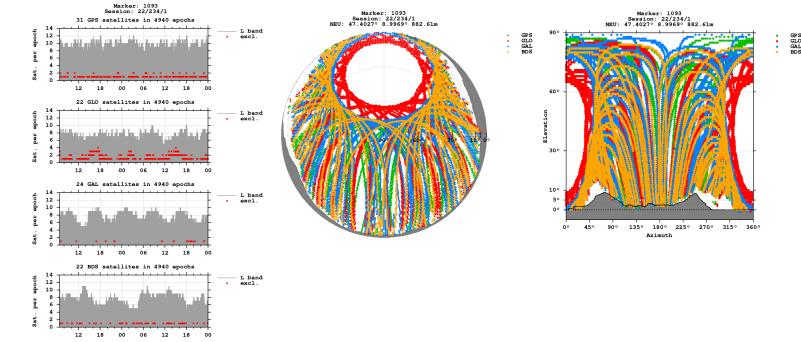


Bands

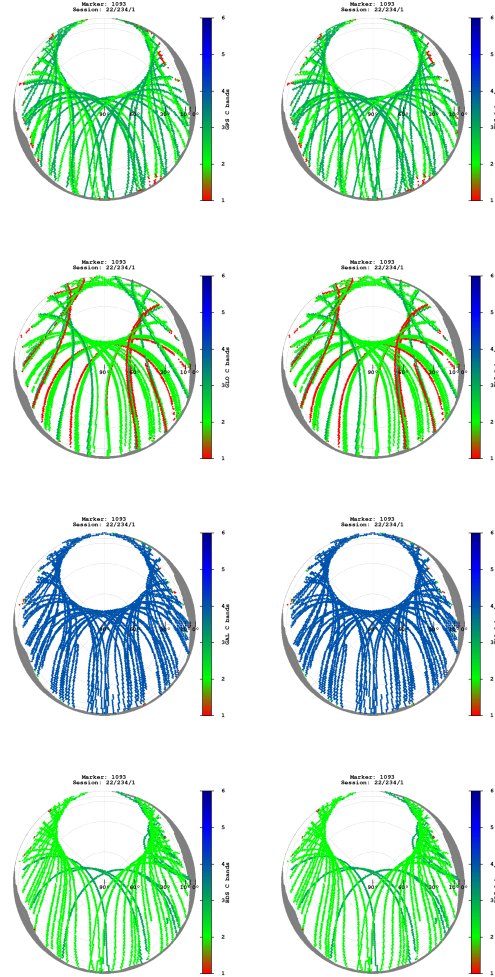


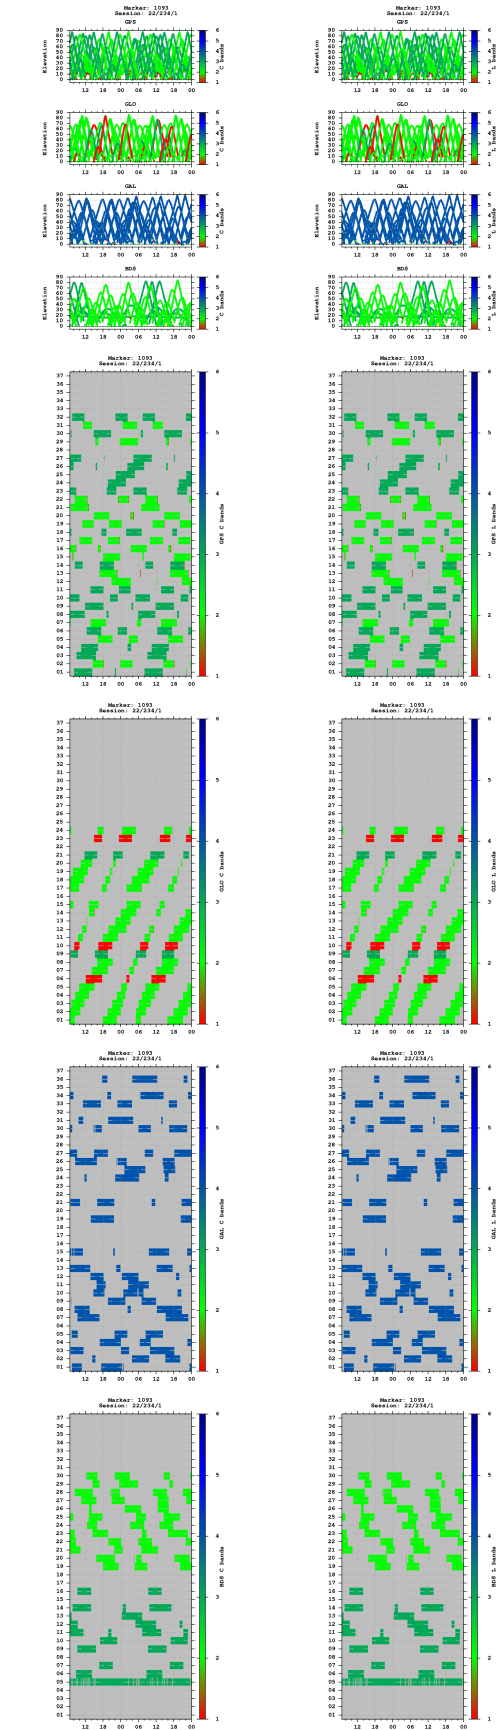


Multipath

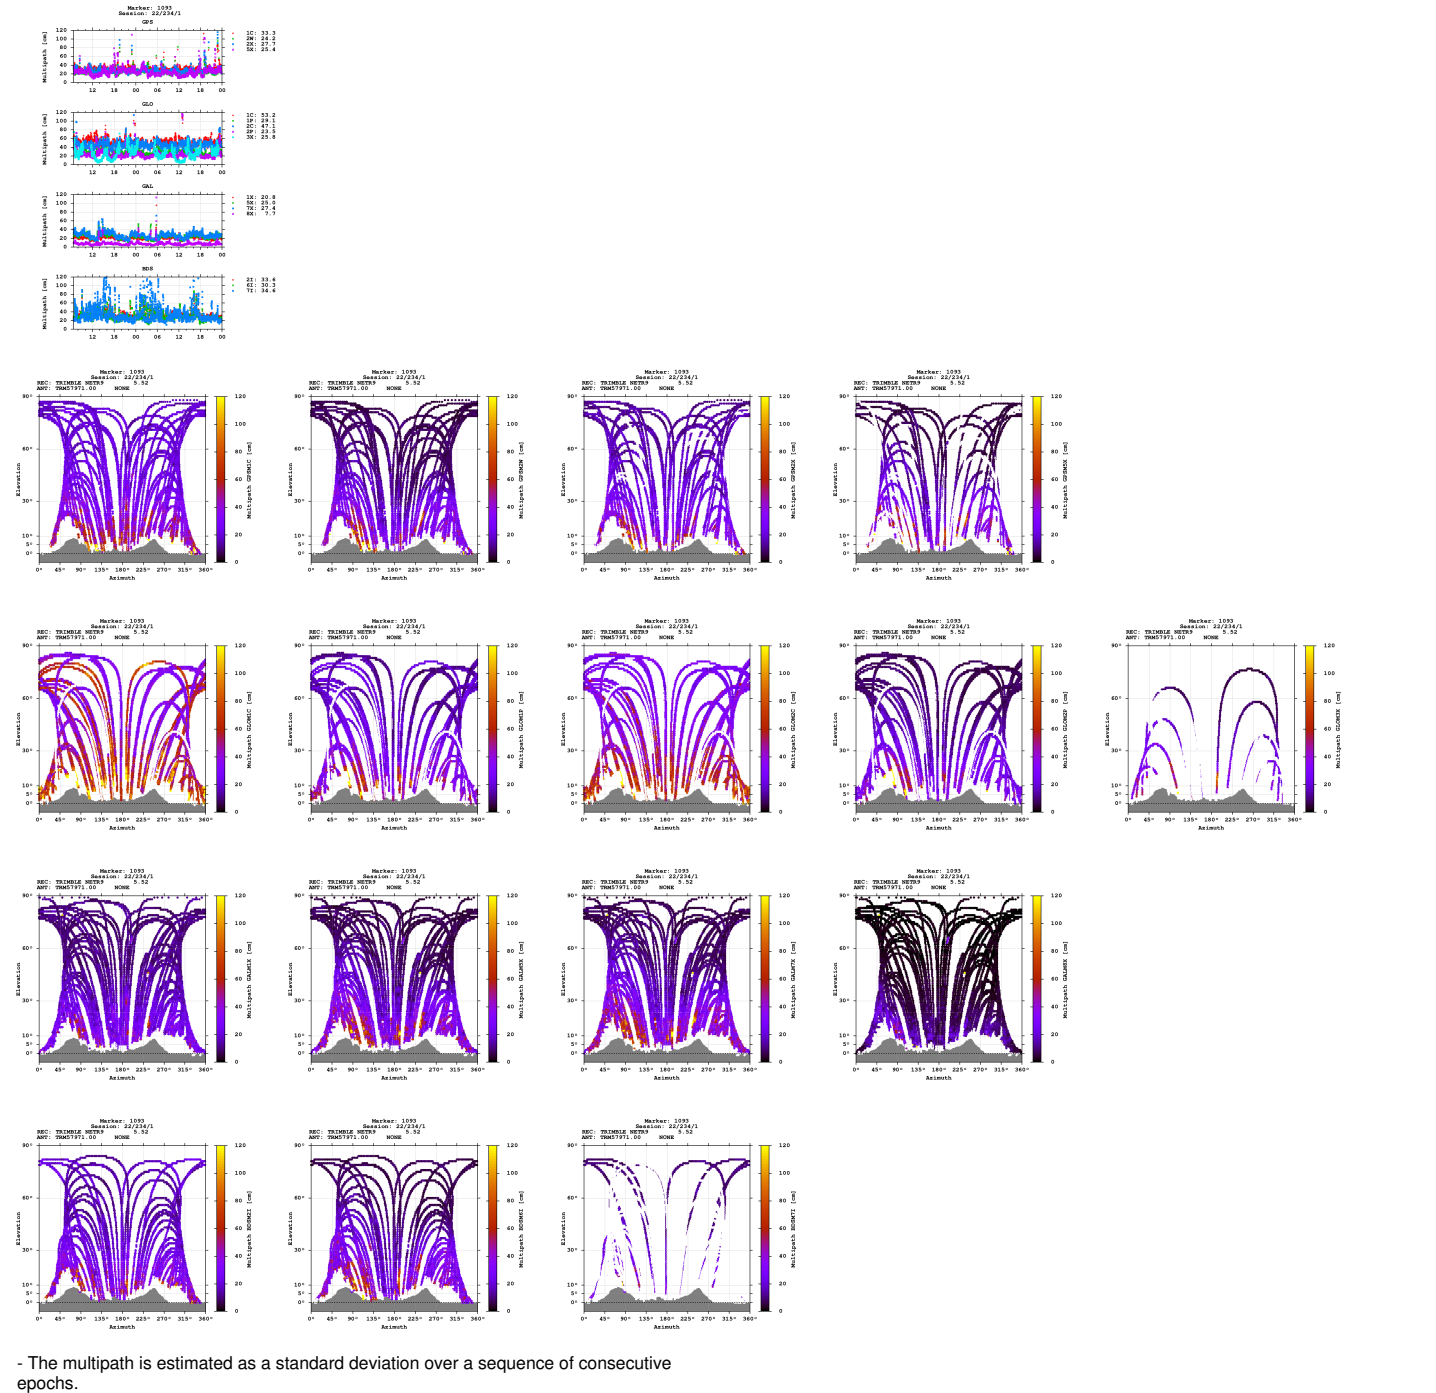


Signal-to-noise ratio

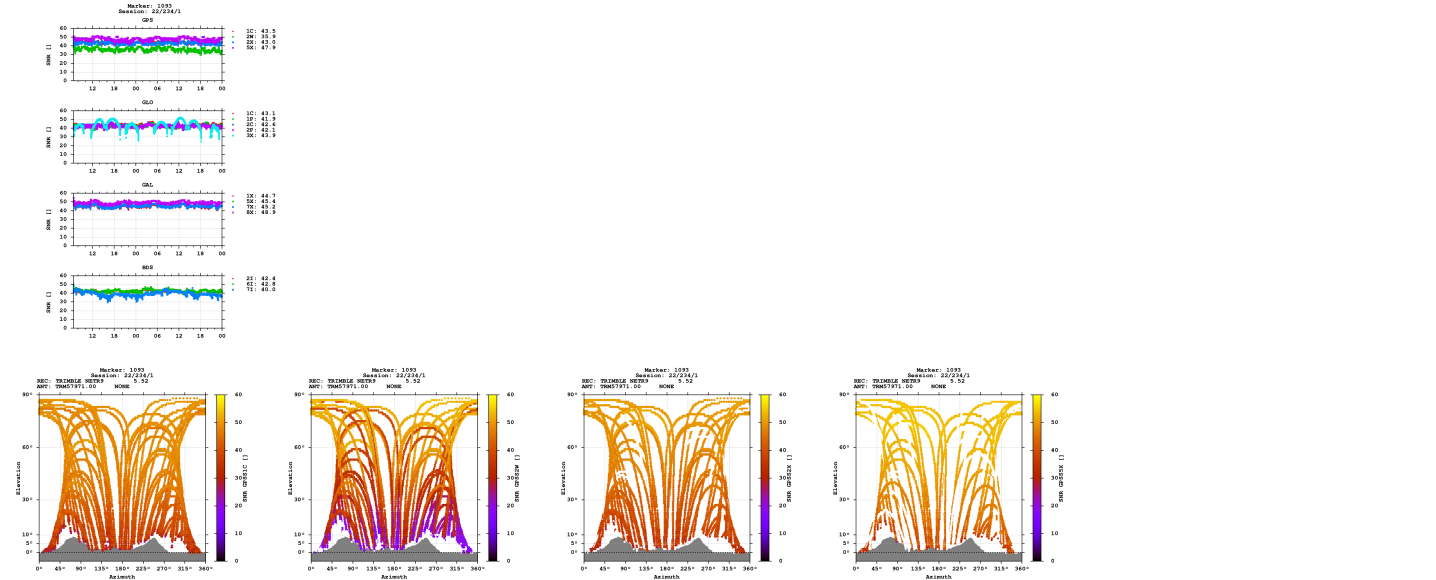

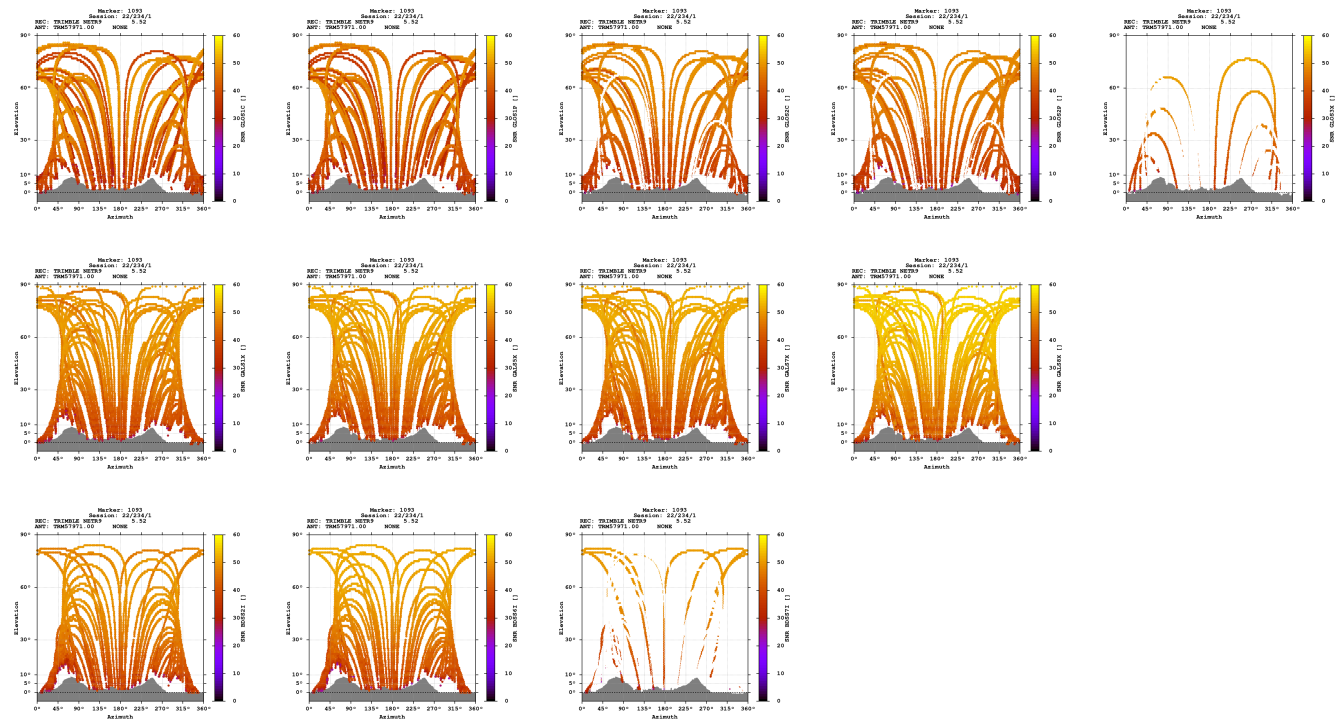

Estimates

2022-08-22 06:45:30	GPS	4272215.2410	676417.0460	4672835.2221	47.402738765	8.996920563	882.6074
2022-08-22 06:45:30	GLO	4272216.4335	676416.7593	4672836.0422	47.402736256	8.996914341	883.9780
2022-08-22 06:45:30	GAL	4272215.2203	676416.9542	4672834.9466	47.402737318	8.996919405	882.3811
2022-08-22 06:45:30	BDS	4272215.0480	676415.9403	4672837.3624	47.402754200	8.996906496	883.9369

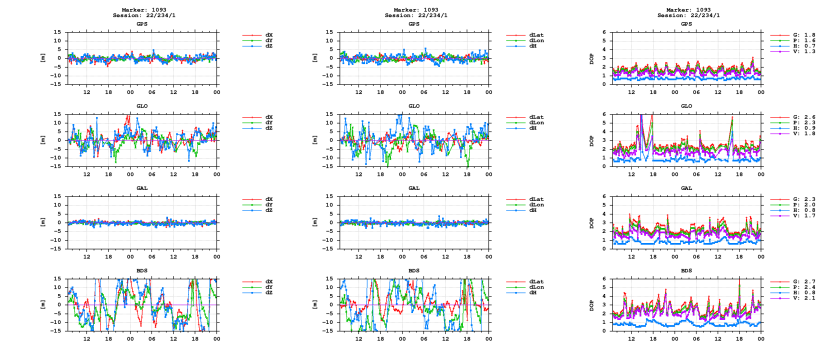

BNC

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)