


GNSS observation file monitoring for 0517


Last RINEX file: 05172371.220
RINEX version: 3.02
Marker: 1054
Receiver: 517 TRIMBLE NETR9 5.52
Antenna: 517 TRM57971.00 NONE

Epochs

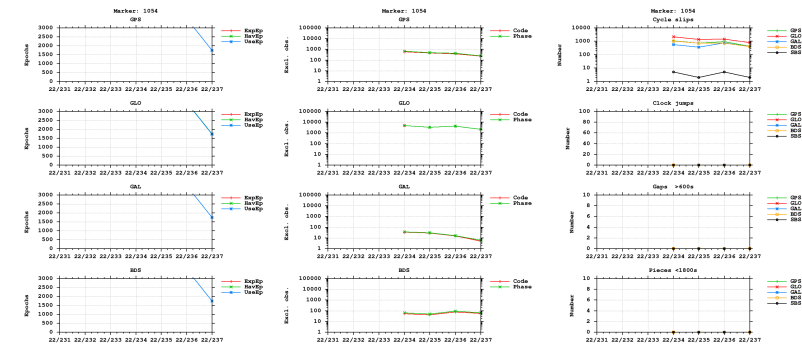



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

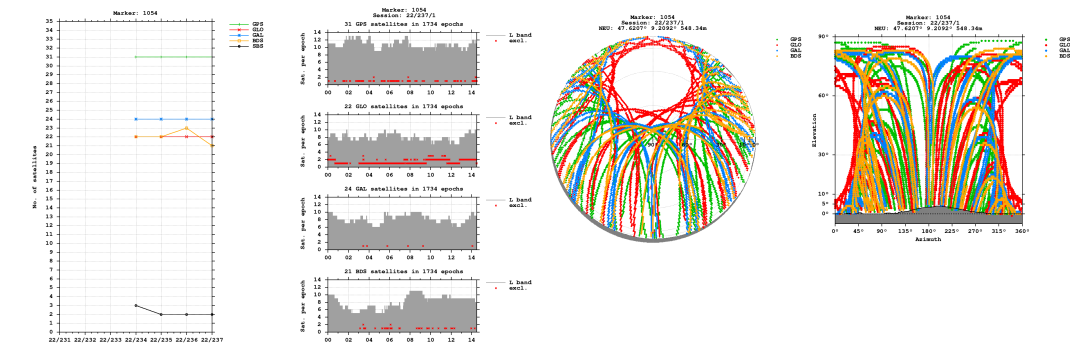


Bands

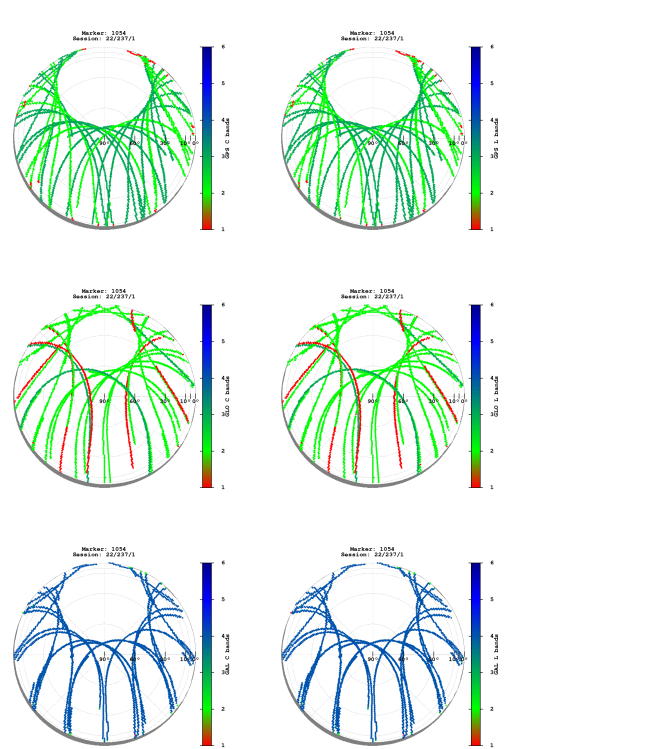

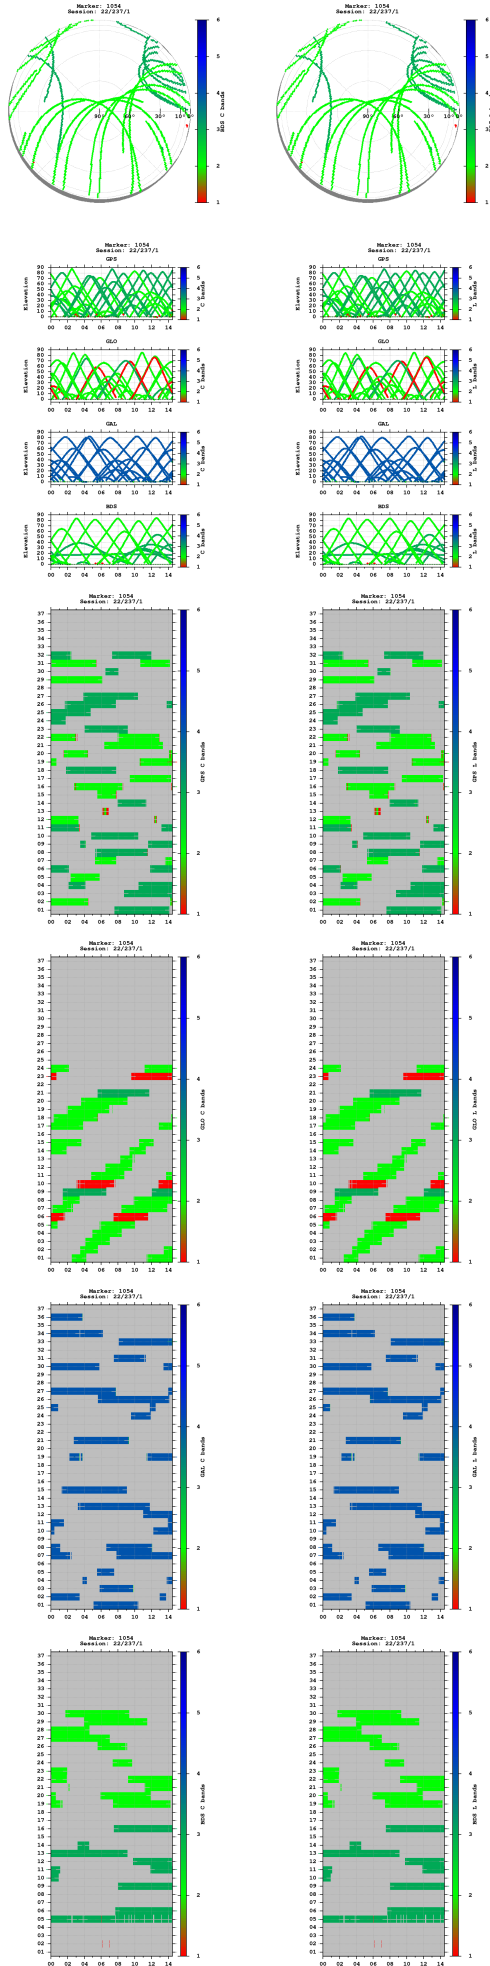


Observations




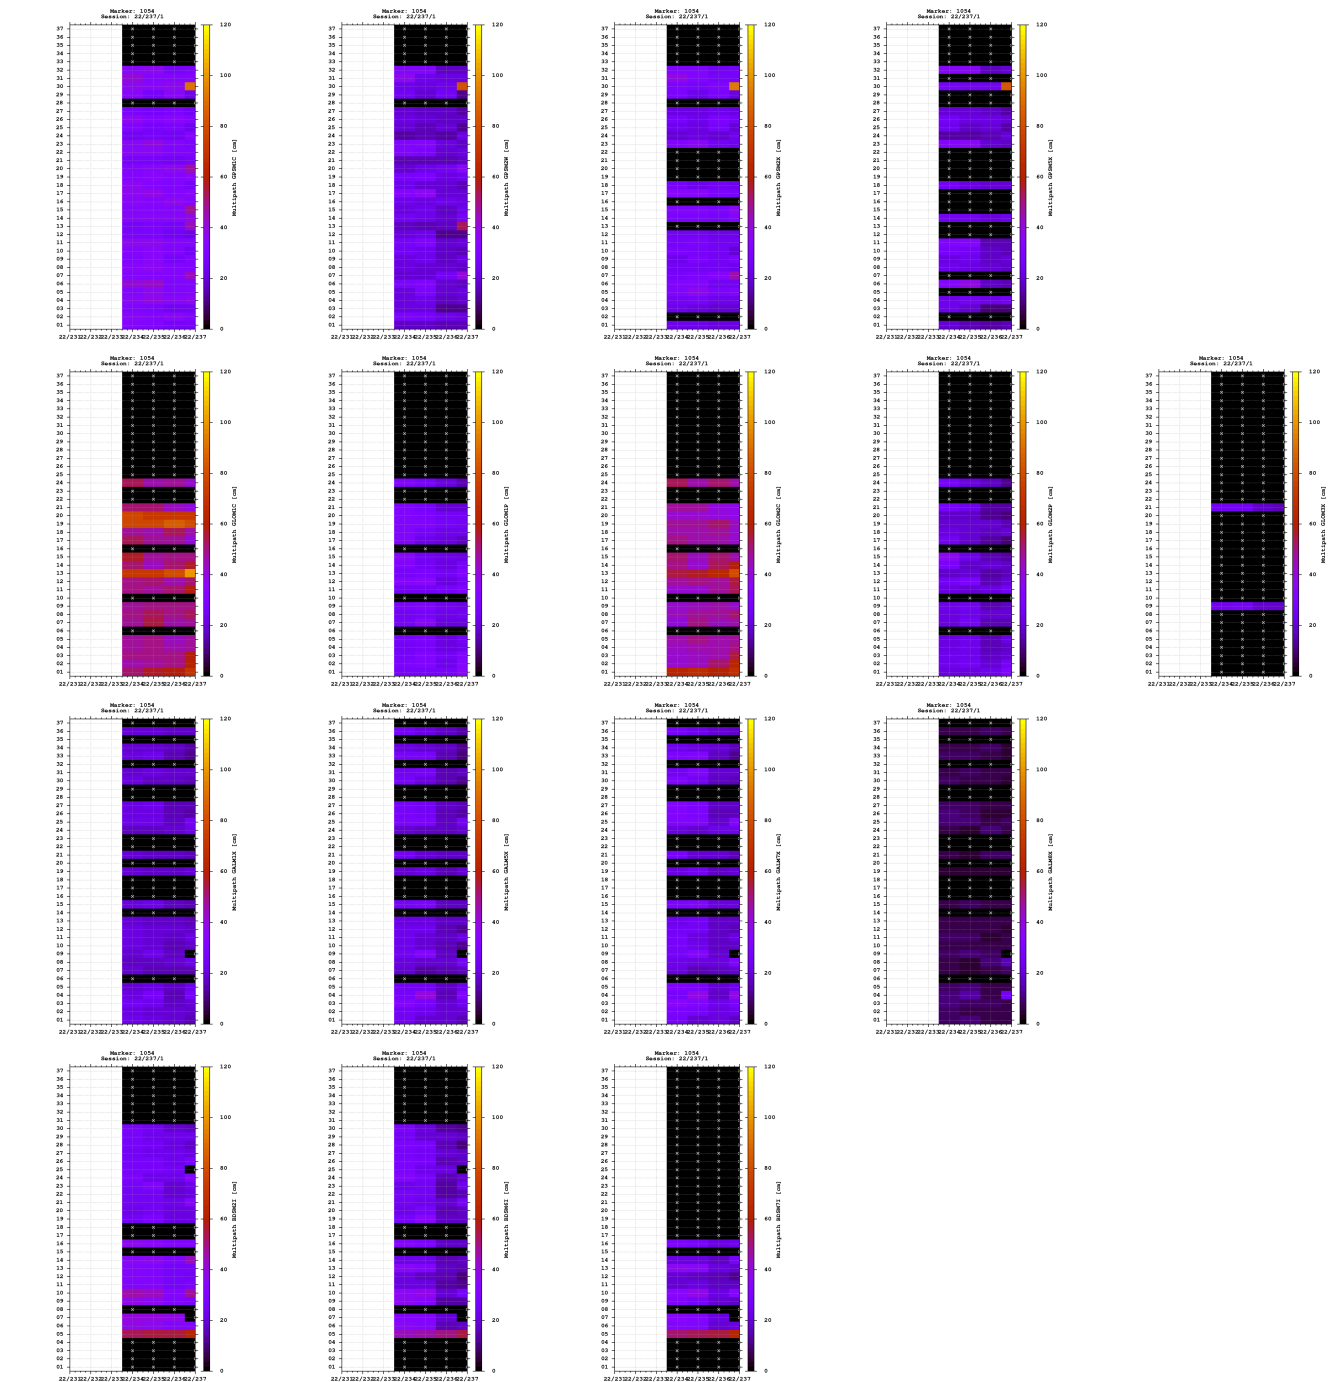


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

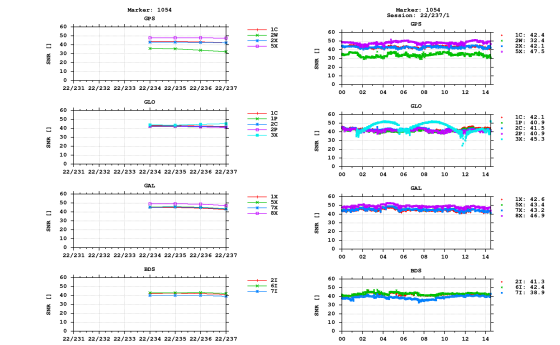


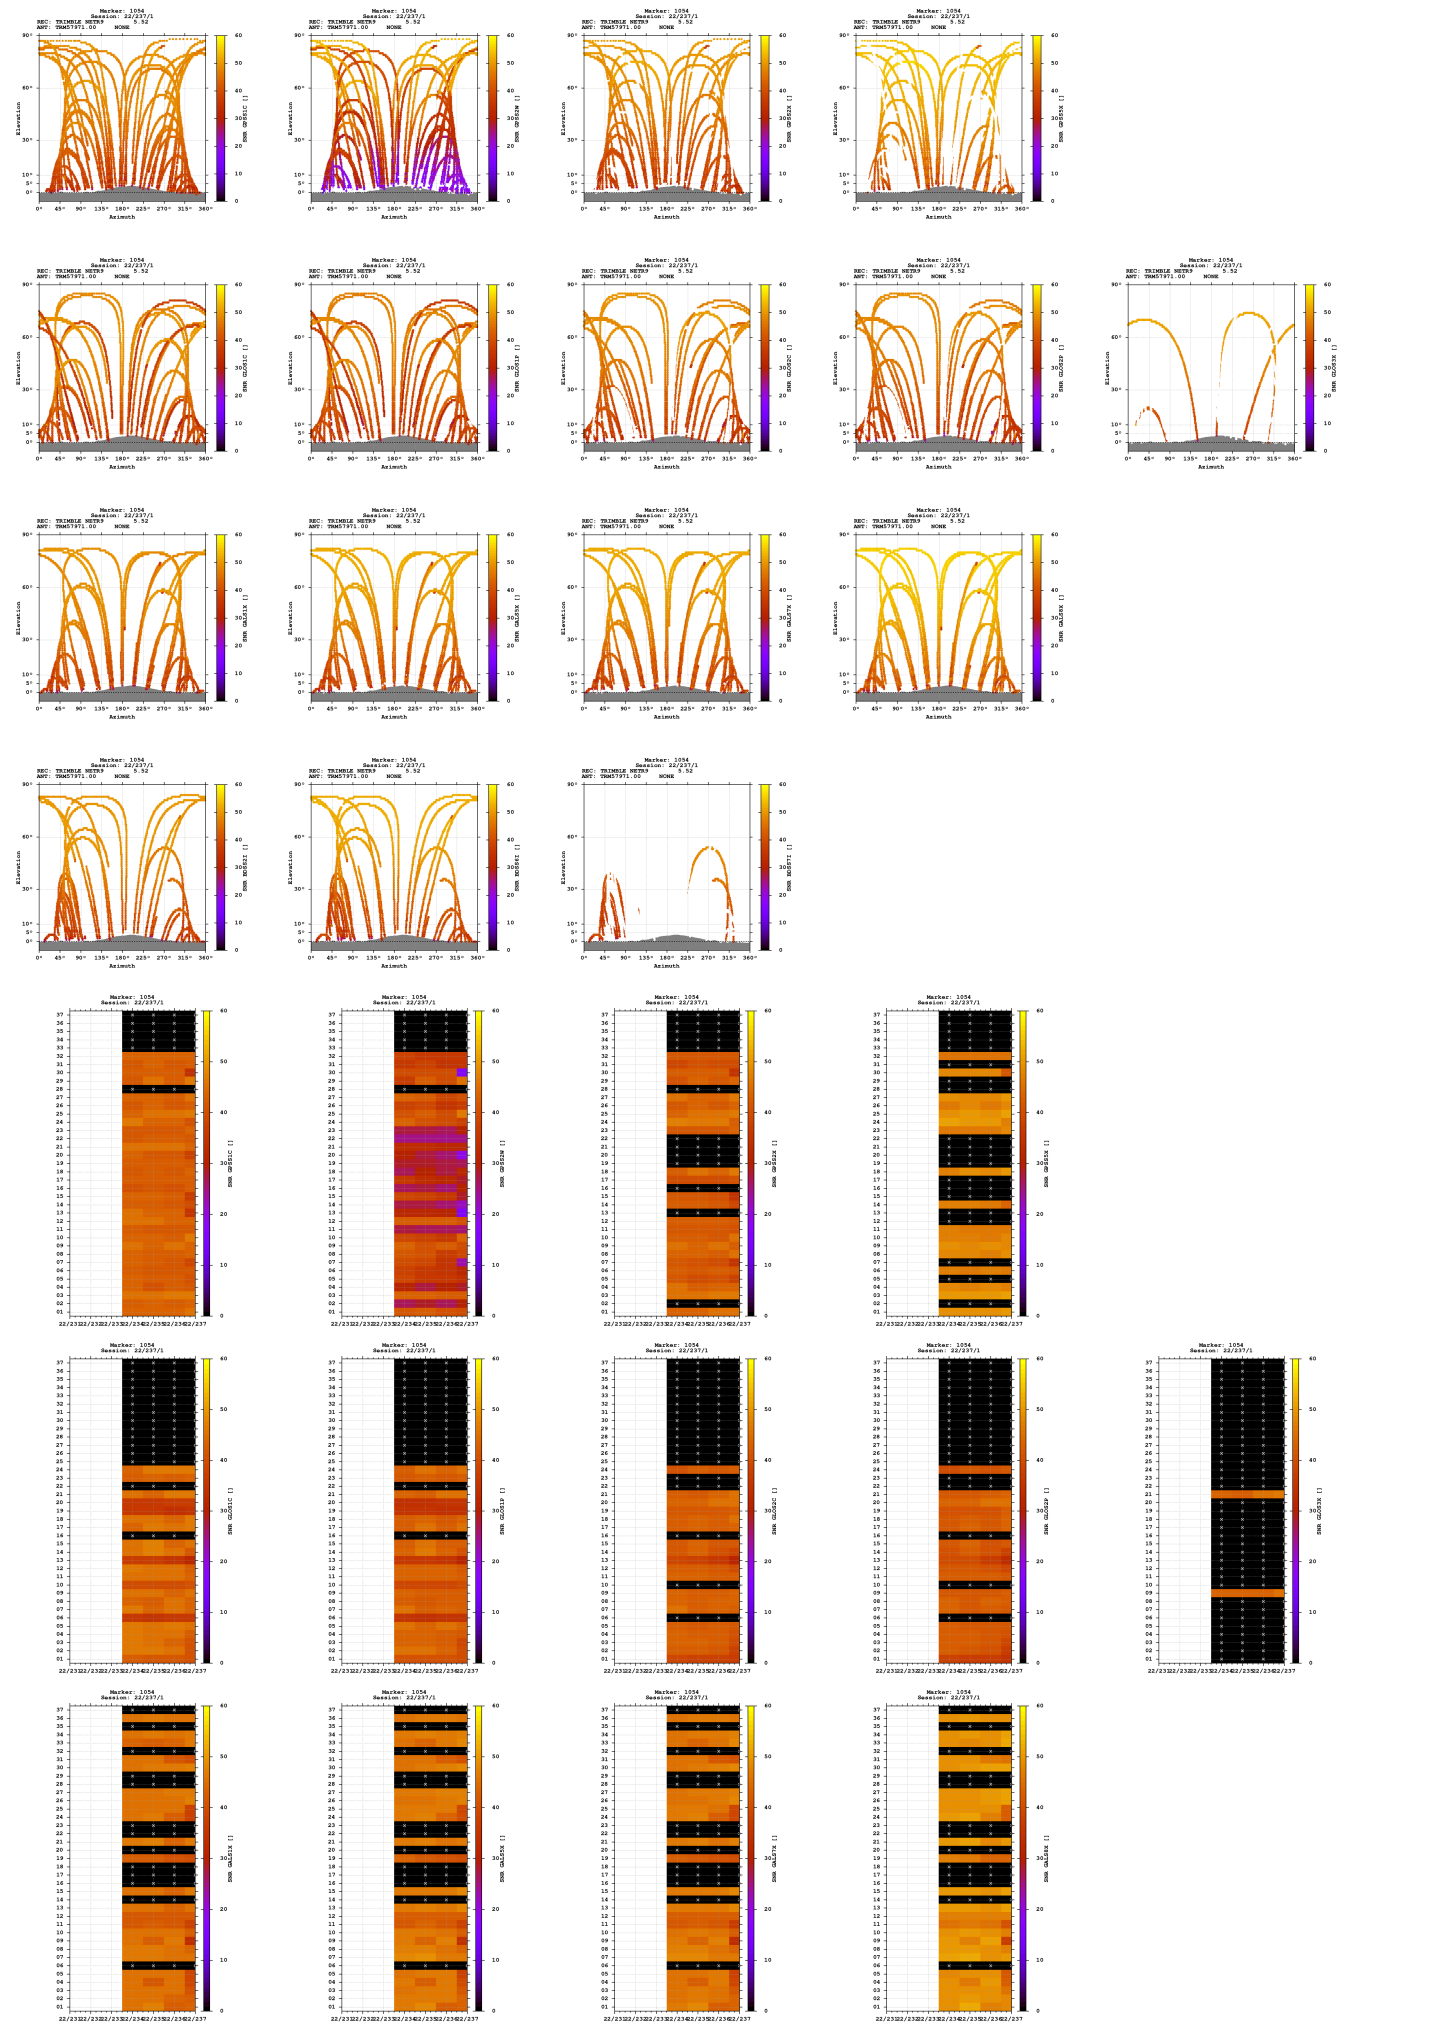

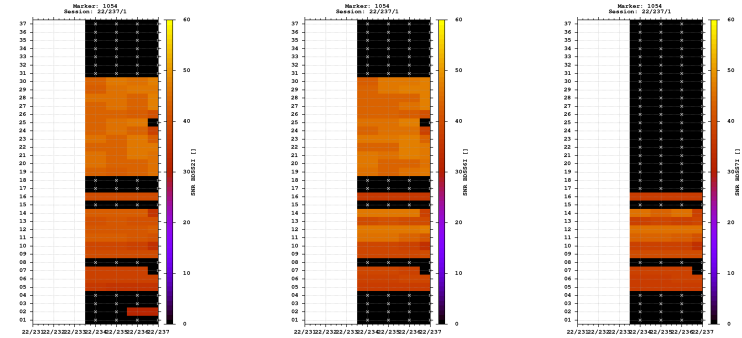



Estimates

2022-08-24 09:00:30	GPS	4251817.6501	689346.7455	4688956.2290	47.620669018	9.209225082	548.3378
2022-08-24 09:00:30	GLO	4251817.5276	689346.1388	4688954.9152	47.620662502	9.209217377	547.2203
2022-08-24 09:00:30	GAL	4251817.8902	689346.6652	4688956.1966	47.620667332	9.209223516	548.4650
2022-08-24 09:00:30	BDS	4251814.6951	689344.4588	4688960.0956	47.620714266	9.209201347	548.9813

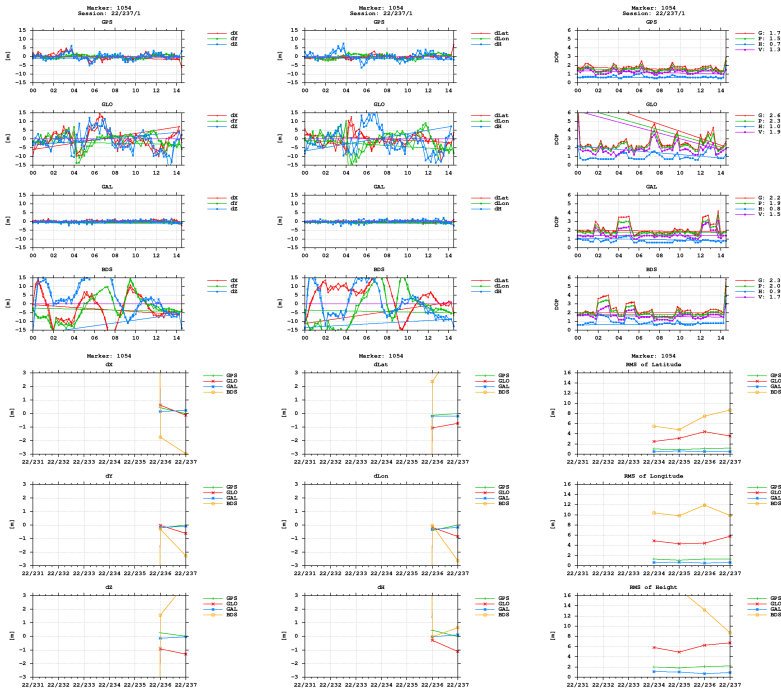

BNC

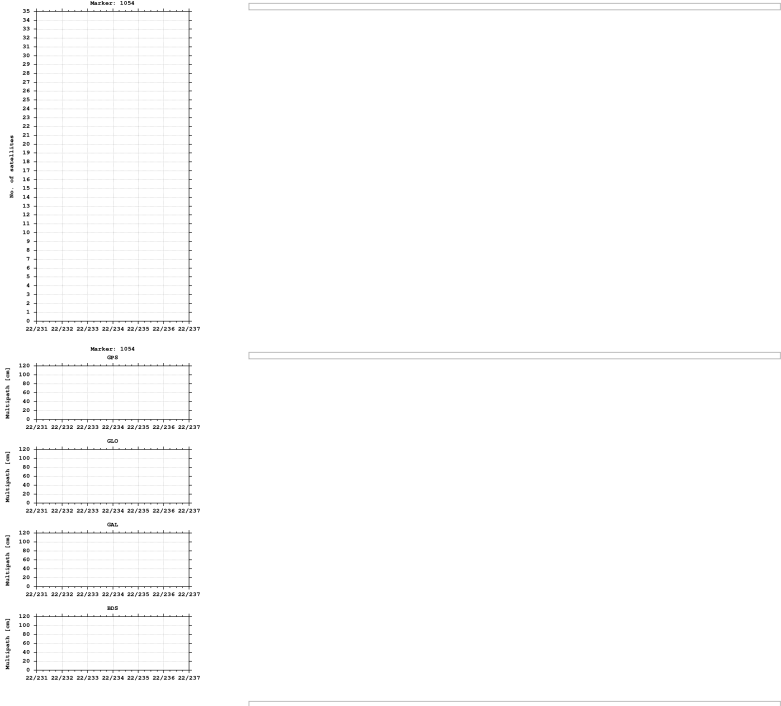

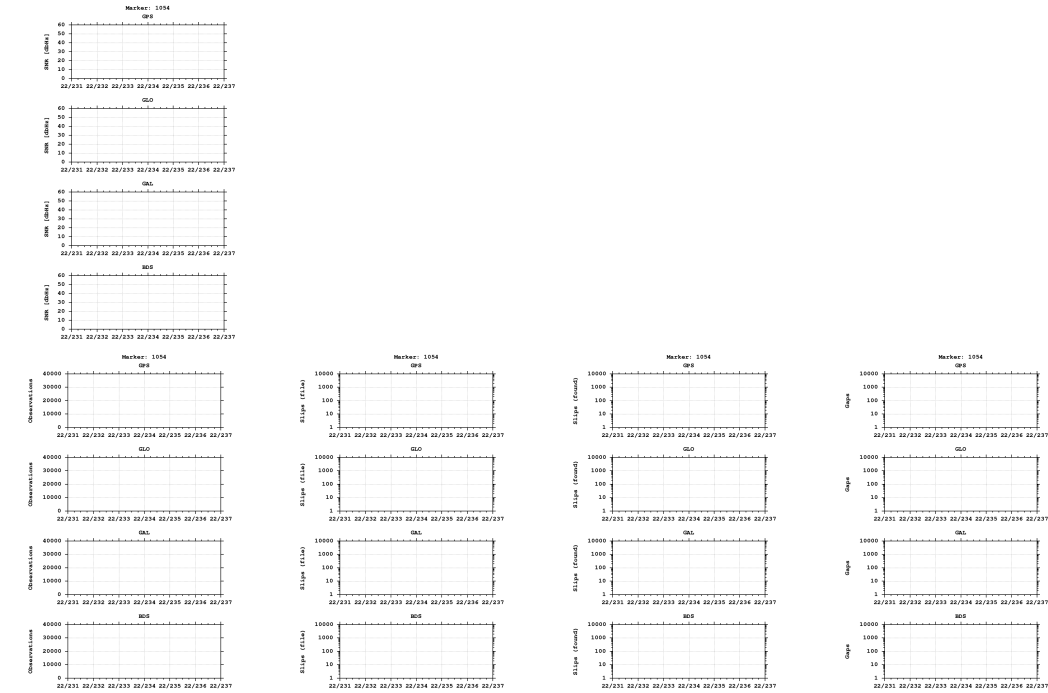

Equipment

2022-08-22 00:00:00 TRIMBLE NETR9 5.52 517 TRM57971.00 NONE 517

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)