


GNSS observation file monitoring for 0518


Last RINEX file: 05182341.22O
RINEX version: 3.02
Marker: 1074
Receiver: 518 TRIMBLE NETR9 5.52
Antenna: 518 TRM57971.00 NONE


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

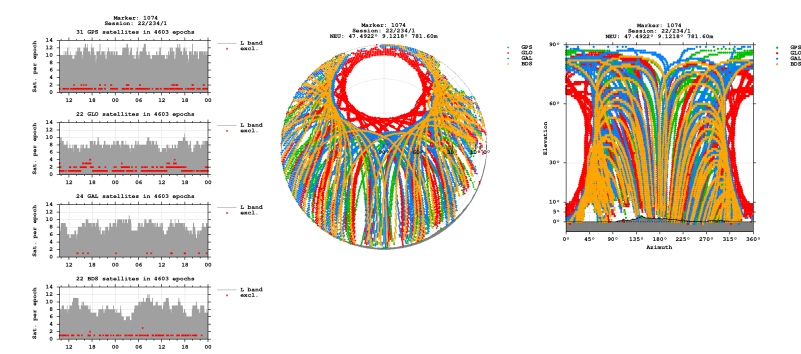


Bands

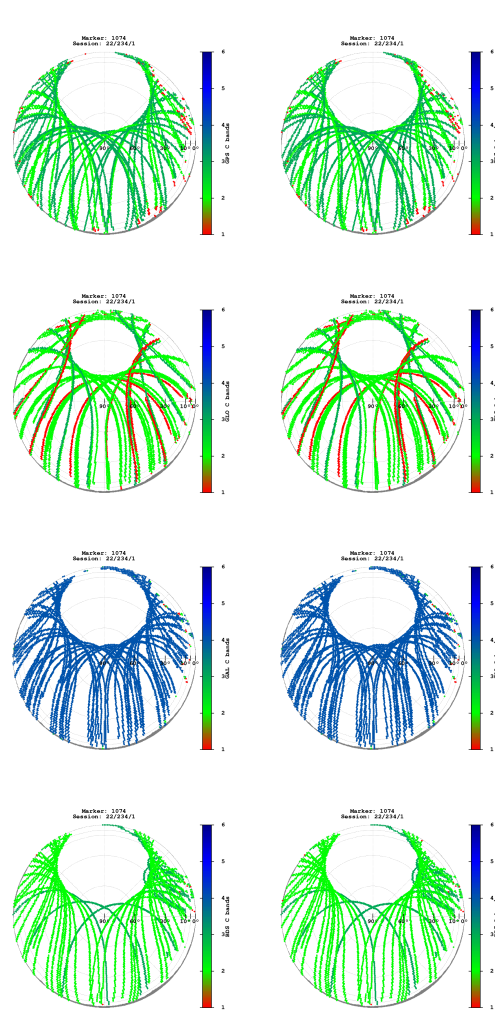


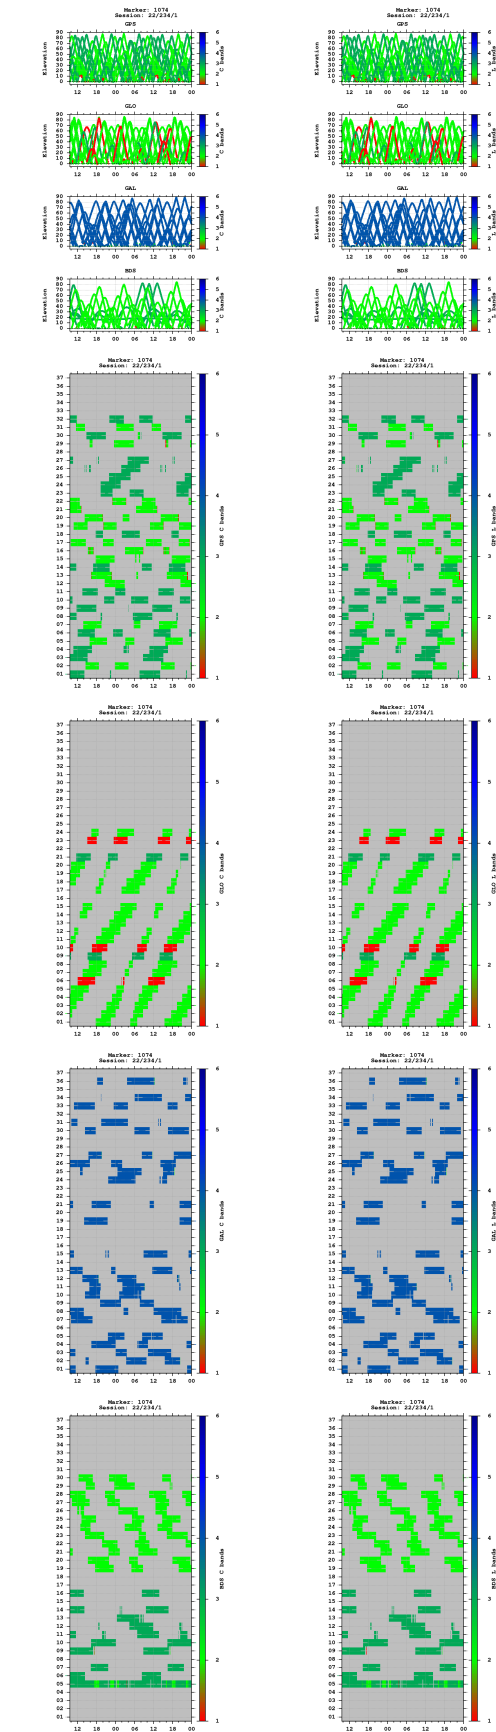


Multipath

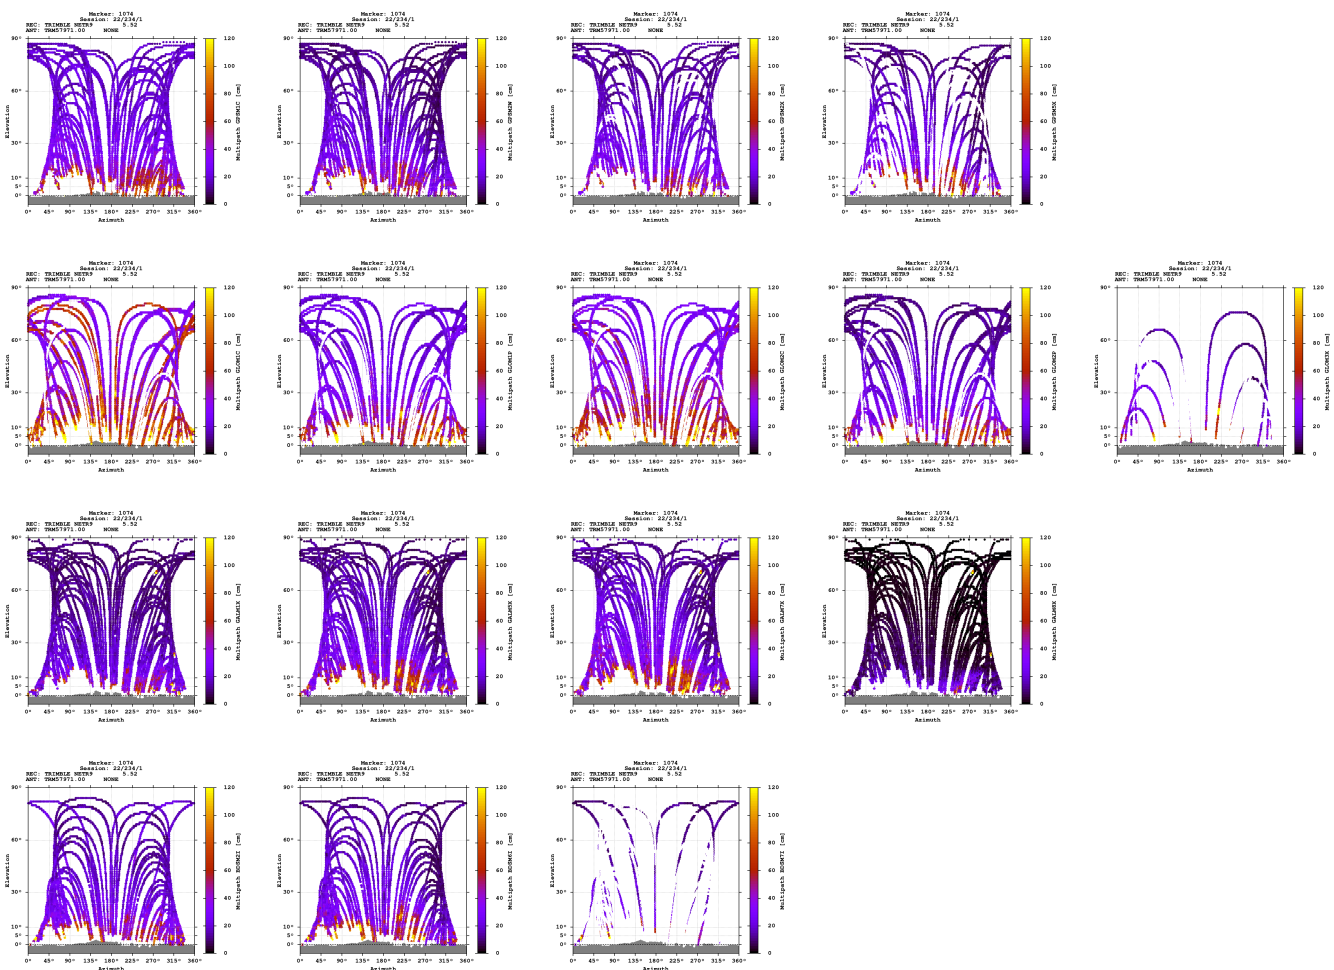


Signal-to-noise ratio

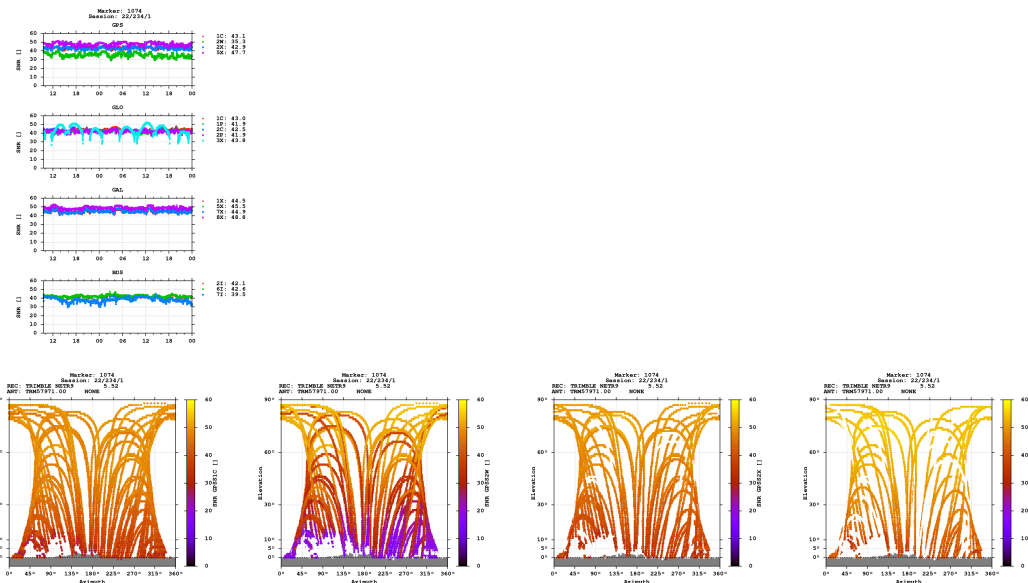

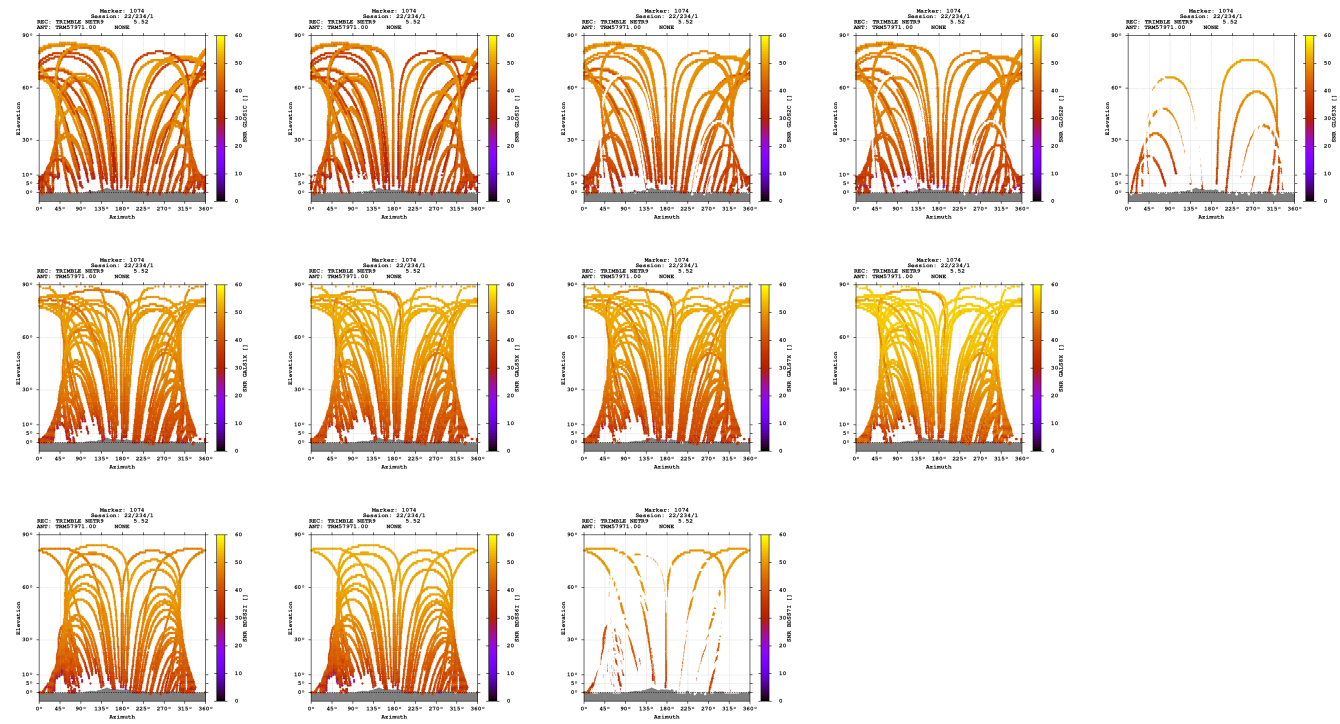

Estimates

2022-08-22 09:35:30	GPS	4263427.7442	684557.0580	4679487.9349	47.492199019	9.121835358	781.5991
2022-08-22 09:35:30	GLO	4263427.9960	684556.9242	4679488.2234	47.492199264	9.121833075	781.9655
2022-08-22 09:35:30	GAL	4263427.6809	684557.0943	4679487.7739	47.492198416	9.121835967	781.4421
2022-08-22 09:35:30	BDS	4263426.9252	684555.8533	4679489.2712	47.492213766	9.121821297	781.9088

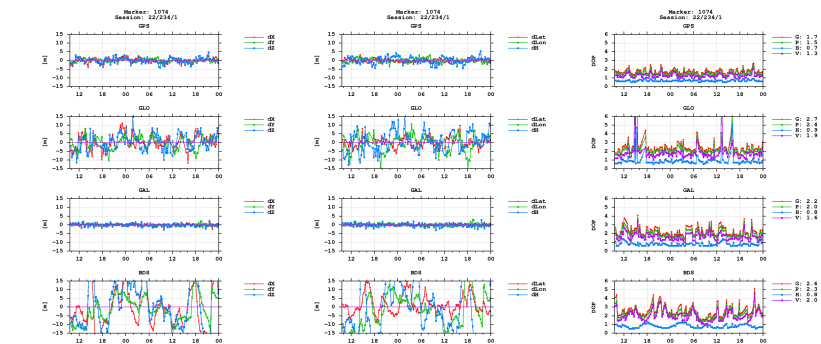

BNC

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)