


GNSS observation file monitoring for 0518


Last RINEX file: 05182371.220
RINEX version: 3.02
Marker: 1054
Receiver: 518 TRIMBLE NETR9 5.52
Antenna: 518 TRM57971.00 NONE

Epochs

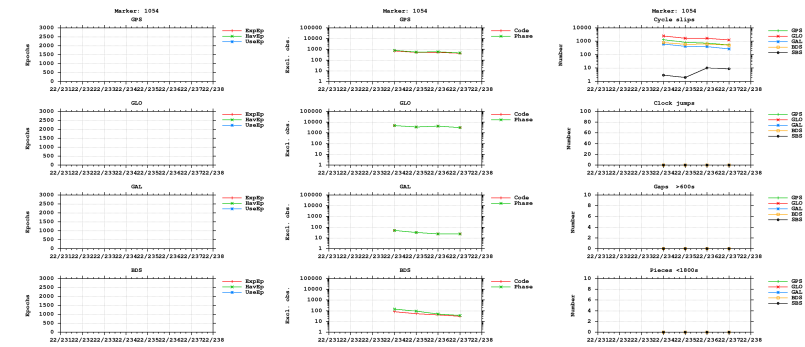



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

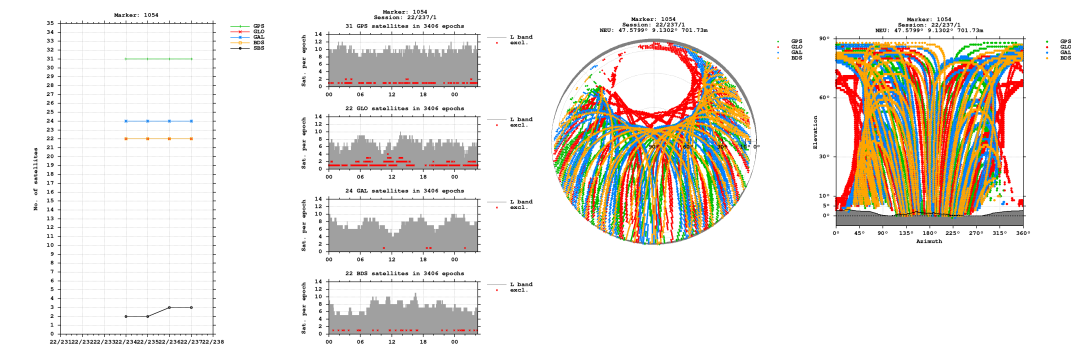


Bands

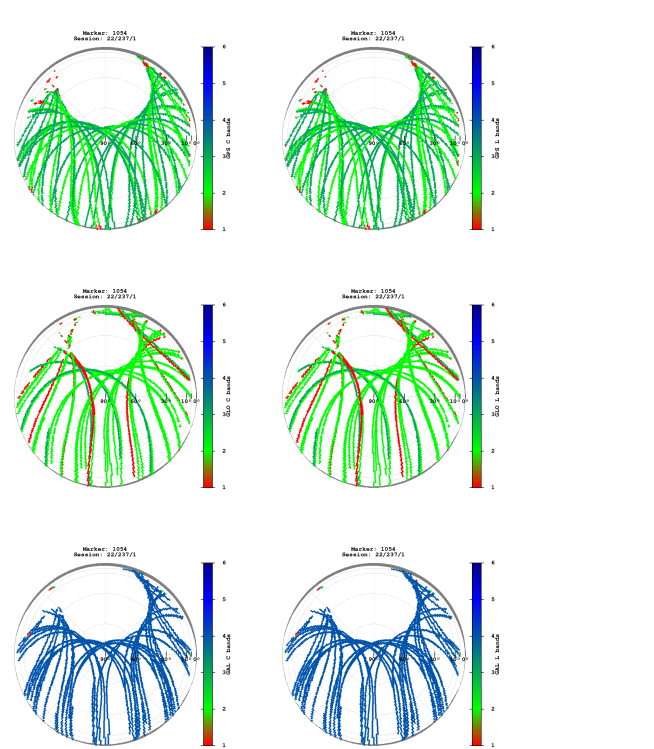


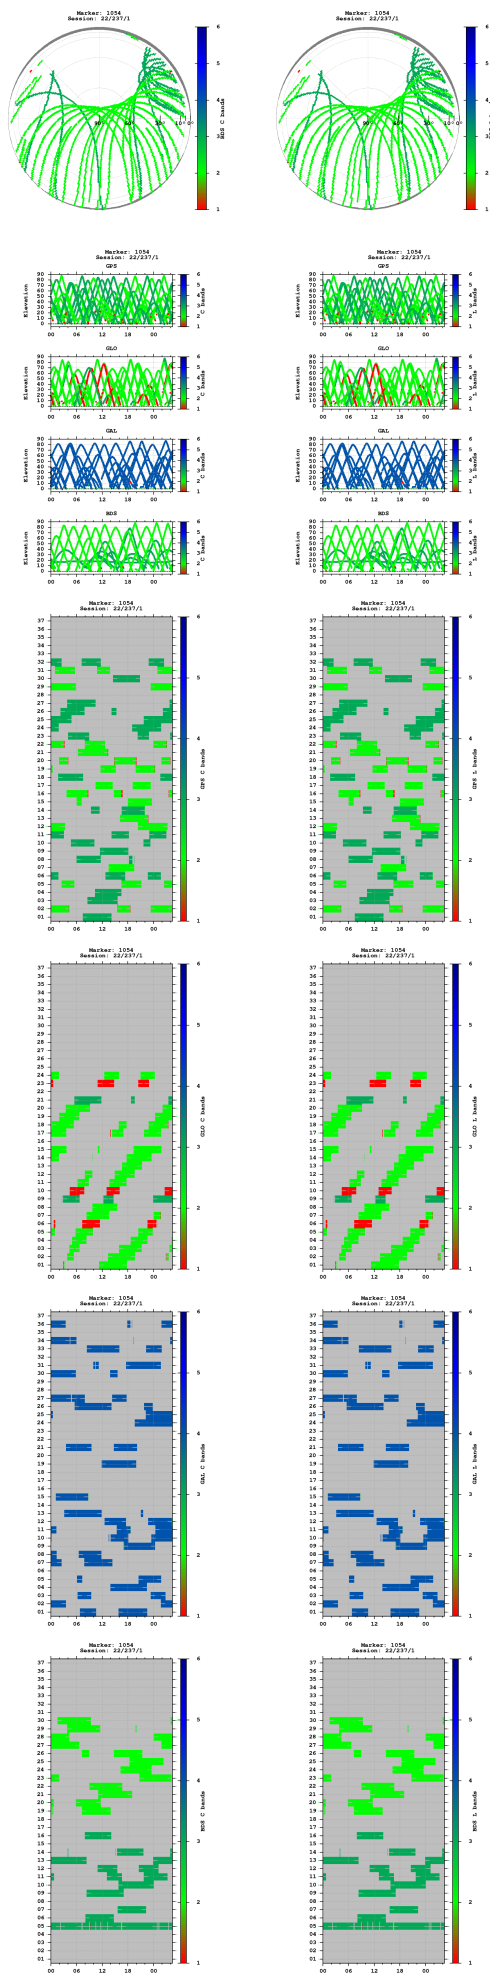


Observations

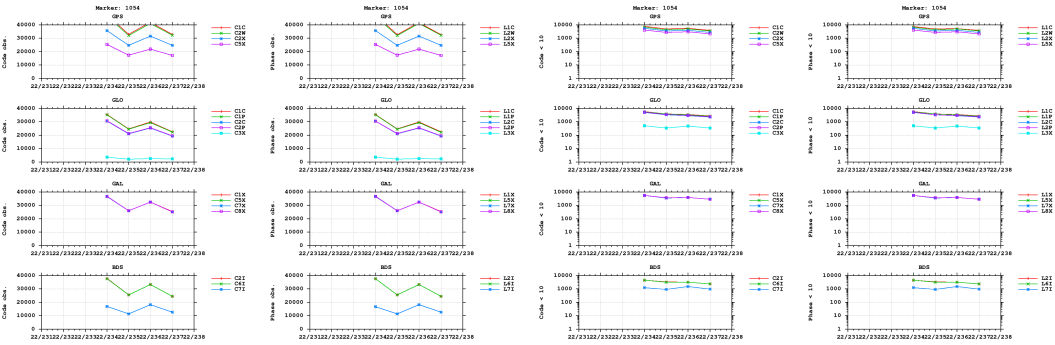


Multipath

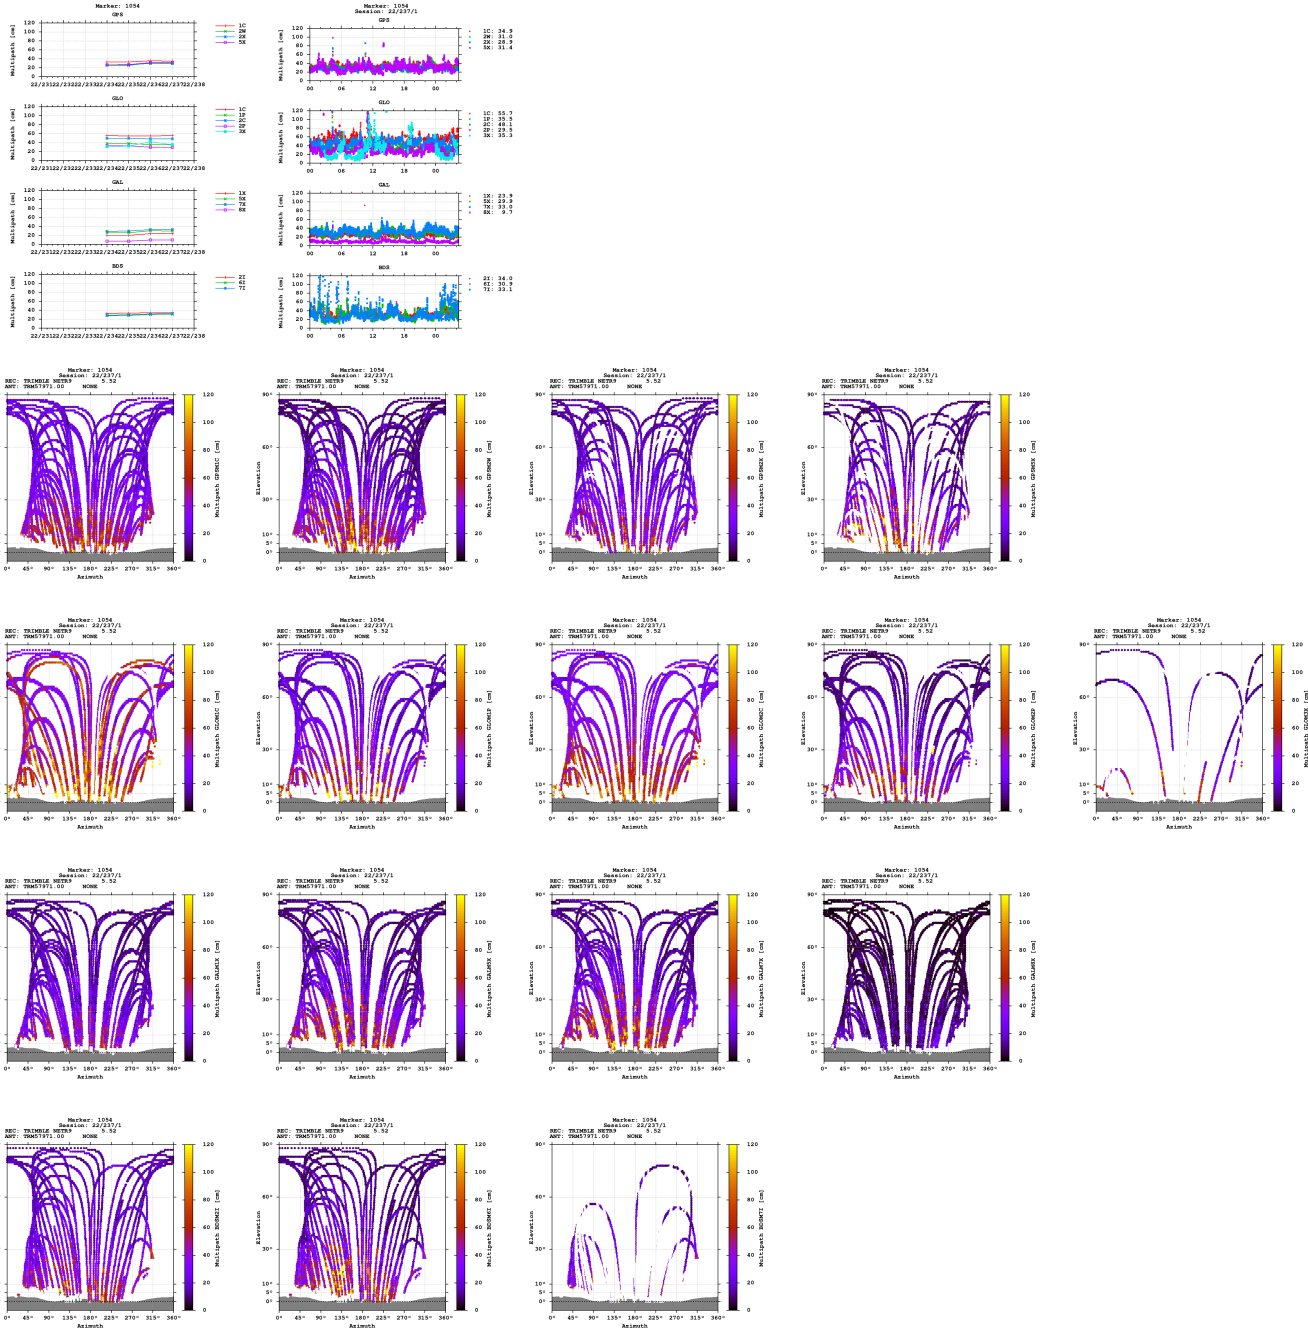


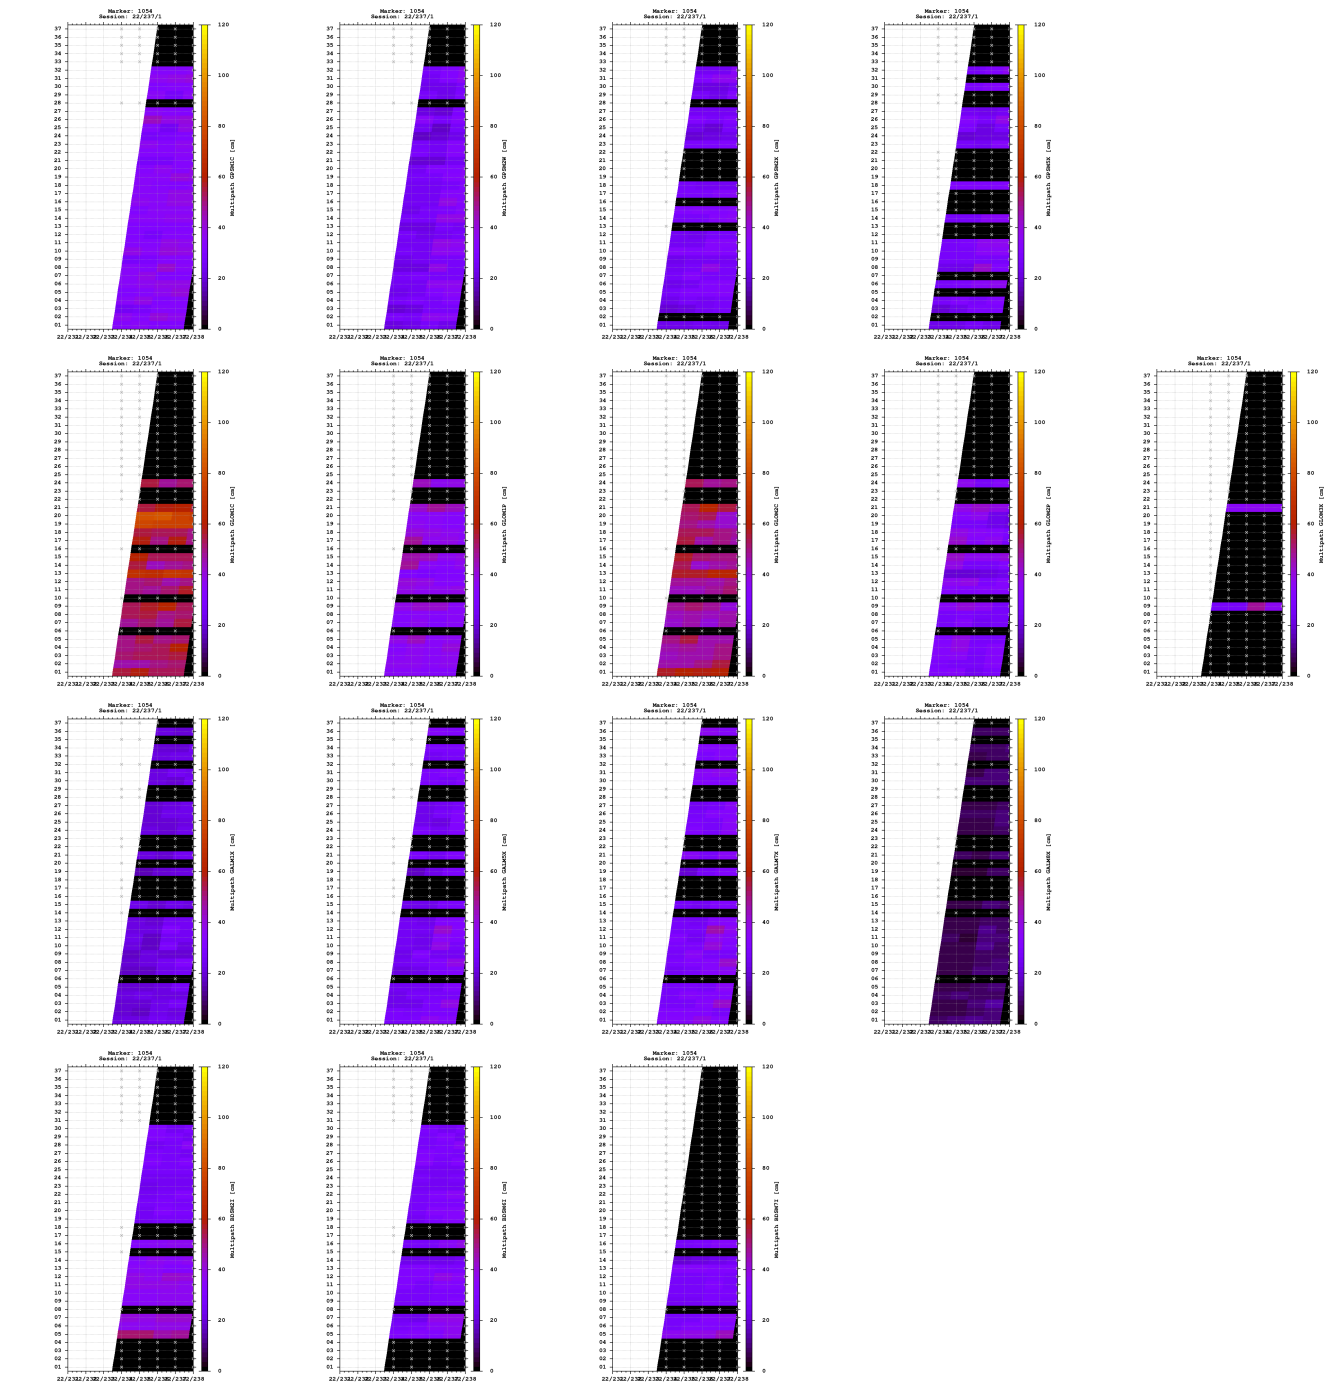


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

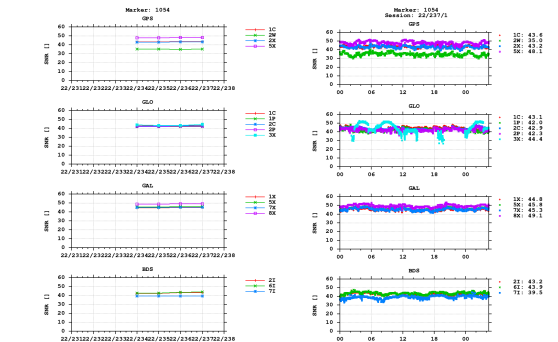


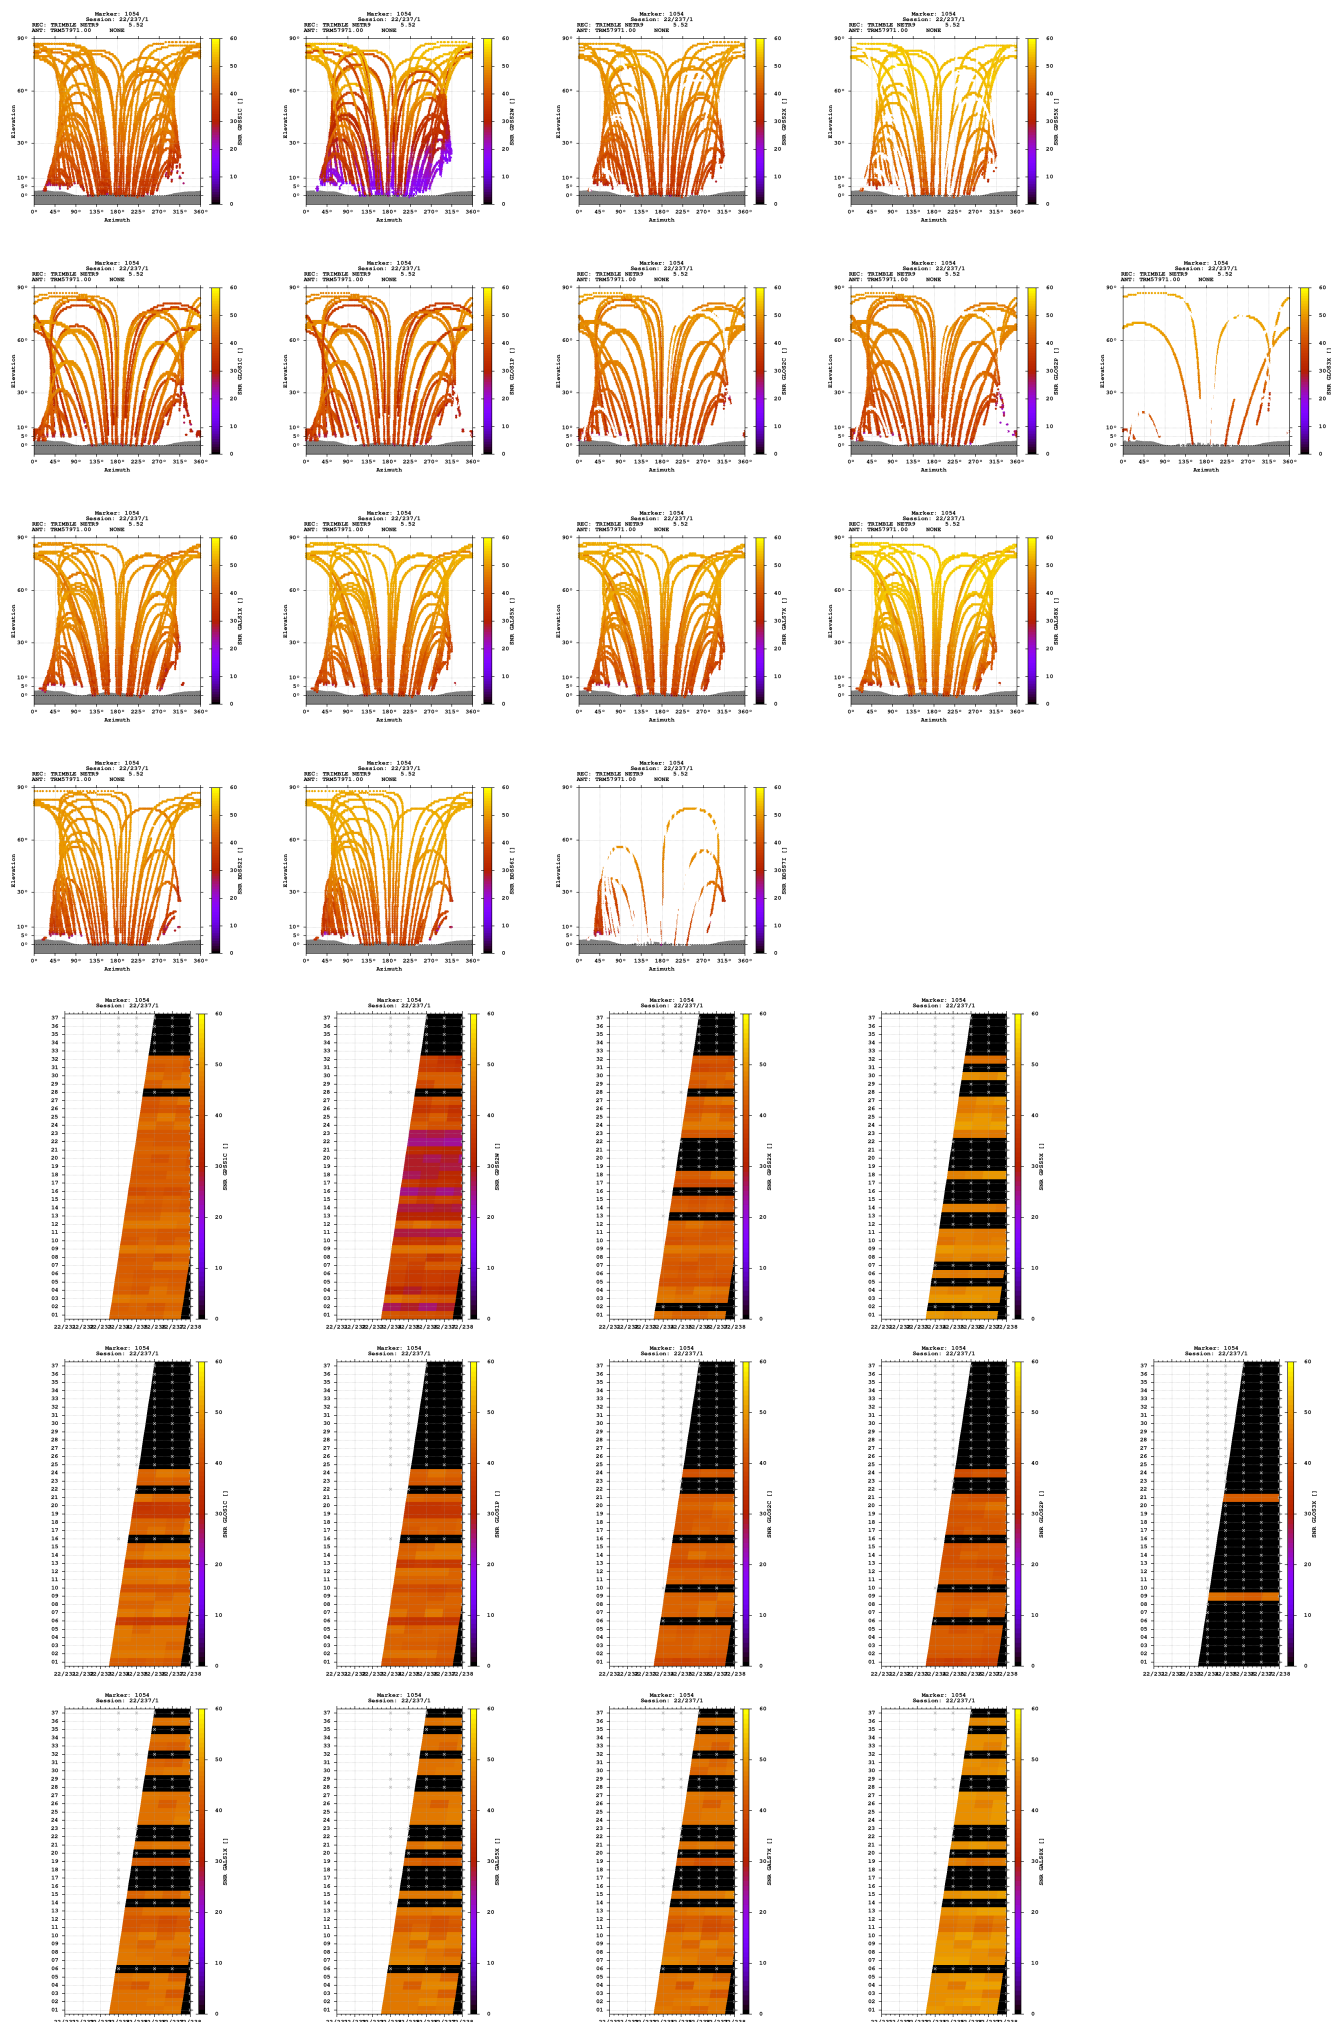

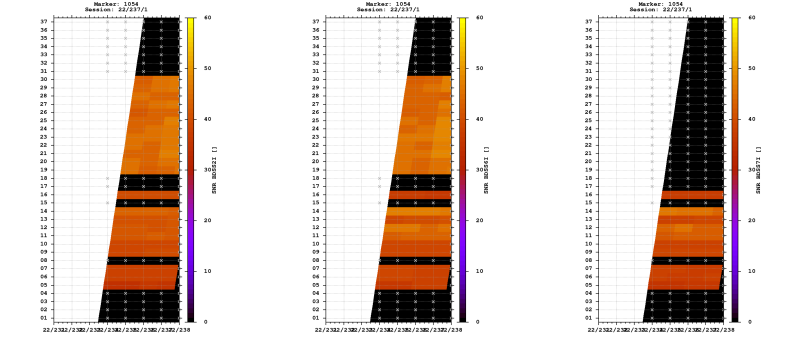


Estimates

2022-08-24 11:21:30	GPS	4256170.7267	684026.8002	4686014.0039	47.579916843	9.130168110	701.7312
2022-08-24 11:21:30	GLO	4256170.5939	684025.8055	4686014.0395	47.579918977	9.130155336	701.5625
2022-08-24 11:21:30	GAL	4256170.2598	684026.8017	4686013.6067	47.579917492	9.130169114	701.1272
2022-08-24 11:21:30	BDS	4256169.6745	684025.6505	4686017.5479	47.579946451	9.130155240	703.5237

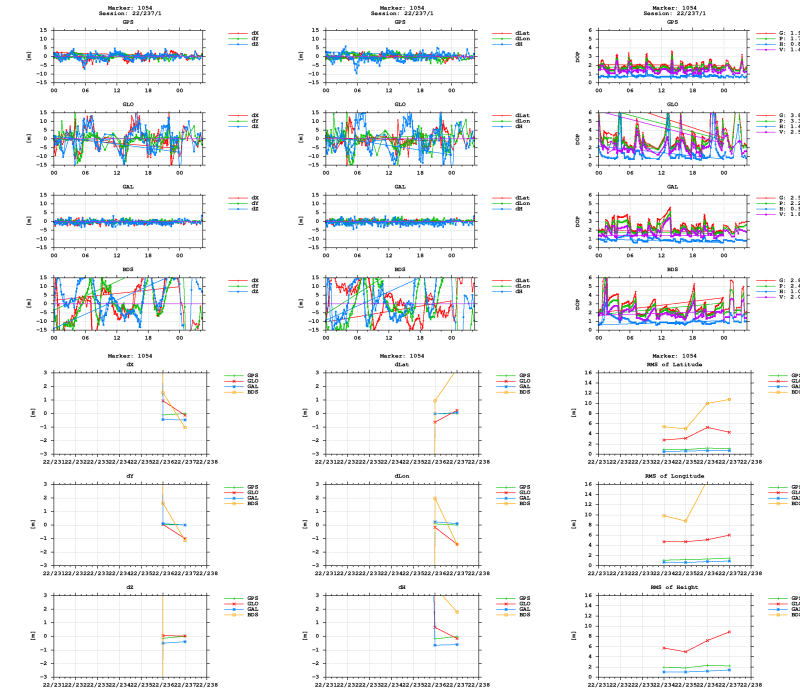

BNC



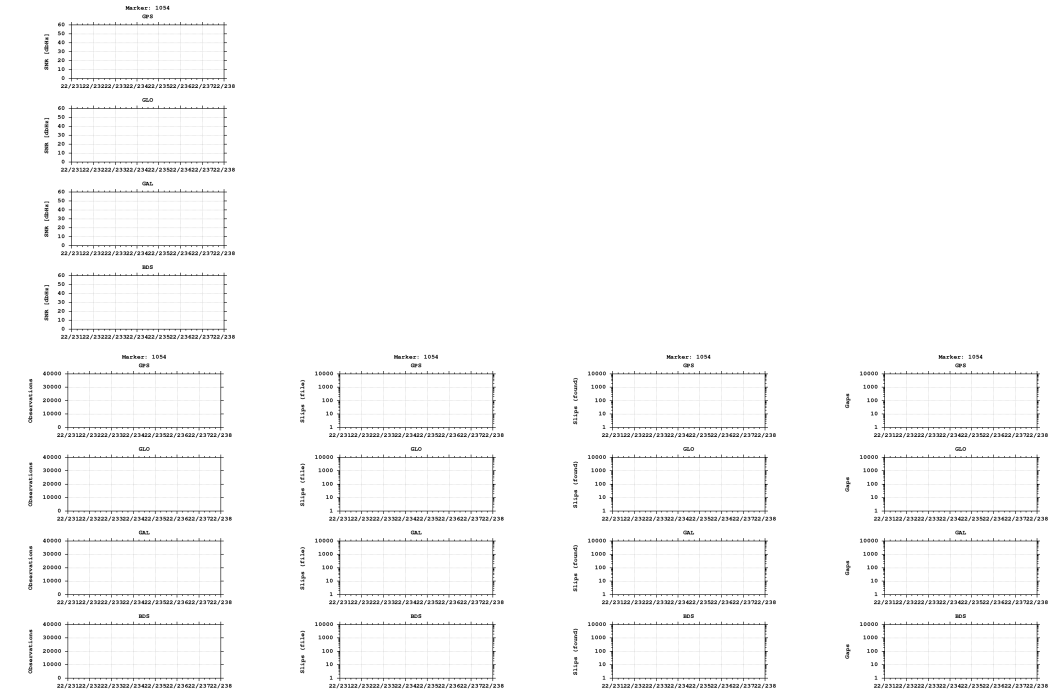

Equipment

2022-08-22 00:00:00 TRIMBLE NETR9 5.52 518 TRM57971.00 NONE 518

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)