


GNSS observation file monitoring for 0518


Last RINEX file: 05182421.220
RINEX version: 3.02
Marker: 1031
Receiver: 518 TRIMBLE NETR9 5.52
Antenna: 518 TRM57971.00 NONE

Epochs

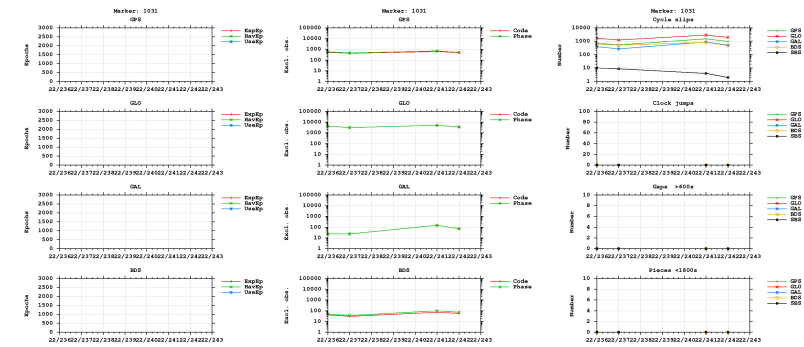



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

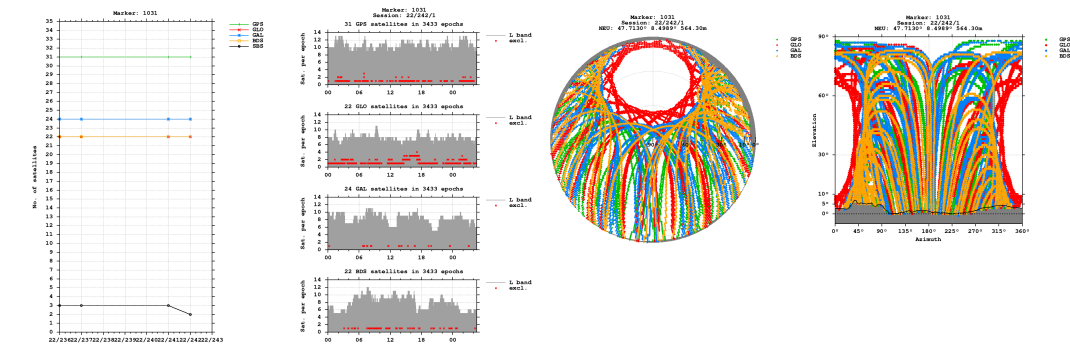


Bands

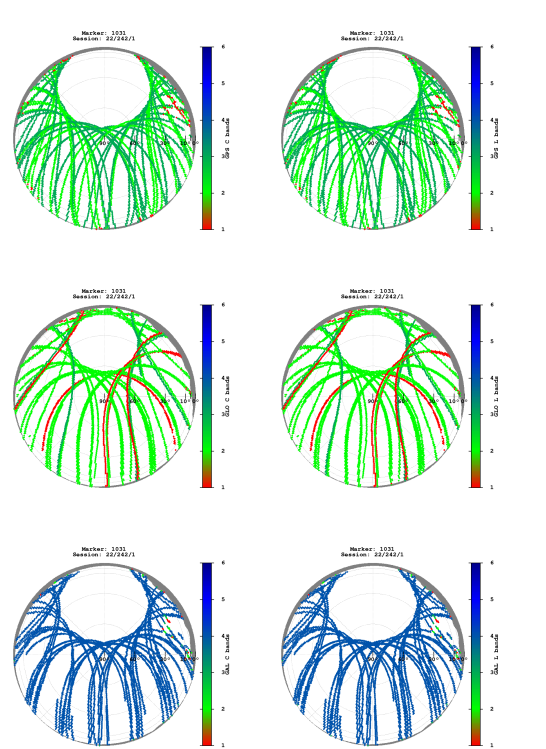


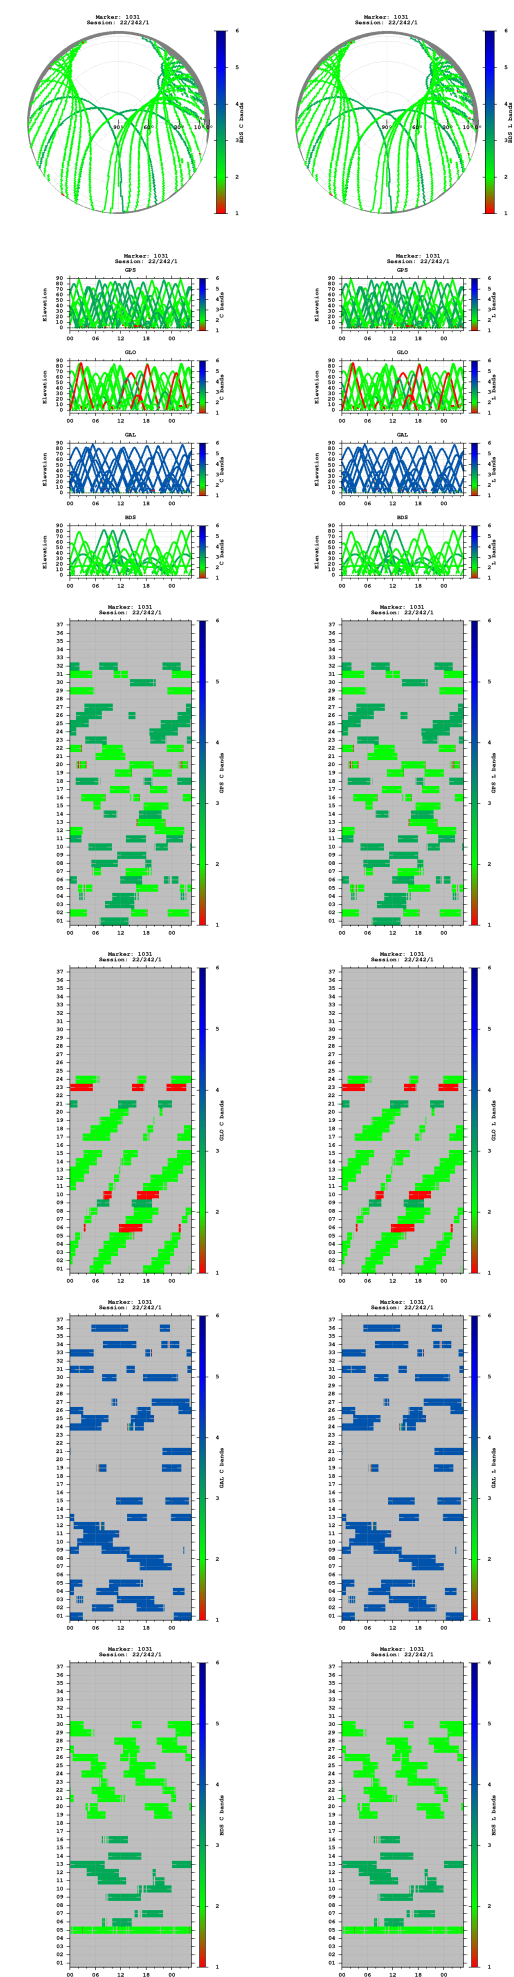


Observations

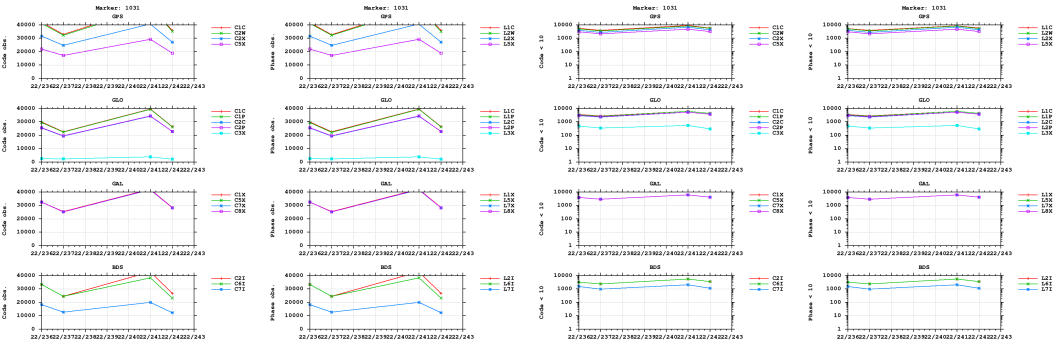


Multipath

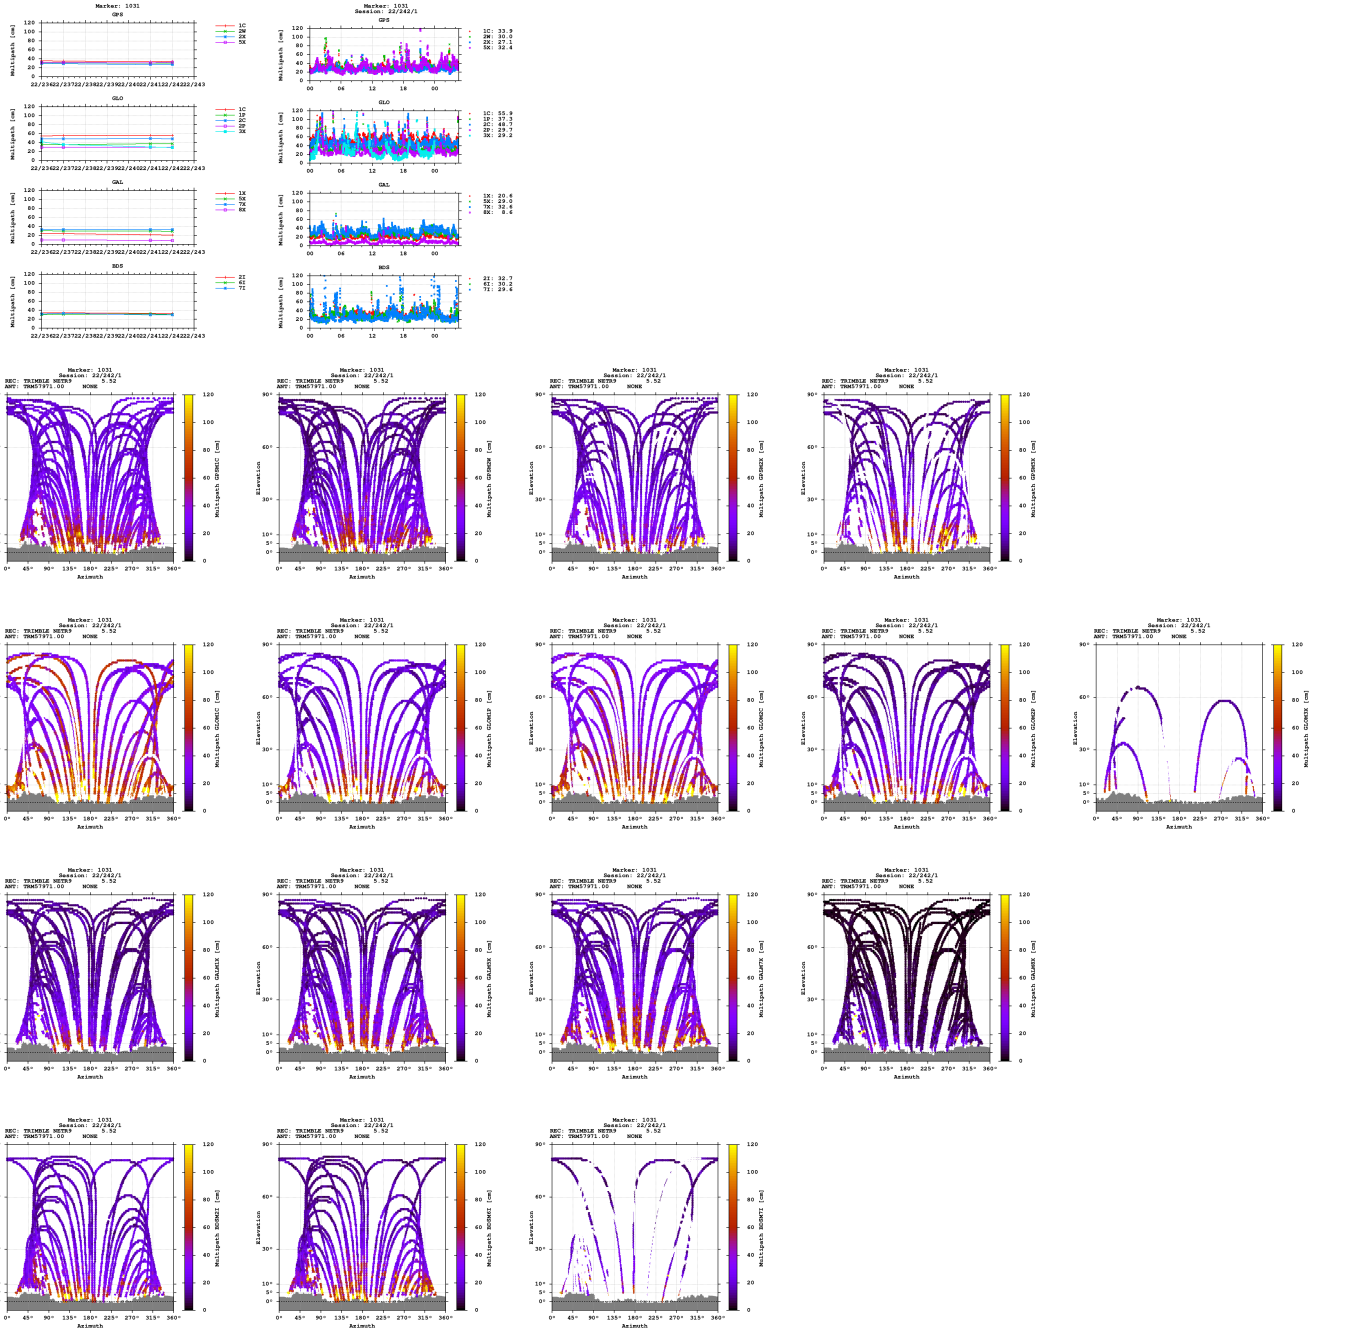


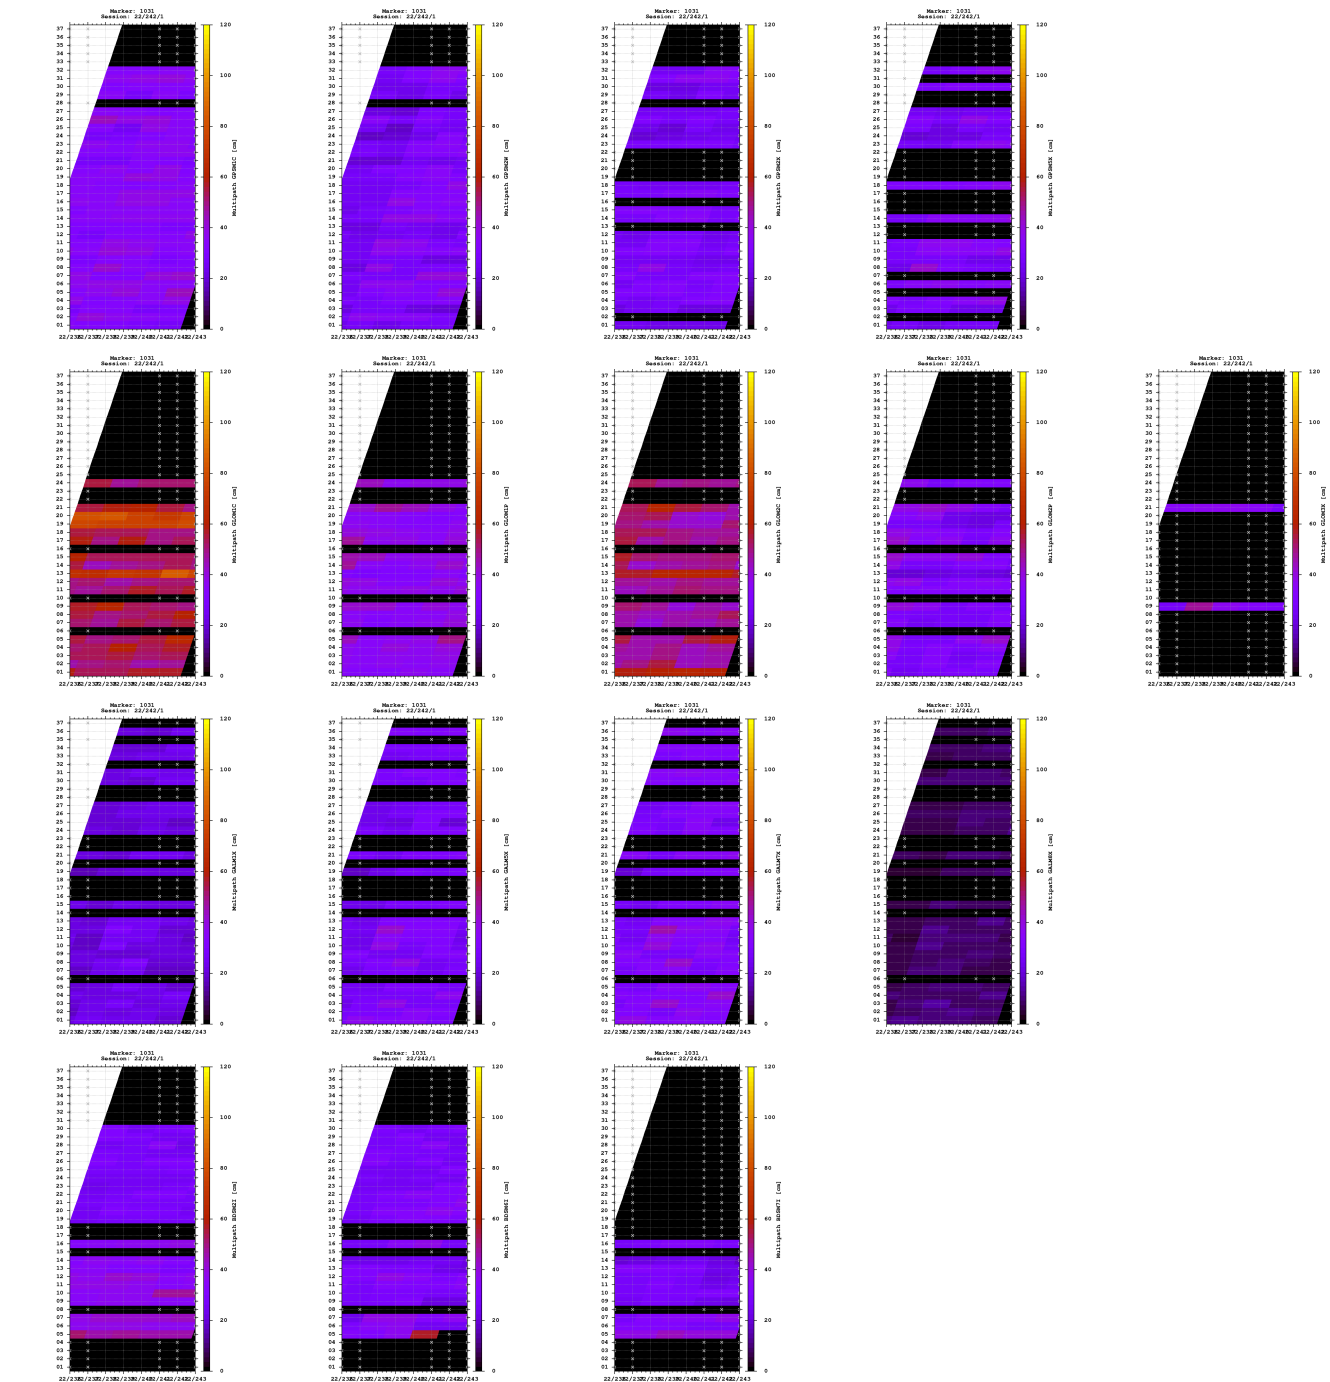


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

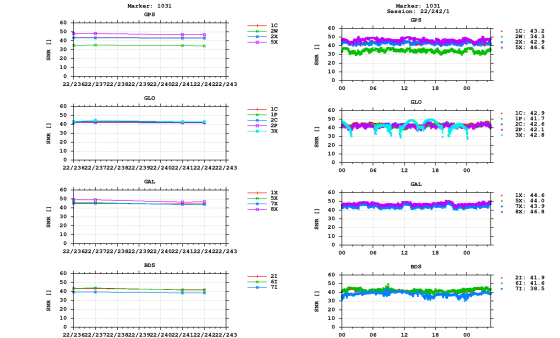


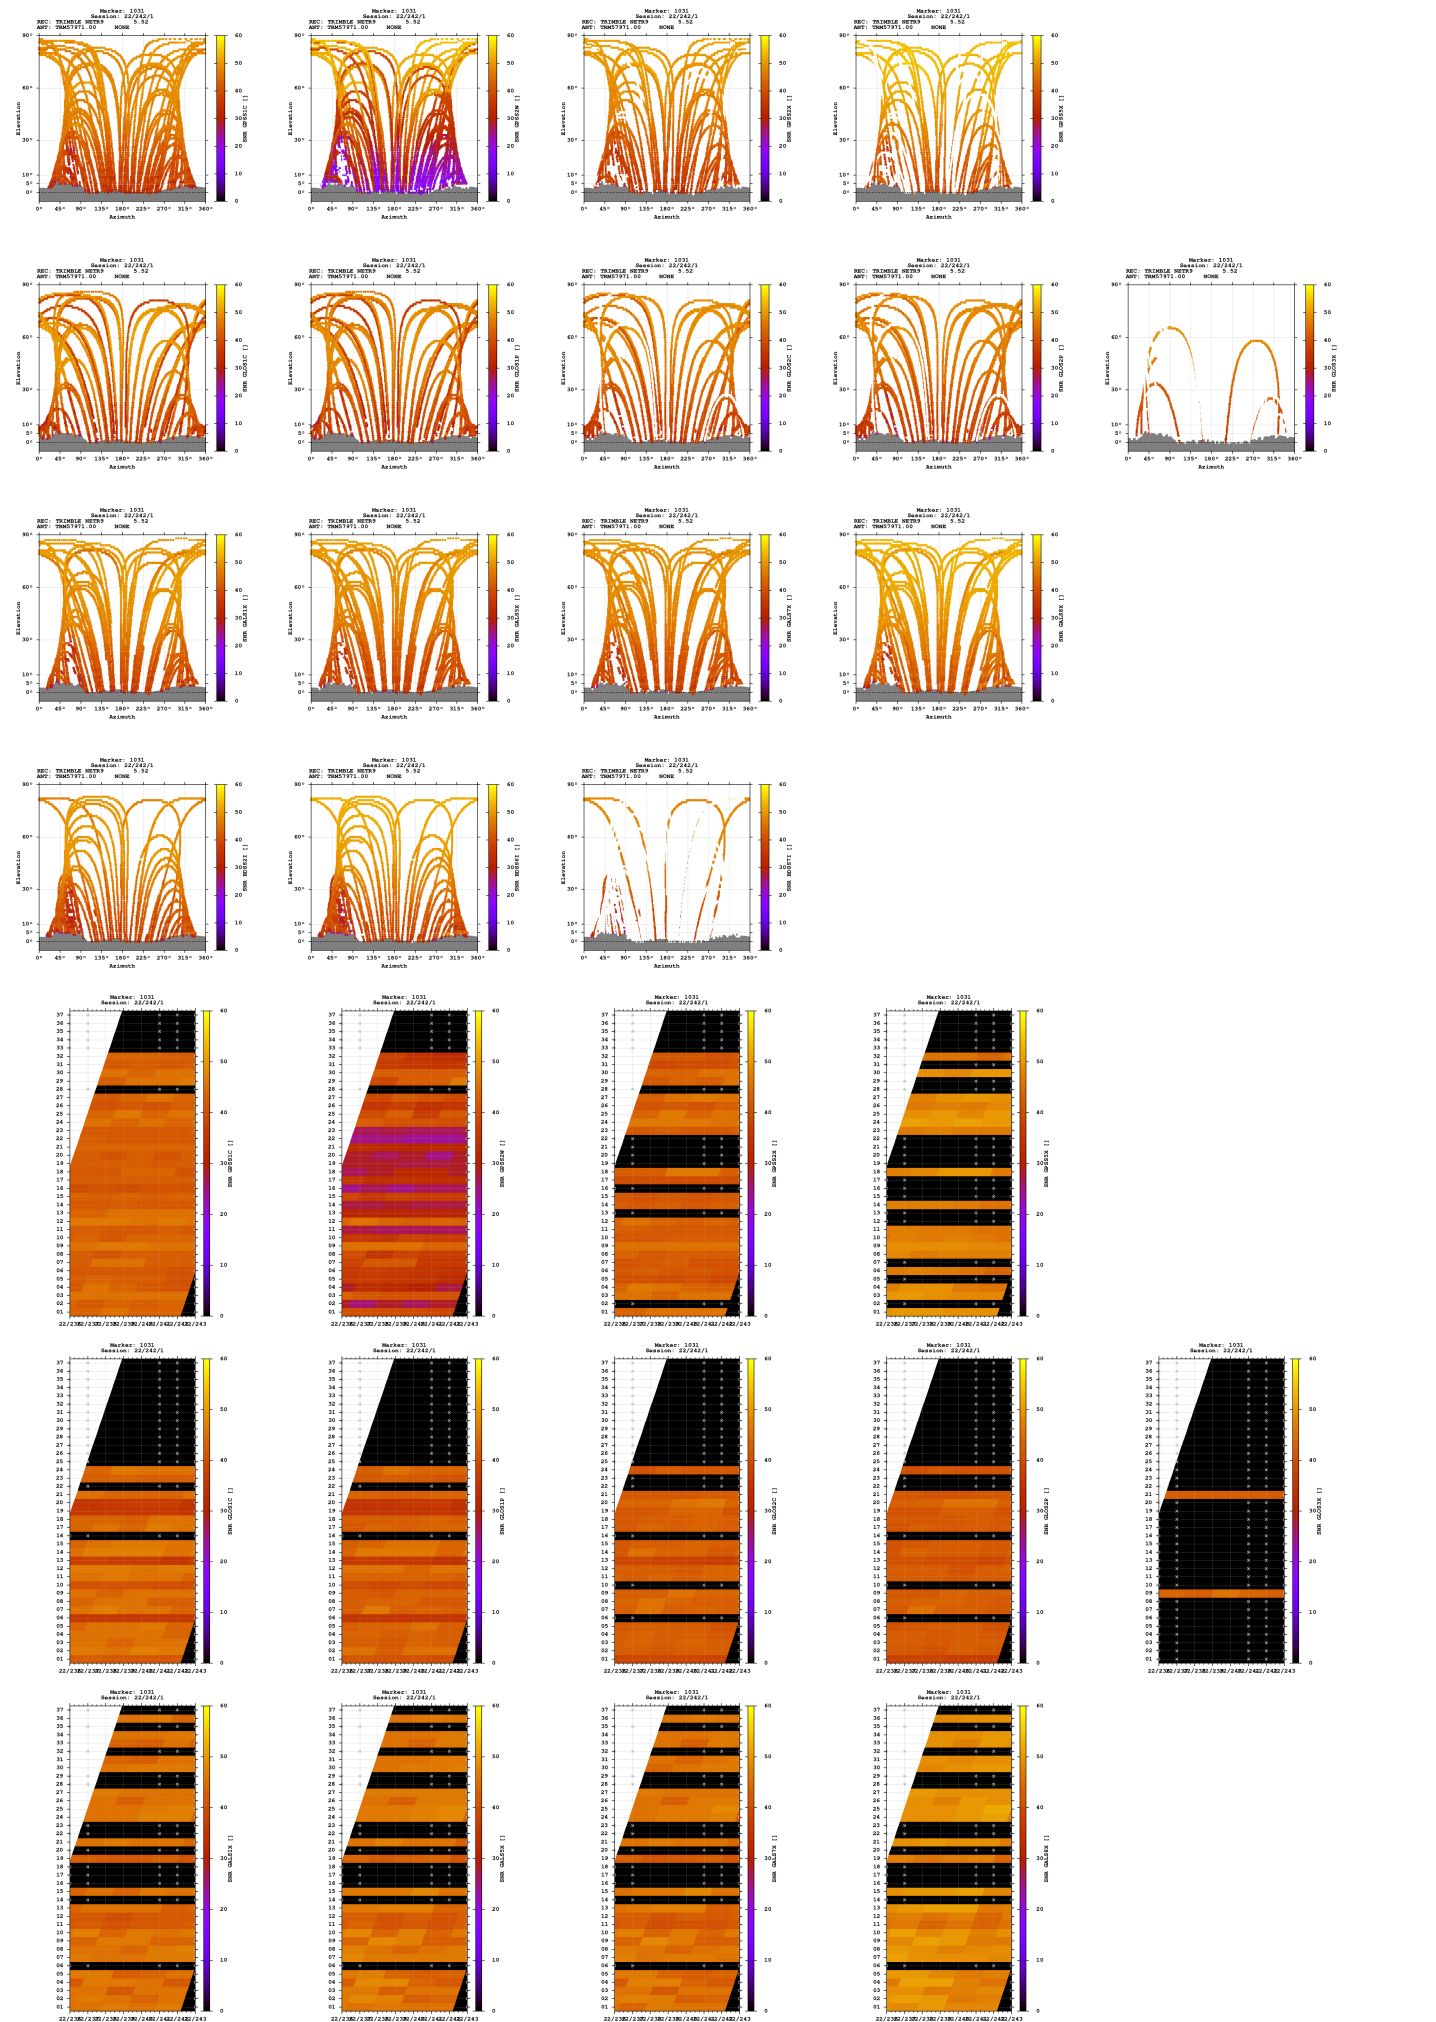

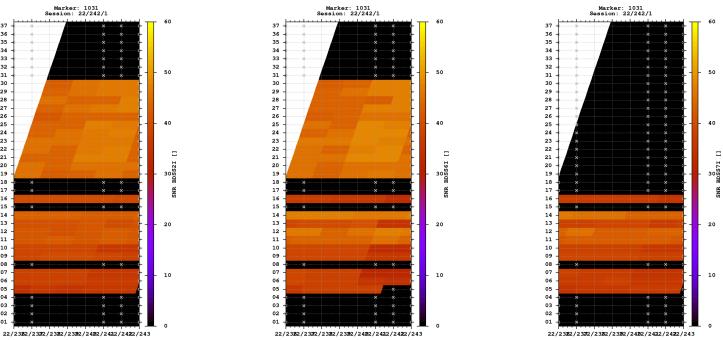



Estimates

2022-08-29 04:44:00	GPS	4252539.6166	635462.4854	4695883.6157	47.713021864	8.498895355	564.3011
2022-08-29 04:44:00	GLO	4252540.4643	635462.2367	4695884.0200	47.713018977	8.498890409	565.1396
2022-08-29 04:44:00	GAL	4252538.9832	635462.1992	4695882.9586	47.713022337	8.498892831	563.3650
2022-08-29 04:44:00	BDS	4252542.8798	635462.4230	4695879.7710	47.712977188	8.498888107	563.6222

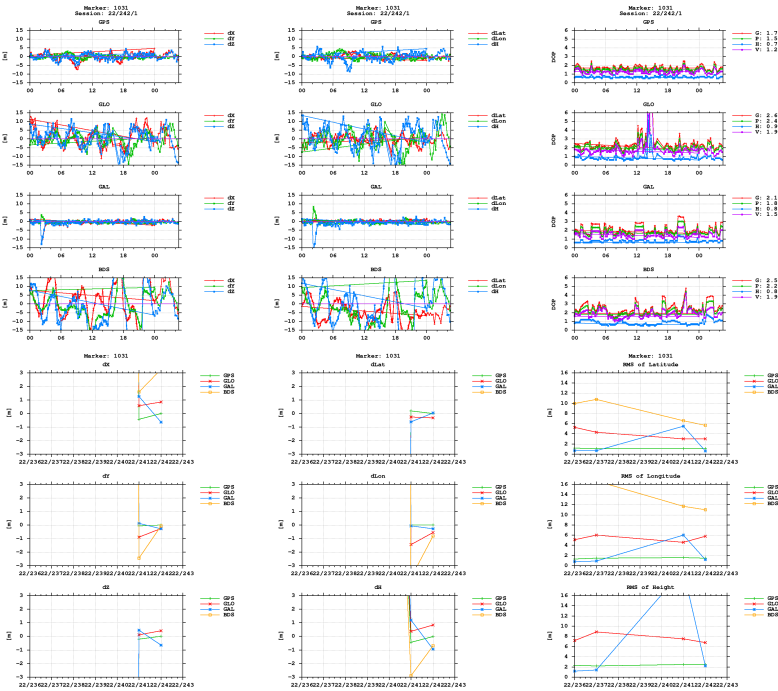

BNC

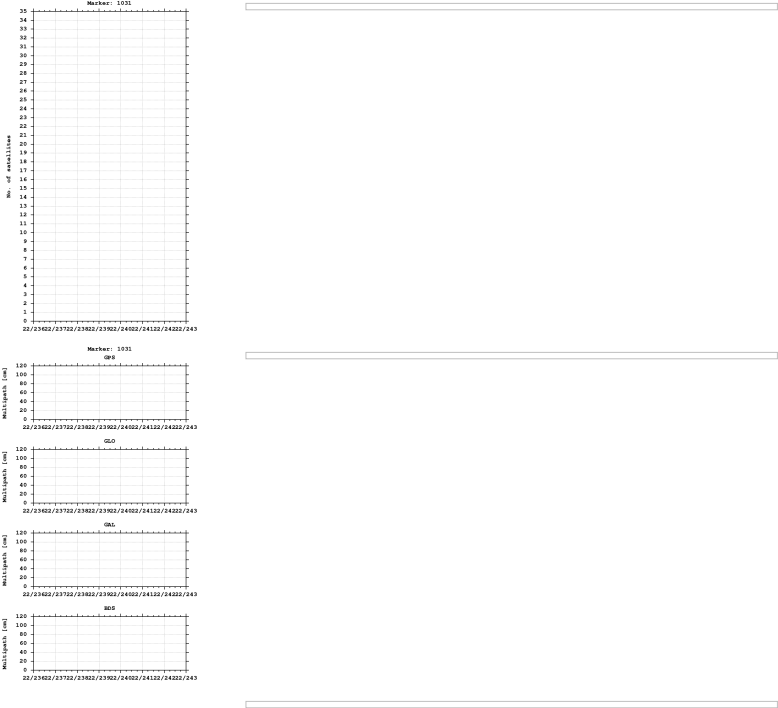

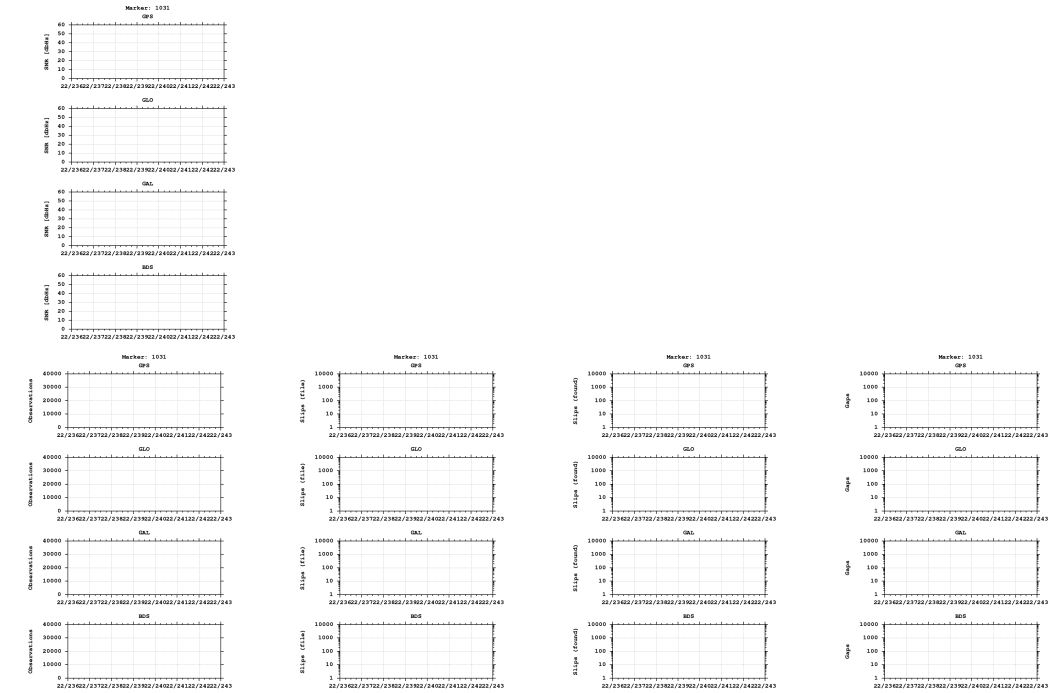

Equipment

2022-08-22 00:00:00 TRIMBLE NETR9 5.52 518 TRM57971.00 NONE 518

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)