

GNSS observation file monitoring for 0518

Last RINEX file: 05182431.220


RINEX version: 3.02

Marker: 1051

Receiver: 518 TRIMBLE NETR9 5.52

Antenna: 518 TRM57971.00 NONE


Epochs

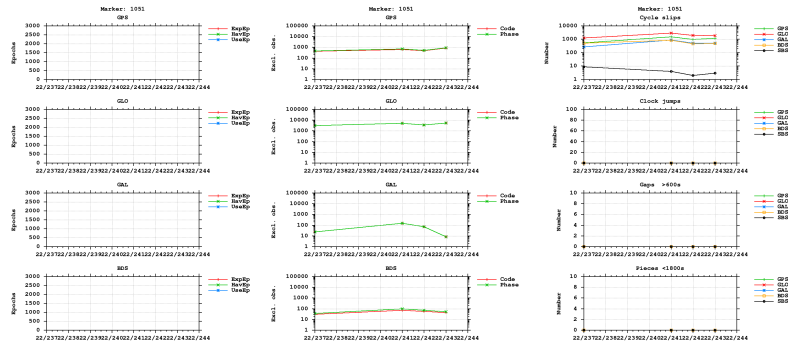


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.


- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

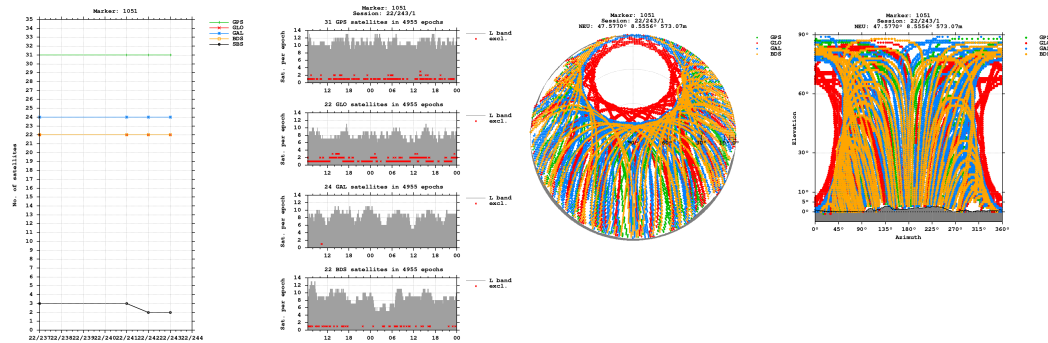


Bands

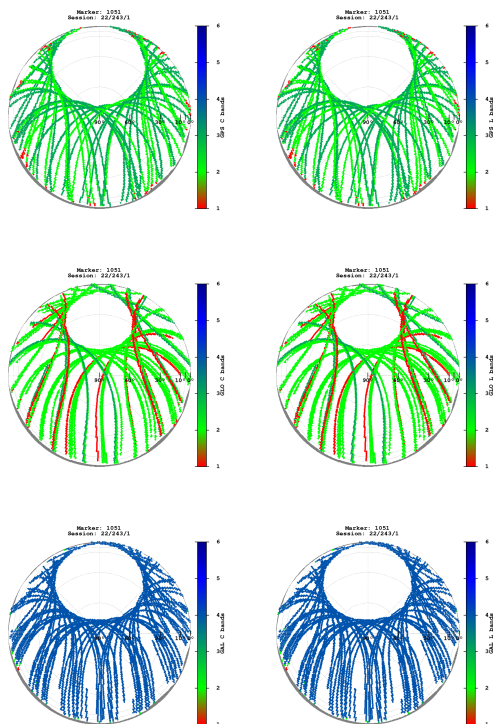


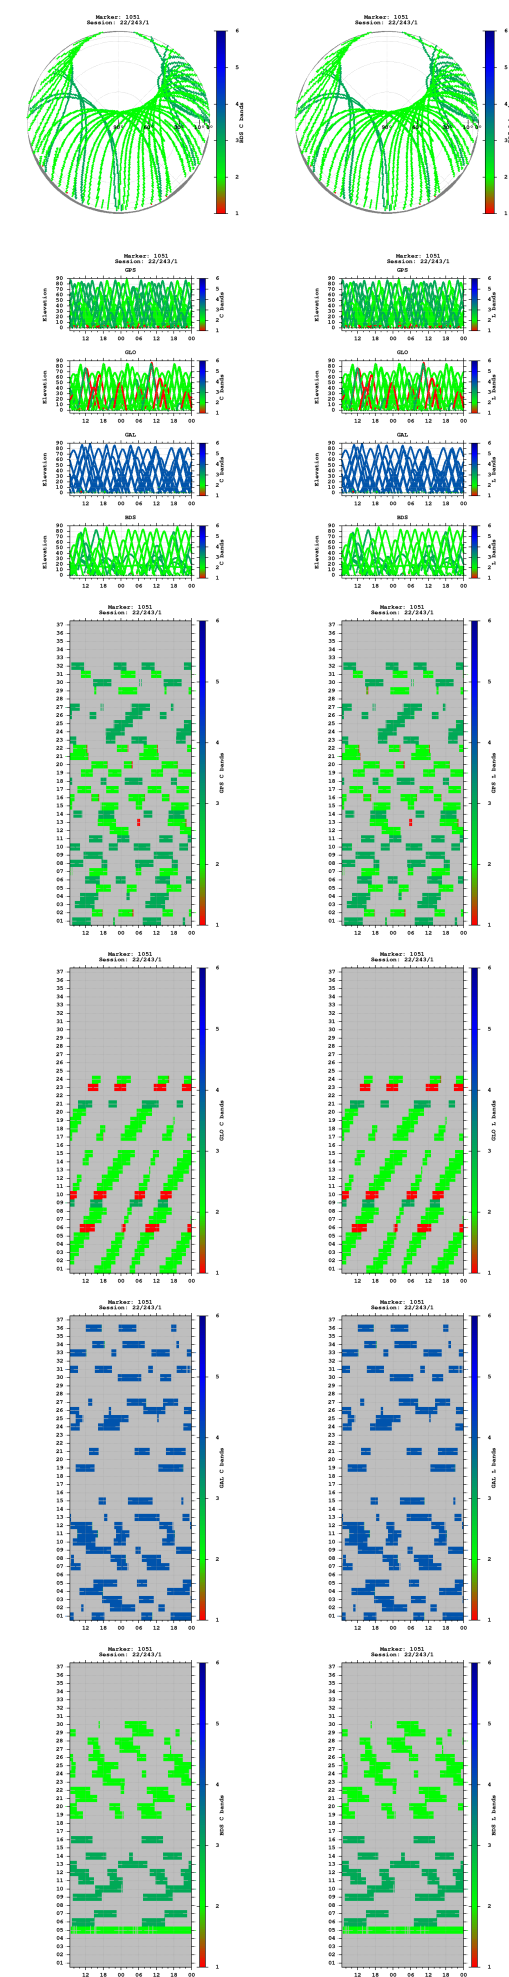


Observations

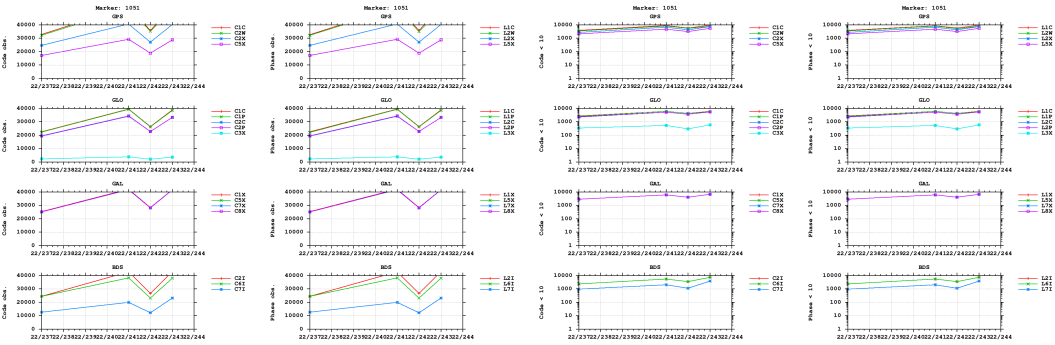


Multipath

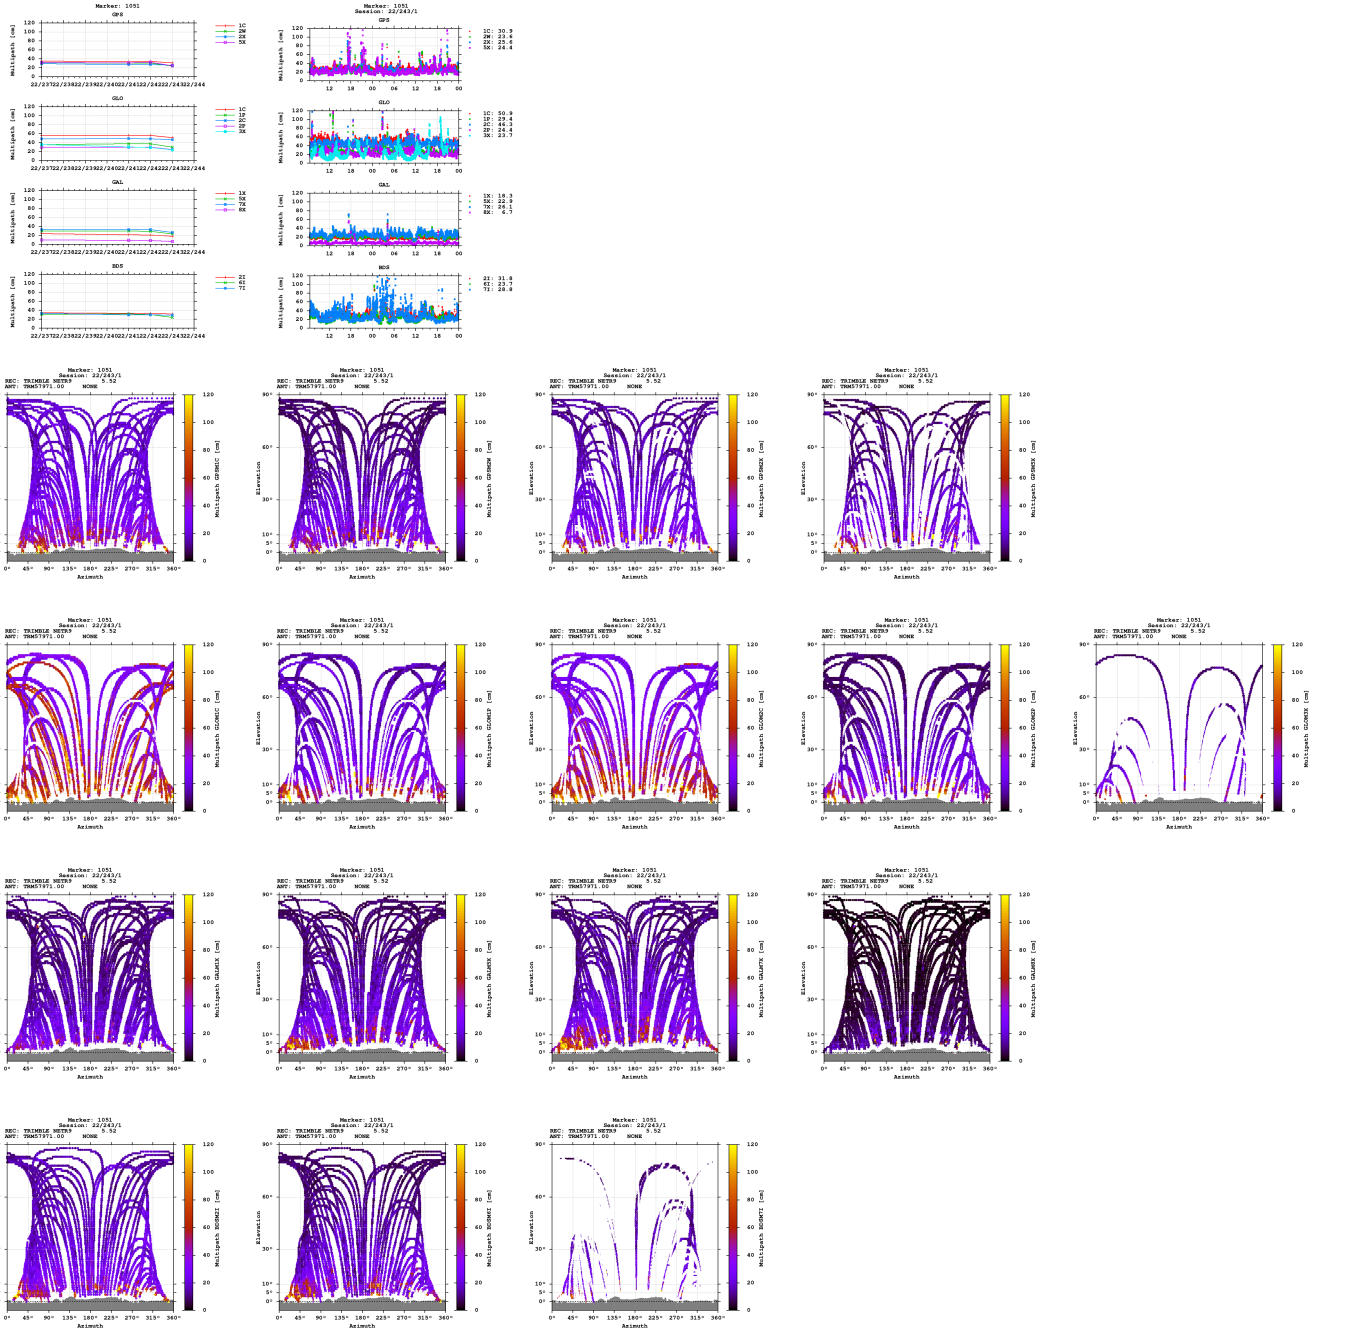


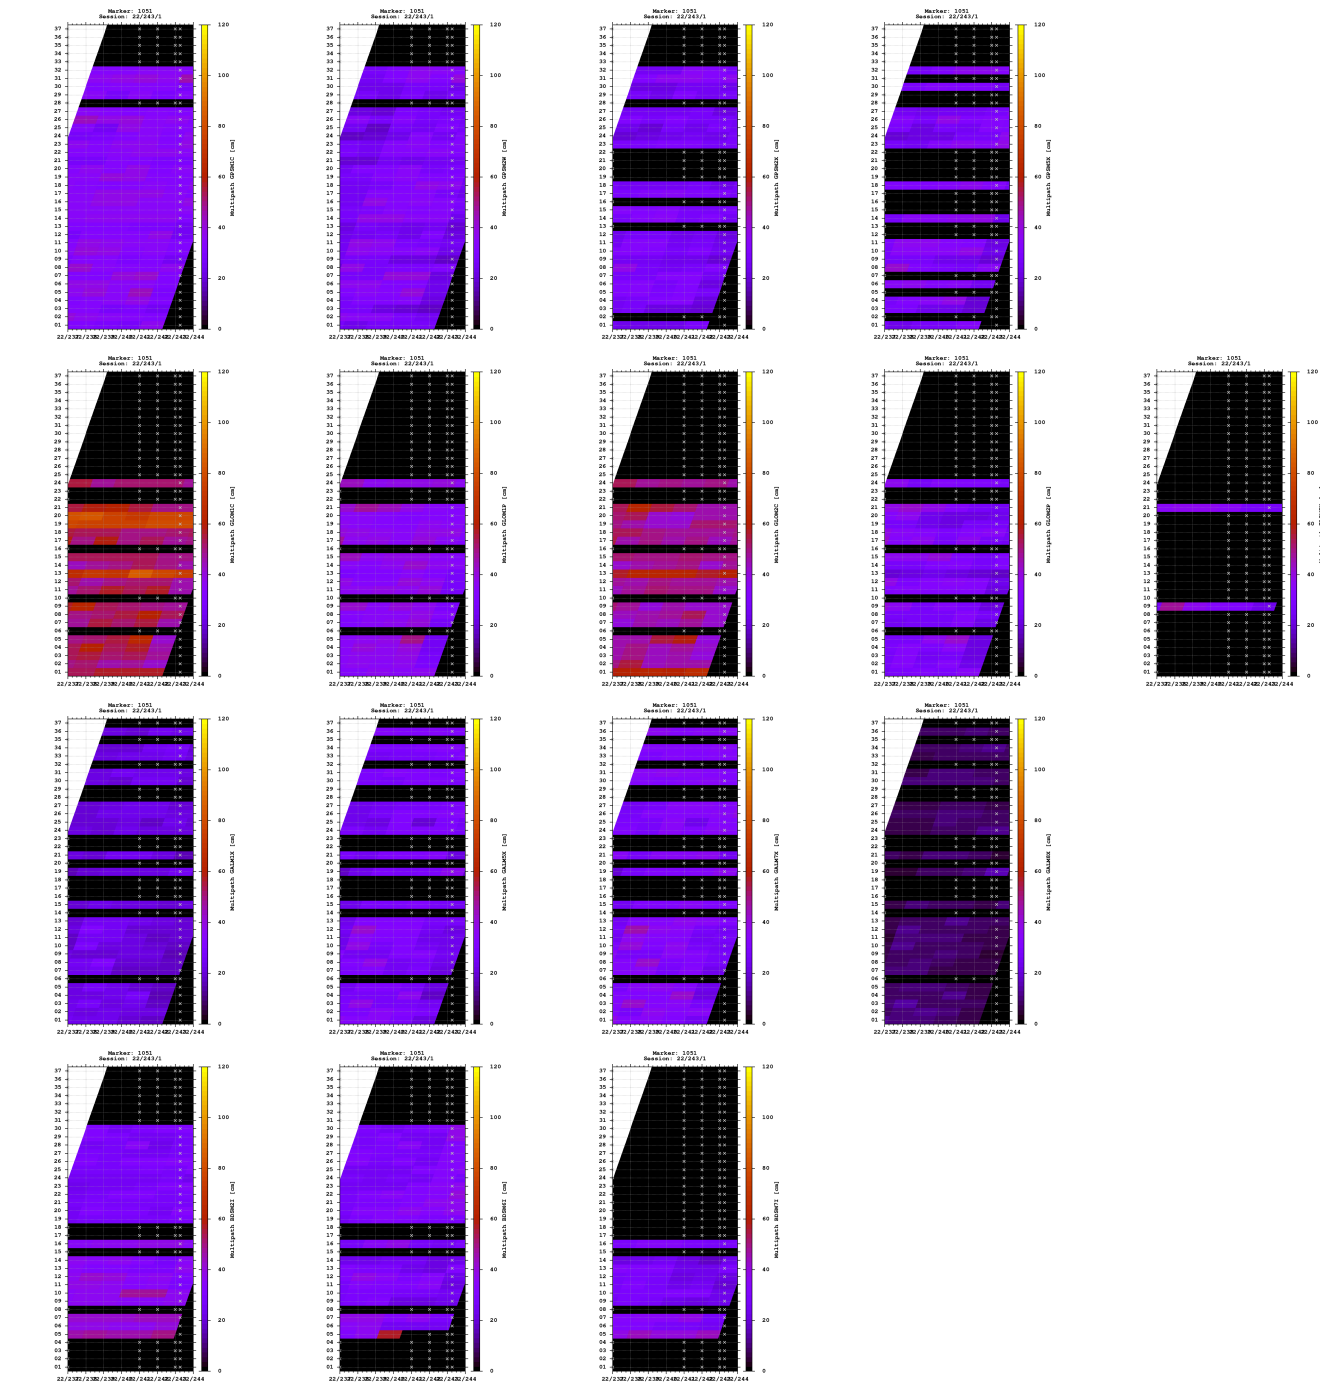


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

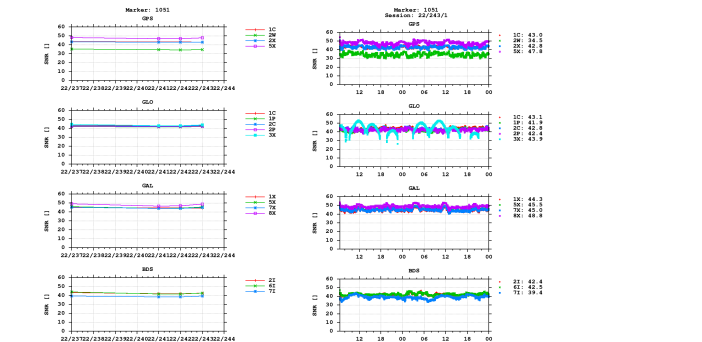


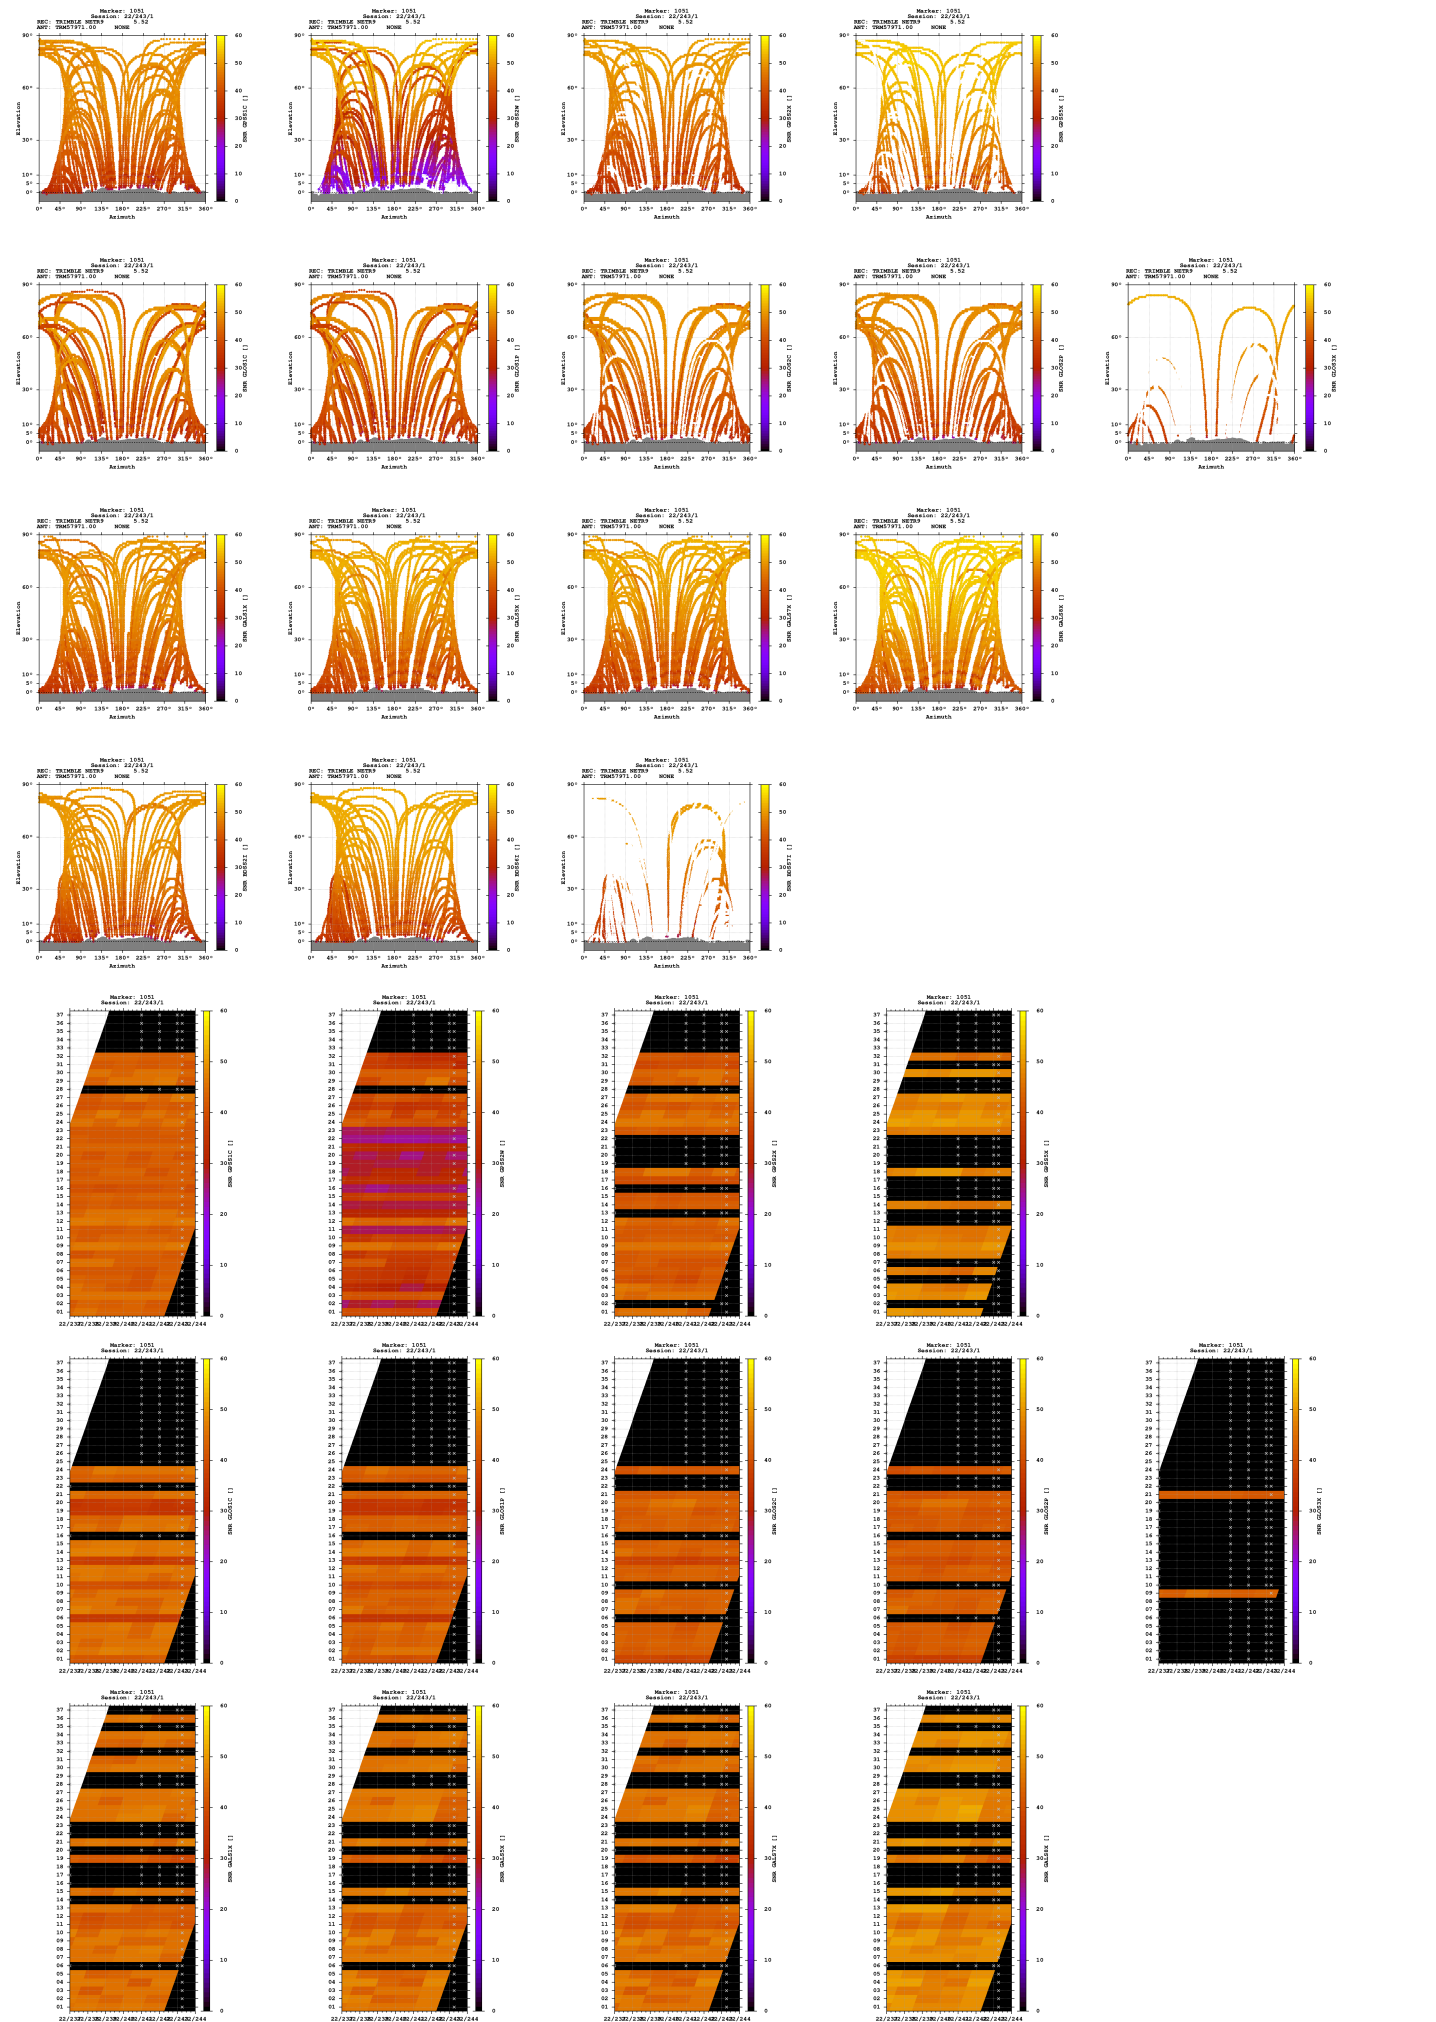

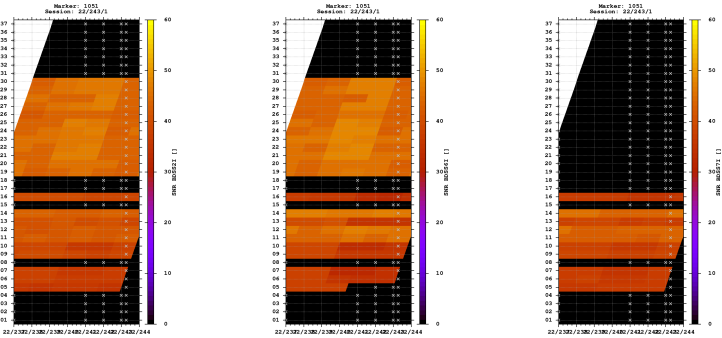



Estimates

2022-08-31 06:37:30	GPS	4262969.1187	641331.9106	4685698.6991	47.576979530	8.555561835	573.0663
2022-08-31 06:37:30	GLO	4262970.0488	641331.6509	4685699.1936	47.576976680	8.555556583	574.0257
2022-08-31 06:37:30	GAL	4262969.0782	641331.9713	4685698.3337	47.576977519	8.555562713	572.7757
2022-08-31 06:37:30	BDS	4262978.3223	641335.8697	4685697.2750	47.576906559	8.555595671	578.5521

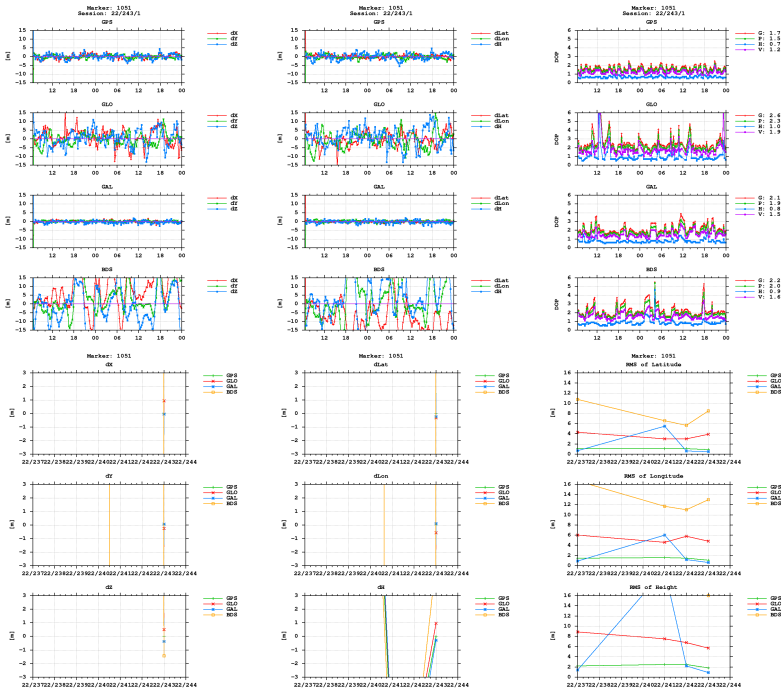

BNC

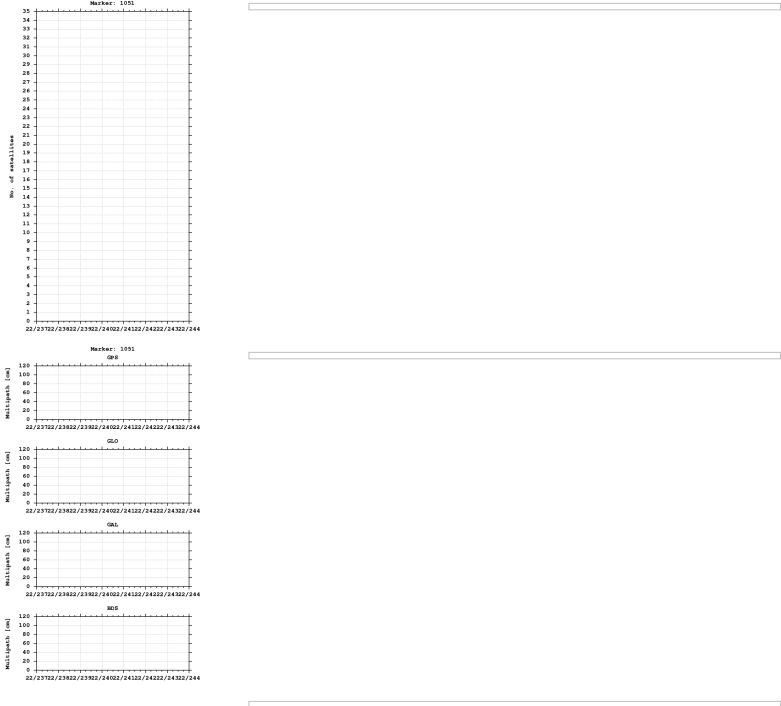

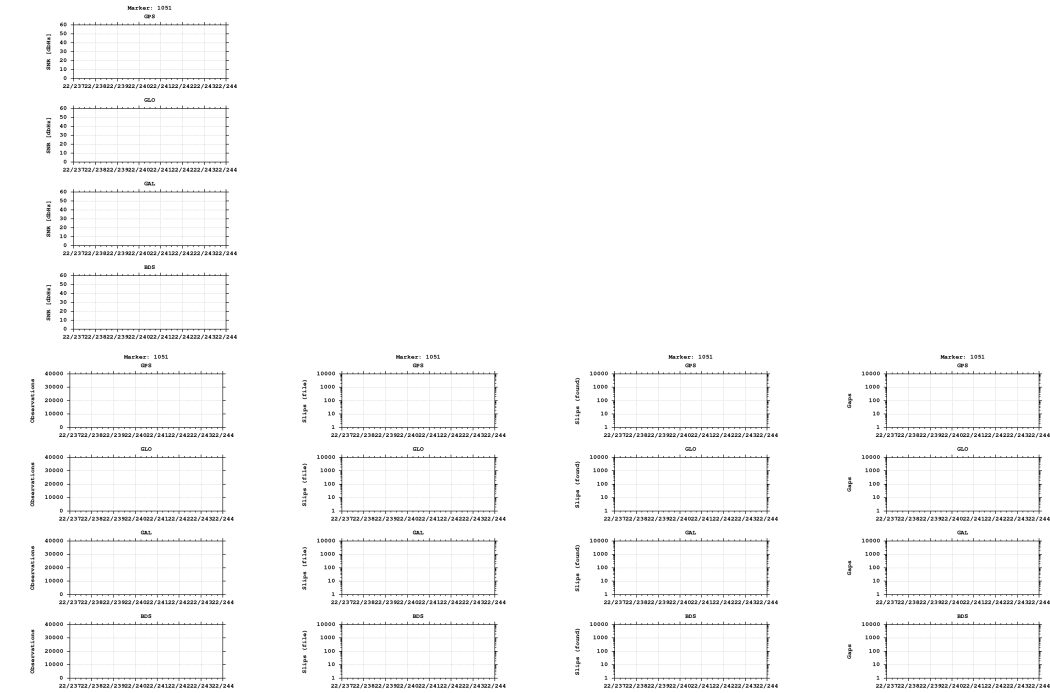

Equipment

2022-08-22 00:00:00 TRIMBLE NETR9 5.52 518 TRM57971.00 NONE 518

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)