

GNSS observation file monitoring for 0518

Last RINEX file: 05182441.220


RINEX version: 3.02

Marker: 1051

Receiver: 518 TRIMBLE NETR9 5.52

Antenna: 518 TRM57971.00 NONE


Epochs

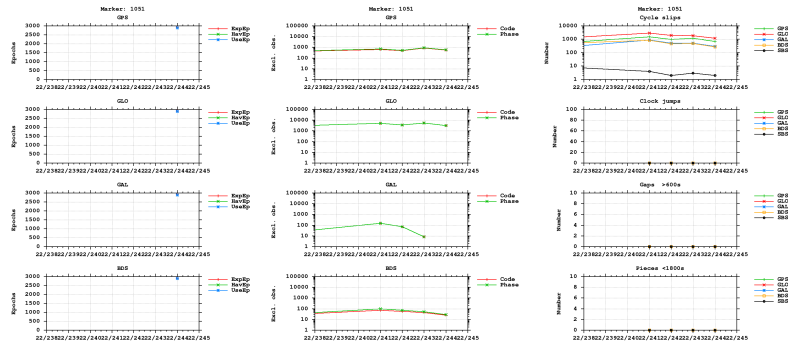


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.


- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

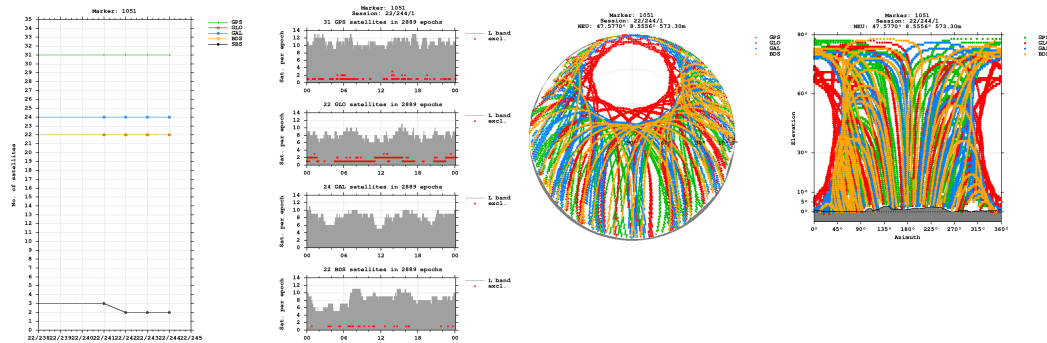


Bands

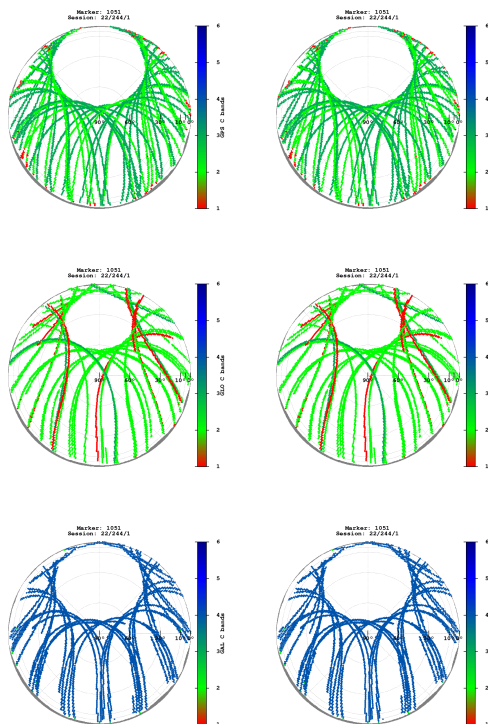


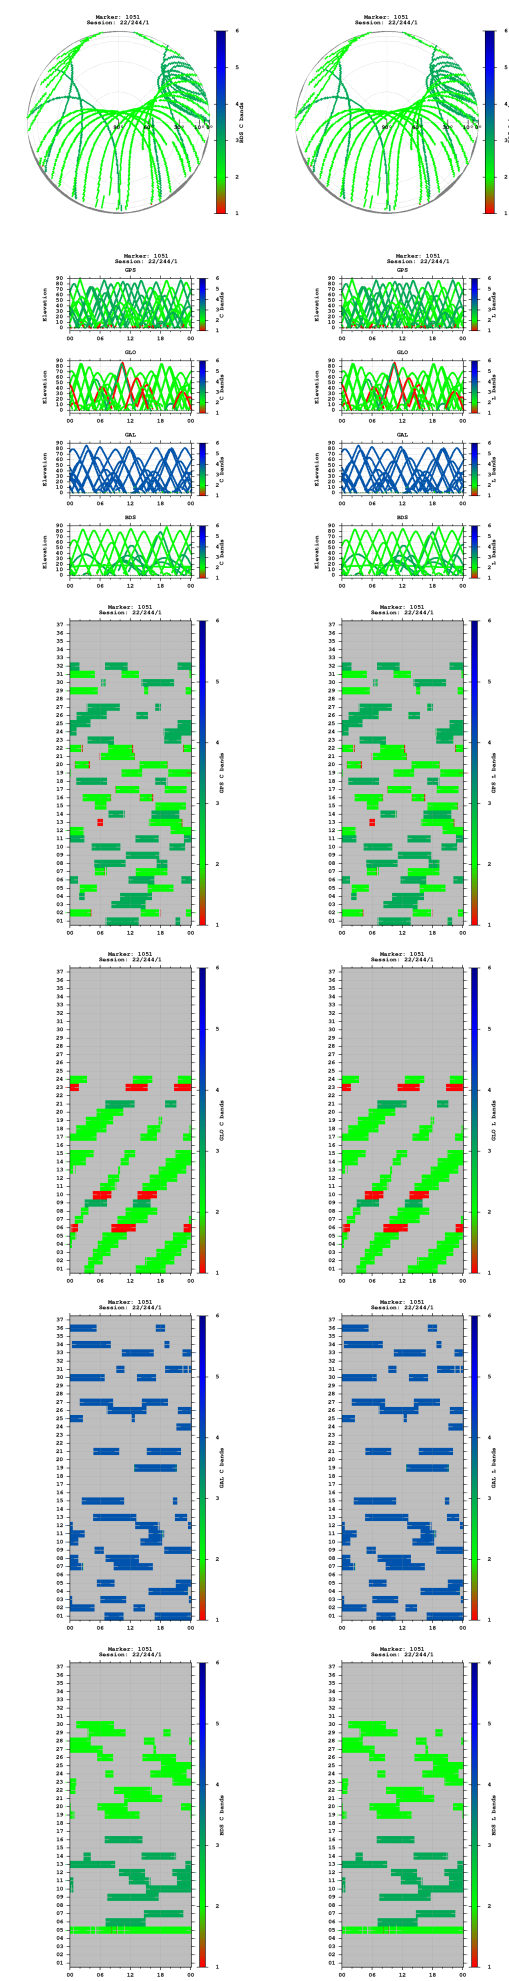


Observations

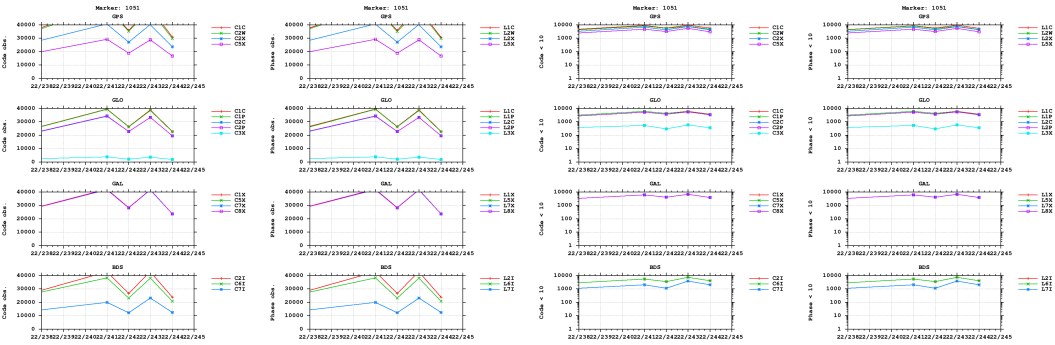


Multipath

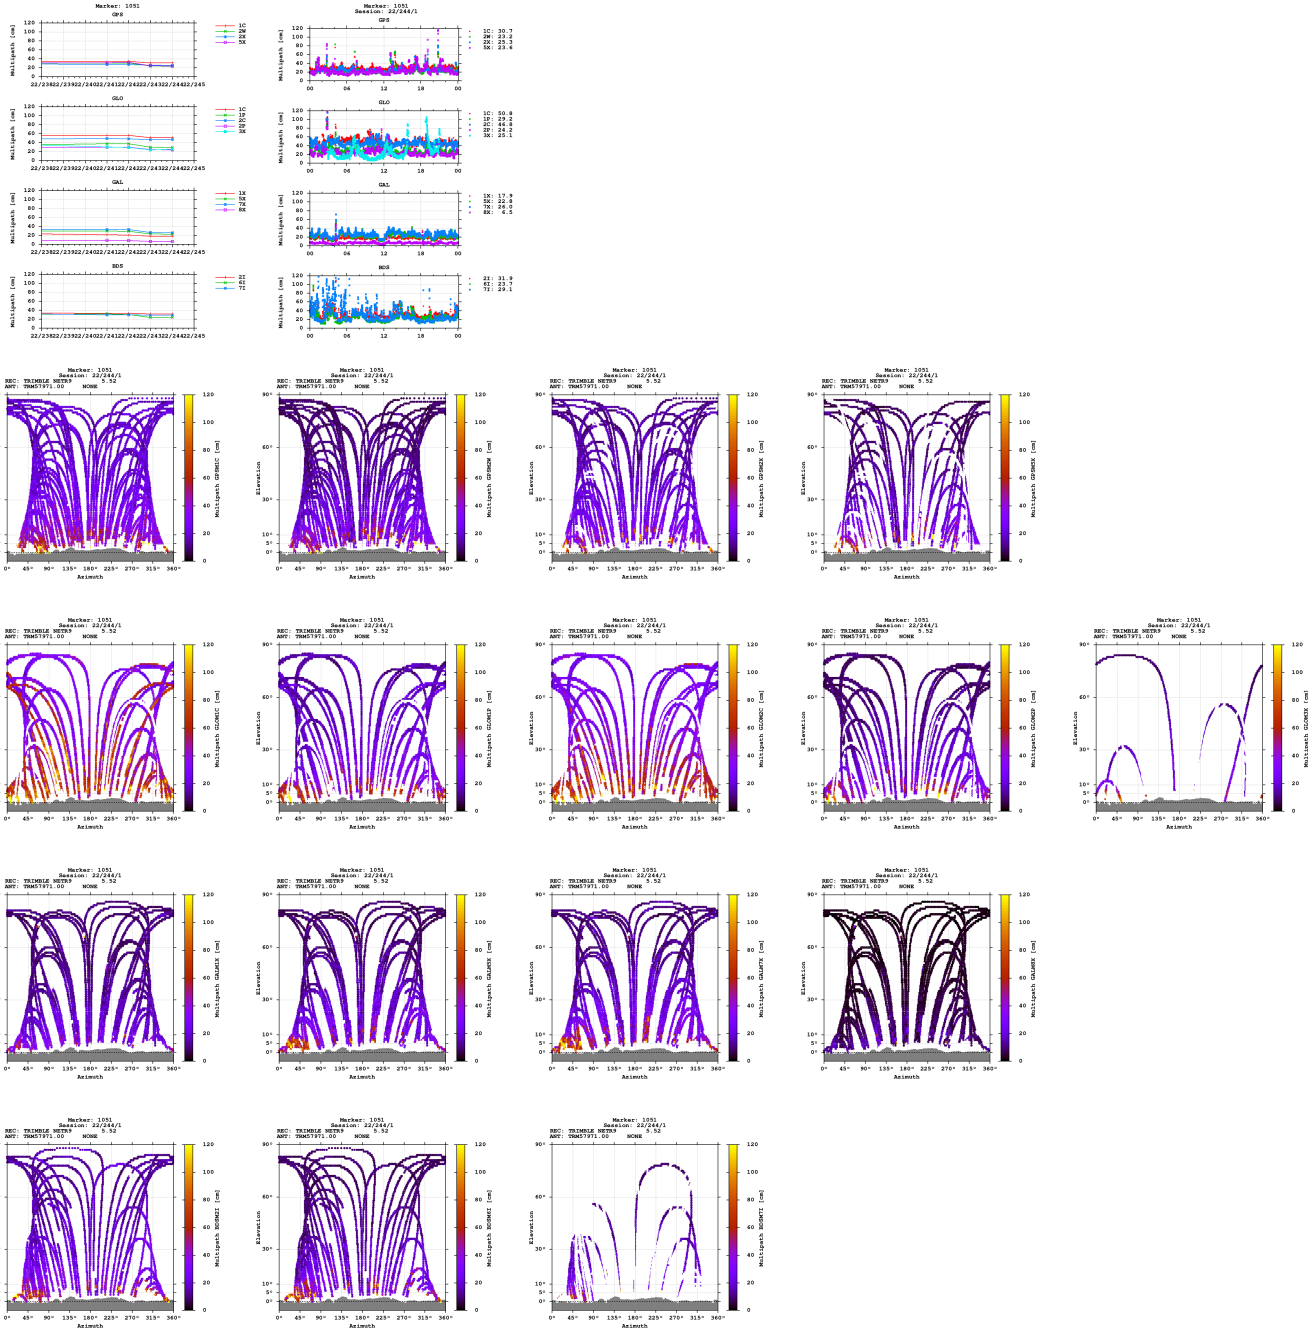


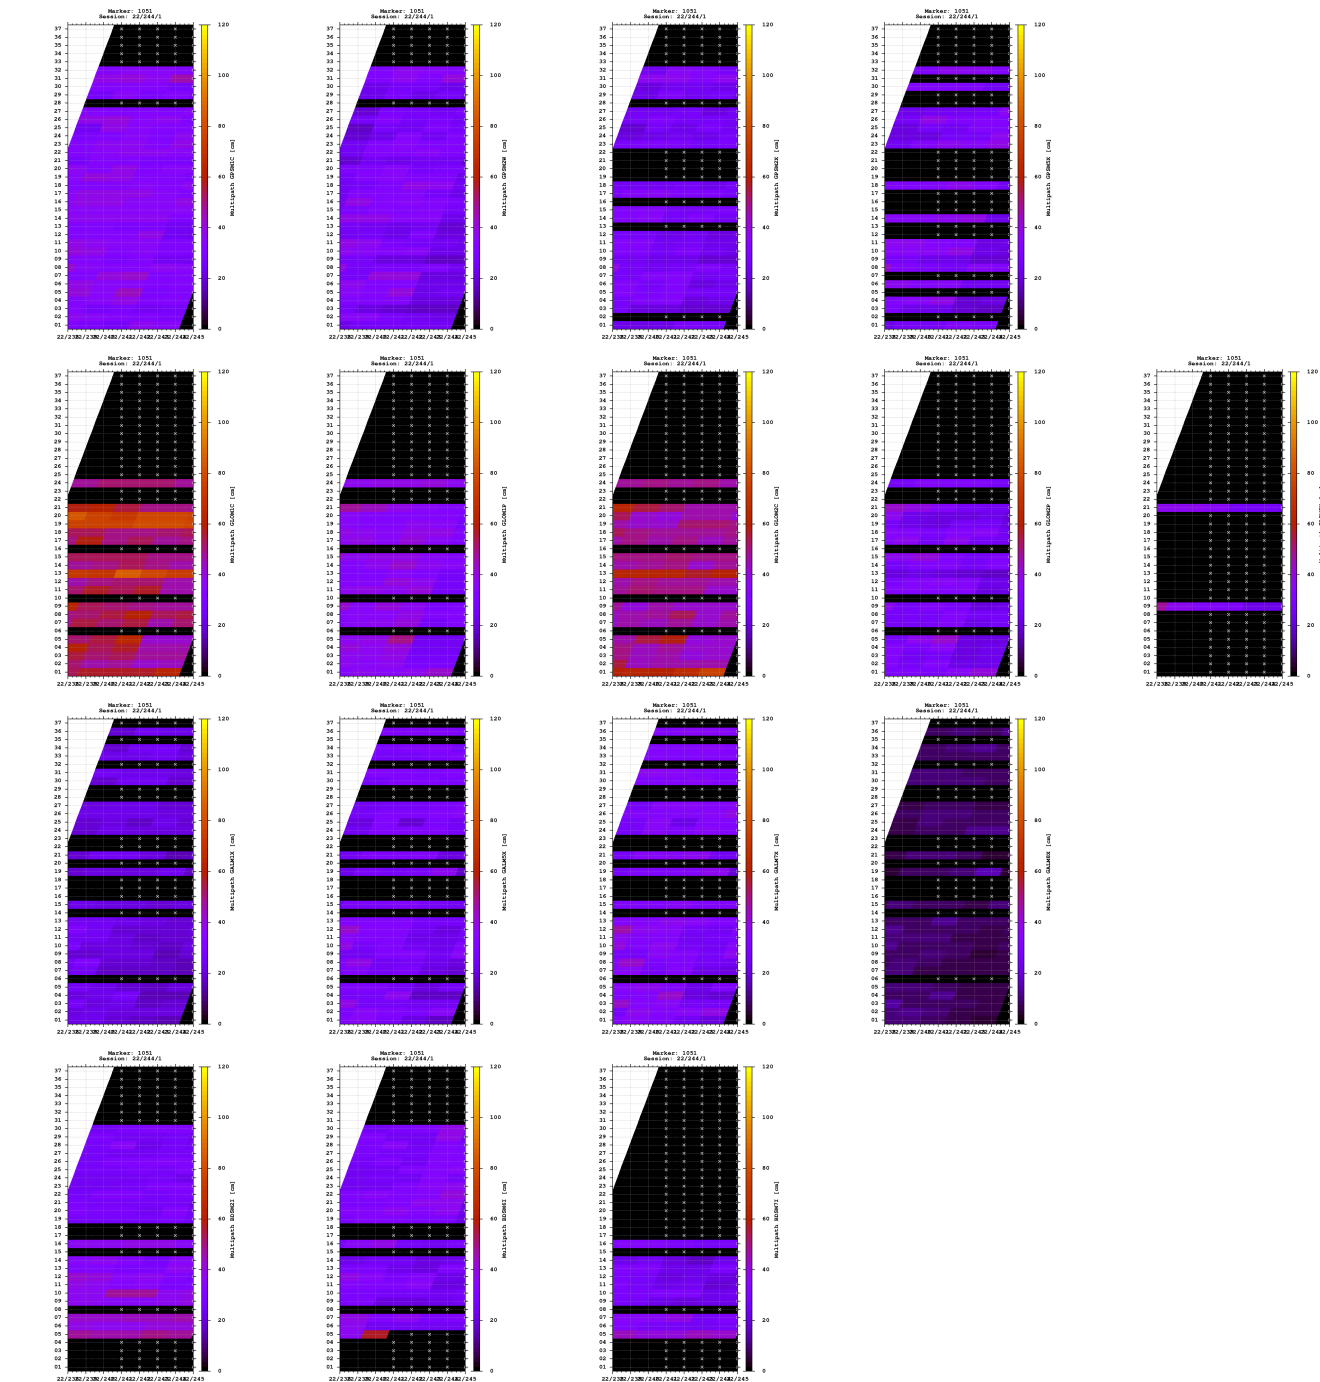


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

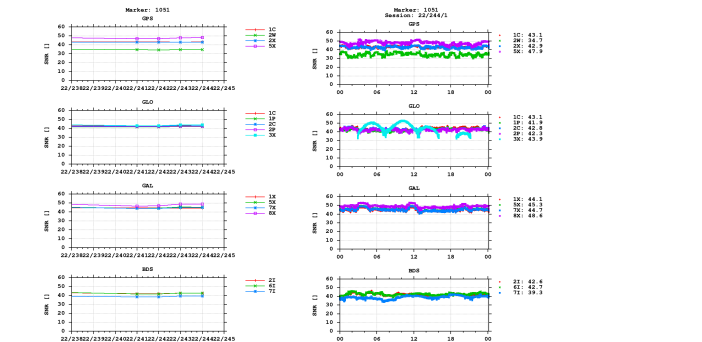


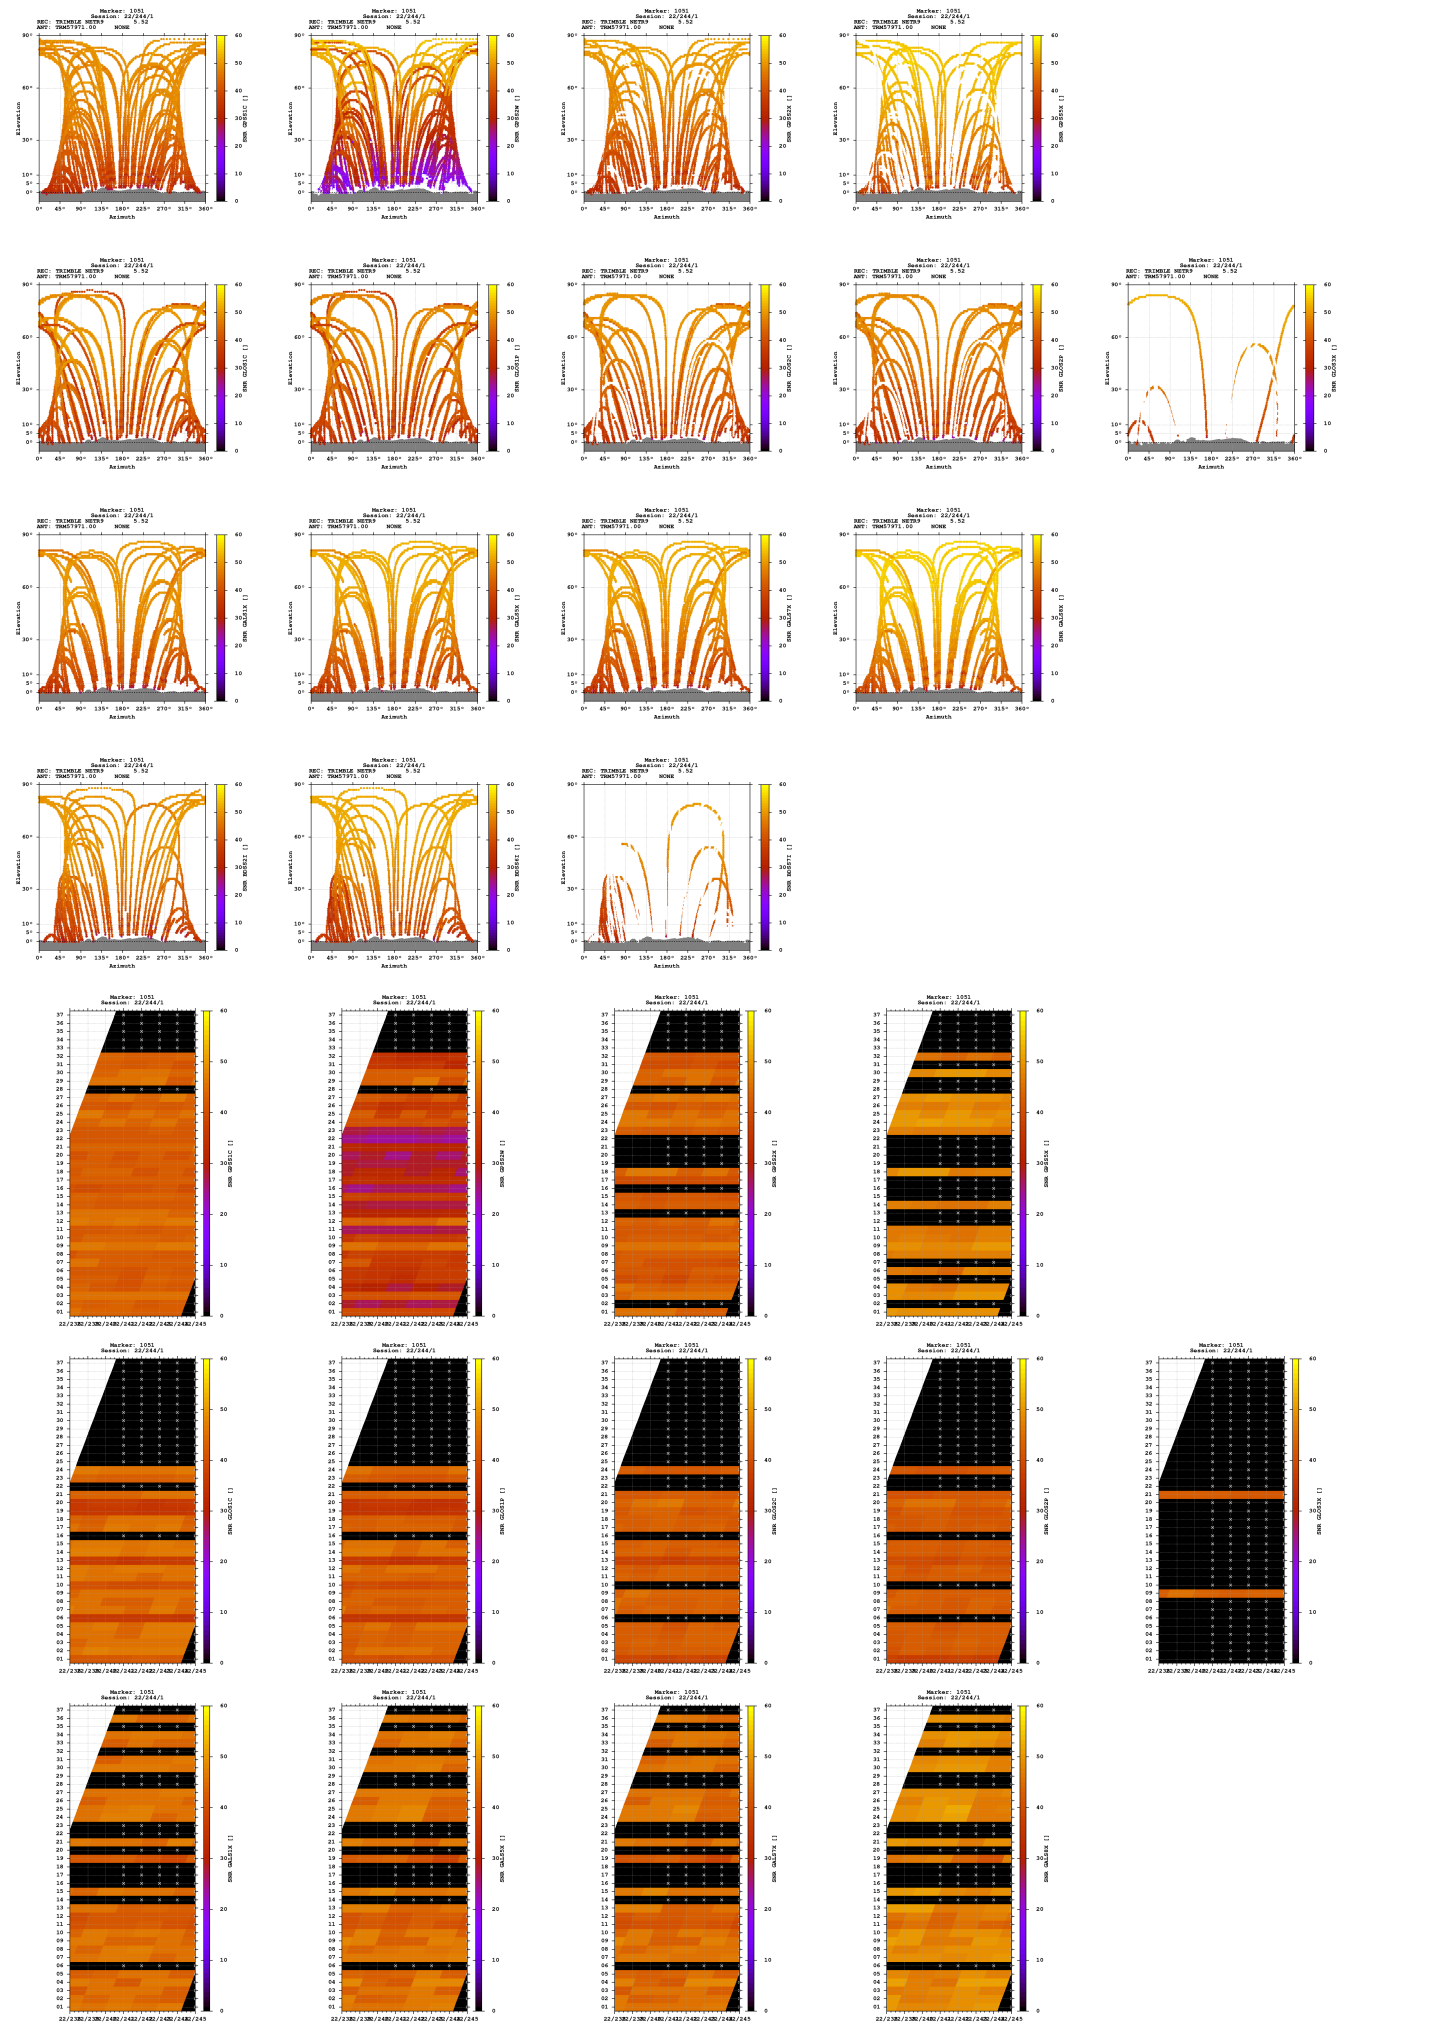

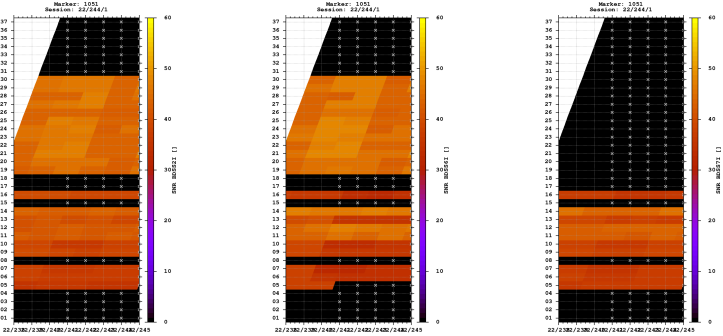



Estimates

2022-08-31 06:37:30	GPS	4262969.2096	641332.1004	4685698.9142	47.576980050	8.555564150	573.3048
2022-08-31 06:37:30	GLO	4262969.9225	641331.9136	4685699.8587	47.576981285	8.555560285	574.4589
2022-08-31 06:37:30	GAL	4262969.0514	641331.9358	4685698.4018	47.576978143	8.555562299	572.8045
2022-08-31 06:37:30	BDS	4262981.0246	641337.0832	4685699.6007	47.576901730	8.555606277	582.1933

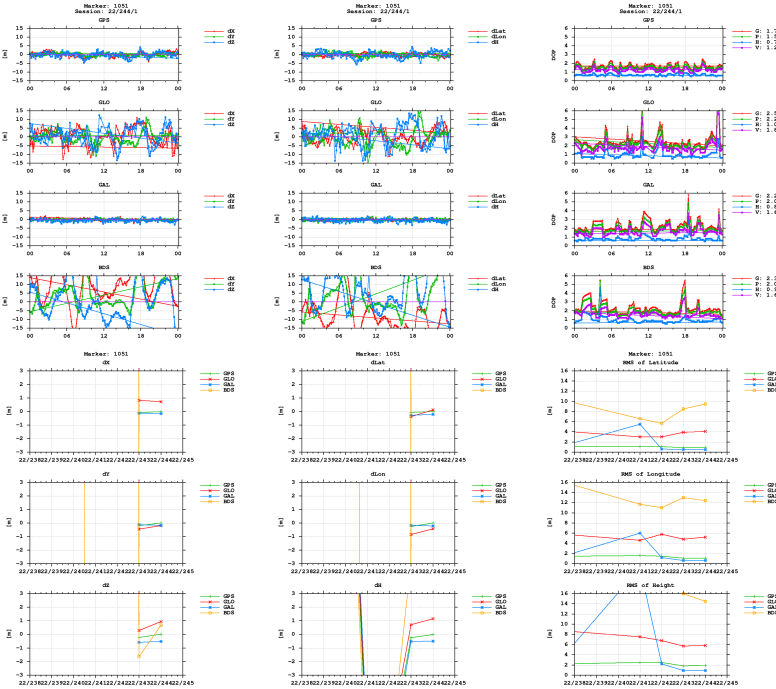

BNC

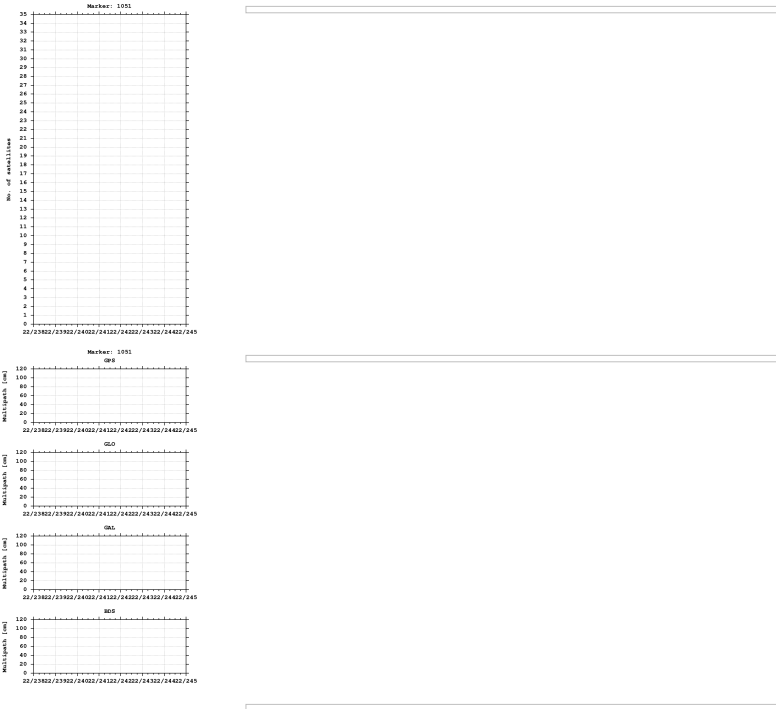

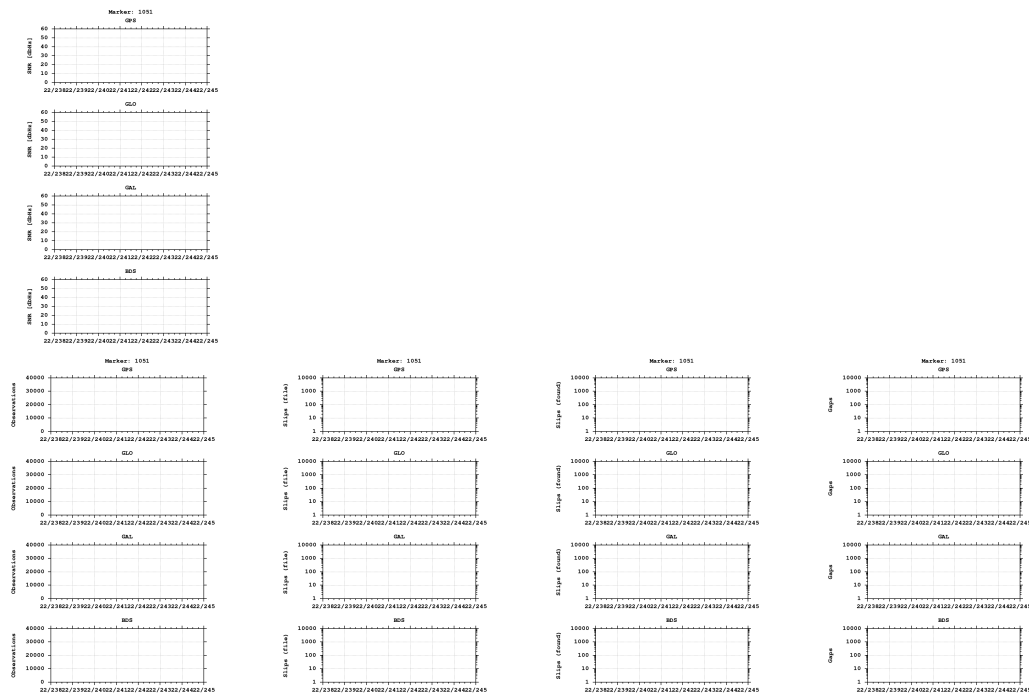

Equipment

2022-08-23 00:00:00 TRIMBLE NETR9 5.52 518 TRM57971.00 NONE 518

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)