


GNSS observation file monitoring for 0512


Last RINEX file: 05122561.22O
RINEX version: 3.02
Marker: 1049
Receiver: 512 TRIMBLE NETR9 5.52
Antenna: 512 TRM57971.00 NONE


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites


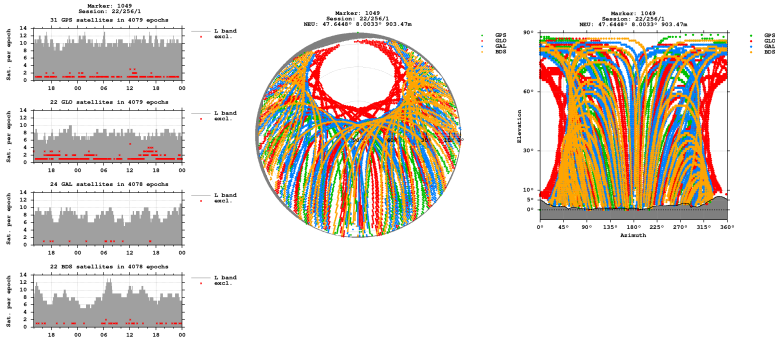


Bands

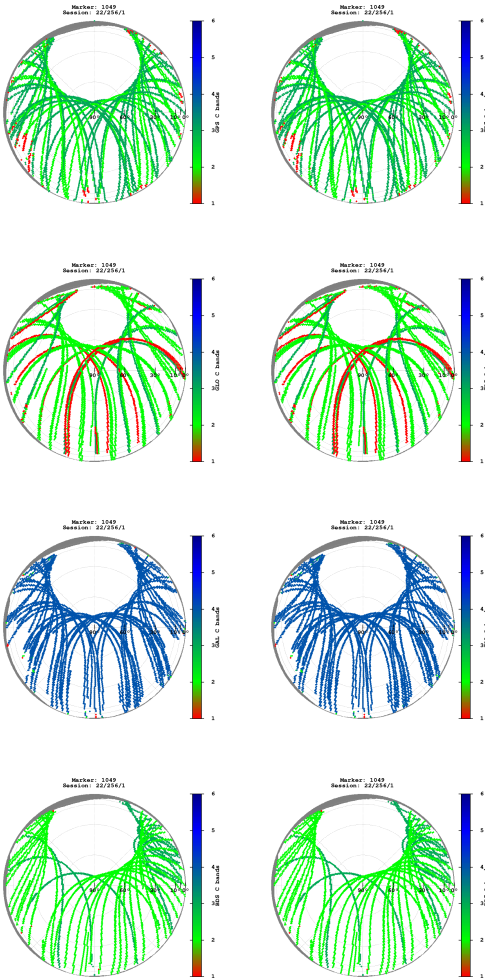

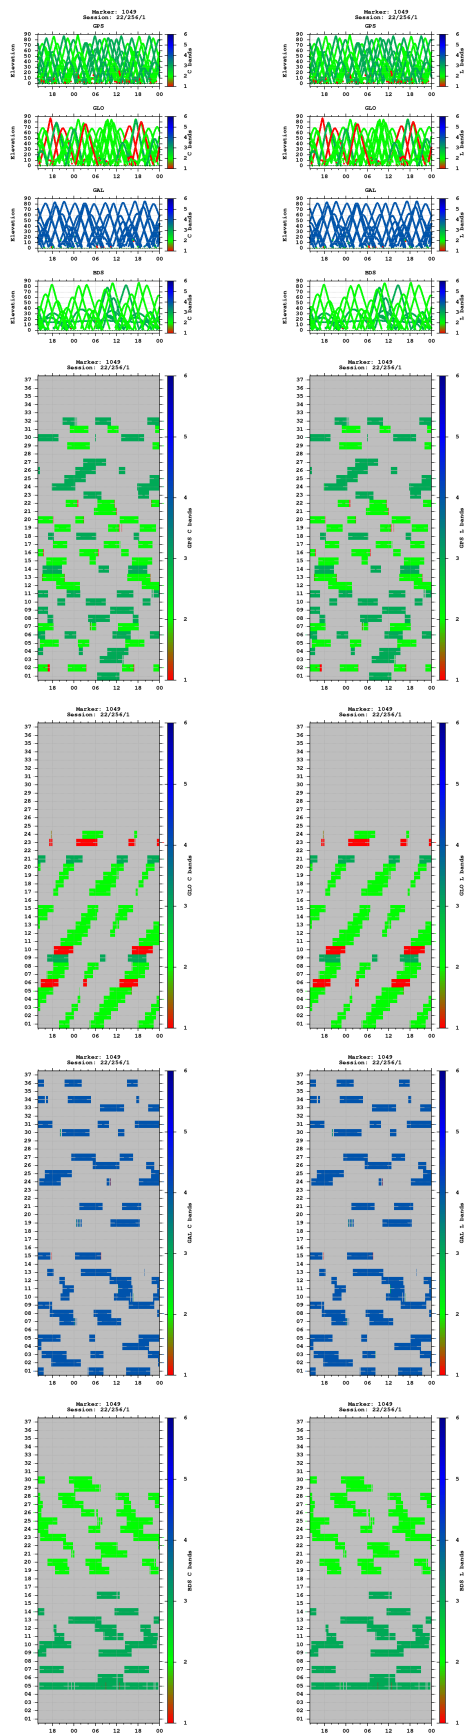



Multipath

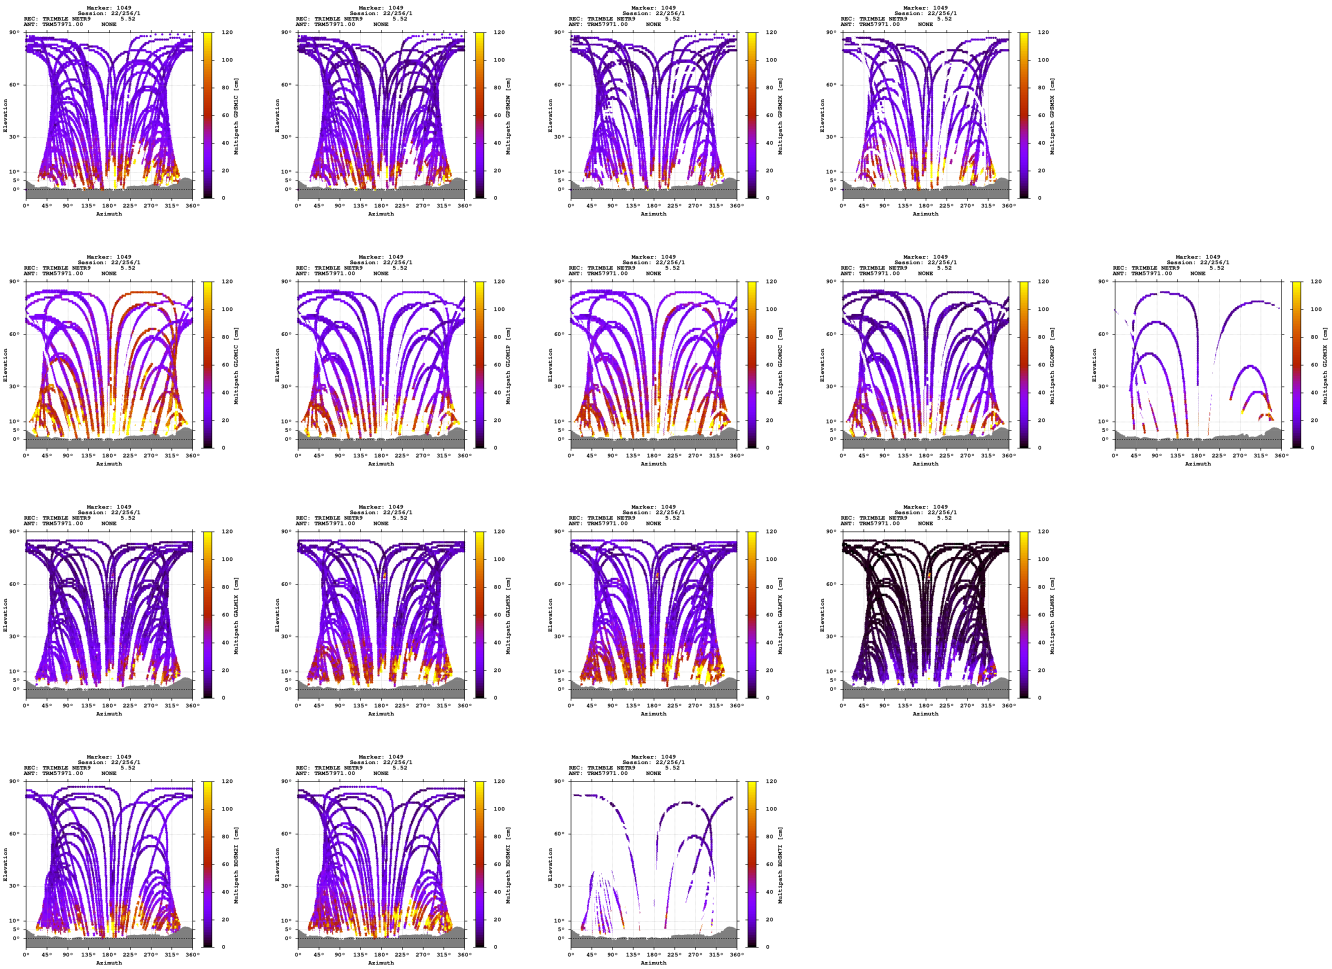

- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.


Signal-to-noise ratio

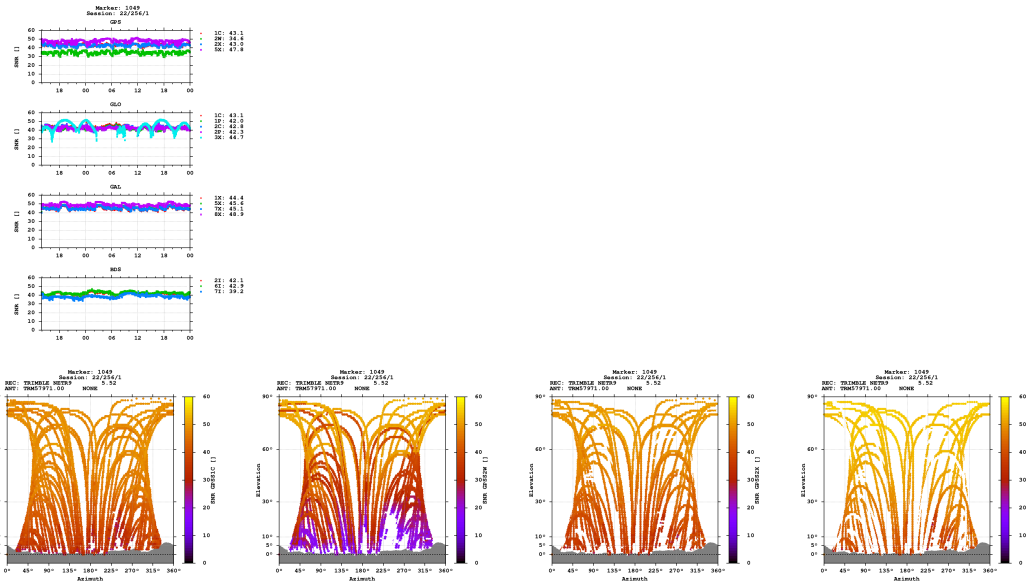

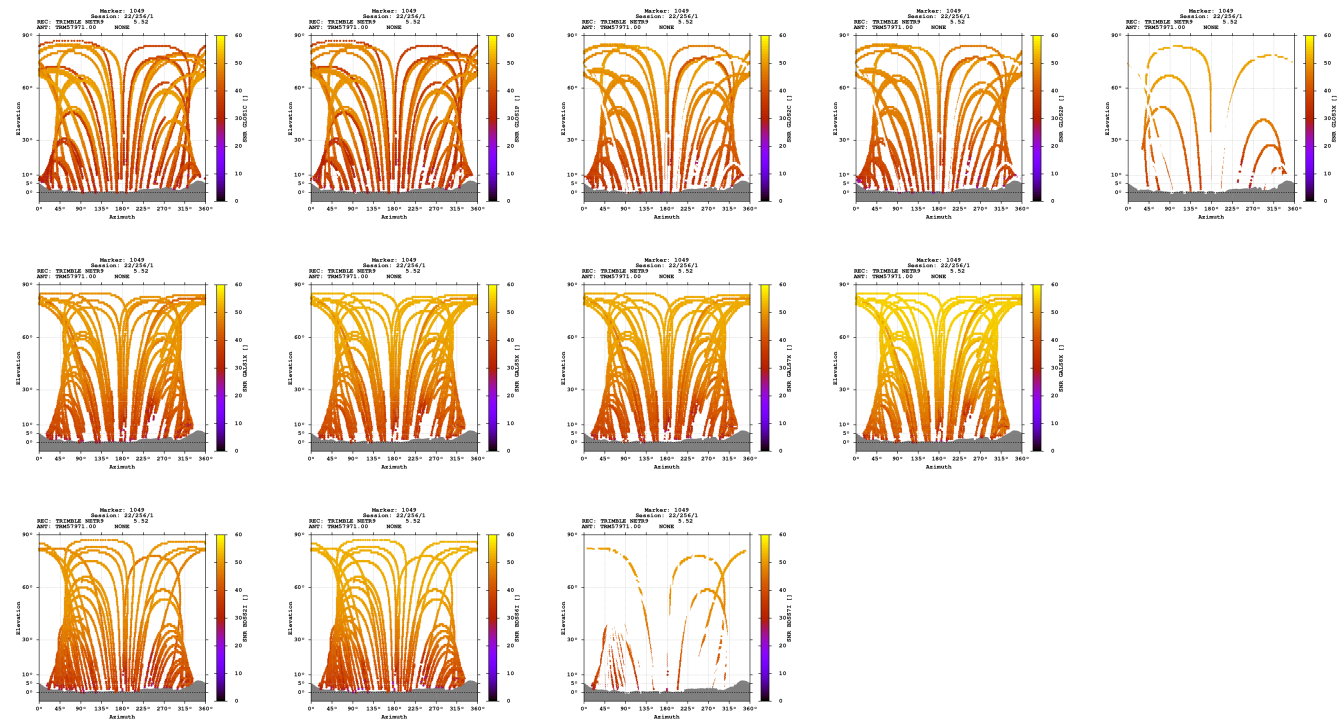

Estimates

2022-09-13 13:56:30	GPS	4263654.4613	599466.3656	4691029.8830	47.644840985	8.003278751	903.4672
2022-09-13 13:56:30	GLO	4263654.9243	599466.3576	4691029.7397	47.644837076	8.003277787	903.6694
2022-09-13 13:56:30	GAL	4263654.3408	599466.2296	4691029.5943	47.644840155	8.003277181	903.1607
2022-09-13 13:56:30	BDS	4263654.2879	599467.5662	4691031.7097	47.644852082	8.003294892	904.8140

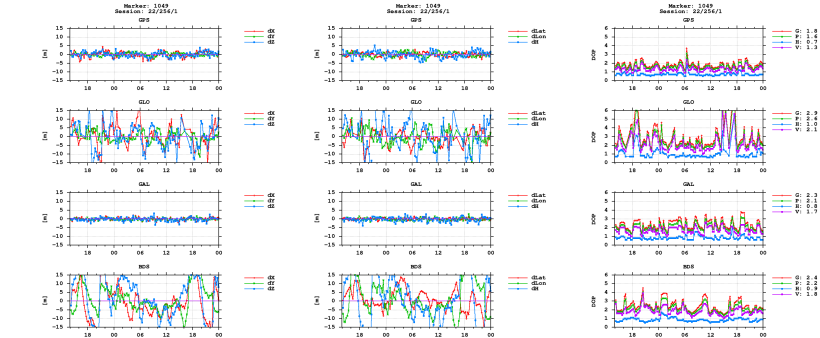

BNC

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)