


GNSS observation file monitoring for 0513


Last RINEX file: 05132581.220
RINEX version: 3.02
Marker: 1049
Receiver: 513 TRIMBLE NETR9 5.52
Antenna: 513 TRM57971.00 NONE

Epochs

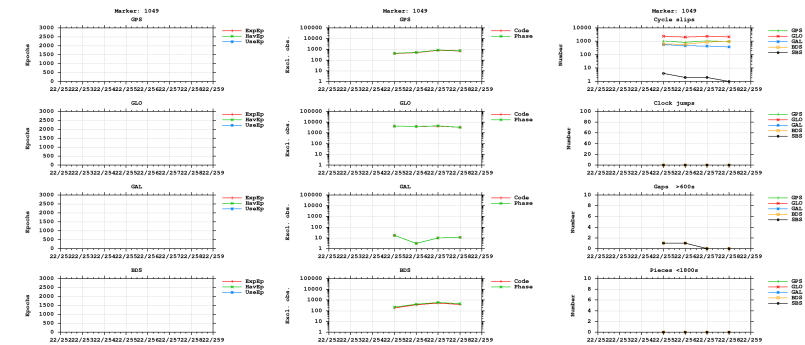



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

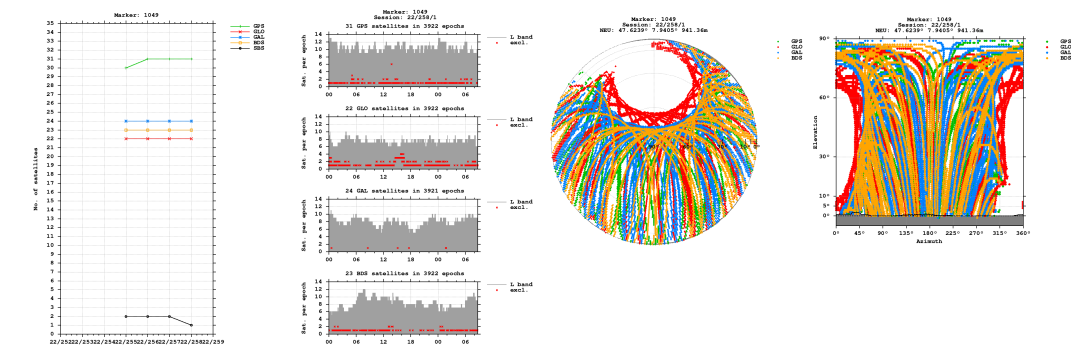


Bands

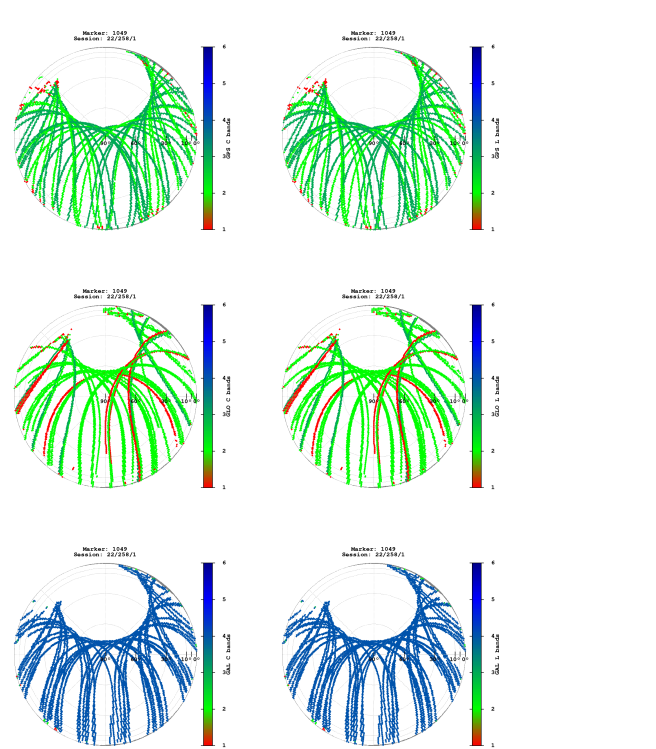


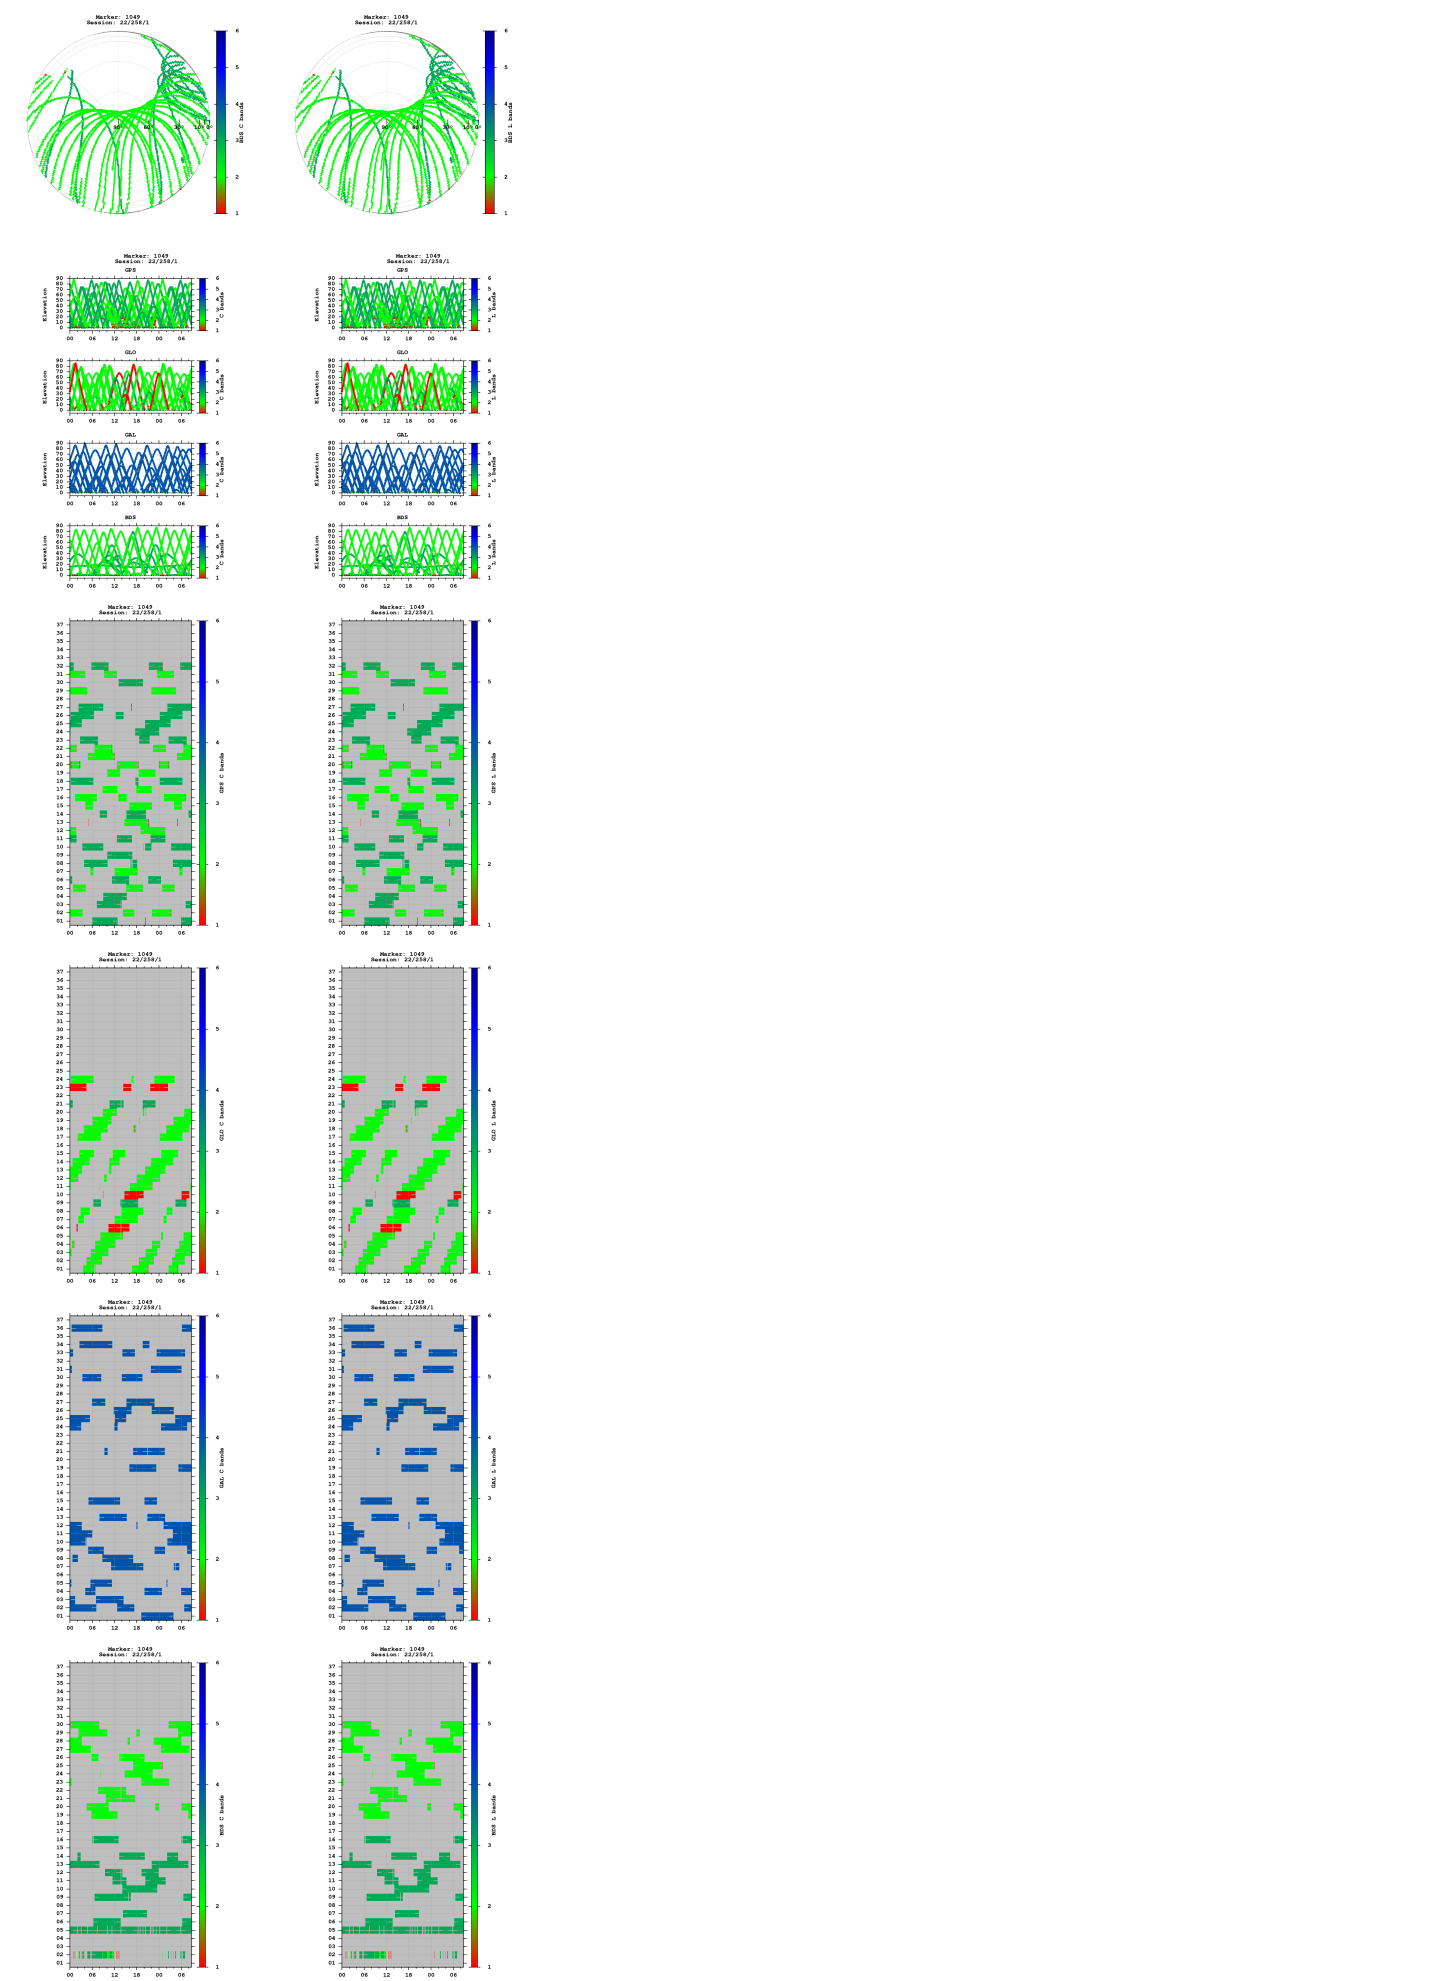


Observations

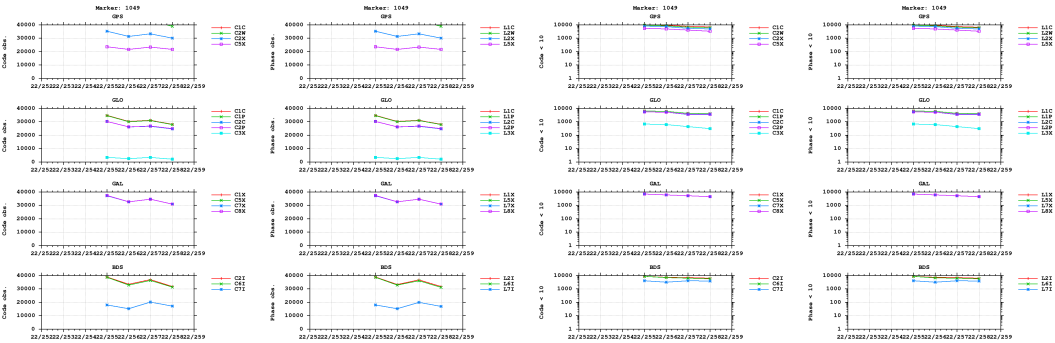


Multipath

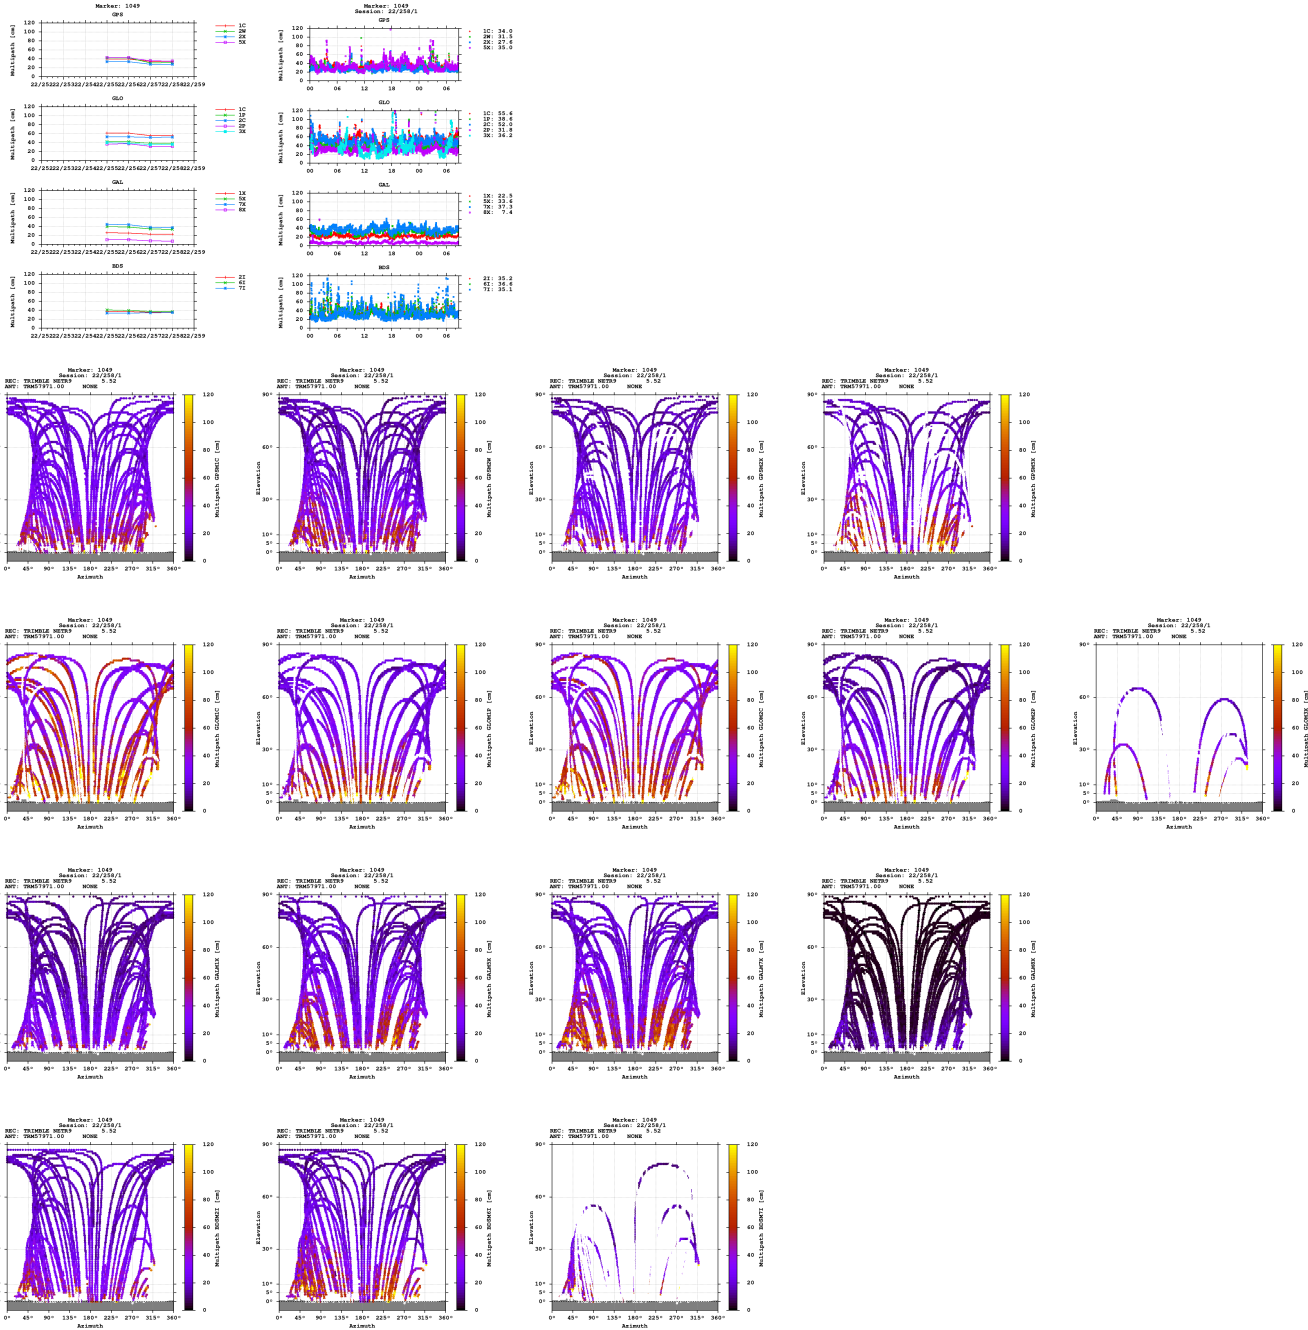


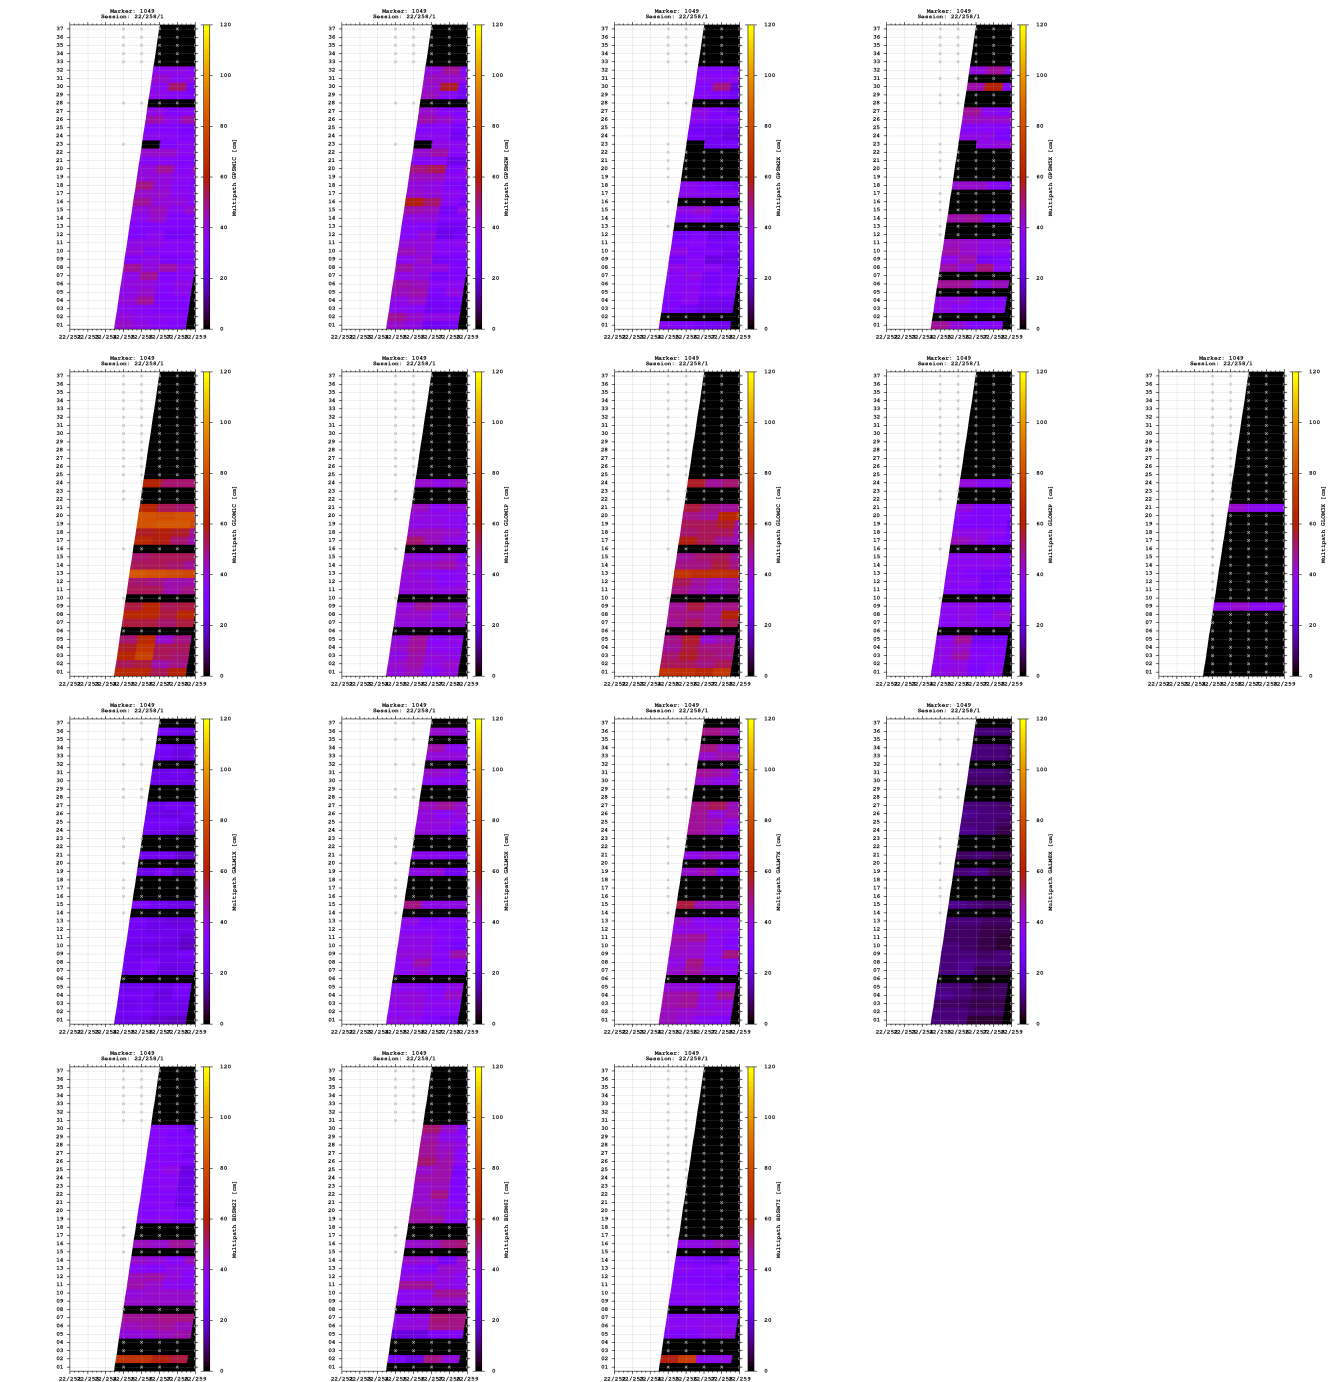


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

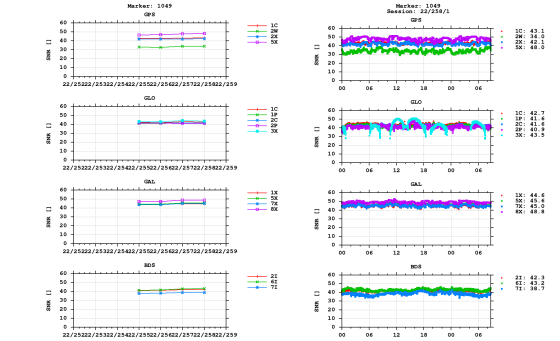


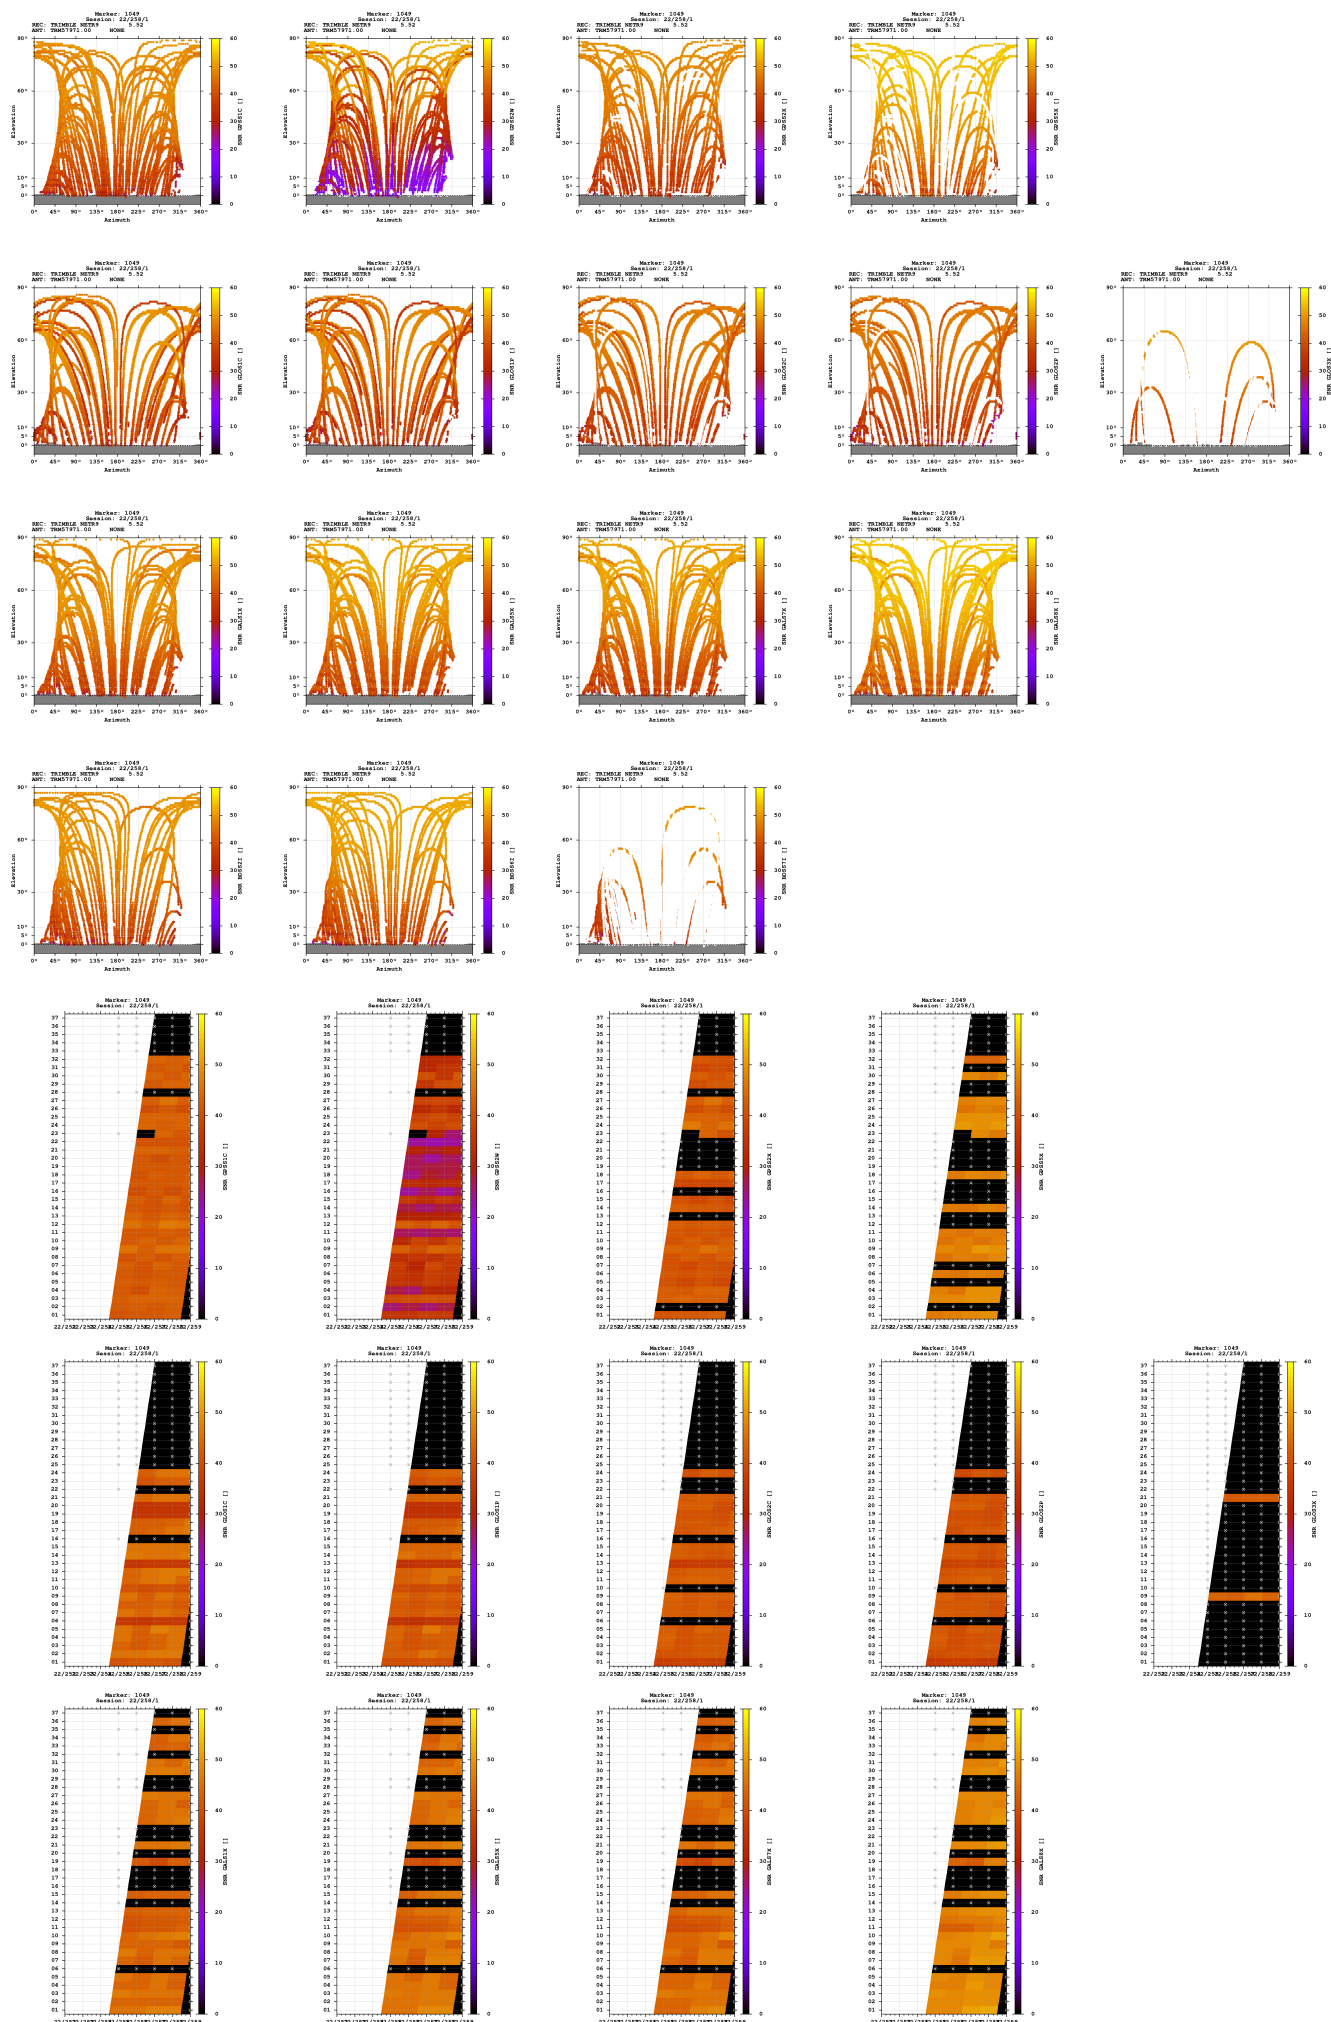

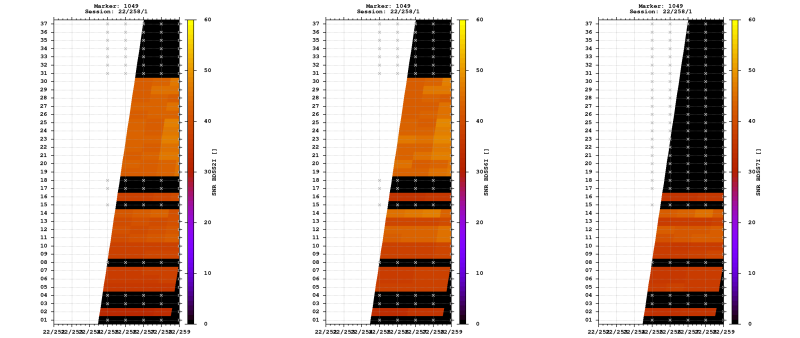


Estimates

2022-09-14 11:26:00	GPS	4266040.3230	595037.0895	4689486.4652	47.623870008	7.940516152	941.3555
2022-09-14 11:26:00	GLO	4266040.2782	595036.5731	4689486.6794	47.623872075	7.940509431	941.4358
2022-09-14 11:26:00	GAL	4266039.9221	595036.7983	4689486.2203	47.623871429	7.940513052	940.8799
2022-09-14 11:26:00	BDS	4266040.5699	595037.0786	4689491.8596	47.623901090	7.940515555	945.5044

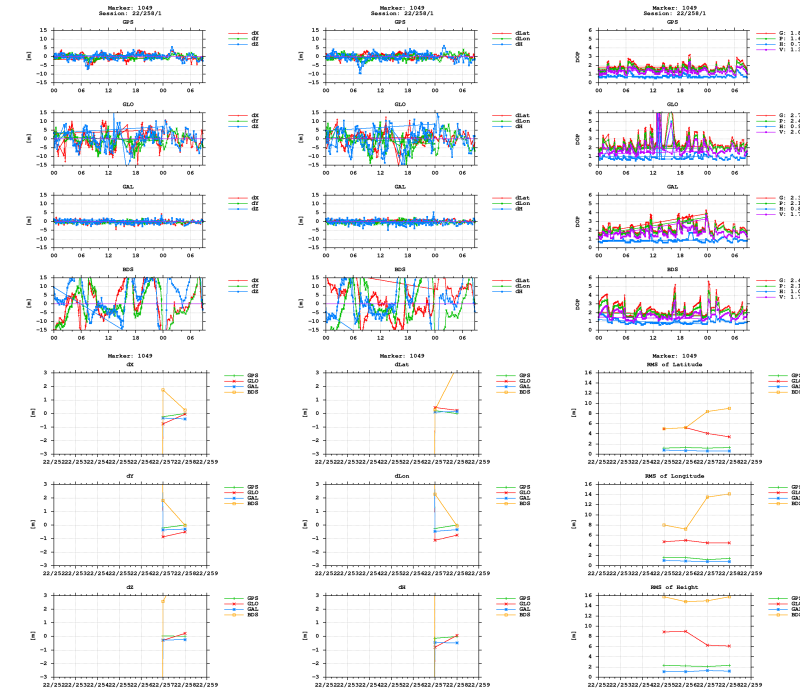

BNC



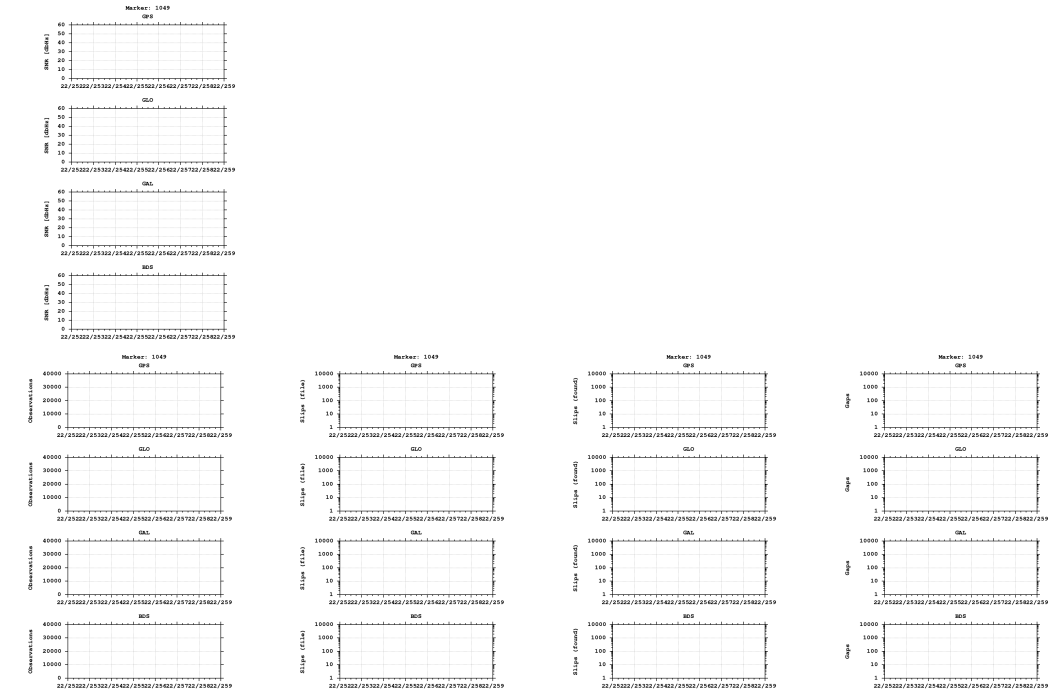

Equipment

2022-09-12 00:00:00 TRIMBLE NETR9 5.52 513 TRM57971.00 NONE 513

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)