


GNSS observation file monitoring for 0514


Last RINEX file: 05142561.22O
RINEX version: 3.02
Marker: 1031
Receiver: 514 TRIMBLE NETR9 5.52
Antenna: 514 TRM57971.00 NONE


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites


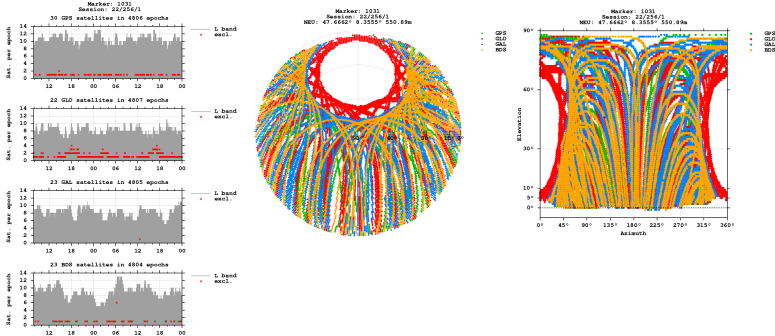


Bands

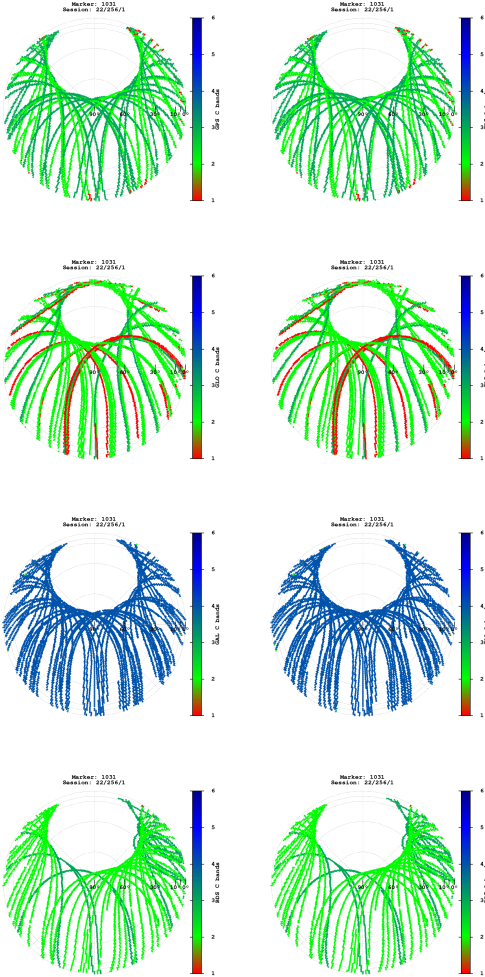

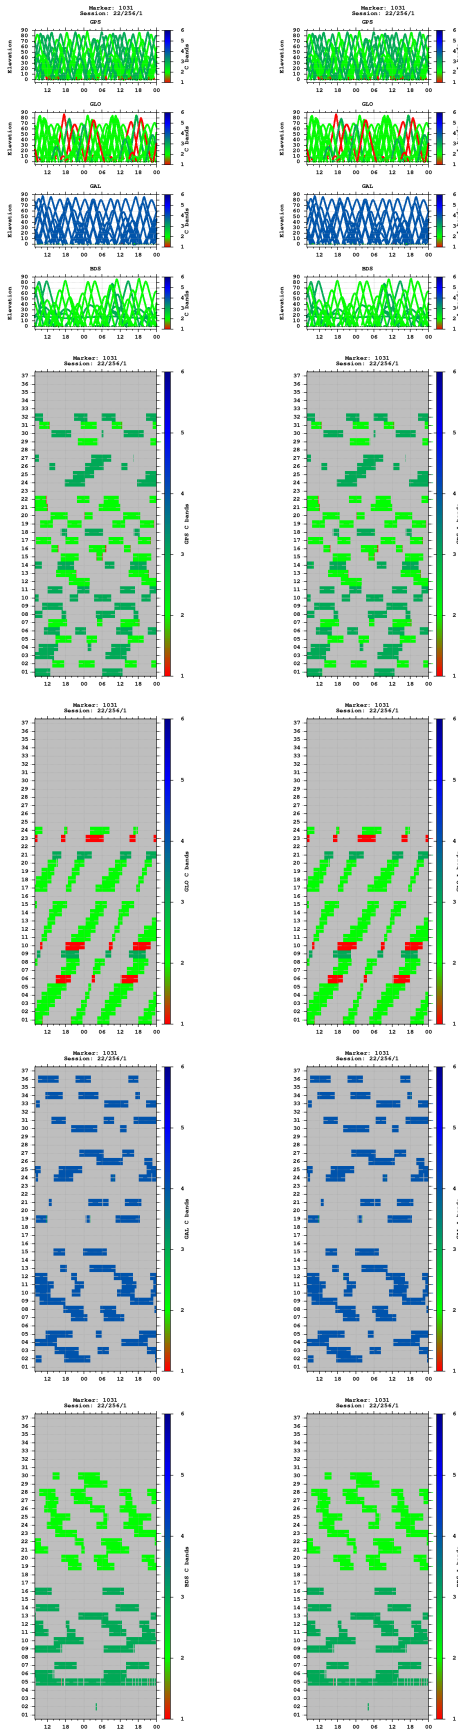



Multipath

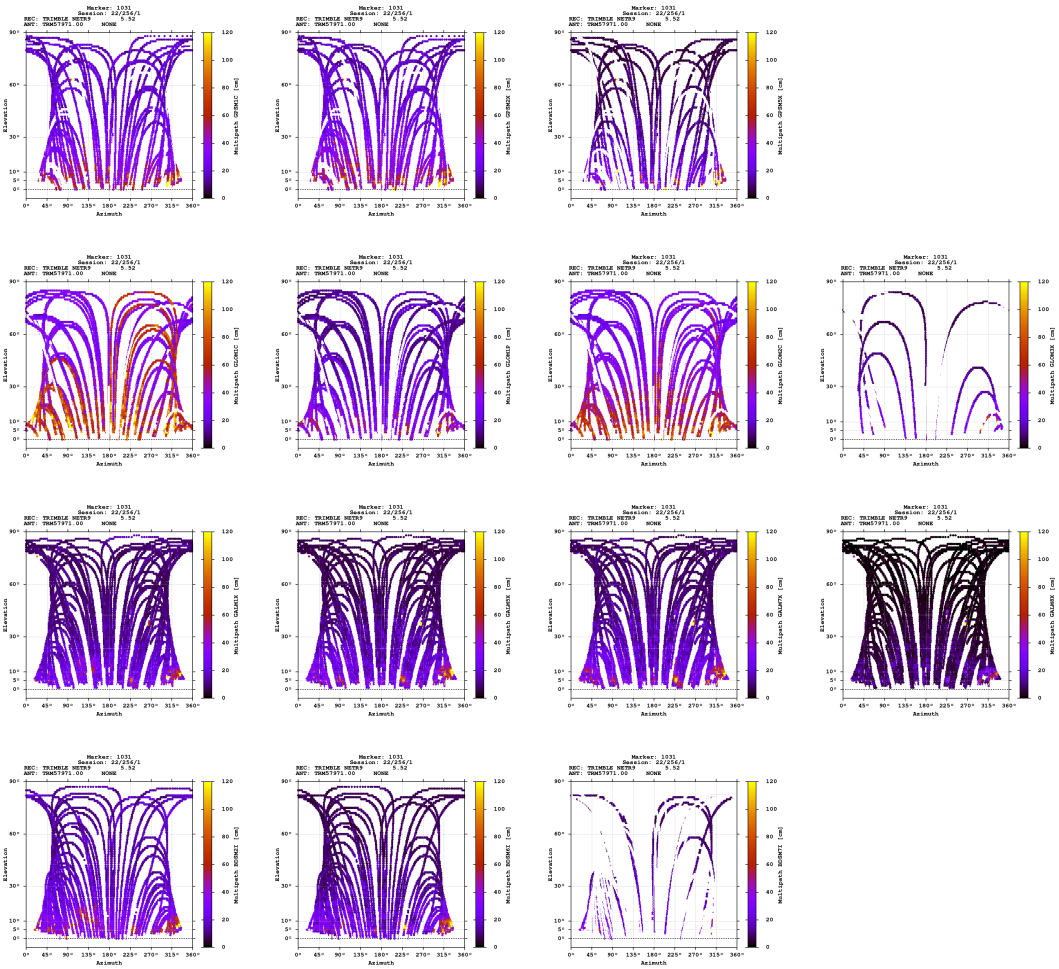

- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.


Signal-to-noise ratio

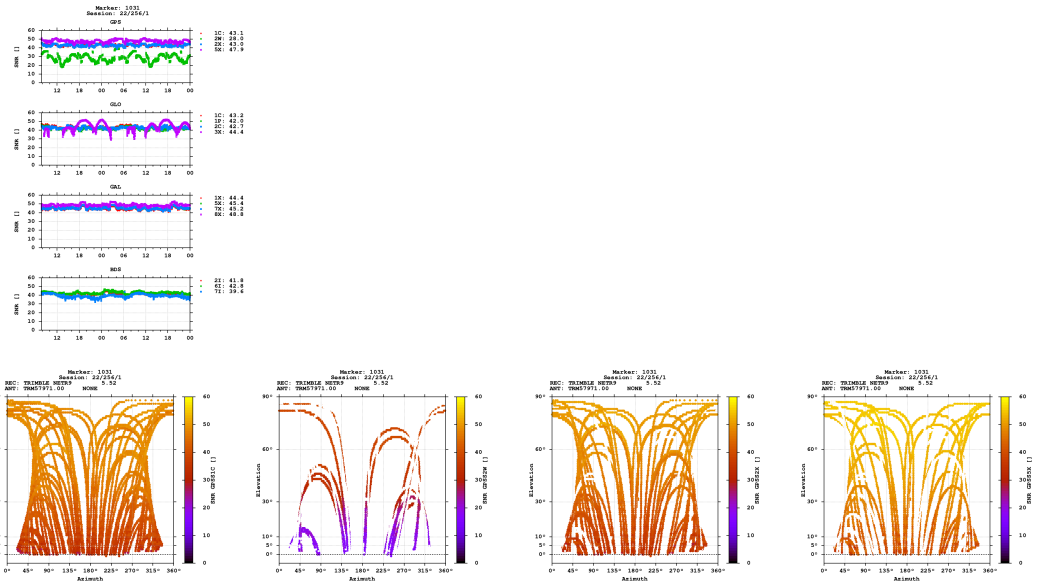

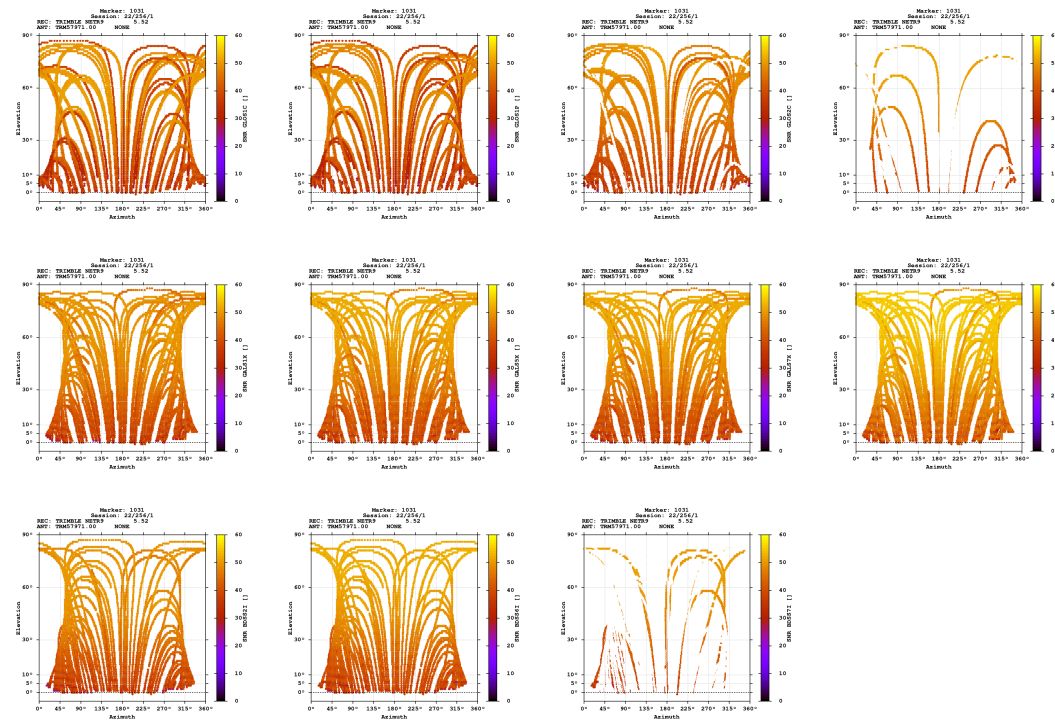

Estimates

2022-09-13 07:50:00	GPS	4257914.1208	625377.9900	4692371.3836	47.666230664	8.355535046	550.8898
2022-09-13 07:50:00	GLO	4257914.2261	625377.8994	4692371.1586	47.666228696	8.355533649	550.7847
2022-09-13 07:50:00	GAL	4257914.0358	625377.9989	4692371.0988	47.666229490	8.355535327	550.6235
2022-09-13 07:50:00	BDS	4257913.6860	625377.9796	4692371.9905	47.666237210	8.355535751	551.0476

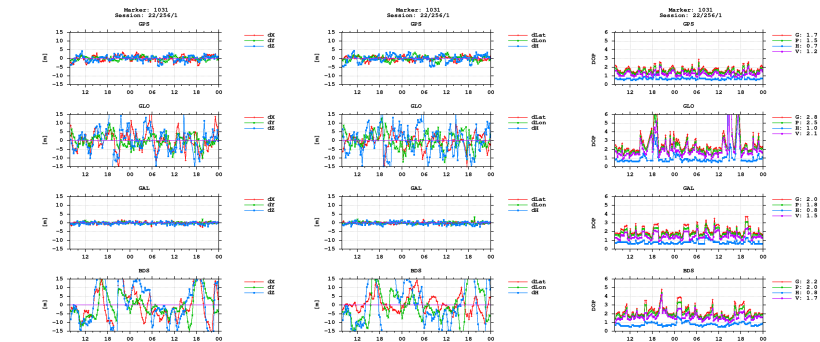

BNC

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)