


GNSS observation file monitoring for 0514


Last RINEX file: 05142571.220
RINEX version: 3.02
Marker: 1031
Receiver: 514 TRIMBLE NETR9 5.52
Antenna: 514 TRM57971.00 NONE

Epochs

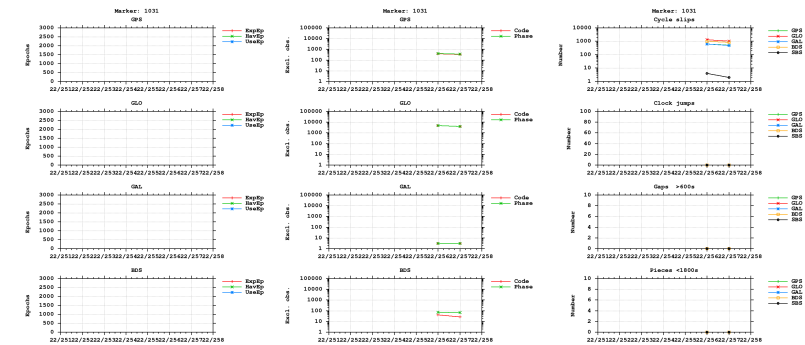



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

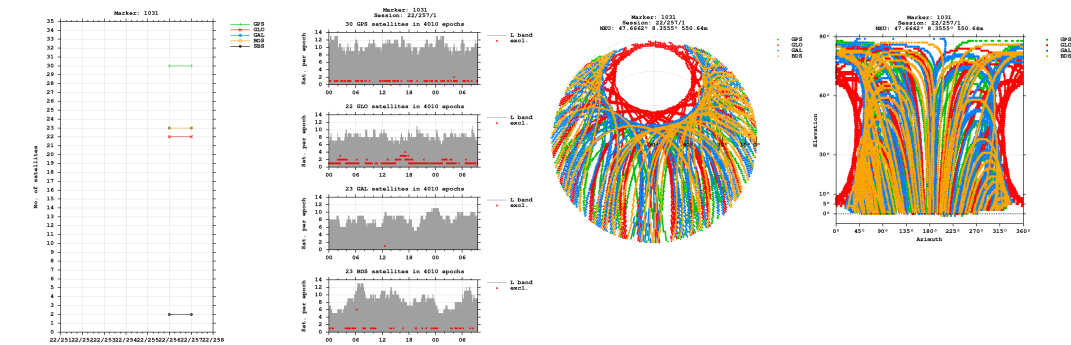


Bands

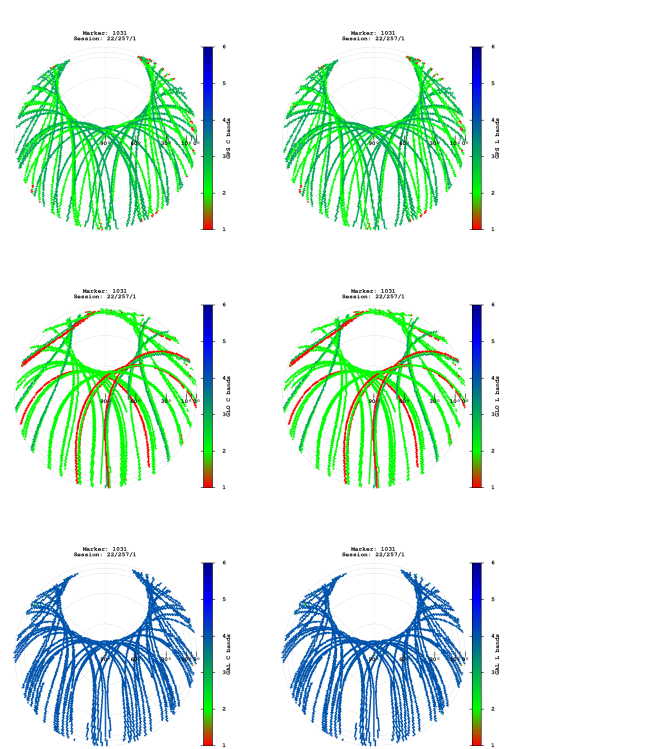


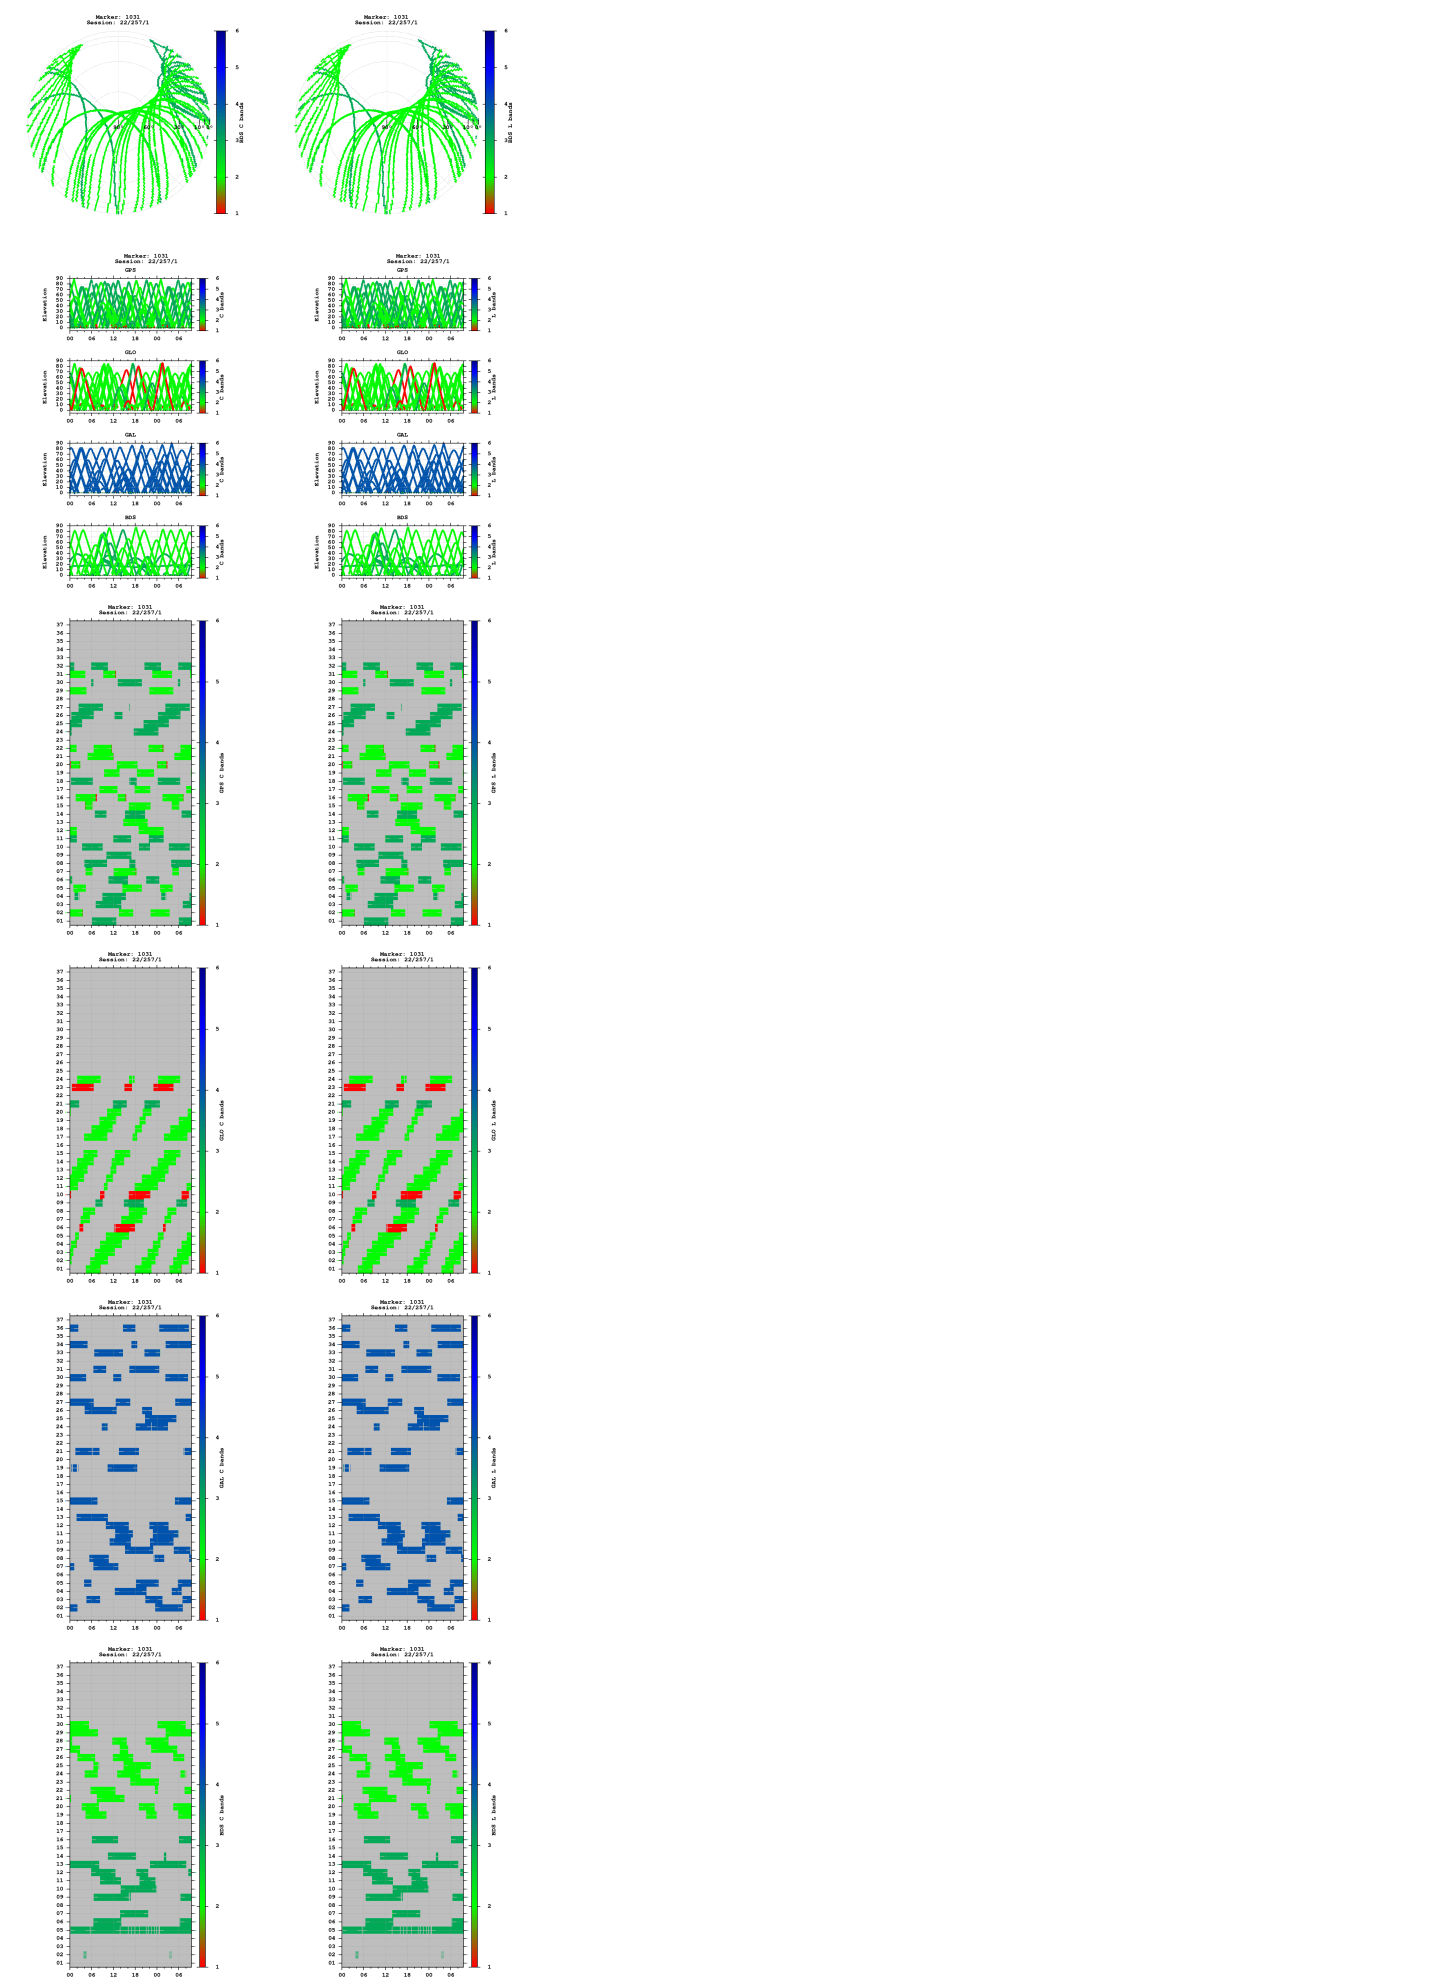


Observations

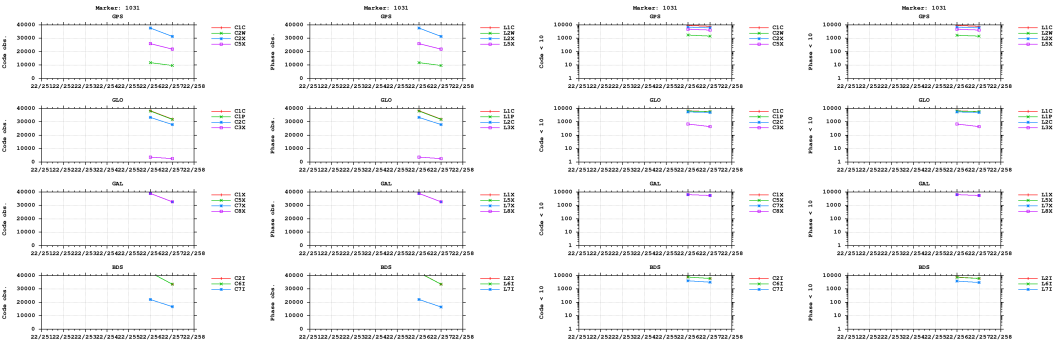


Multipath

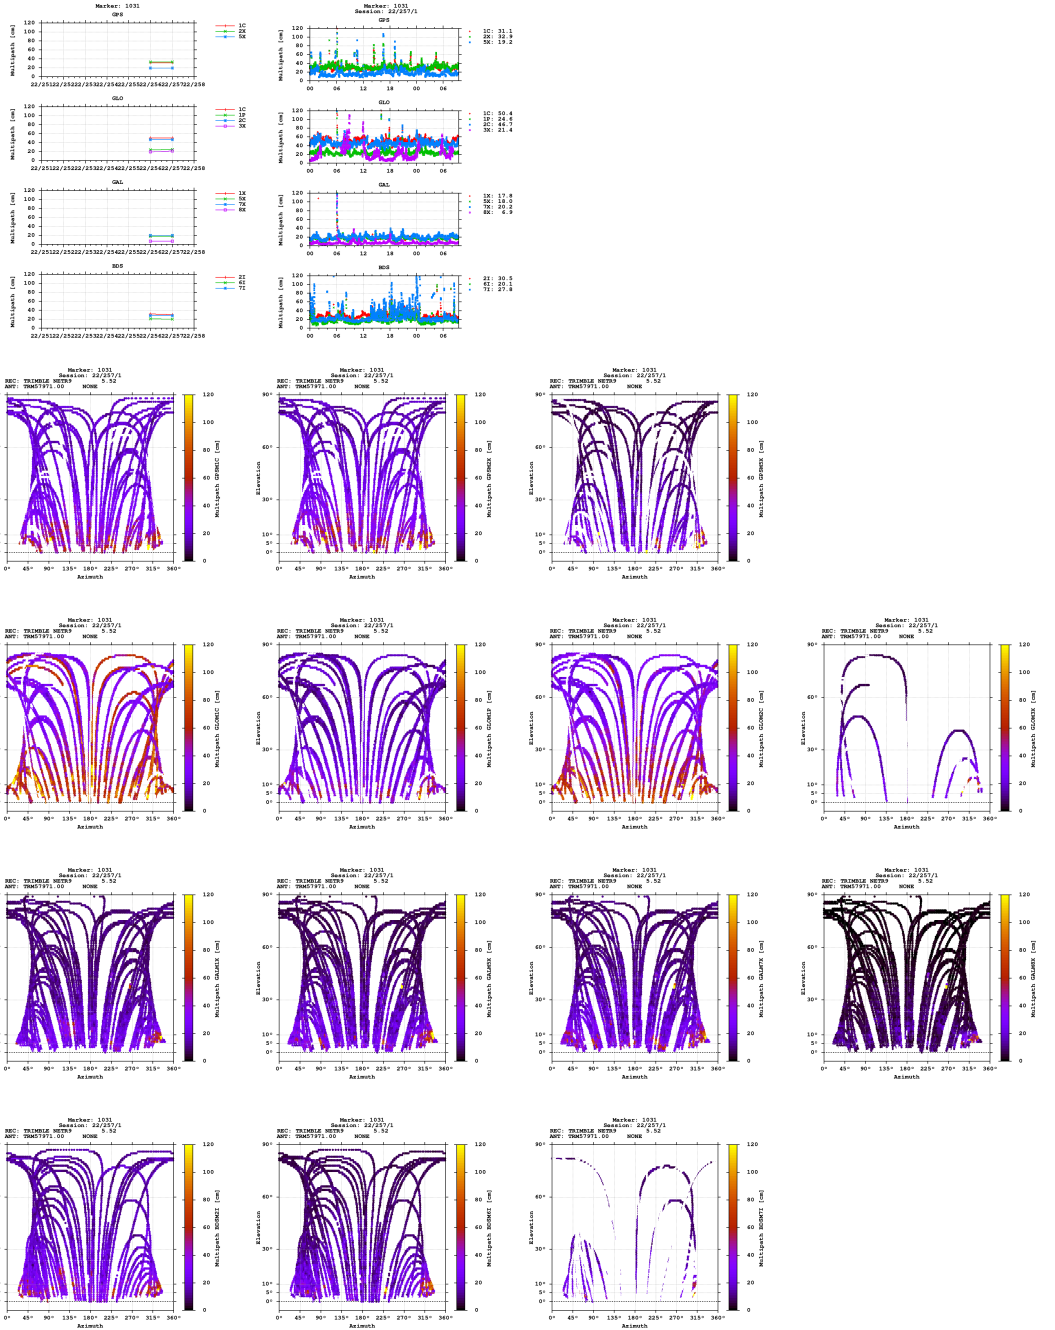


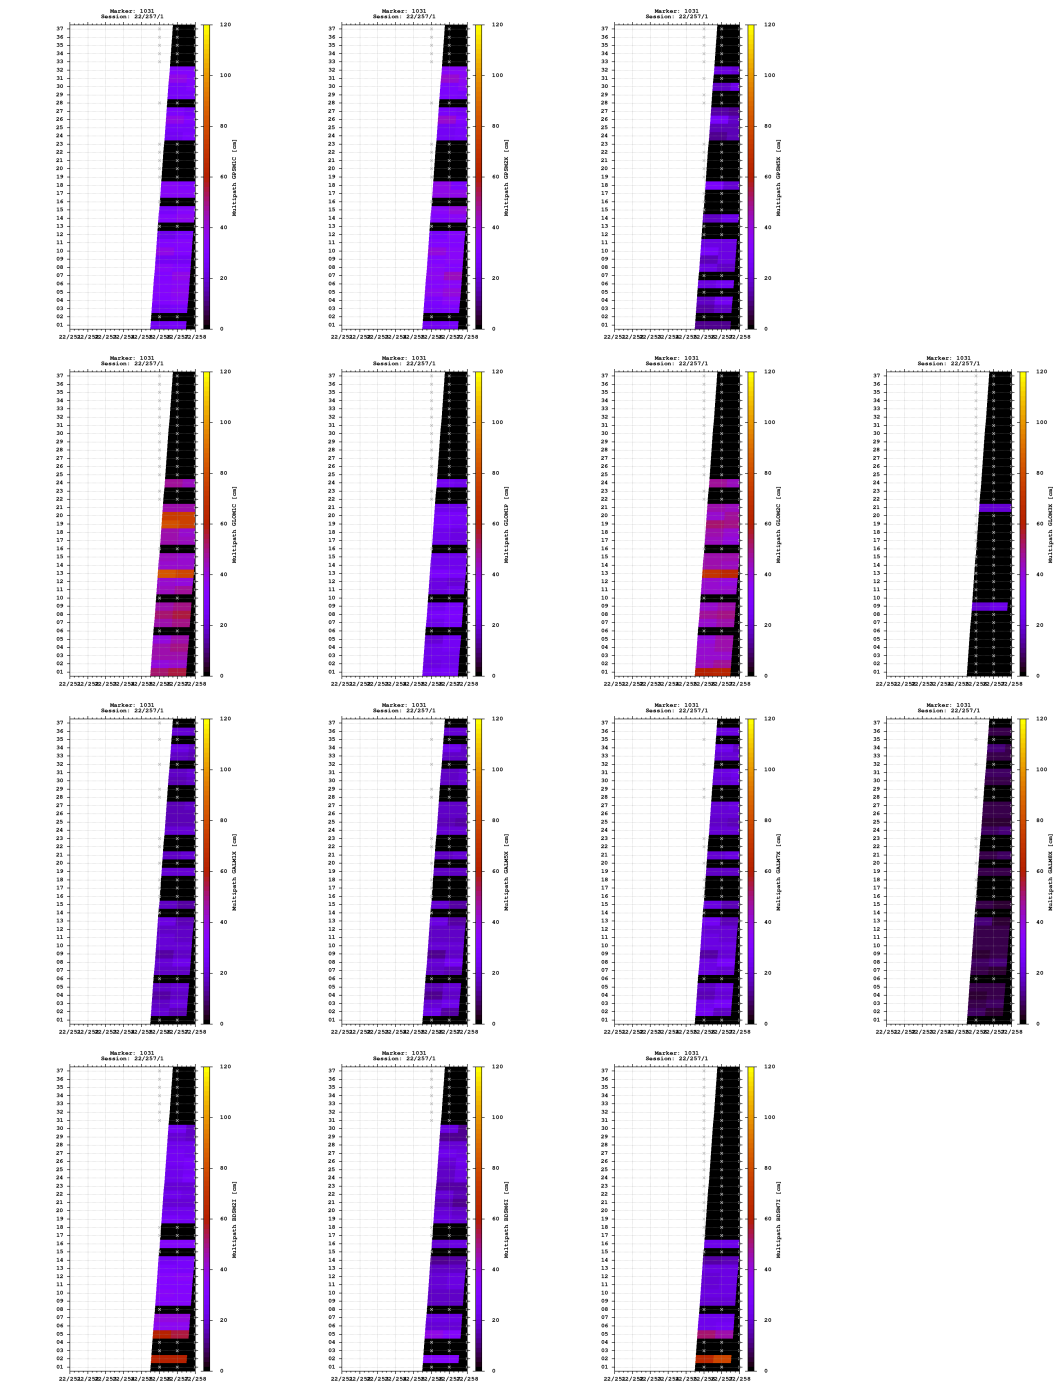


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

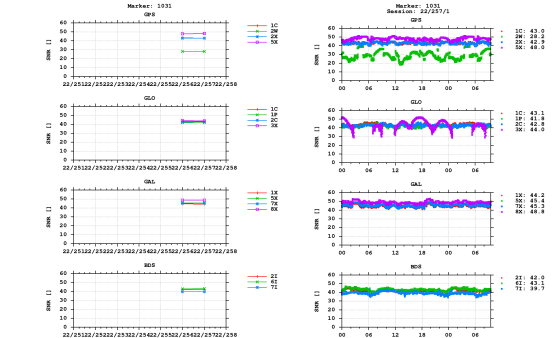


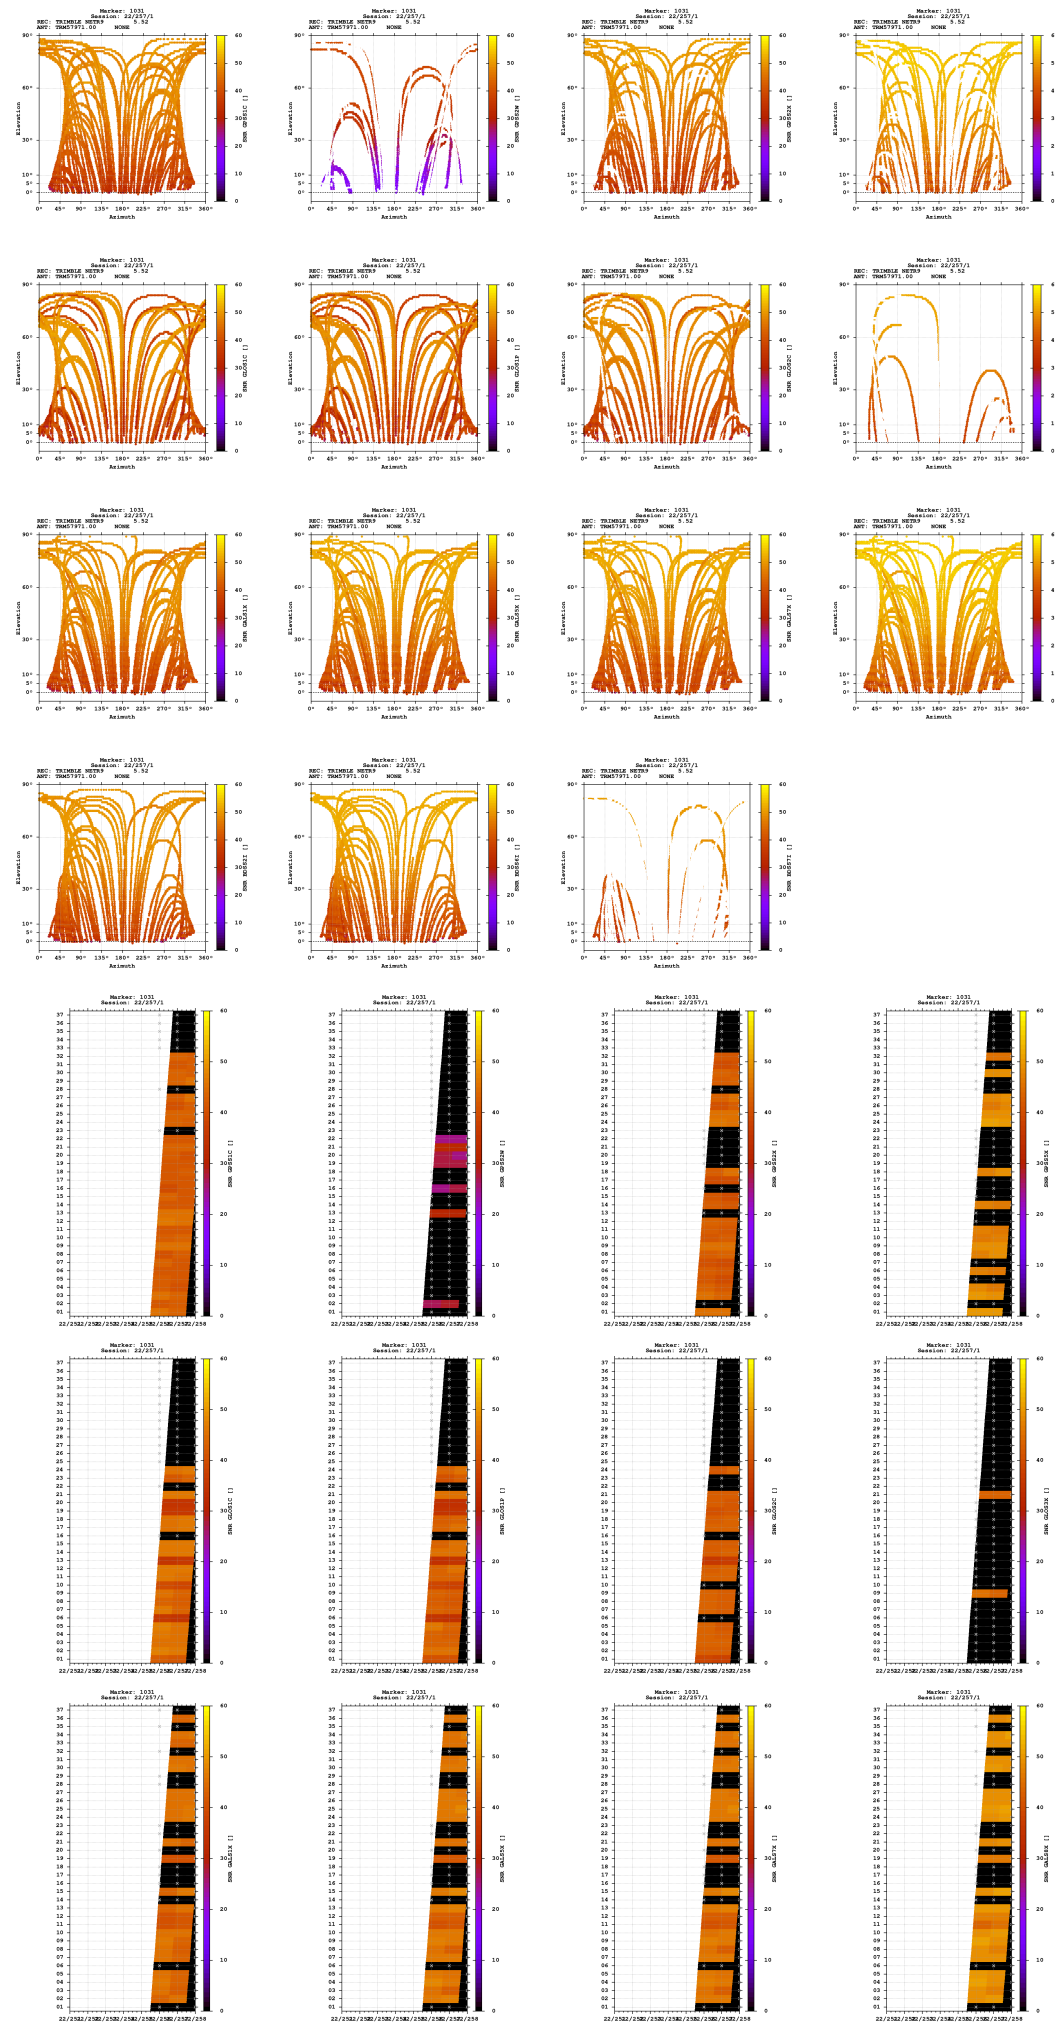

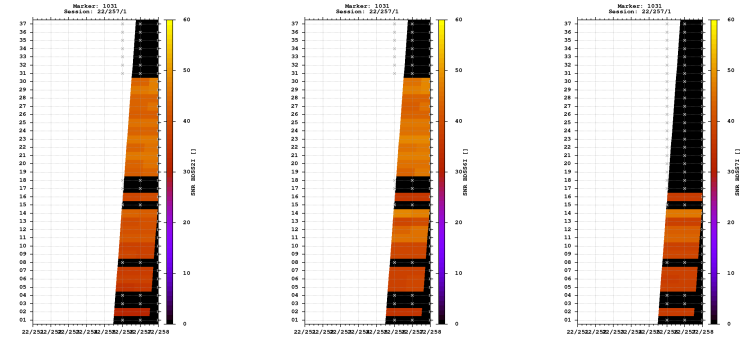



Estimates

2022-09-13 07:50:00	GPS	4257914.0759	625377.9878	4692371.0837	47.666229145	8.355535104	550.6379
2022-09-13 07:50:00	GLO	4257913.7744	625377.4196	4692370.4666	47.666227940	8.355528203	549.9252
2022-09-13 07:50:00	GAL	4257914.0939	625377.9261	4692371.0363	47.666228799	8.355534256	550.6088
2022-09-13 07:50:00	BDS	4257912.8295	625378.1850	4692373.6356	47.666252608	8.355540112	551.7132

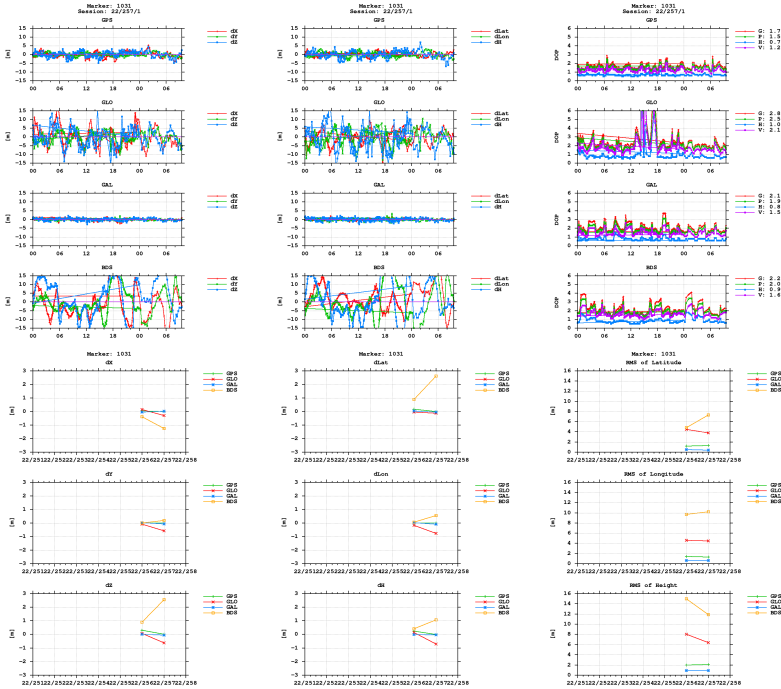

BNC

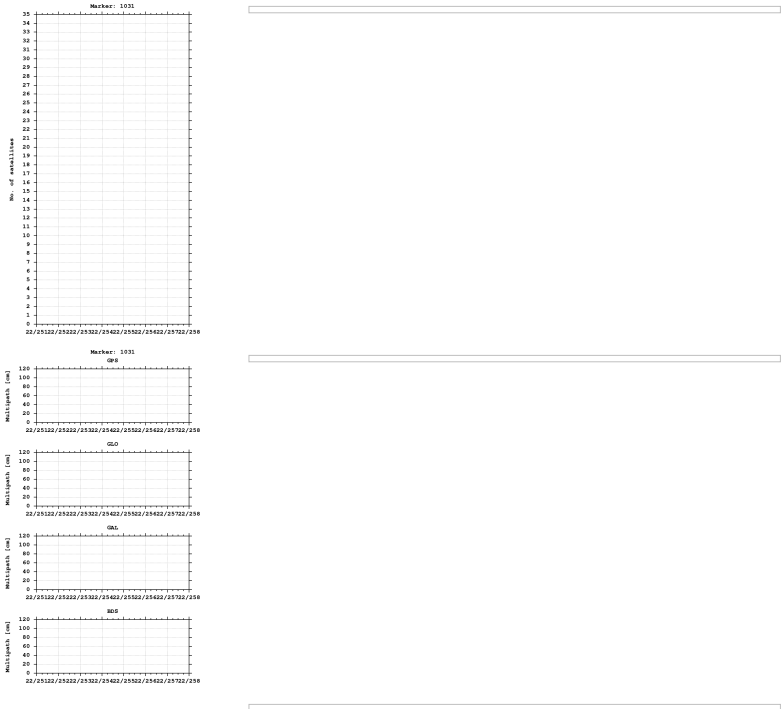

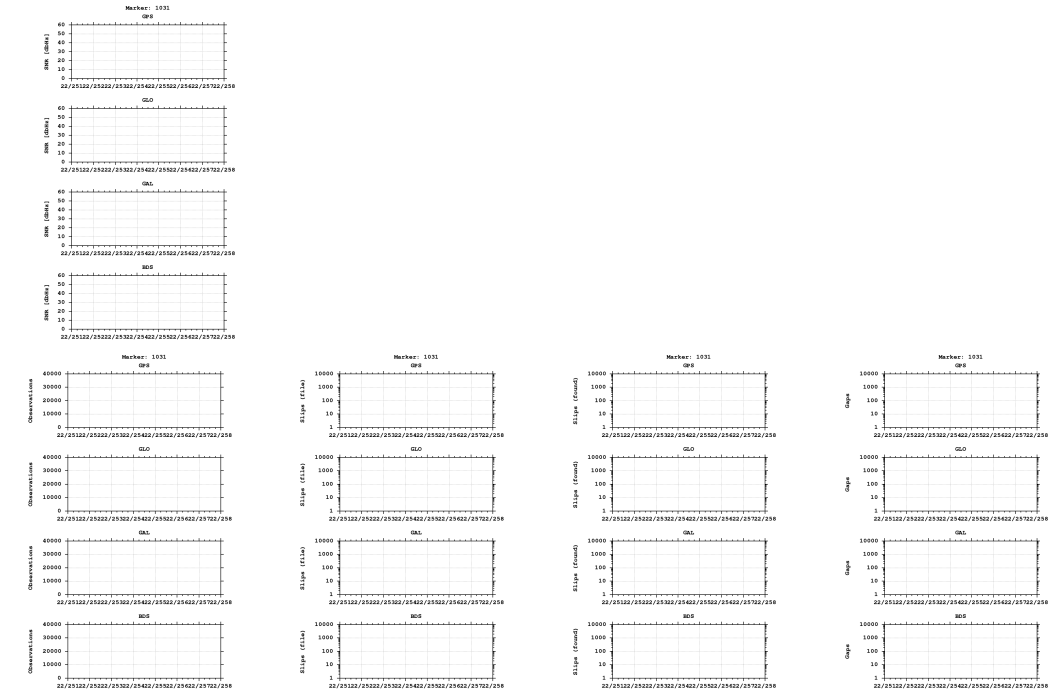

Equipment

2022-09-13 00:00:00 TRIMBLE NETR9 5.52 514 TRM57971.00 NONE 514

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)