

GNSS observation file monitoring for 0515

Last RINEX file: 05152561.220

RINEX version: 3.02

Marker: 1068

Receiver: 515

Antenna: 515


TRIMBLE NETR9

5.52

TRM57971.00


NONE

Epochs

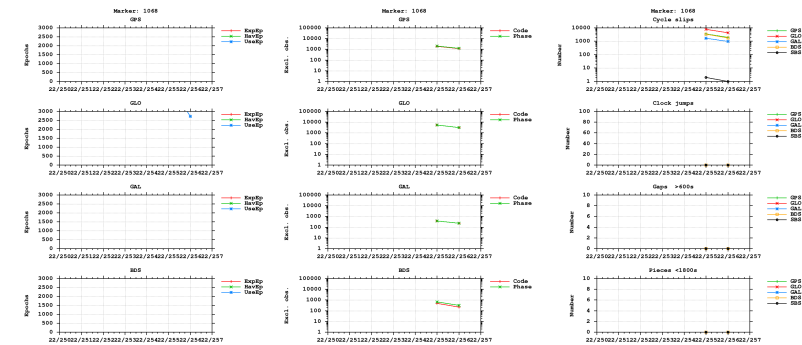



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

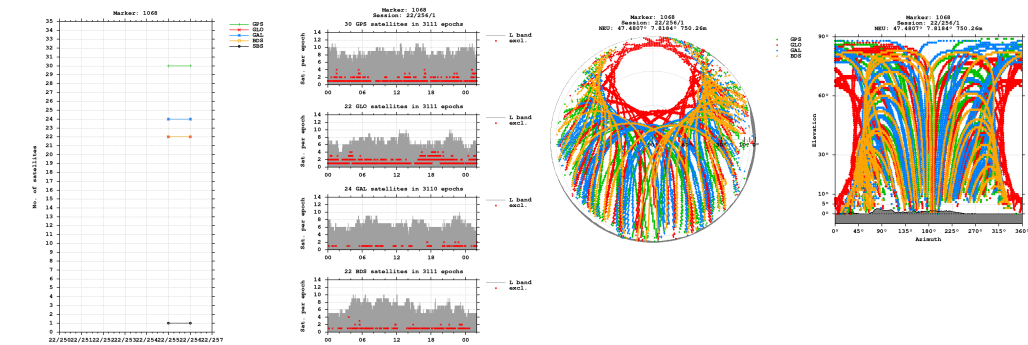


Bands

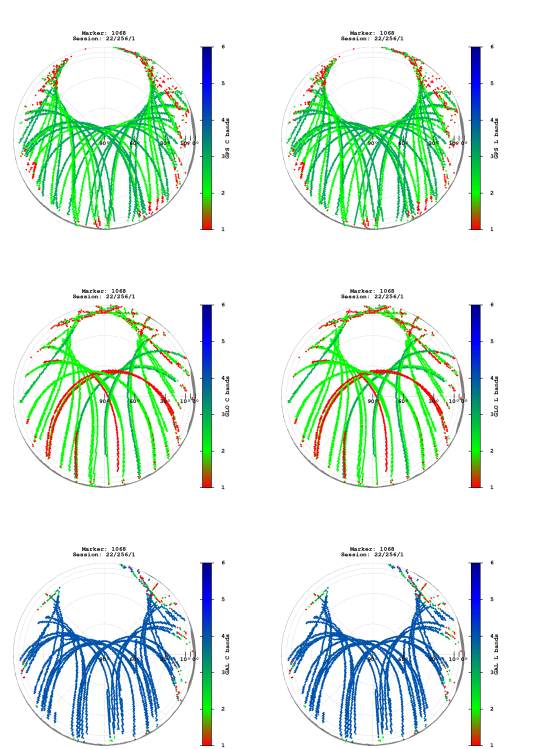


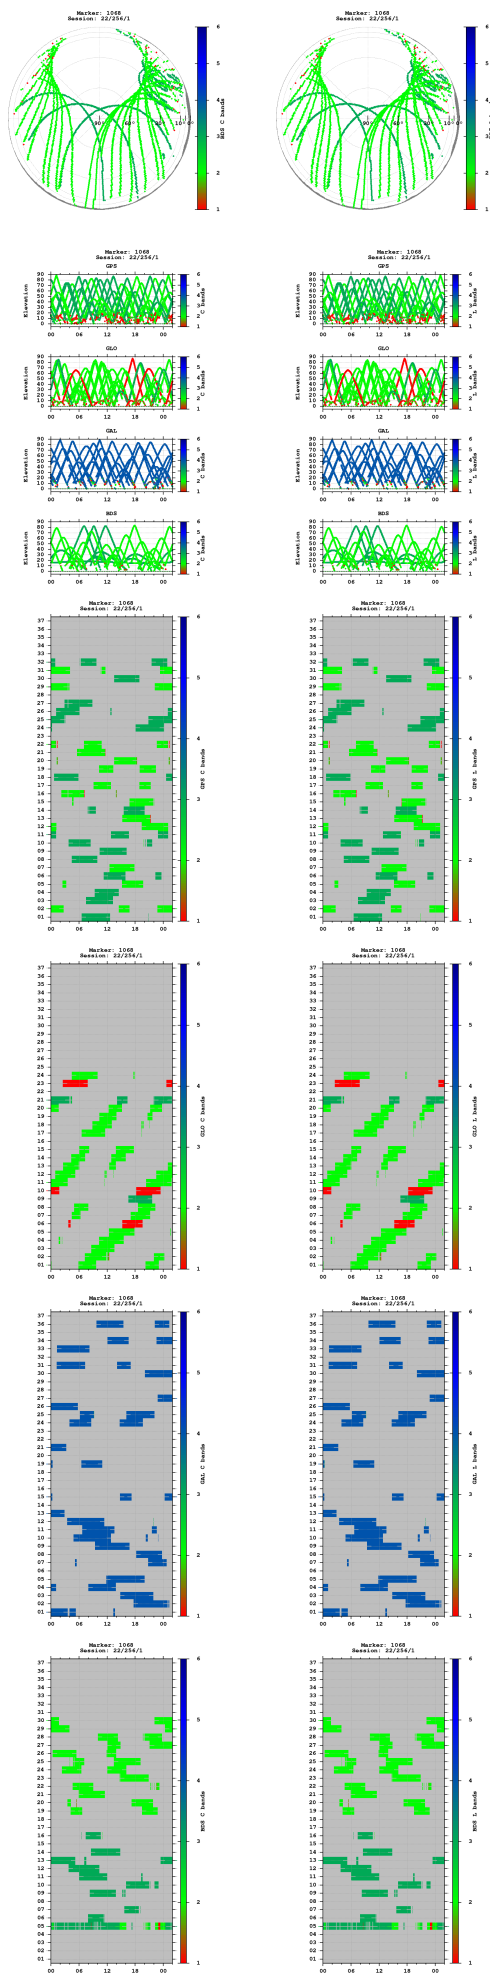


Observations

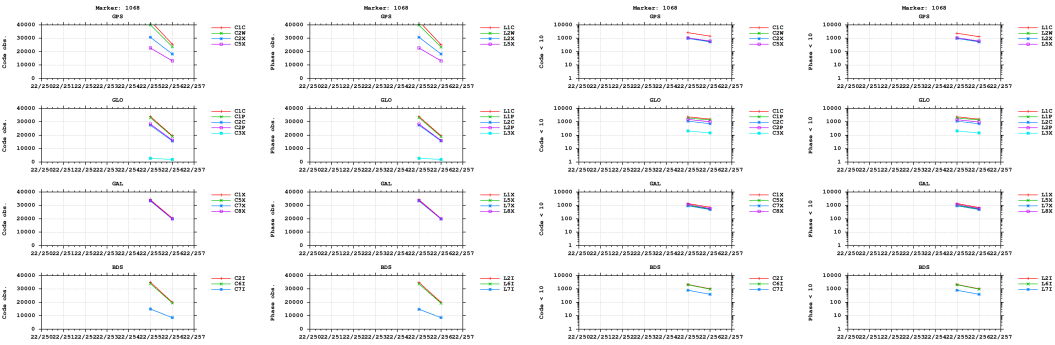


Multipath

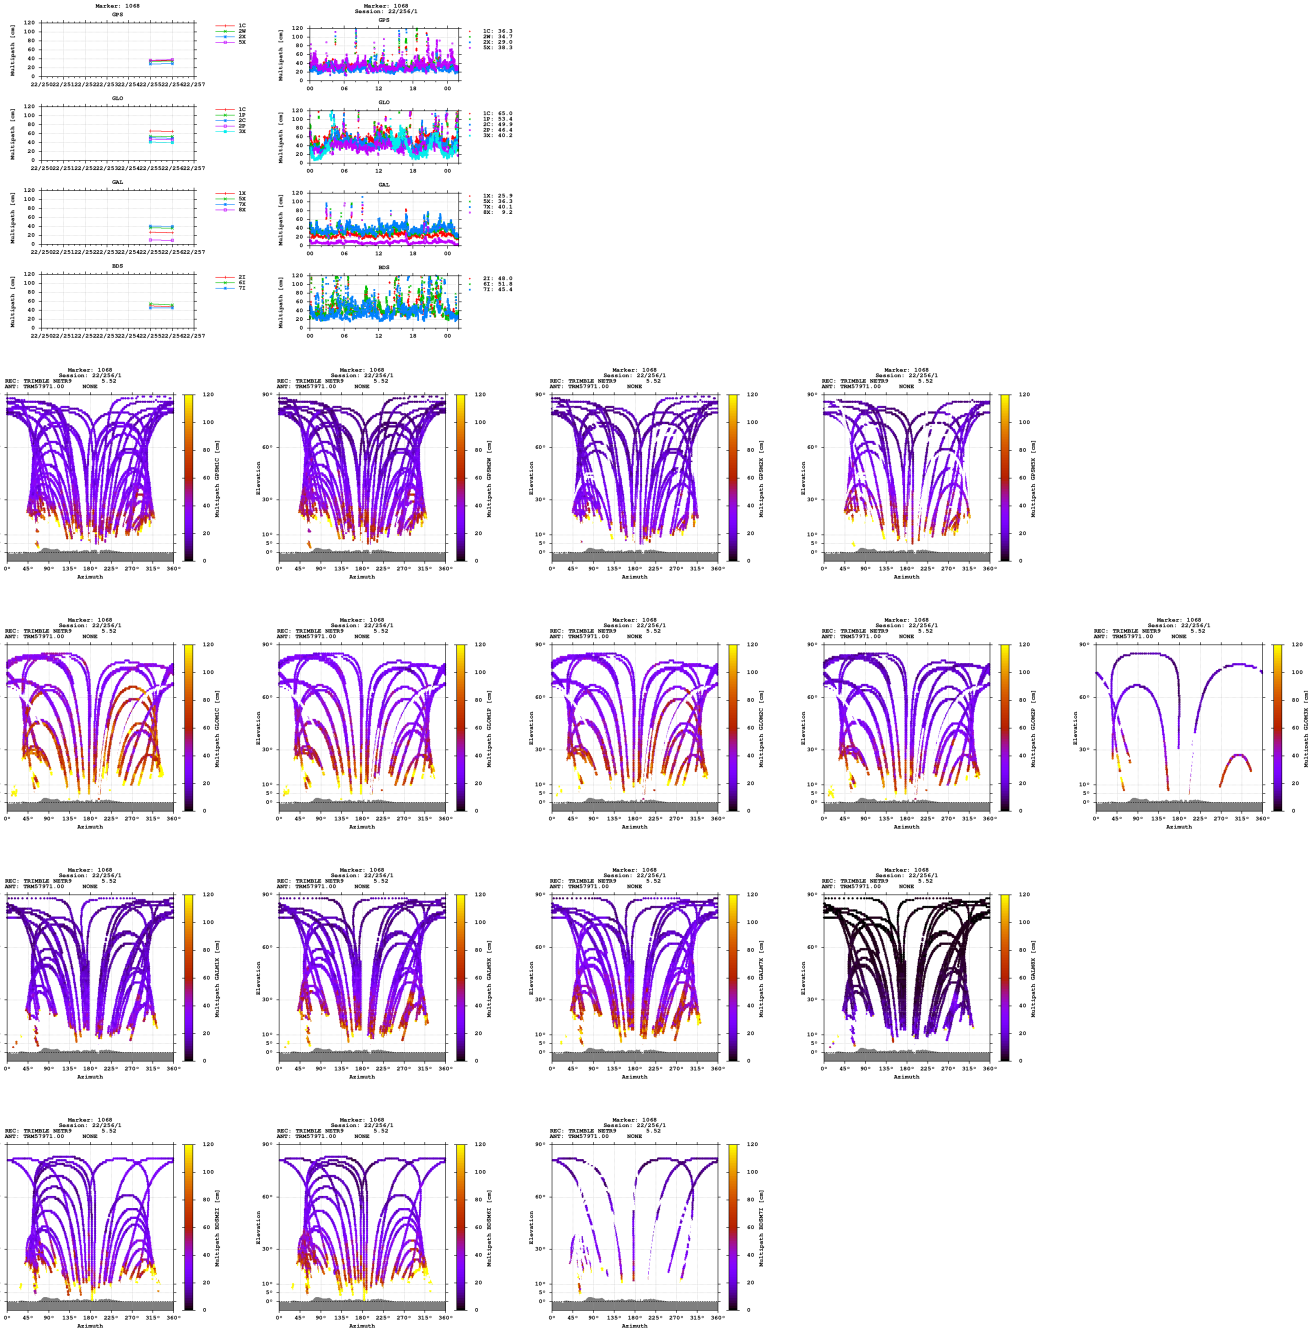


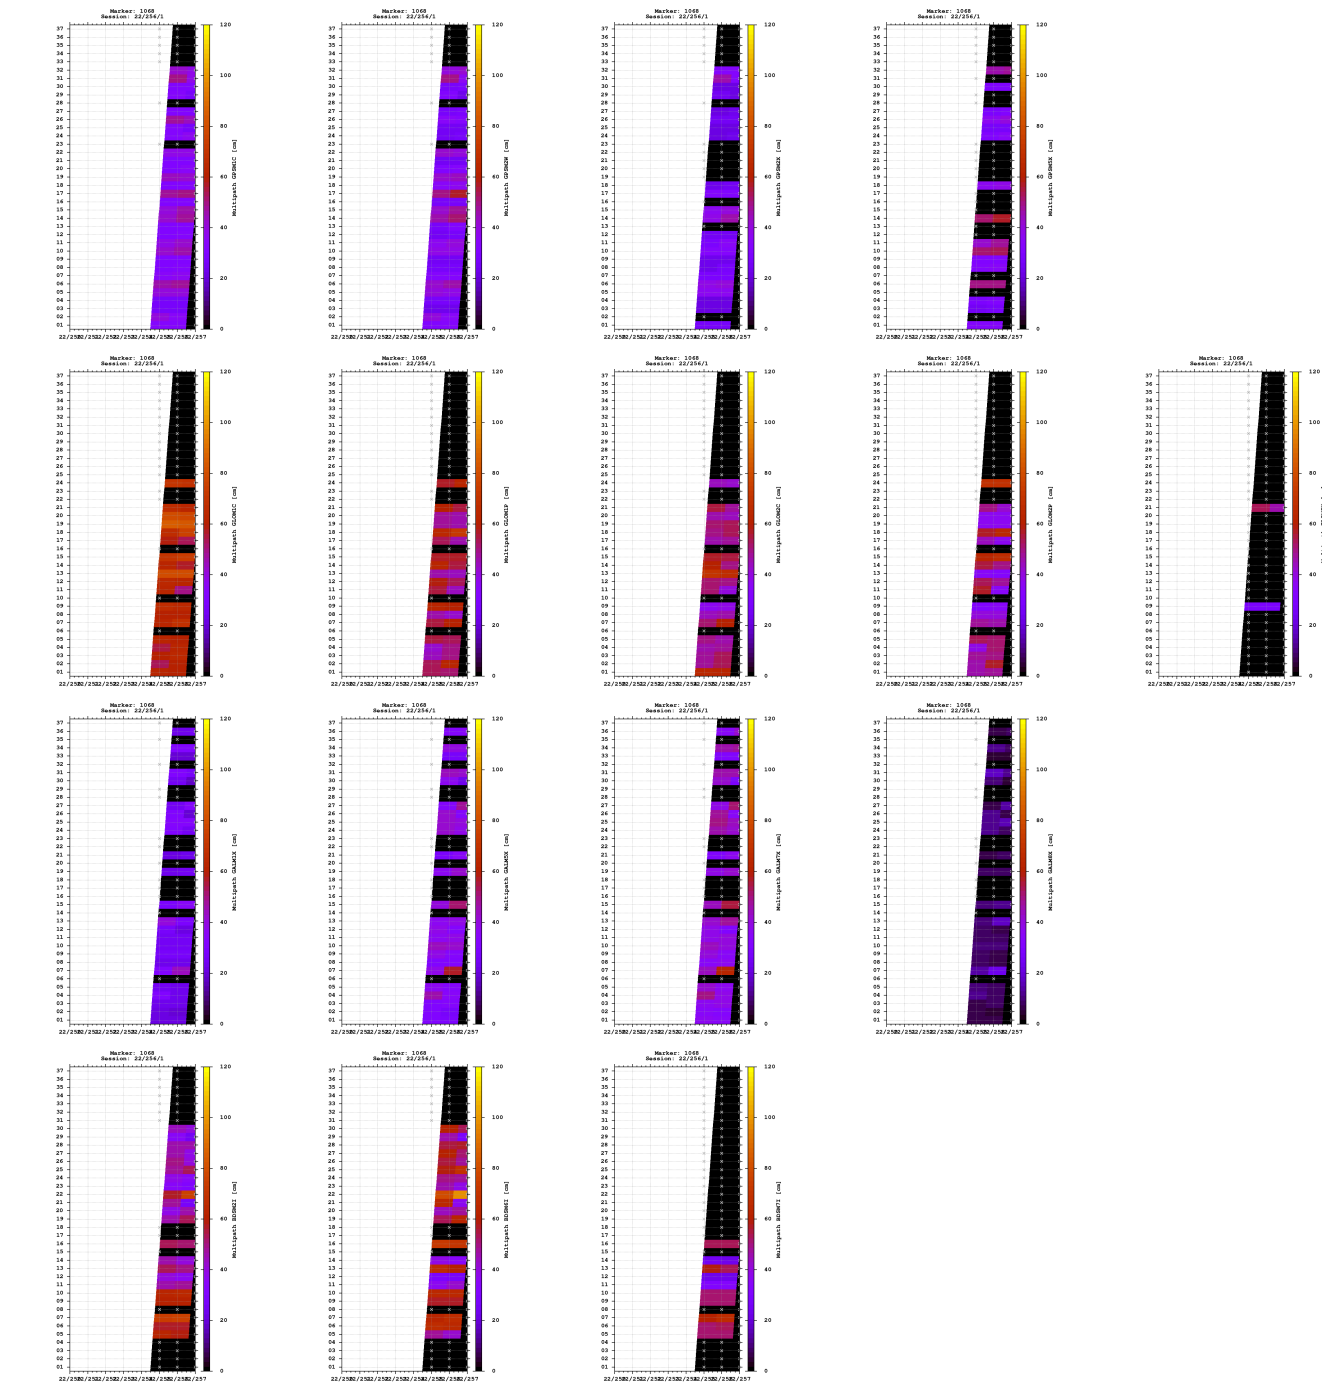


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

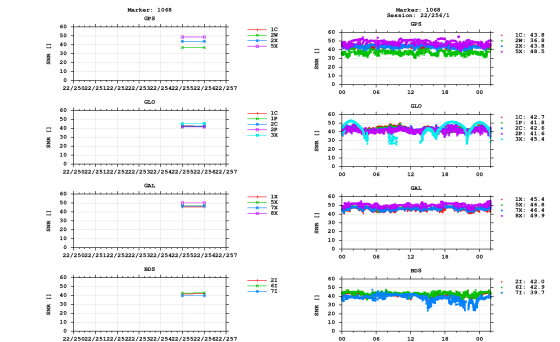


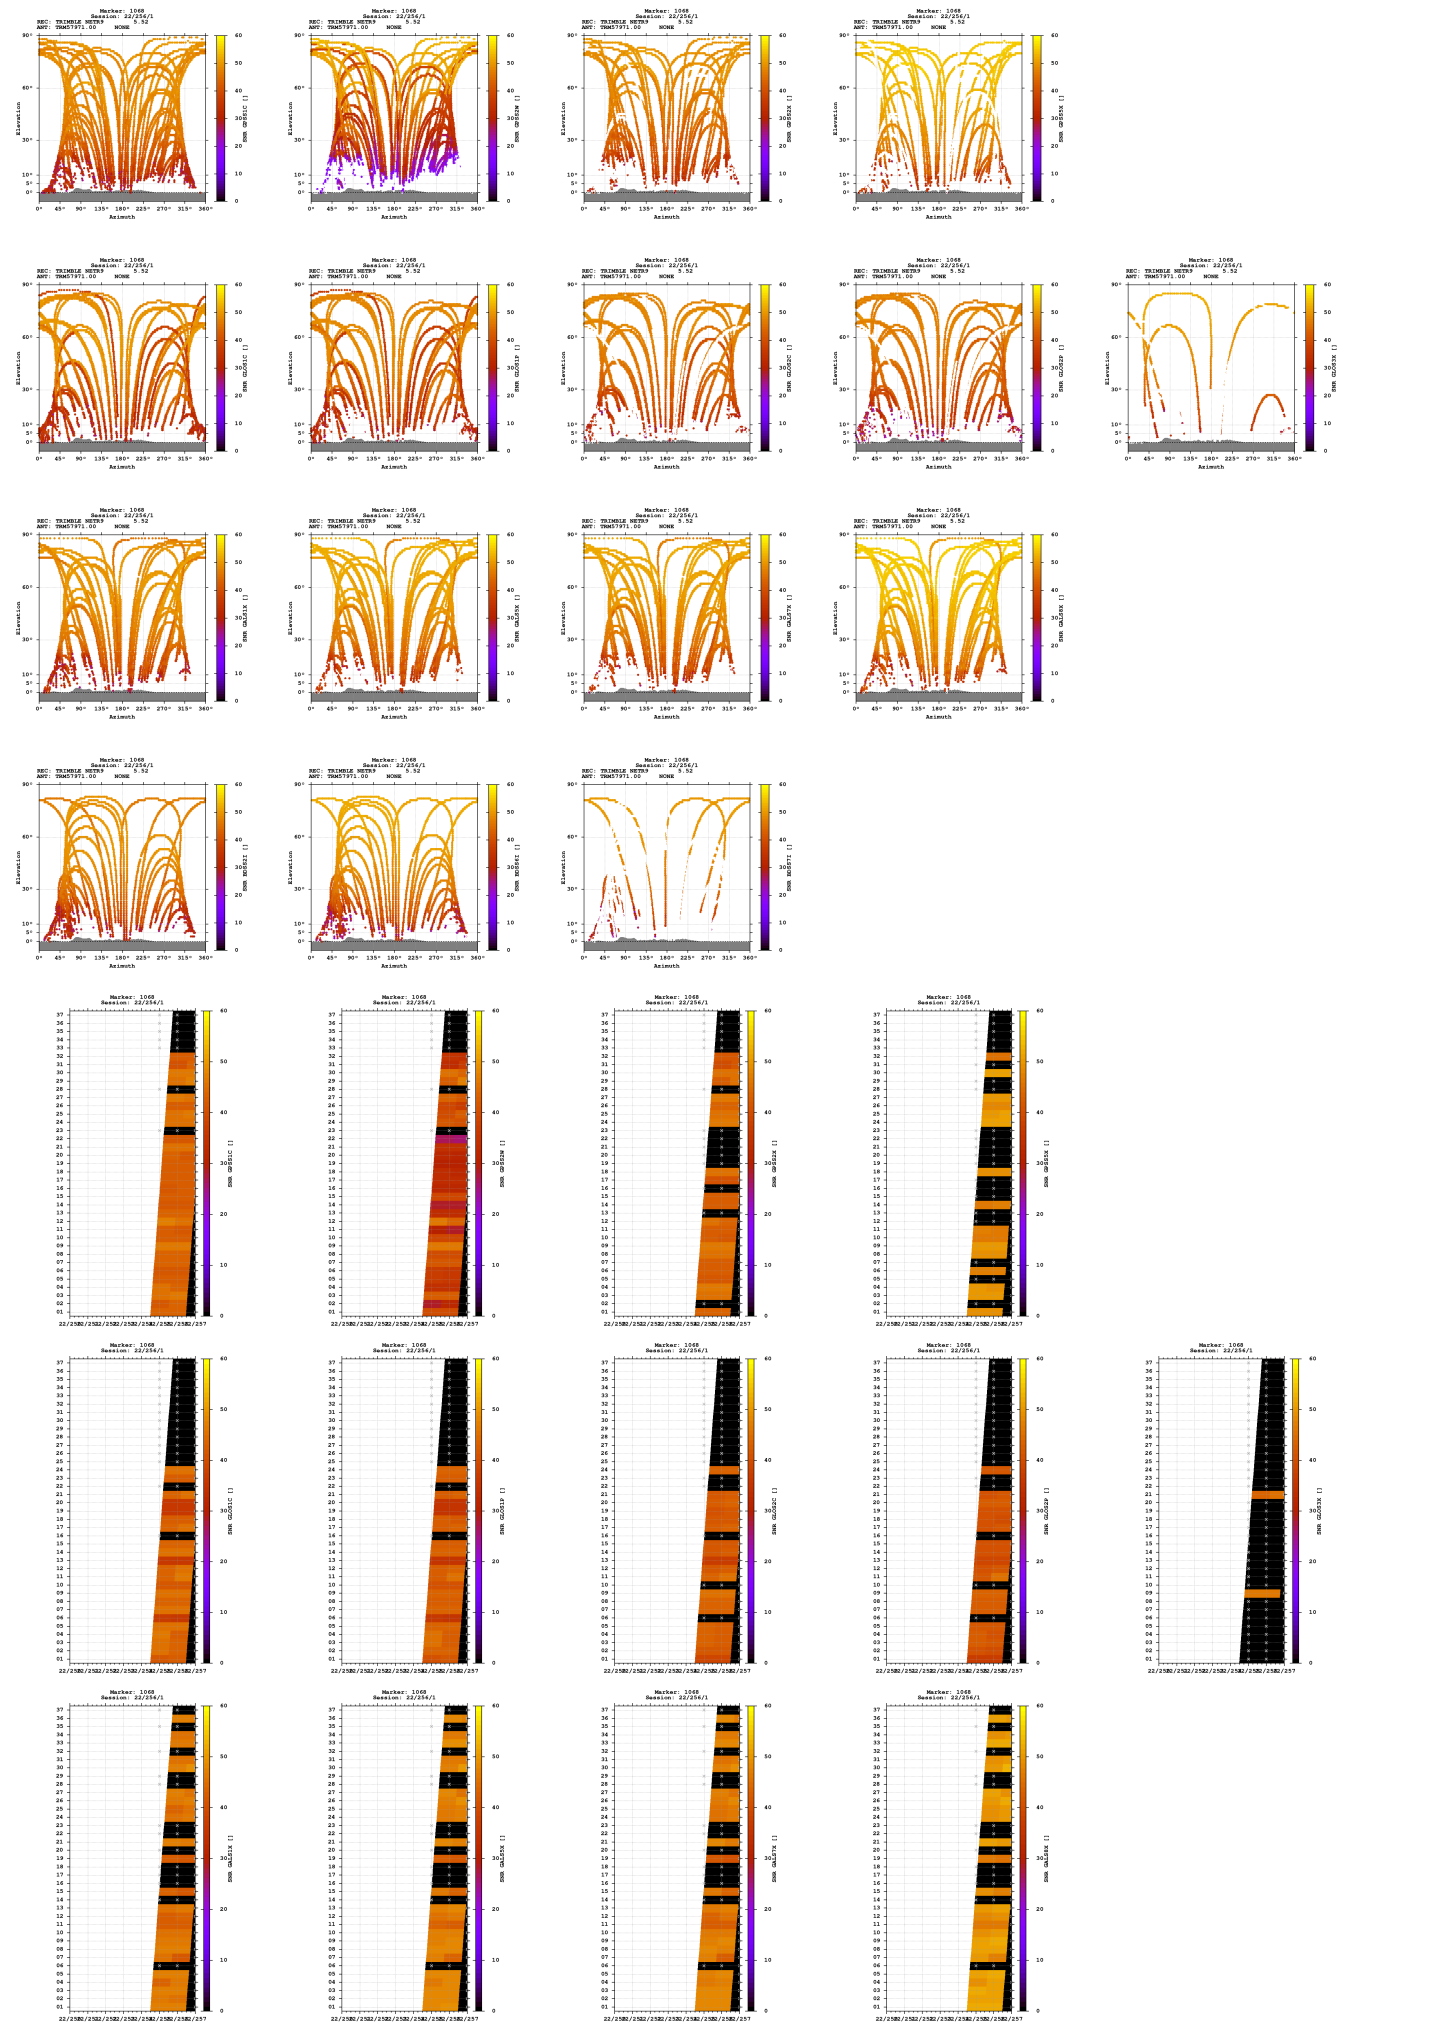

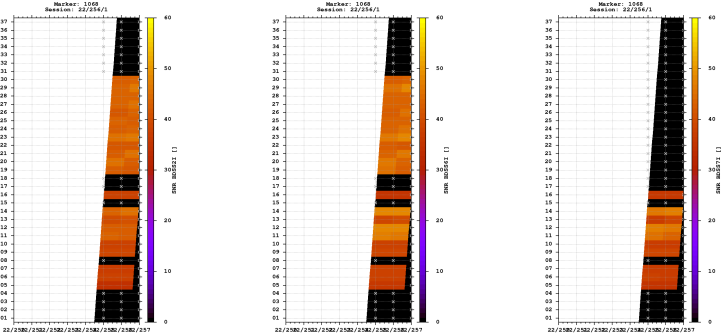


Estimates

2022-09-12 04:02:30	GPS	4278811.2114	587521.2260	4678599.2334	47.480679267	7.818361263	750.2629
2022-09-12 04:02:30	GLO	4278812.0953	587520.2390	4678599.9727	47.480678846	7.818346697	751.3089
2022-09-12 04:02:30	GAL	4278810.9142	587520.7838	4678599.1027	47.480680823	7.818355988	749.9269
2022-09-12 04:02:30	BDS	4278811.2798	587522.3193	4678601.8670	47.480693839	7.818375508	752.3503

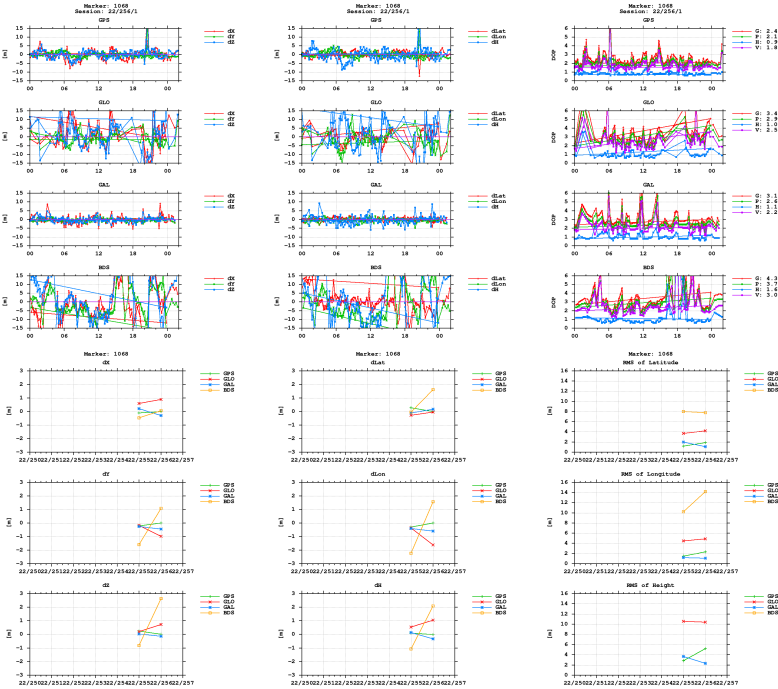

BNC



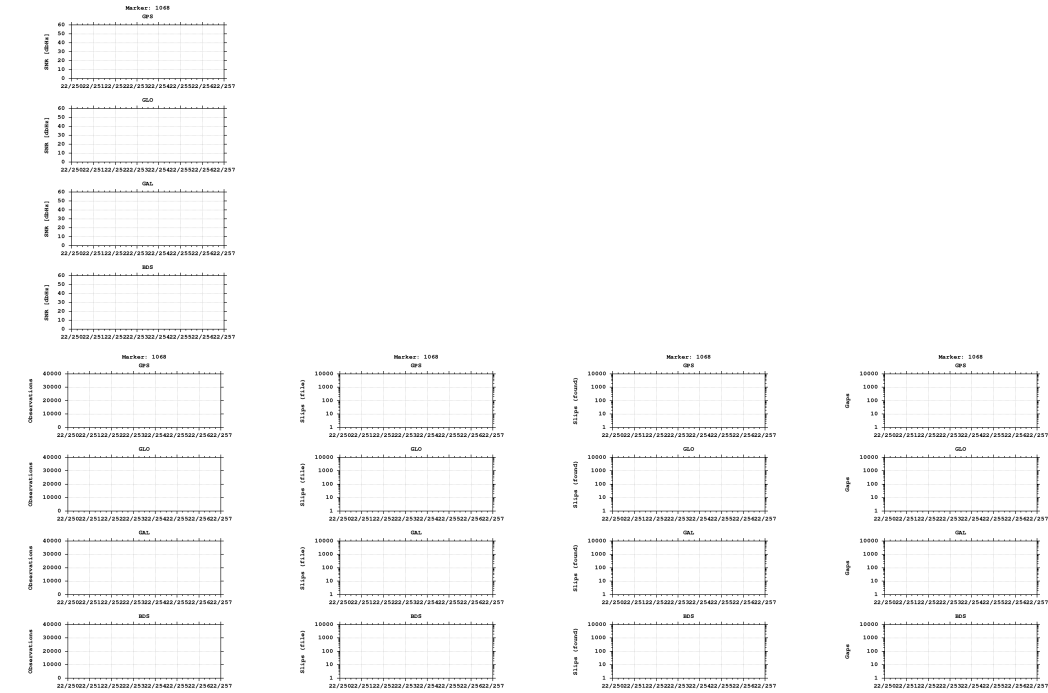

Equipment

2022-09-12 00:00:00 TRIMBLE NETR9 5.52 515 TRM57971.00 NONE 515

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)