


GNSS observation file monitoring for 0516


Last RINEX file: 05162561.220
RINEX version: 3.02
Marker: 1048
Receiver: 516 TRIMBLE NETR9 5.52
Antenna: 516 TRM57971.00 NONE

Epochs

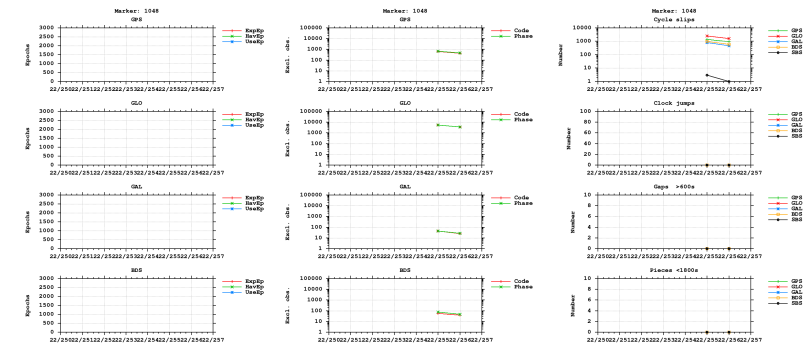



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

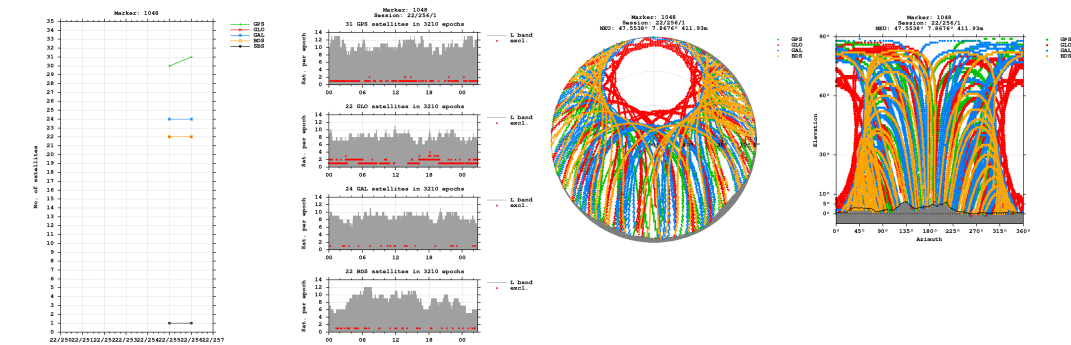


Bands

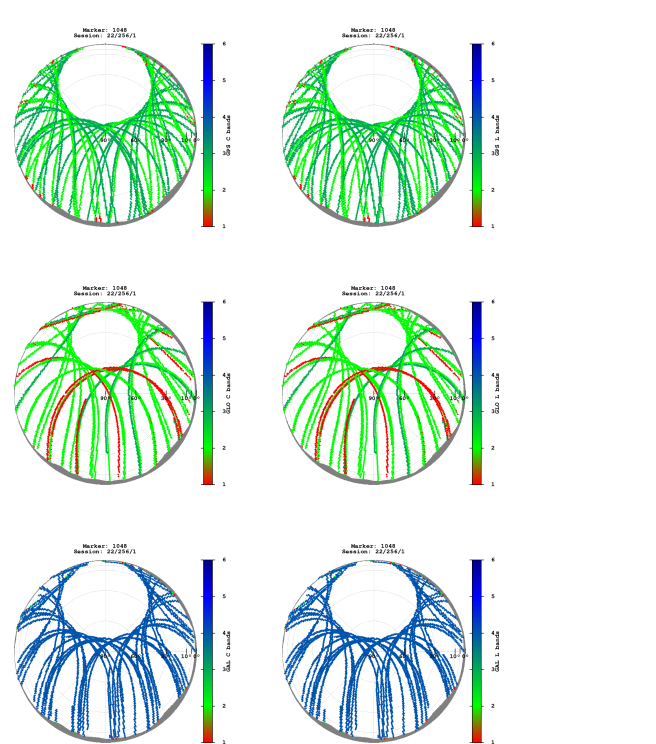


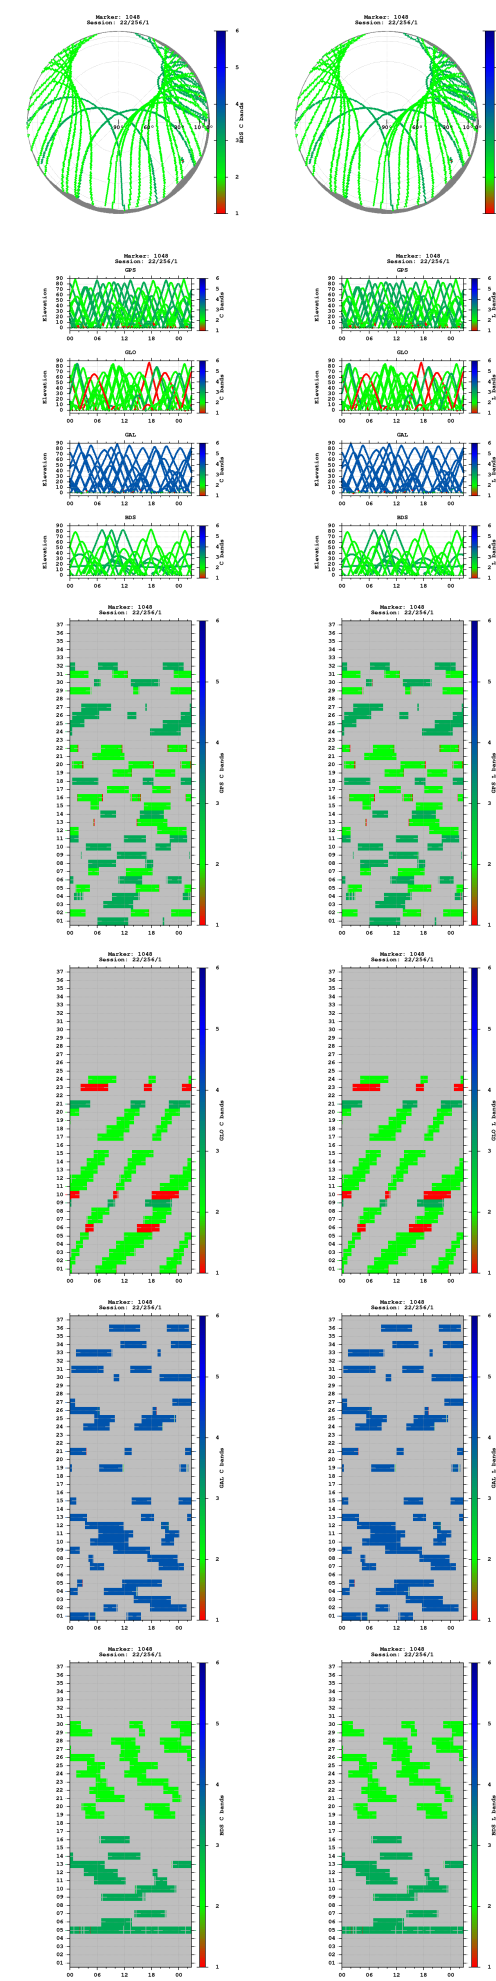


Observations

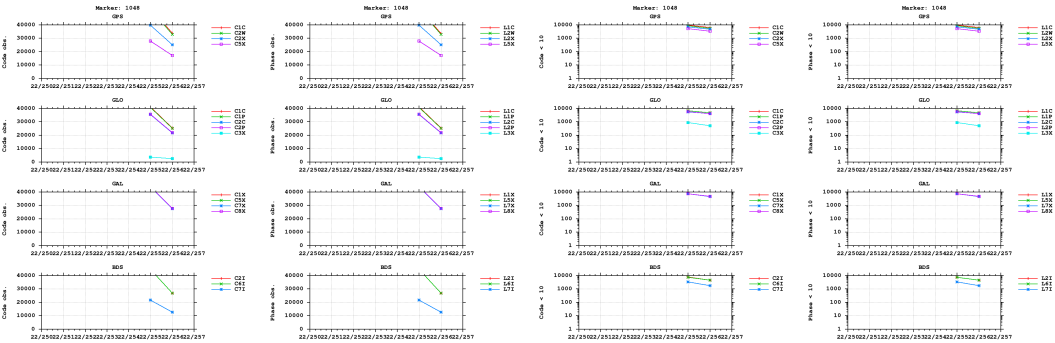


Multipath

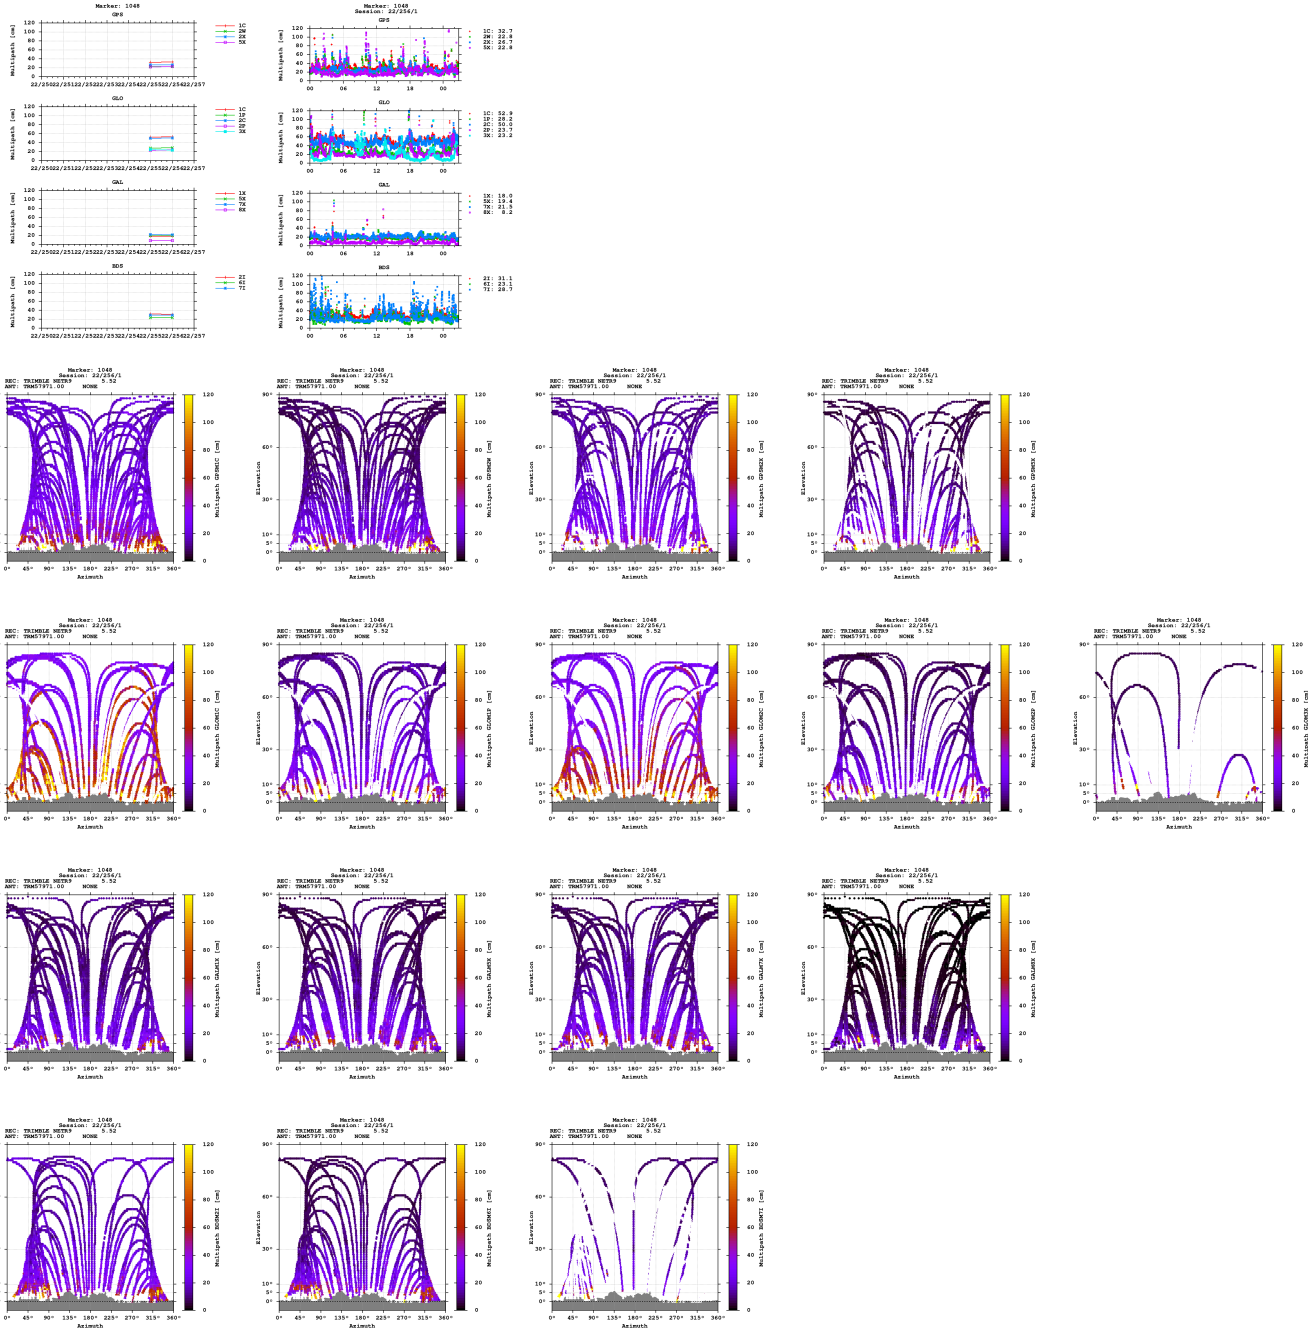


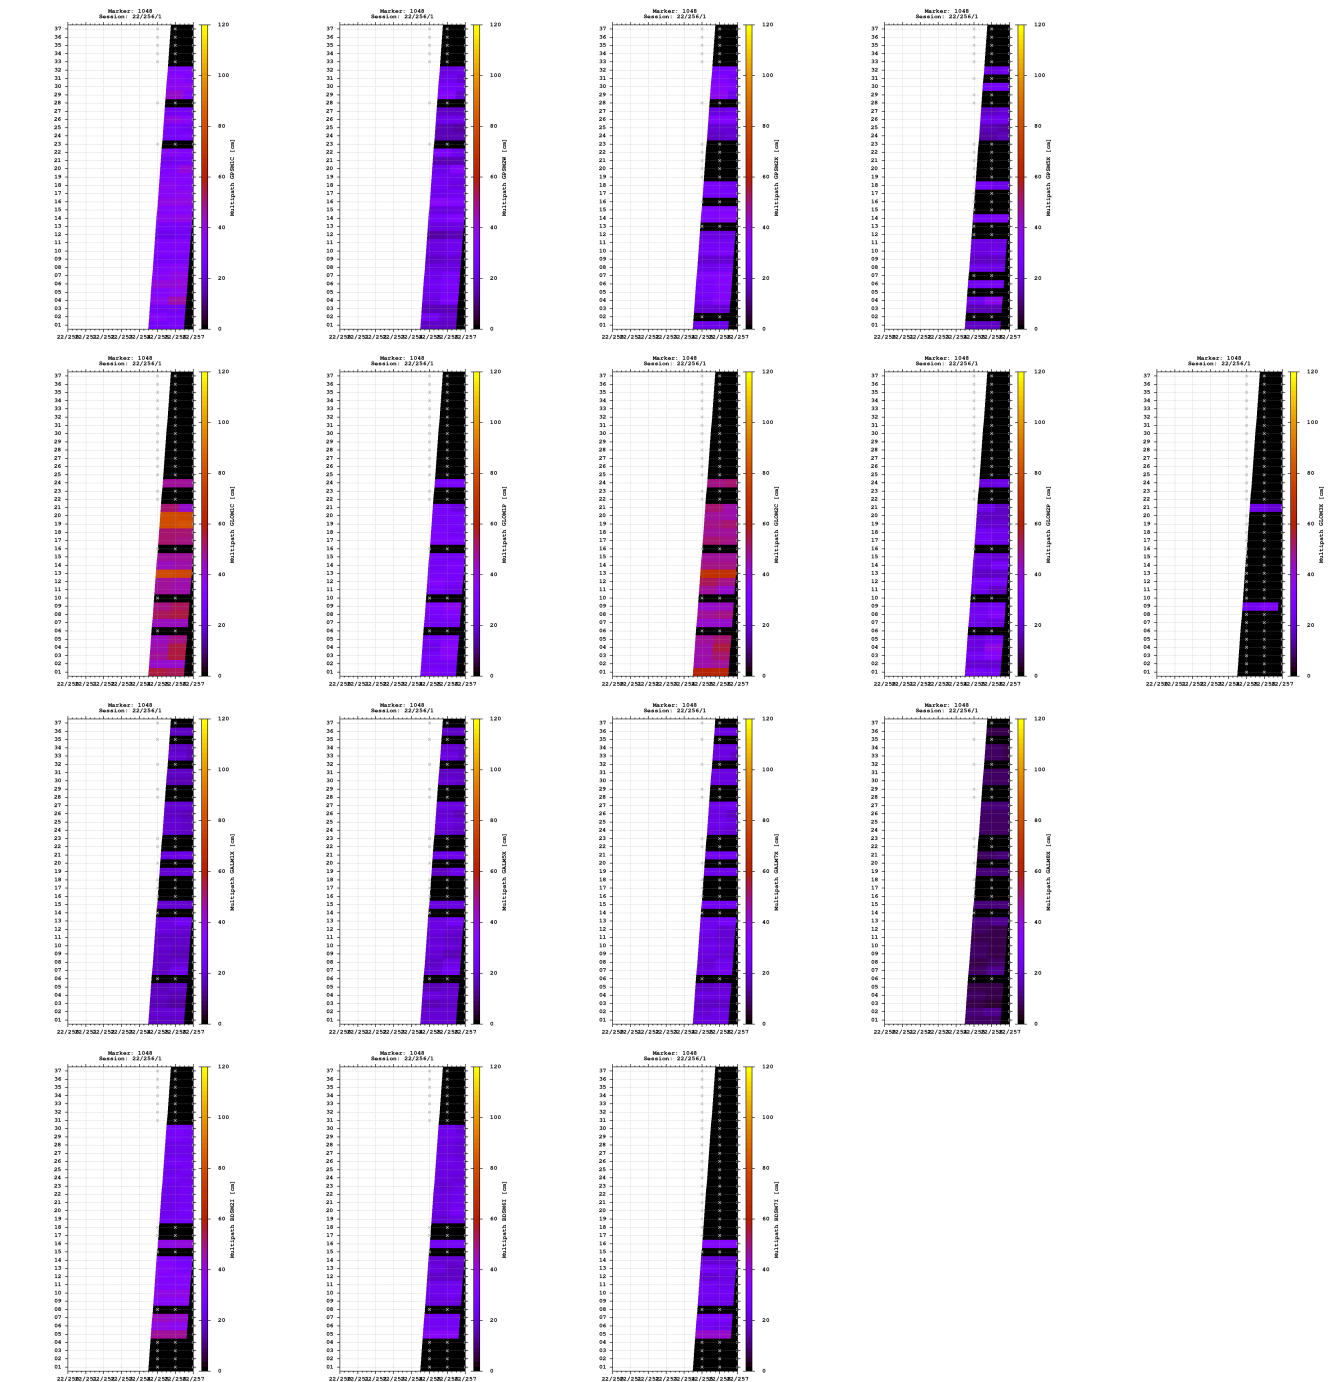


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

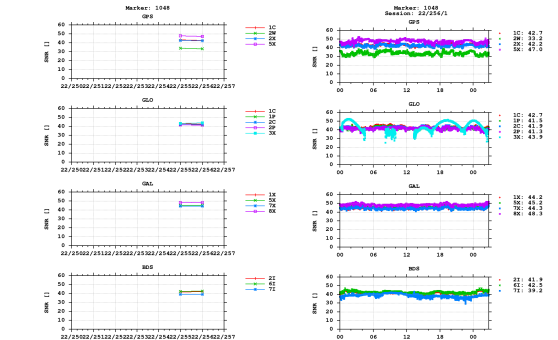


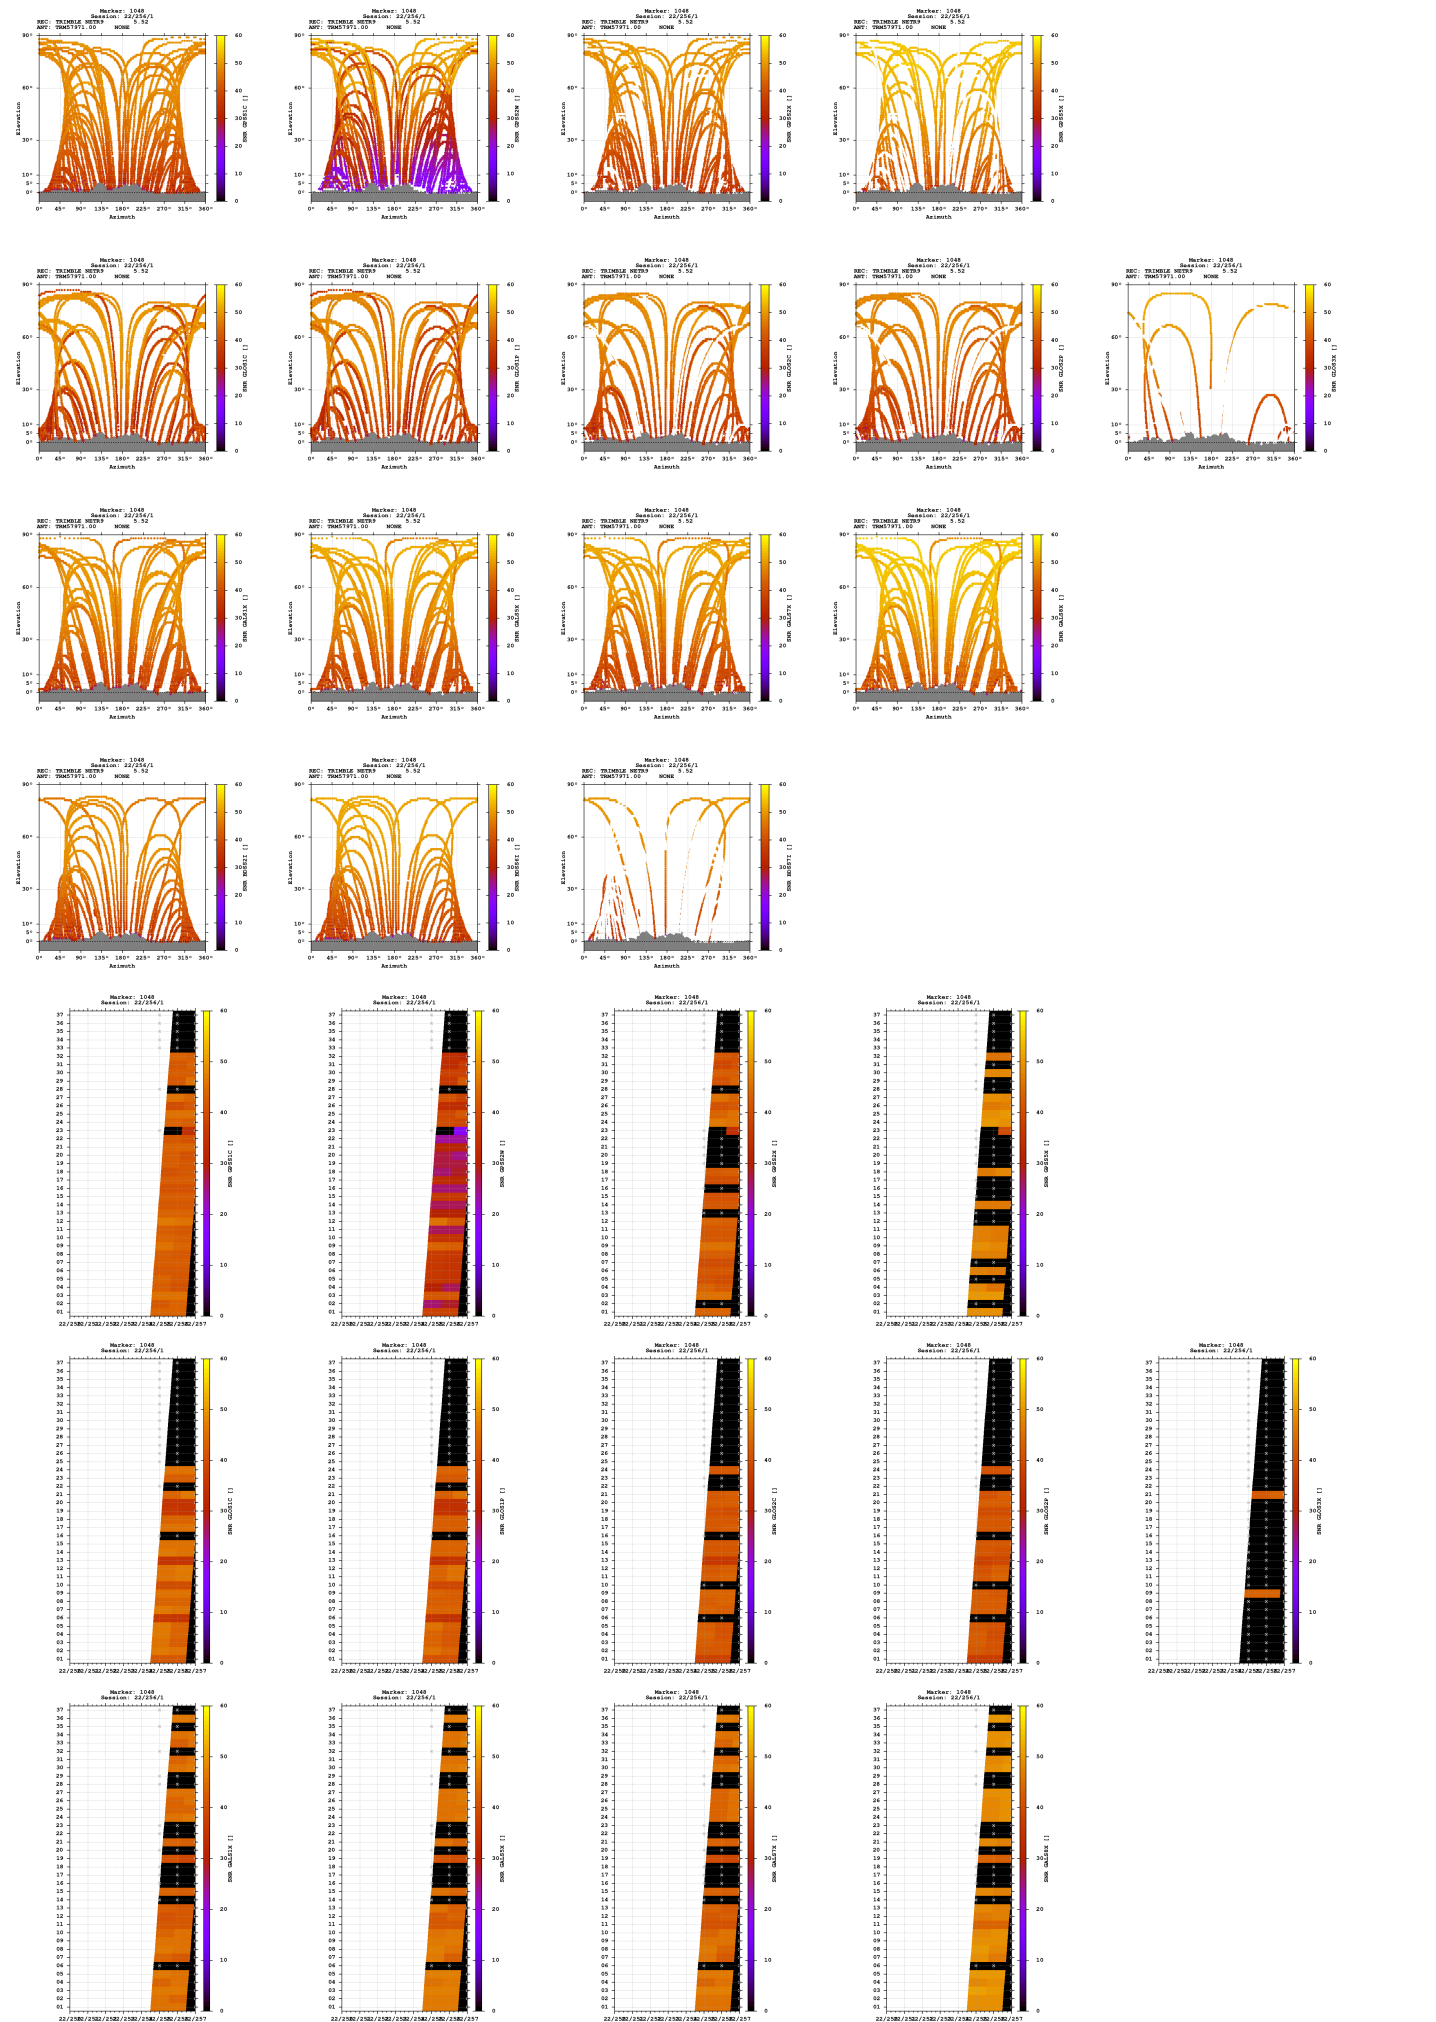

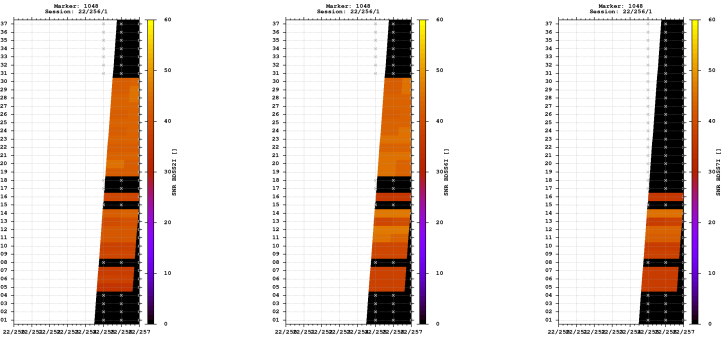


Estimates

2022-09-12 05:03:30	GPS	4272141.9877	590347.9725	4683837.6198	47.553758735	7.867619037	411.9316
2022-09-12 05:03:30	GLO	4272142.8240	590347.3816	4683838.3703	47.553758330	7.867609740	412.9899
2022-09-12 05:03:30	GAL	4272141.8396	590347.7791	4683837.6269	47.553759927	7.867616760	411.8199
2022-09-12 05:03:30	BDS	4272142.2125	590347.4544	4683840.9896	47.553778182	7.867611810	414.5206

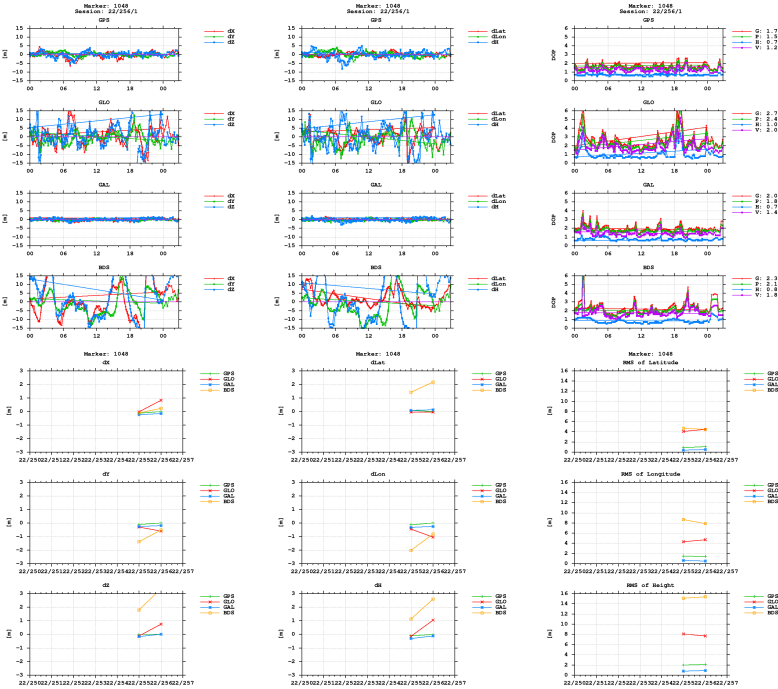

BNC



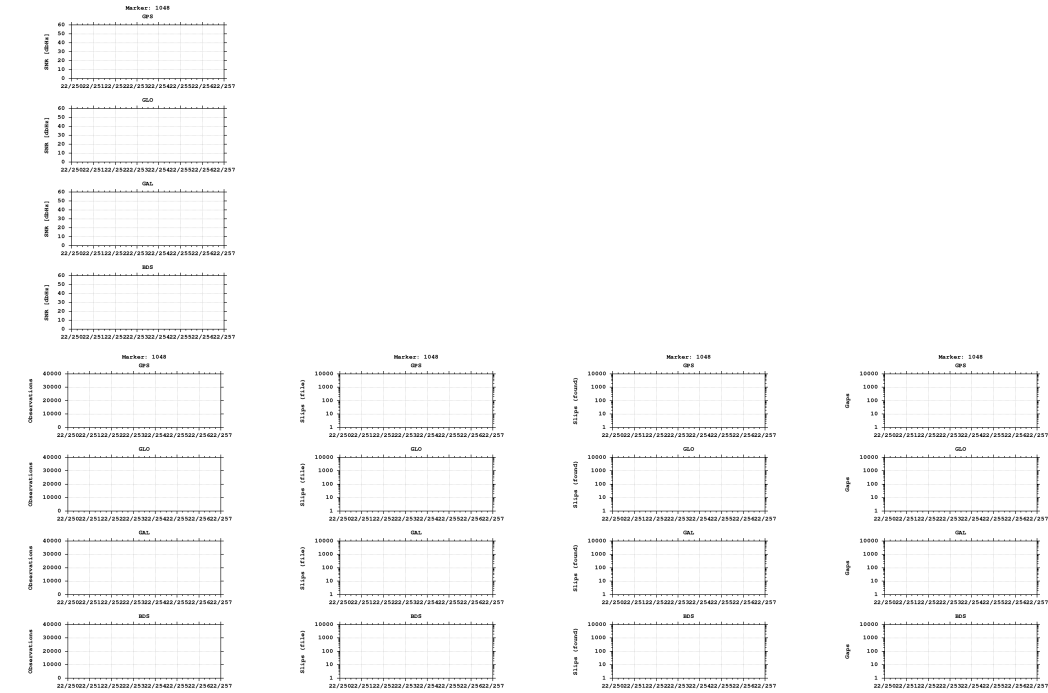

Equipment

2022-09-12 00:00:00 TRIMBLE NETR9 5.52 516 TRM57971.00 NONE 516

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)