


GNSS observation file monitoring for 0516


Last RINEX file: 05162571.220
RINEX version: 3.02
Marker: 1066
Receiver: 516 TRIMBLE NETR9 5.52
Antenna: 516 TRM57971.00 NONE

Epochs

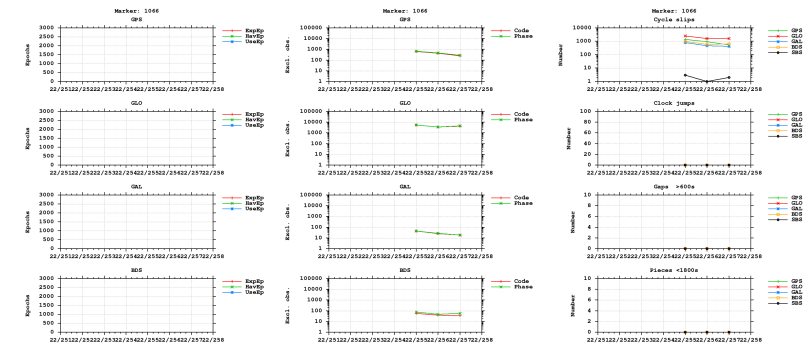



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

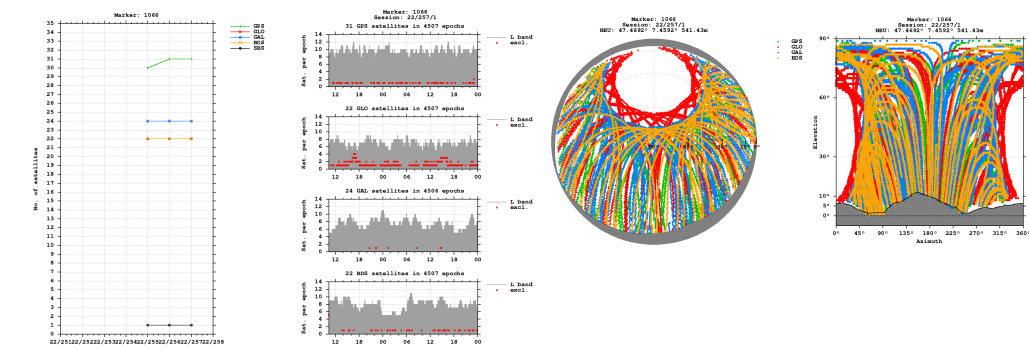


Bands

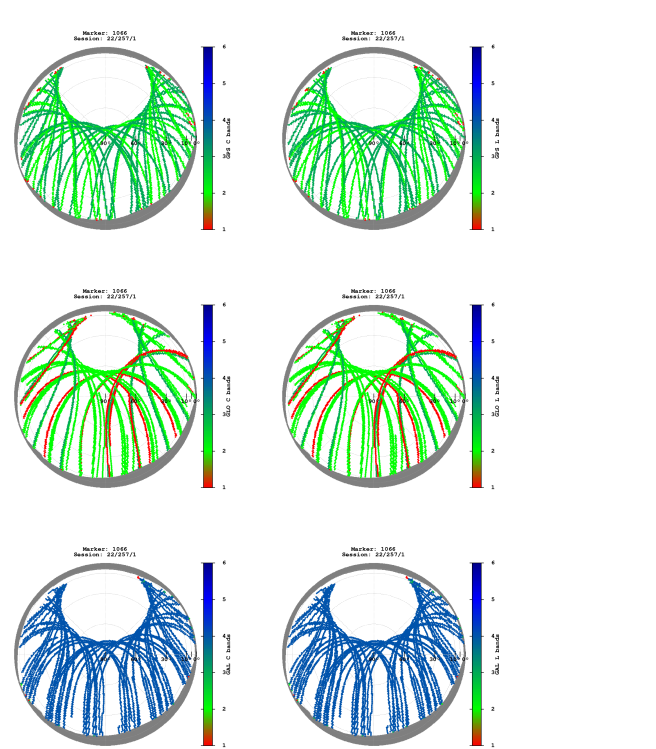


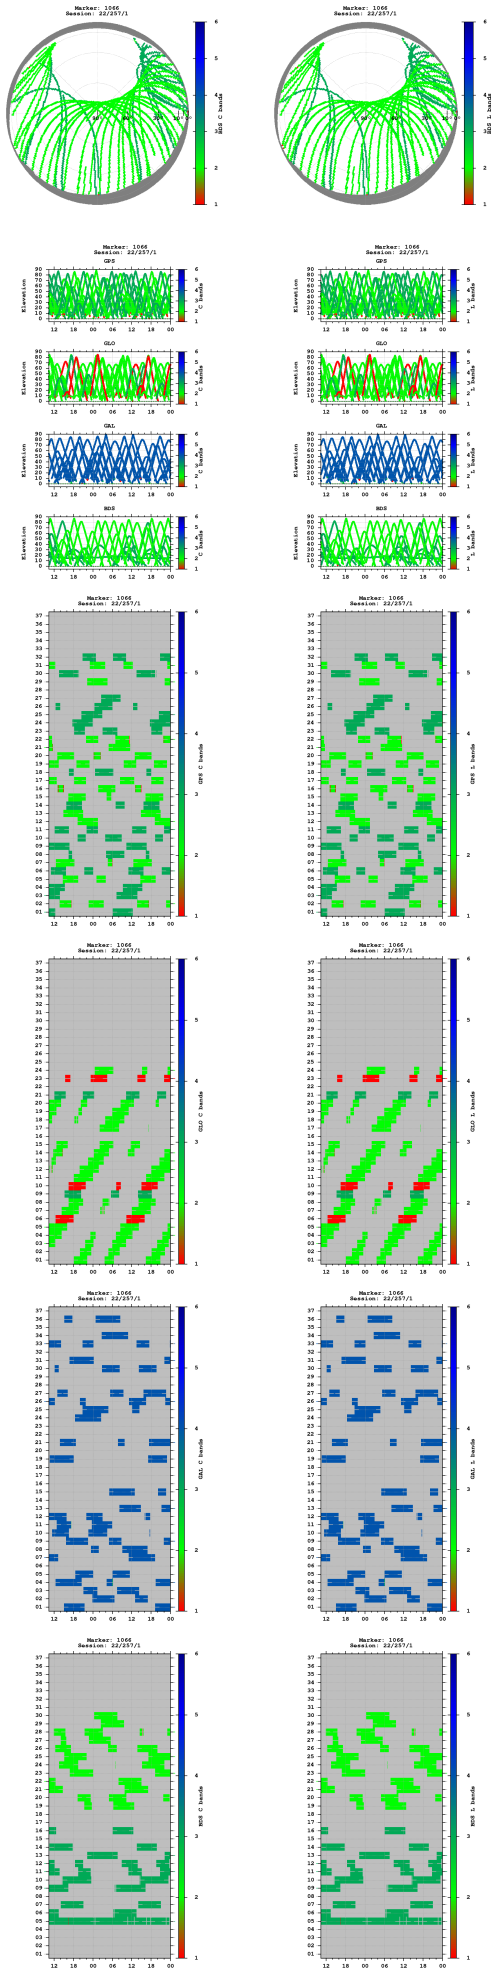


Observations

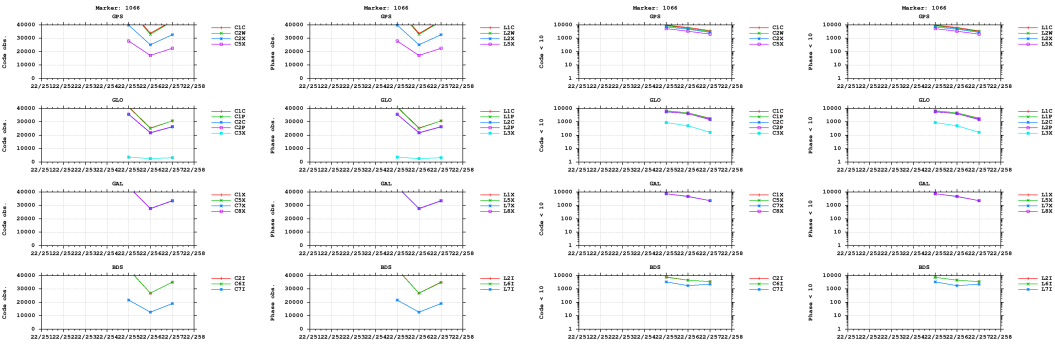



Multipath

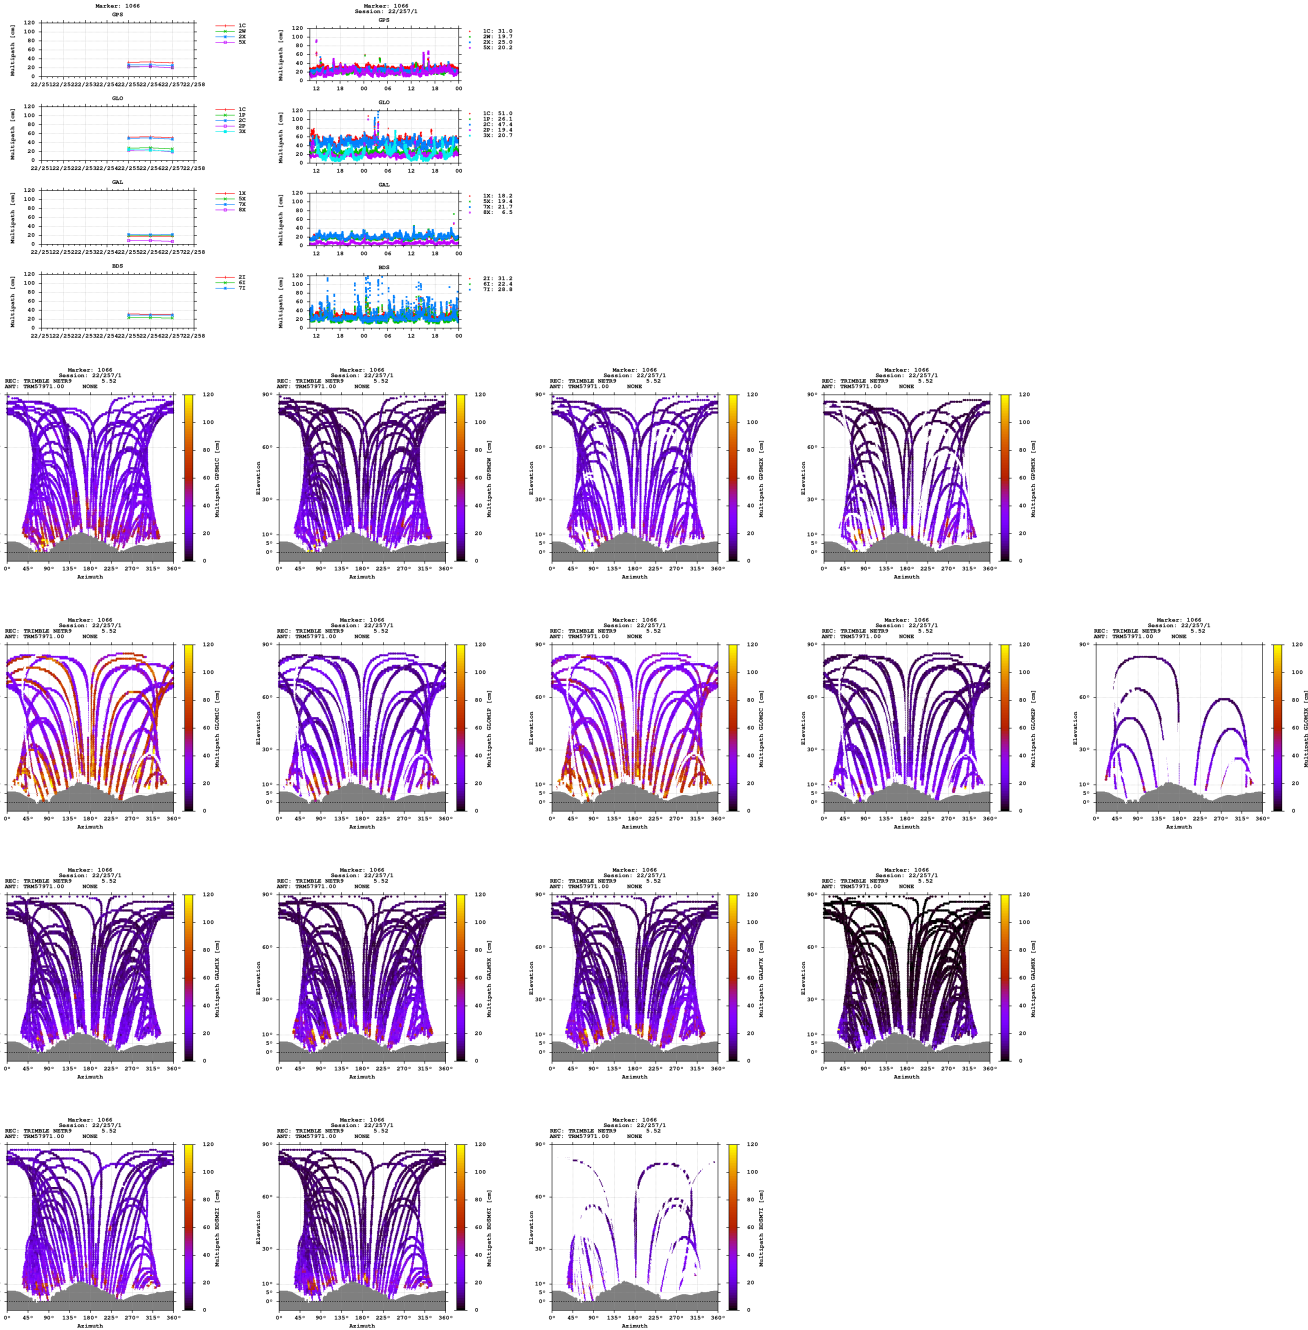


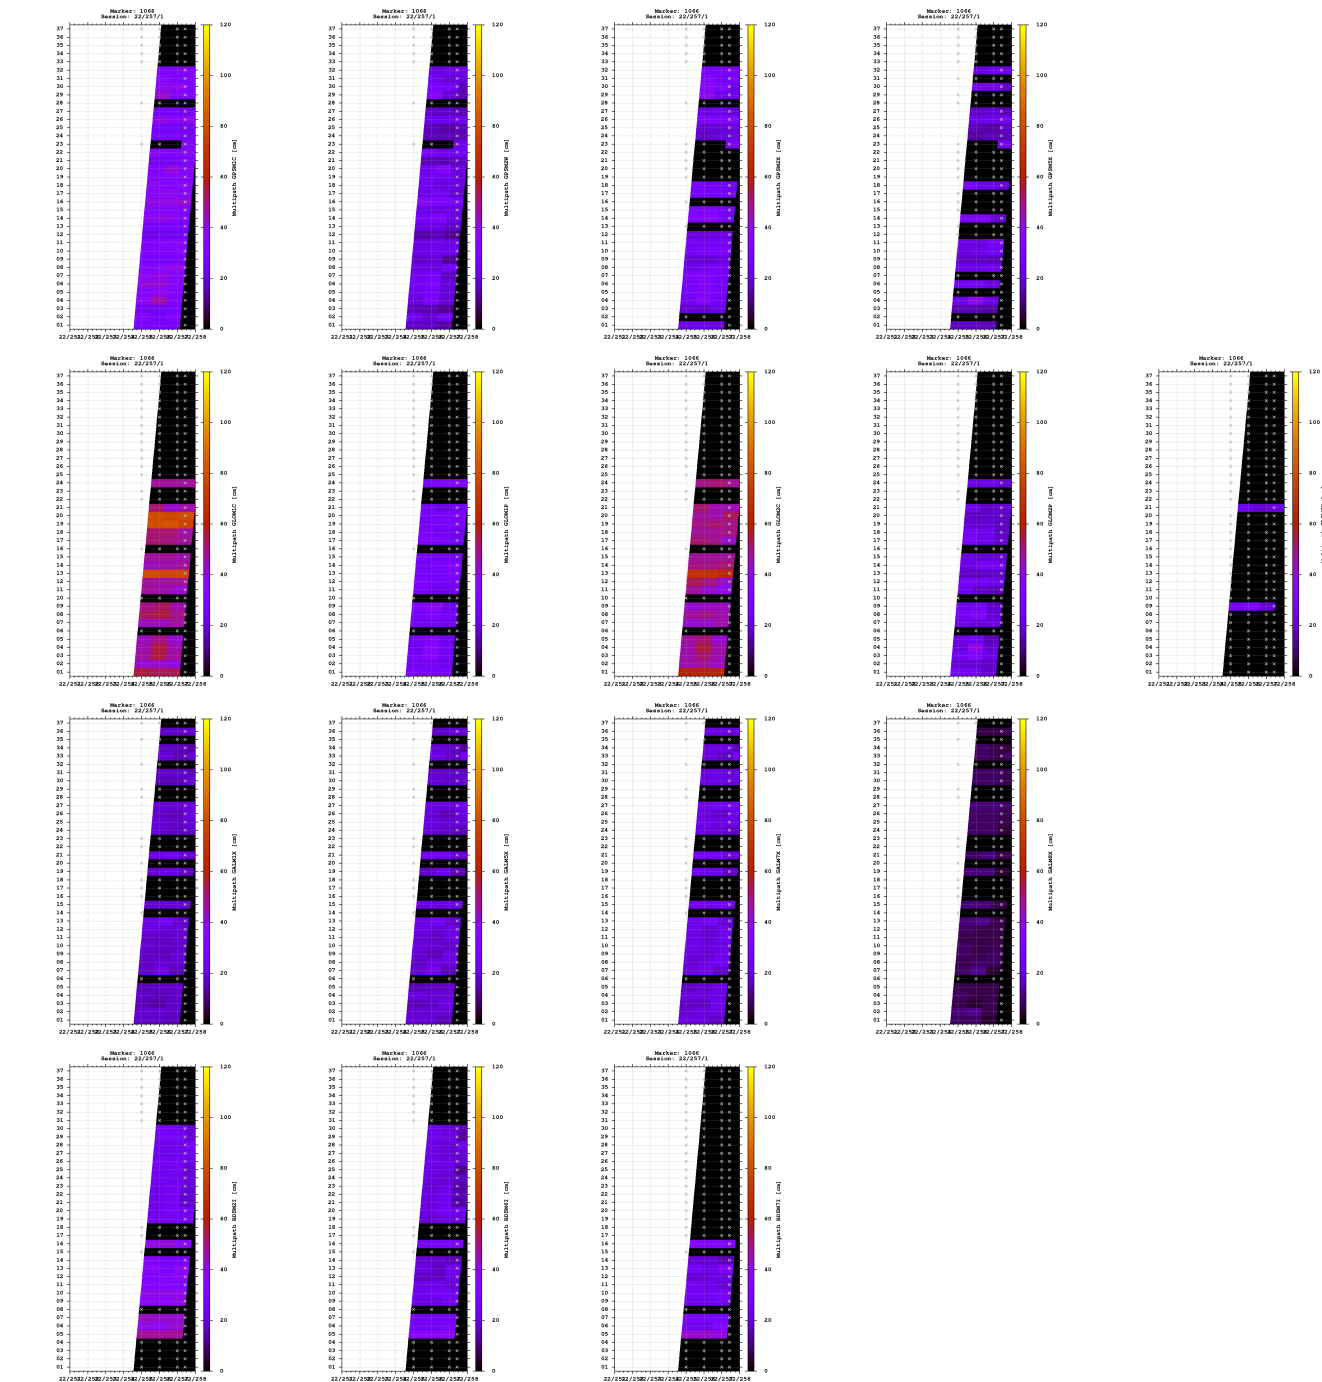

Signal-to-noise ratio

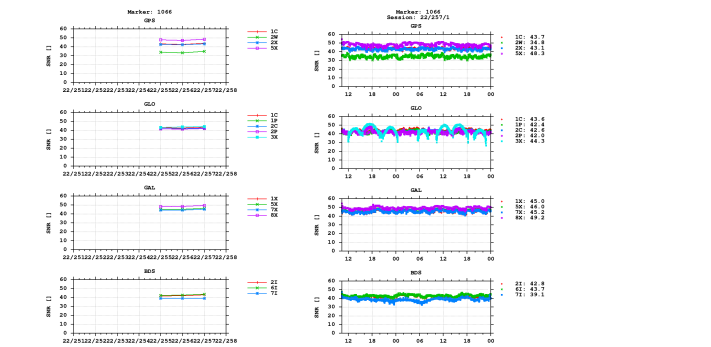


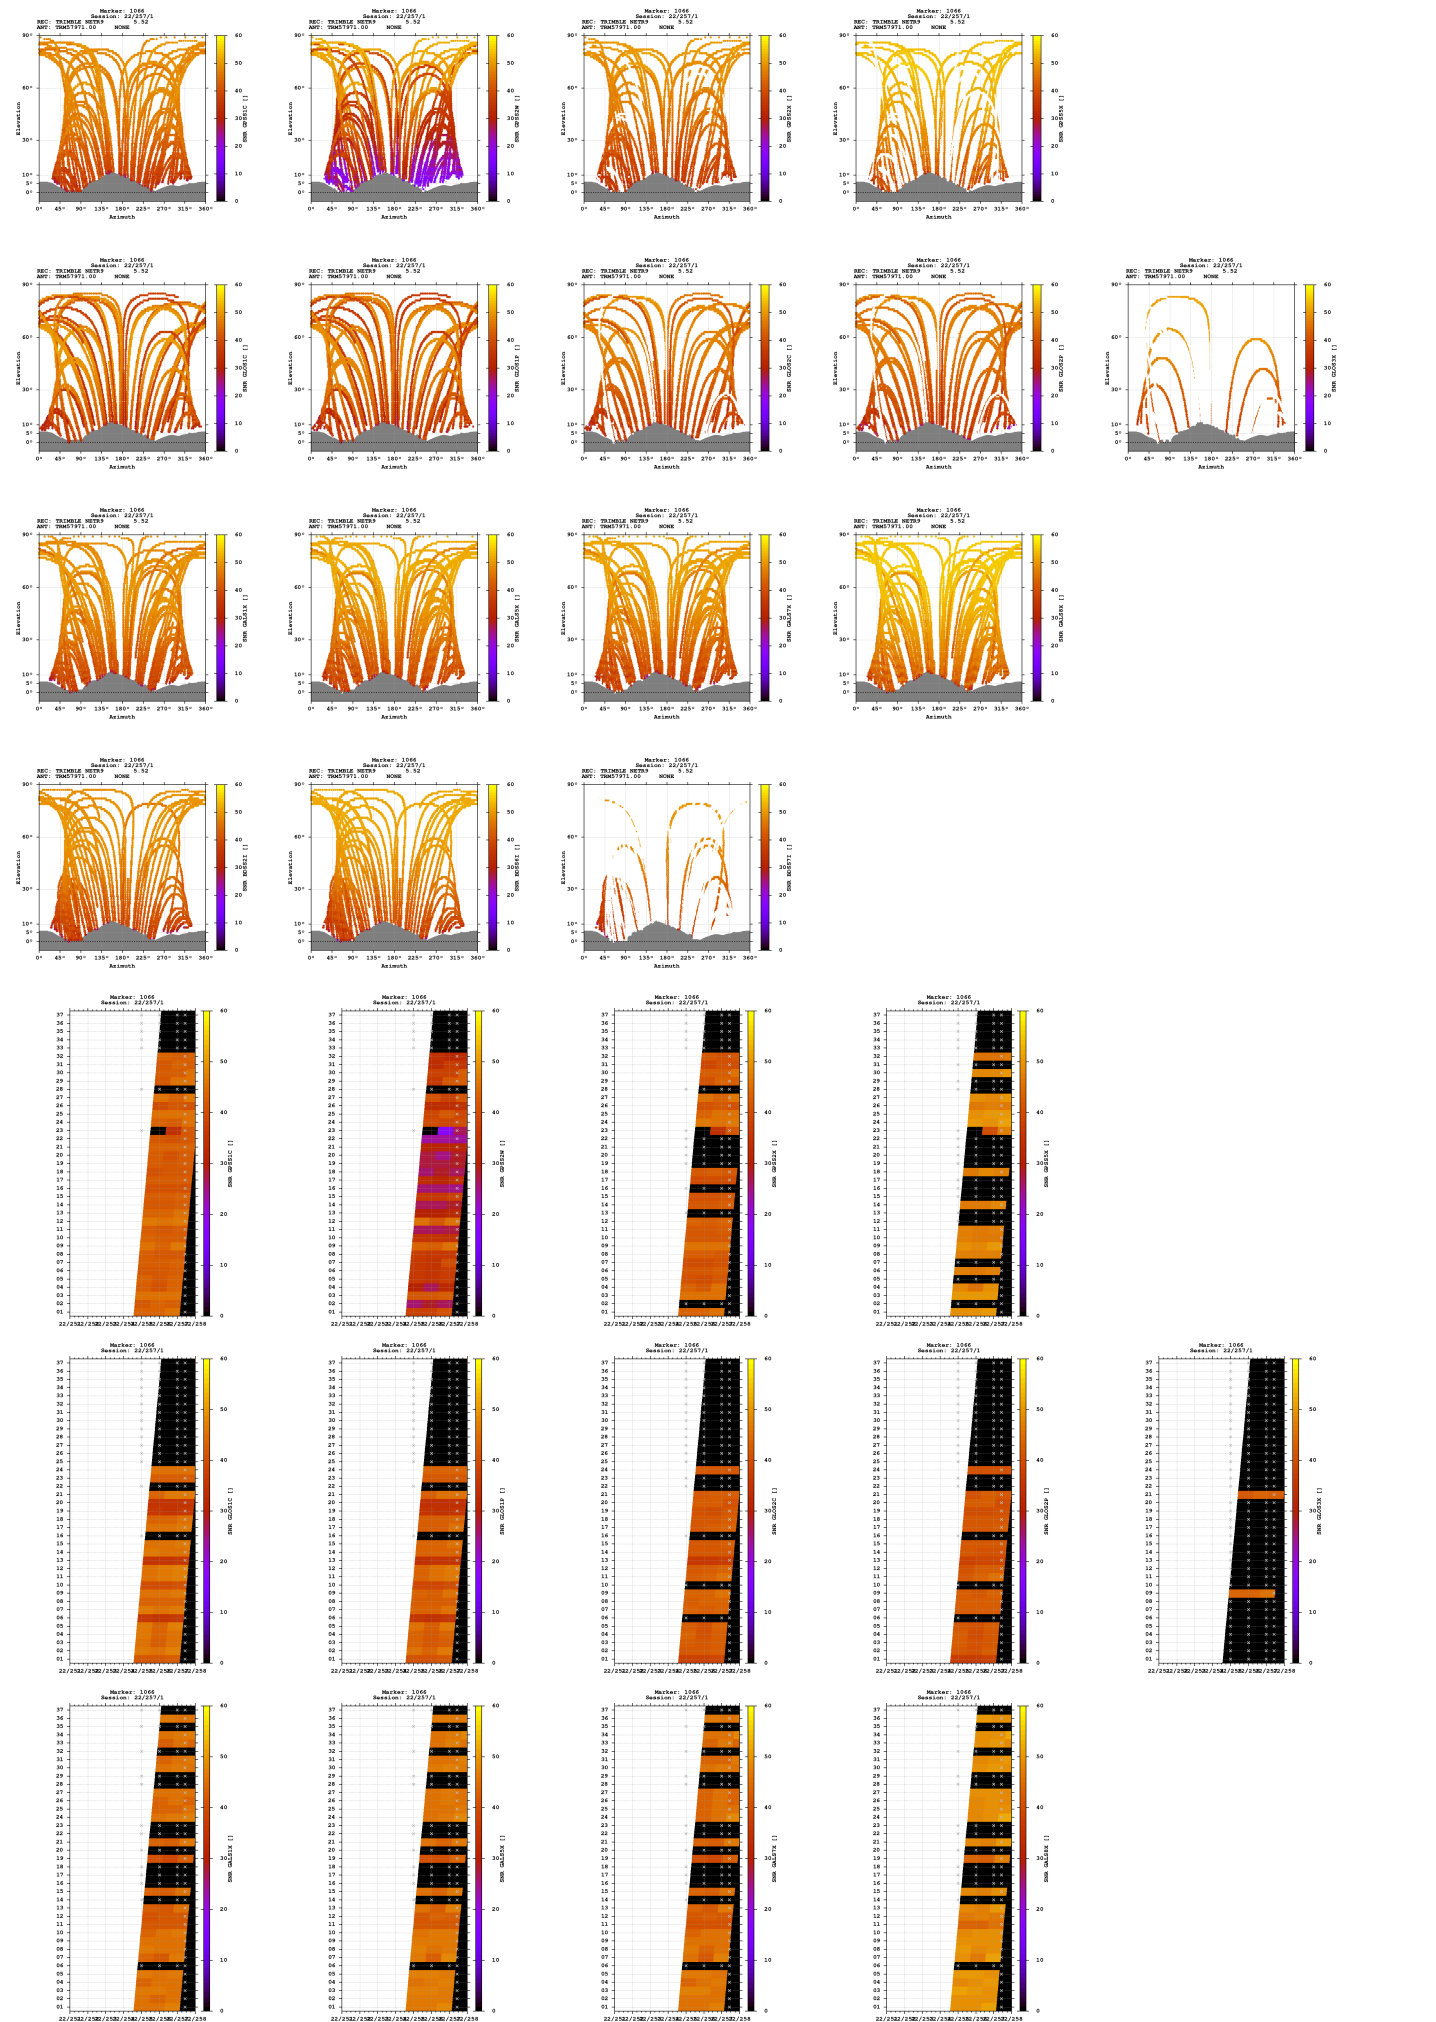

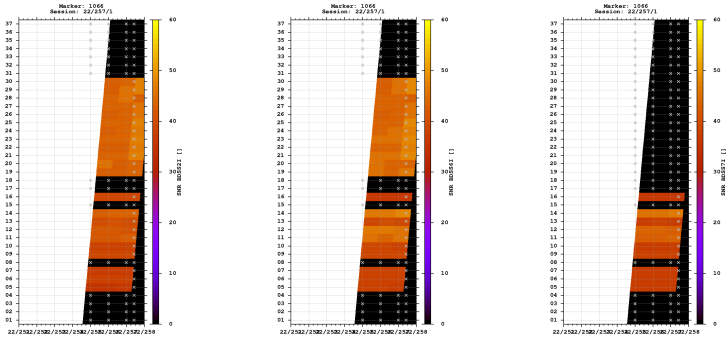



Estimates

2022-09-14 10:23:30	GPS	4283204.8865	560788.9821	4677581.0137	47.469178939	7.459160299	541.4314
2022-09-14 10:23:30	GLO	4283204.4634	560788.3323	4677580.1769	47.469177191	7.459152482	540.4741
2022-09-14 10:23:30	GAL	4283204.6980	560788.8196	4677580.4611	47.469176958	7.459158486	540.8836
2022-09-14 10:23:30	BDS	4283205.4180	560790.0666	4677582.7137	47.469184848	7.459173647	543.1356

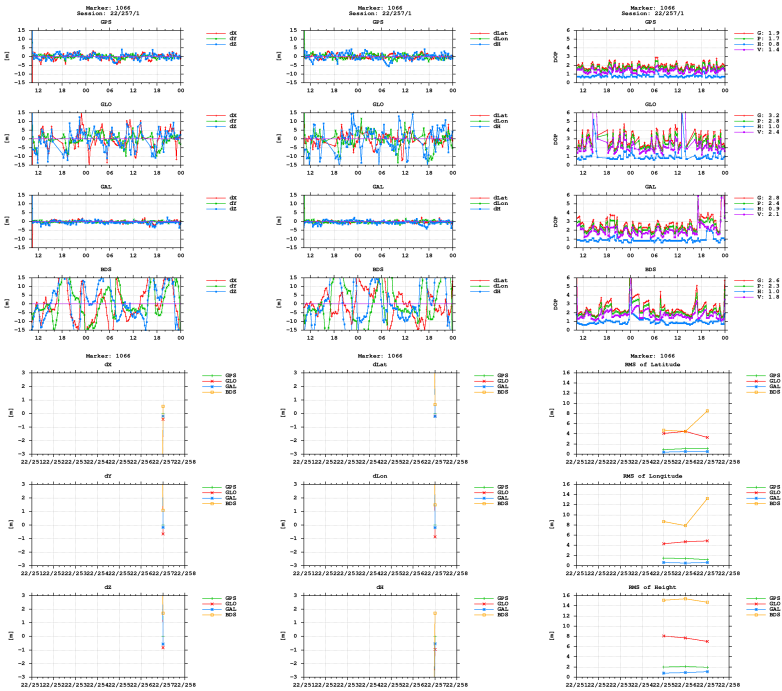

BNC

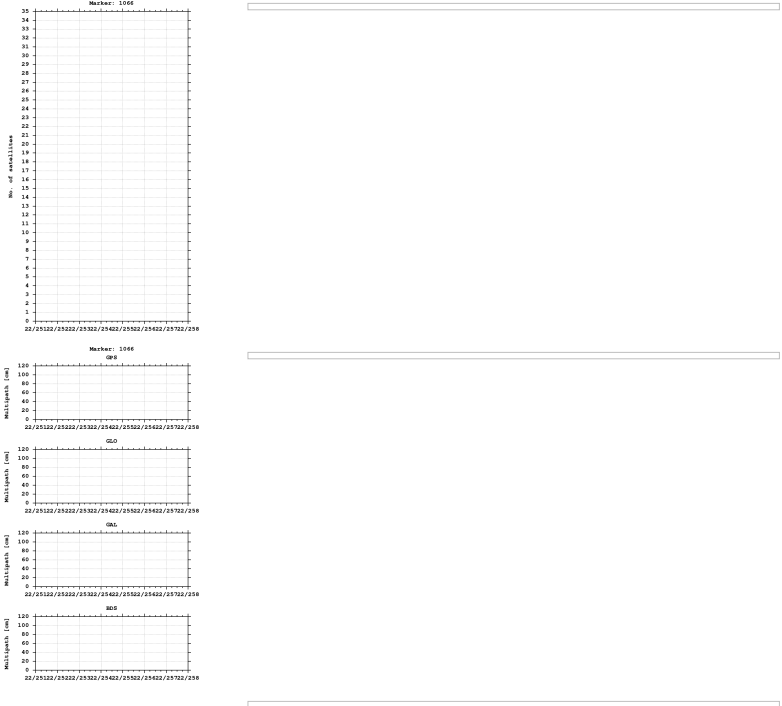

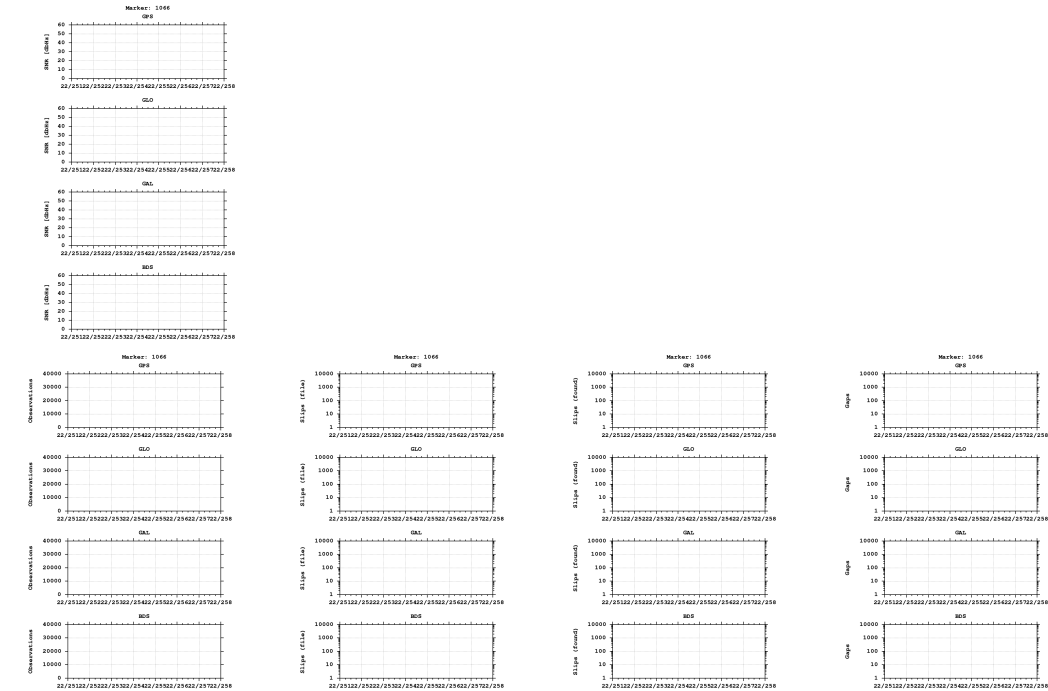

Equipment

2022-09-12 00:00:00 TRIMBLE NETR9 5.52 516 TRM57971.00 NONE 516

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)