


GNSS observation file monitoring for 0516


Last RINEX file: 05162581.220
RINEX version: 3.02
Marker: 1066
Receiver: 516 TRIMBLE NETR9 5.52
Antenna: 516 TRM57971.00 NONE

Epochs

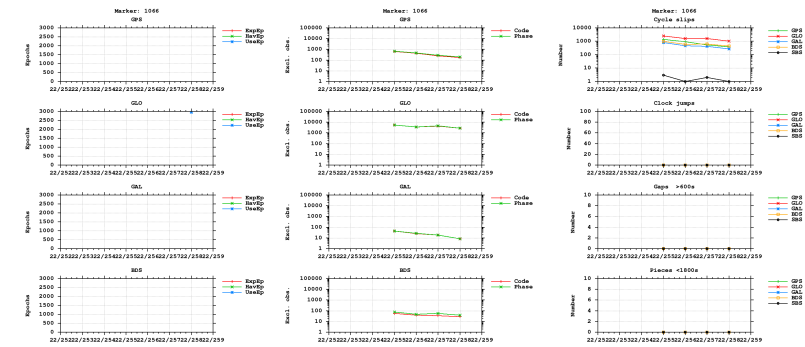



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

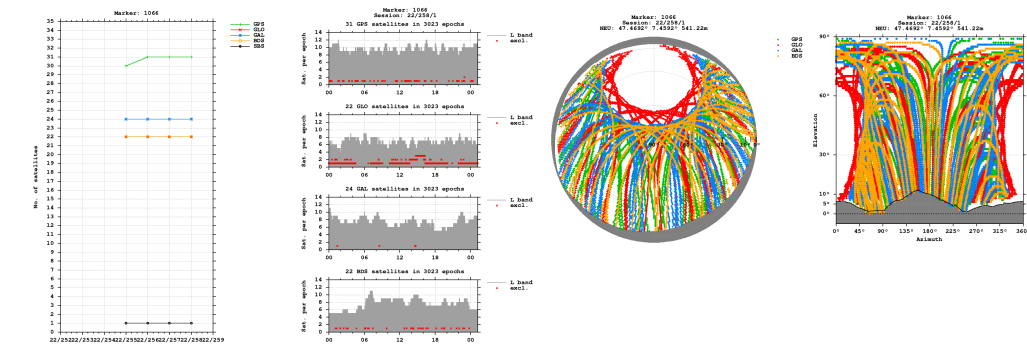


Bands

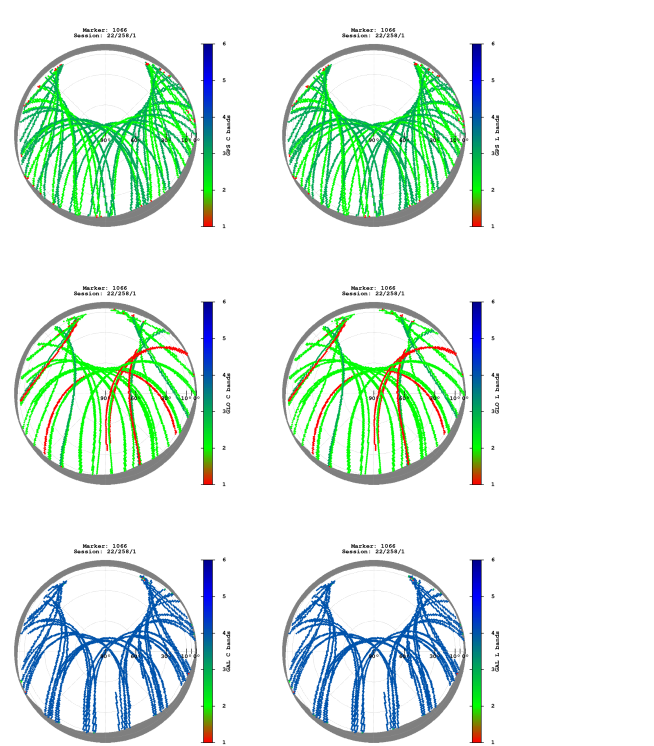


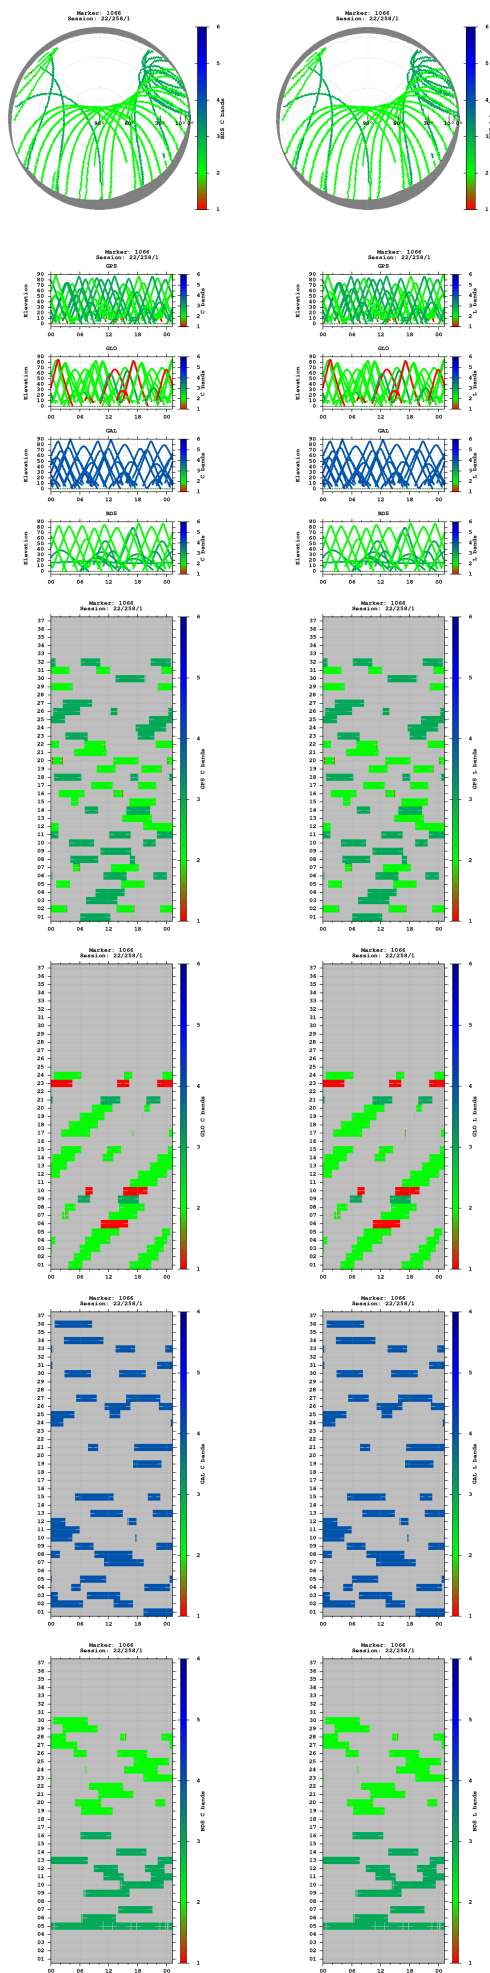


Observations

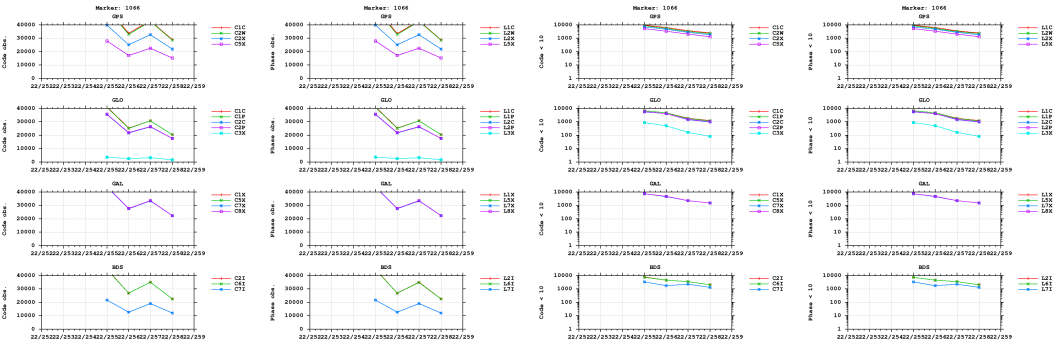


Multipath

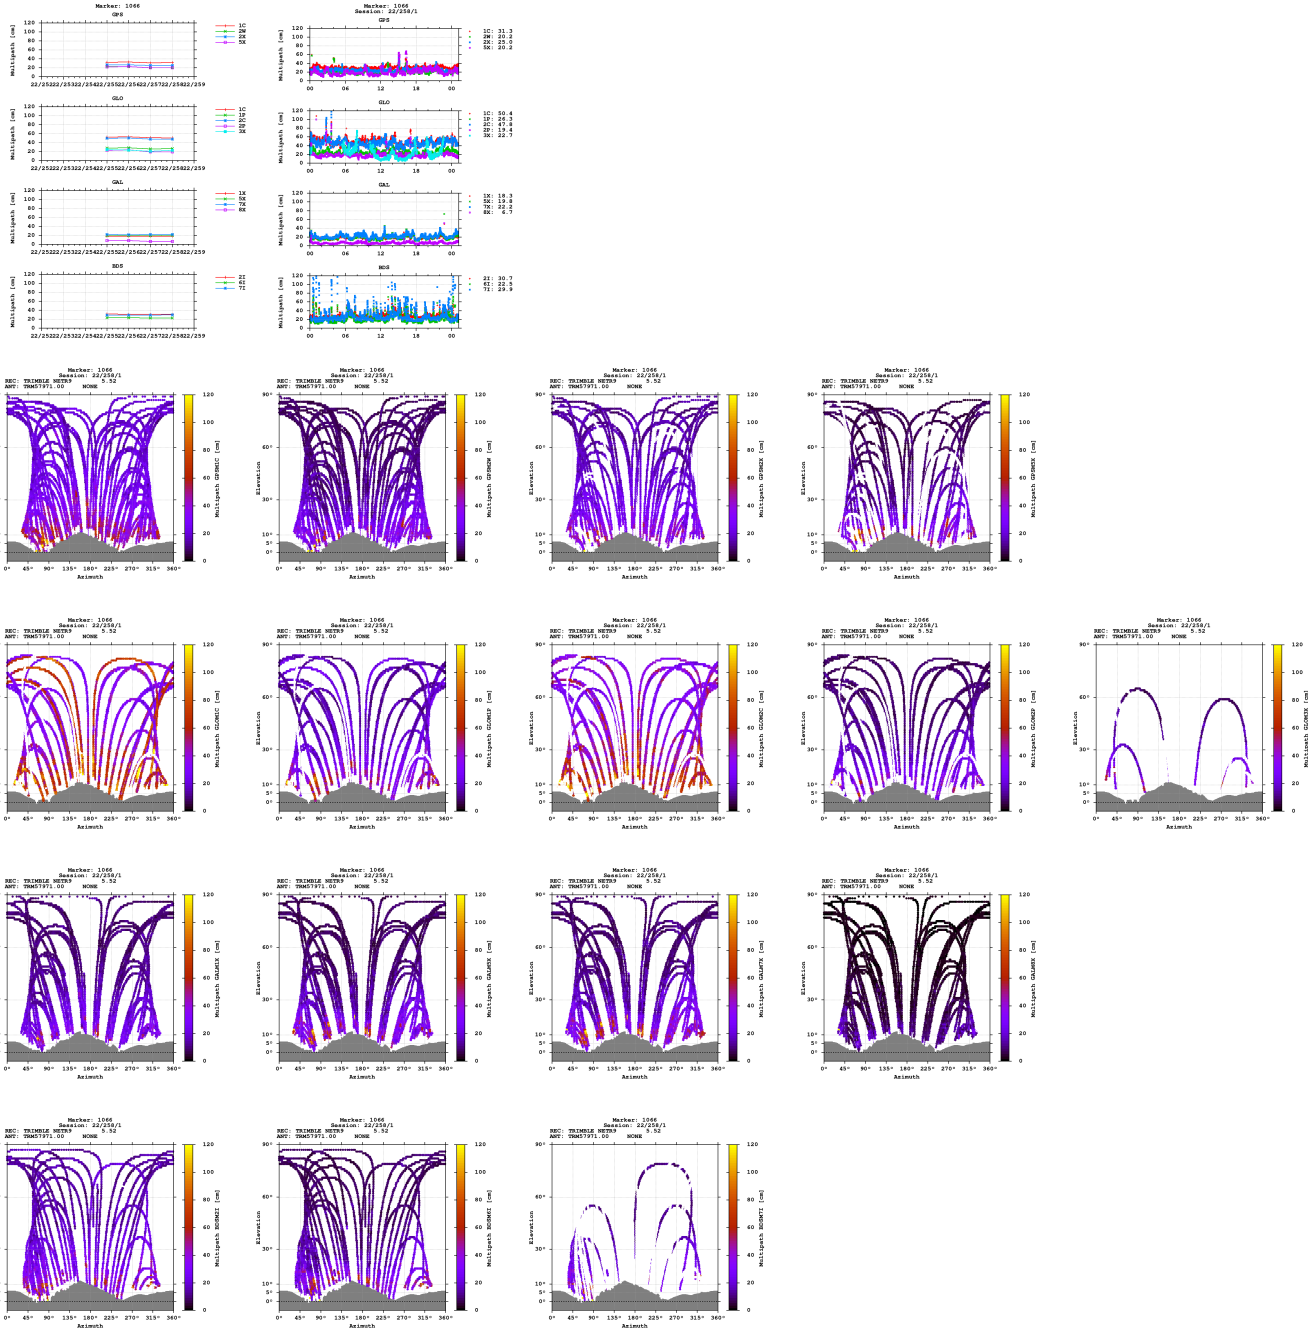


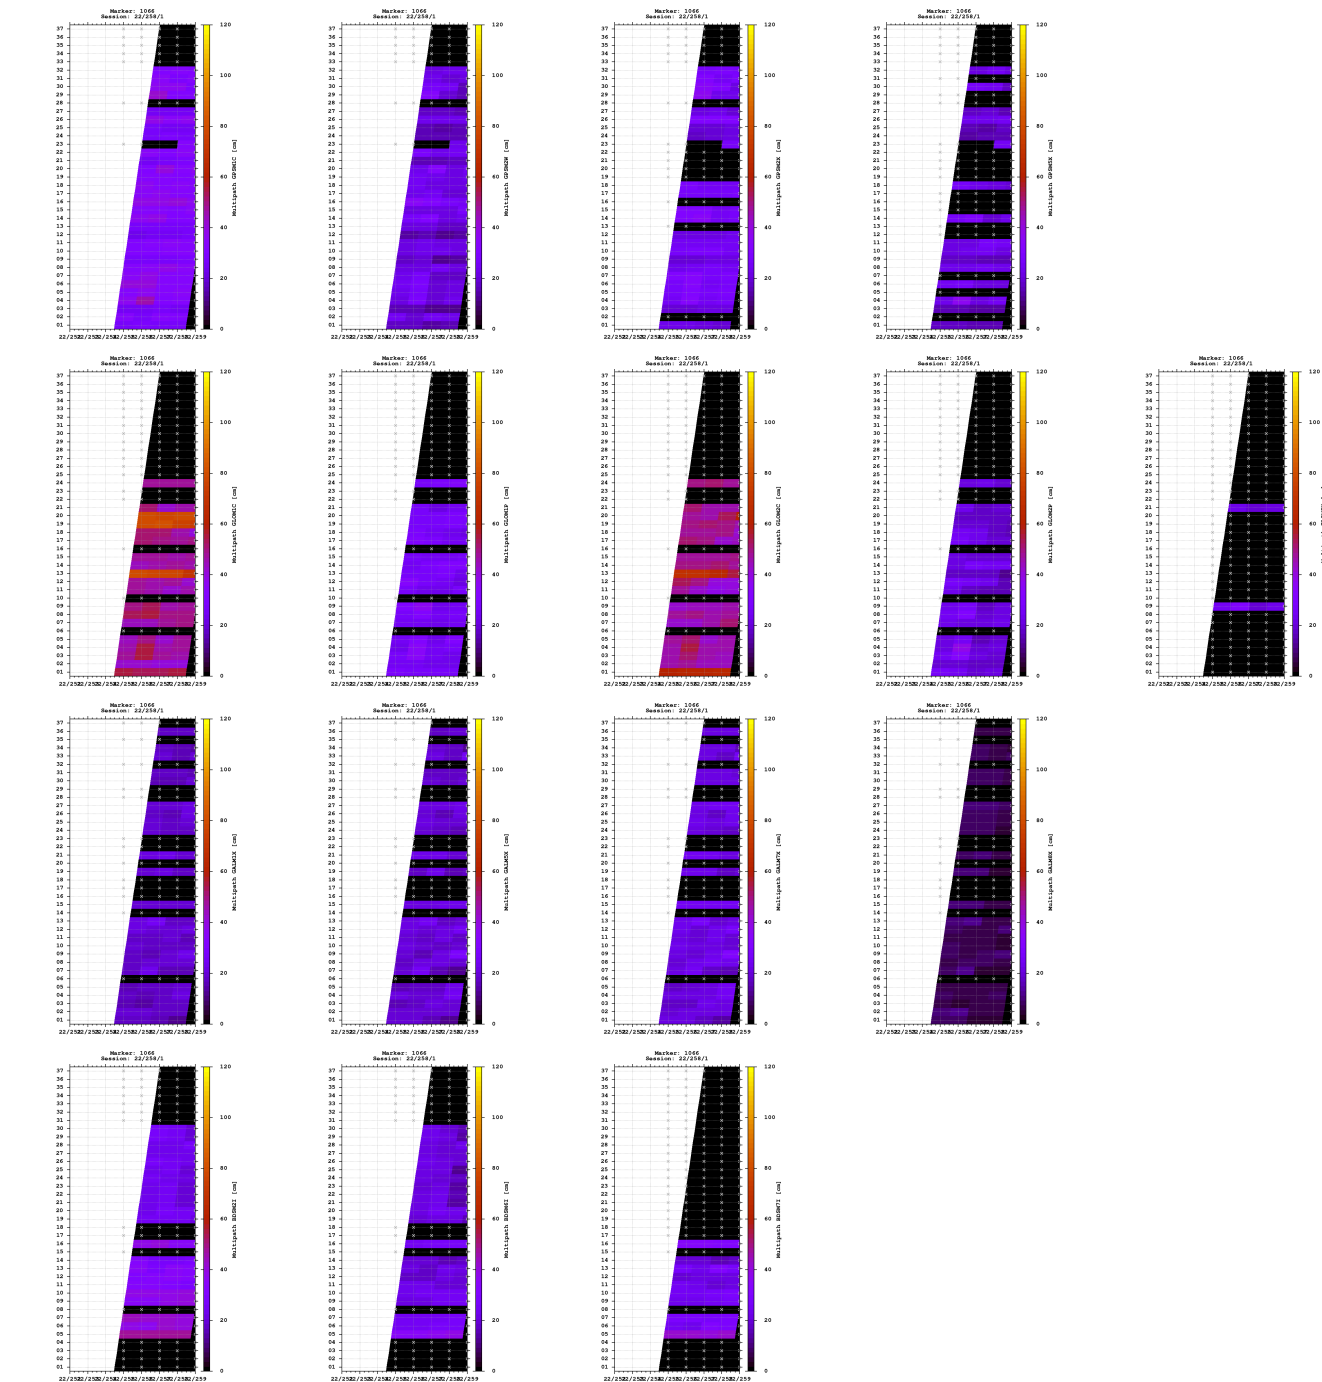


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

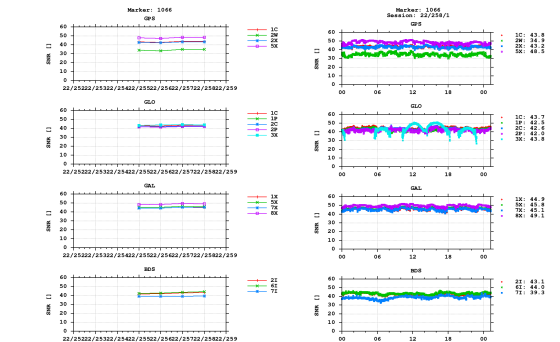


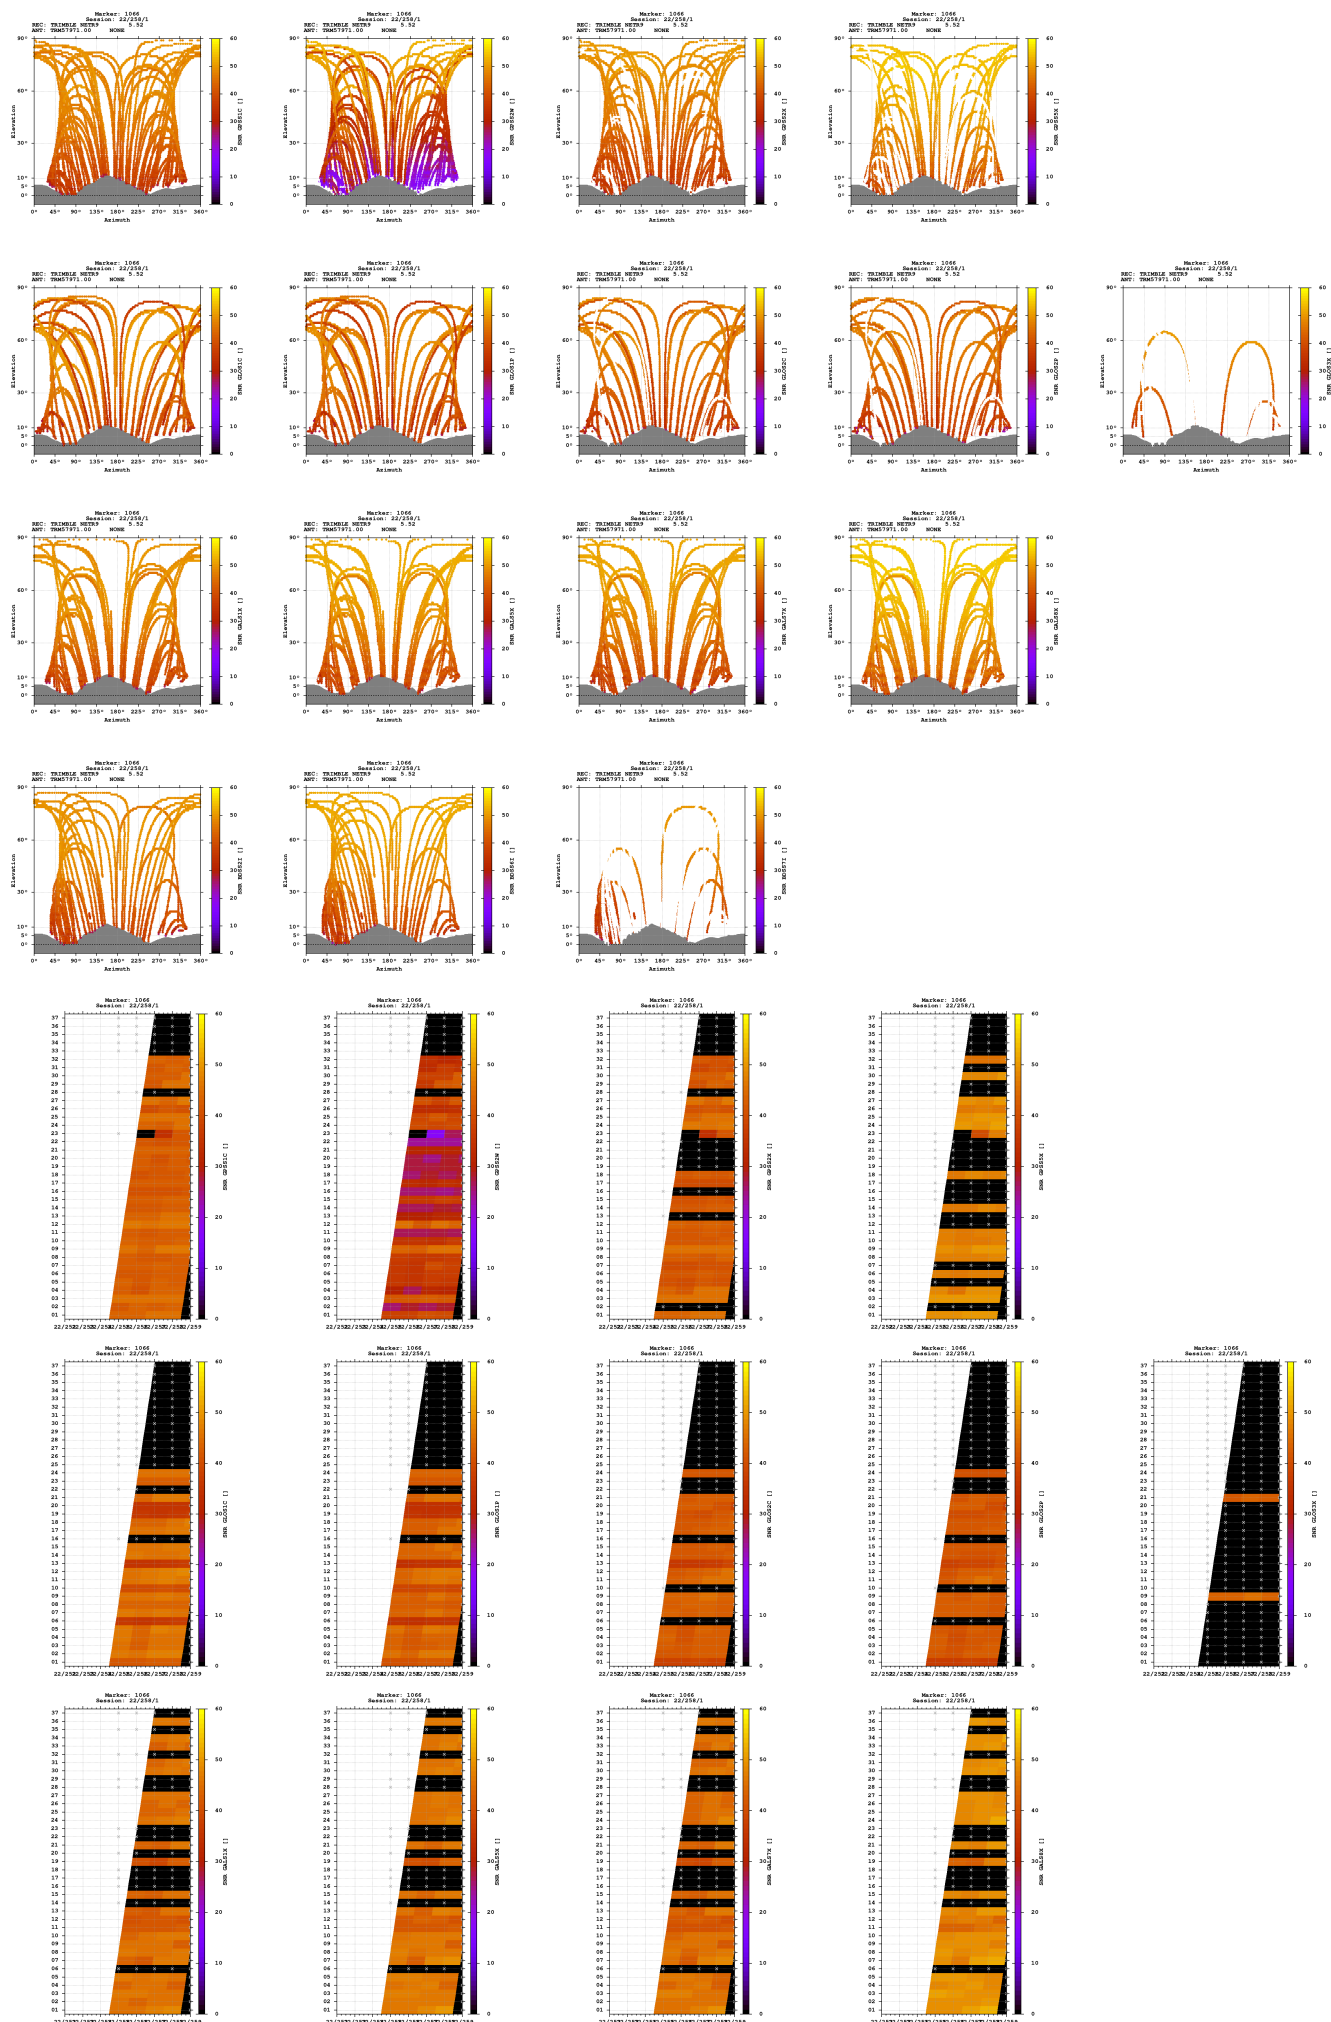

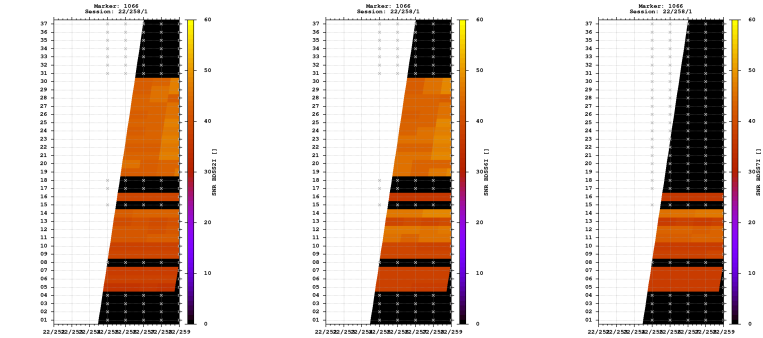

Estimates

2022-09-14 10:23:30	GPS	4283204.9398	560788.9212	4677580.6906	47.469176678	7.459159407	541.2237
2022-09-14 10:23:30	GLO	4283205.1809	560788.1754	4677581.1536	47.469178550	7.459149183	541.6611
2022-09-14 10:23:30	GAL	4283204.6498	560788.8495	4677580.5386	47.469177720	7.459158963	540.9110
2022-09-14 10:23:30	BDS	4283204.5486	560789.2815	4677582.9797	47.469192855	7.459164819	542.6800

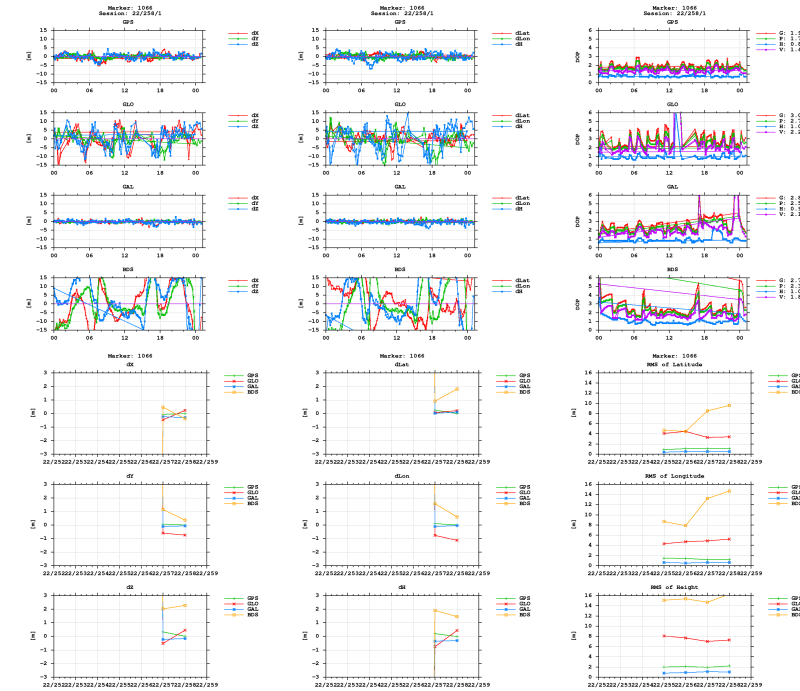

BNC





Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)