


GNSS observation file monitoring for 0517


Last RINEX file: 05172551.22O
RINEX version: 3.02
Marker: 1049
Receiver: 517 TRIMBLE NETR9 5.52
Antenna: 519 TRM57971.00 NONE


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

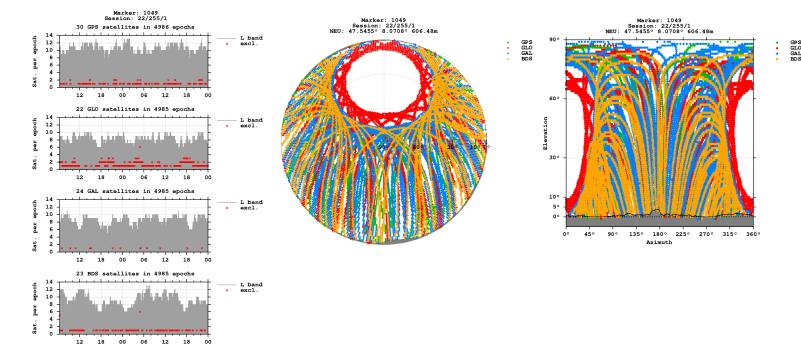


Bands

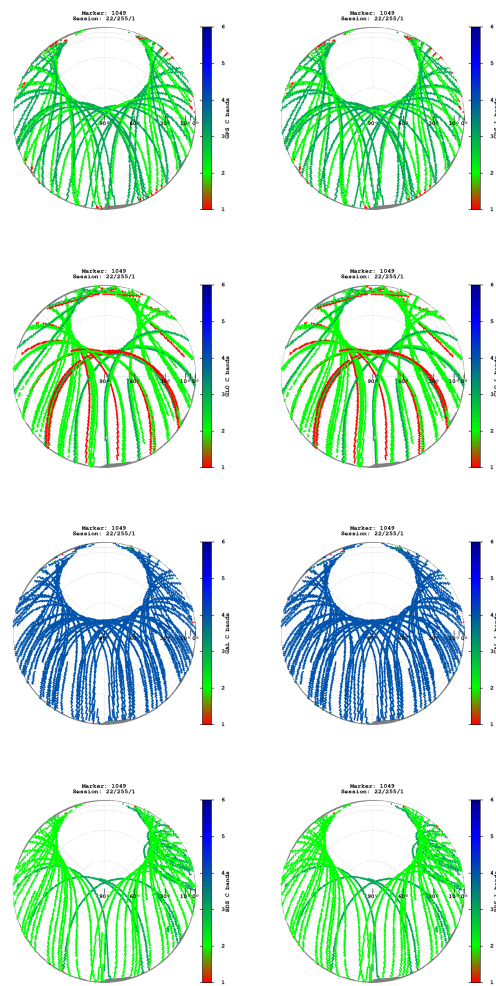


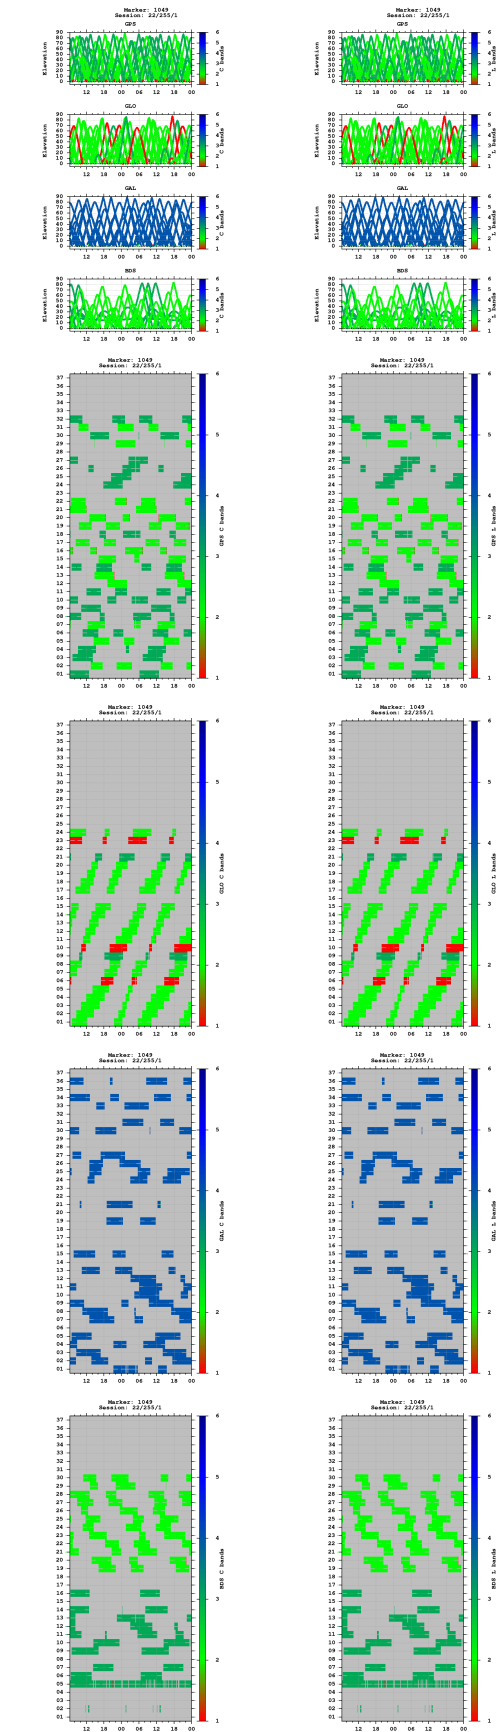


Multipath

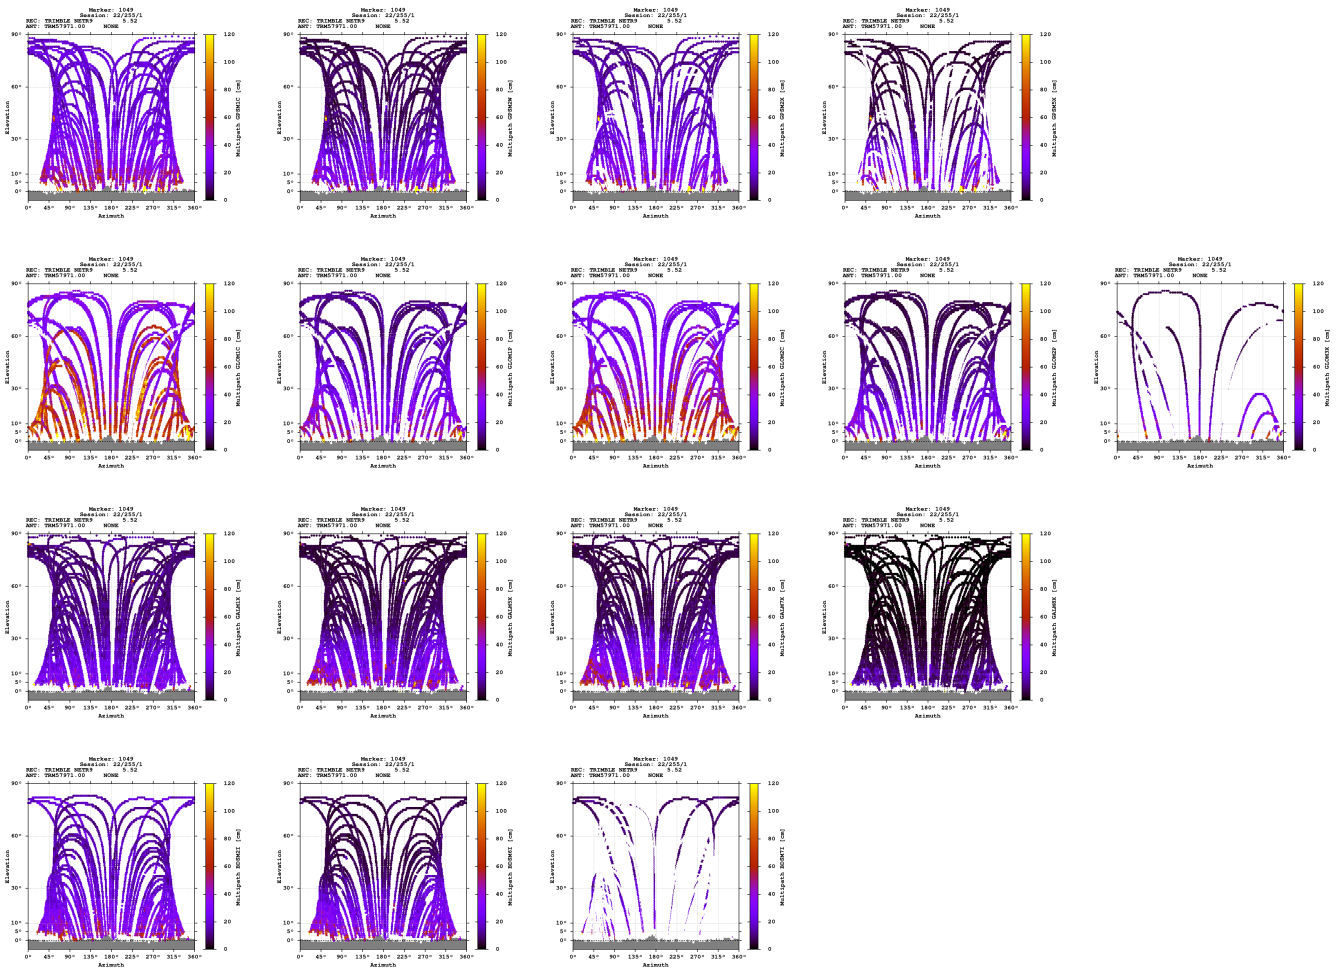


Signal-to-noise ratio



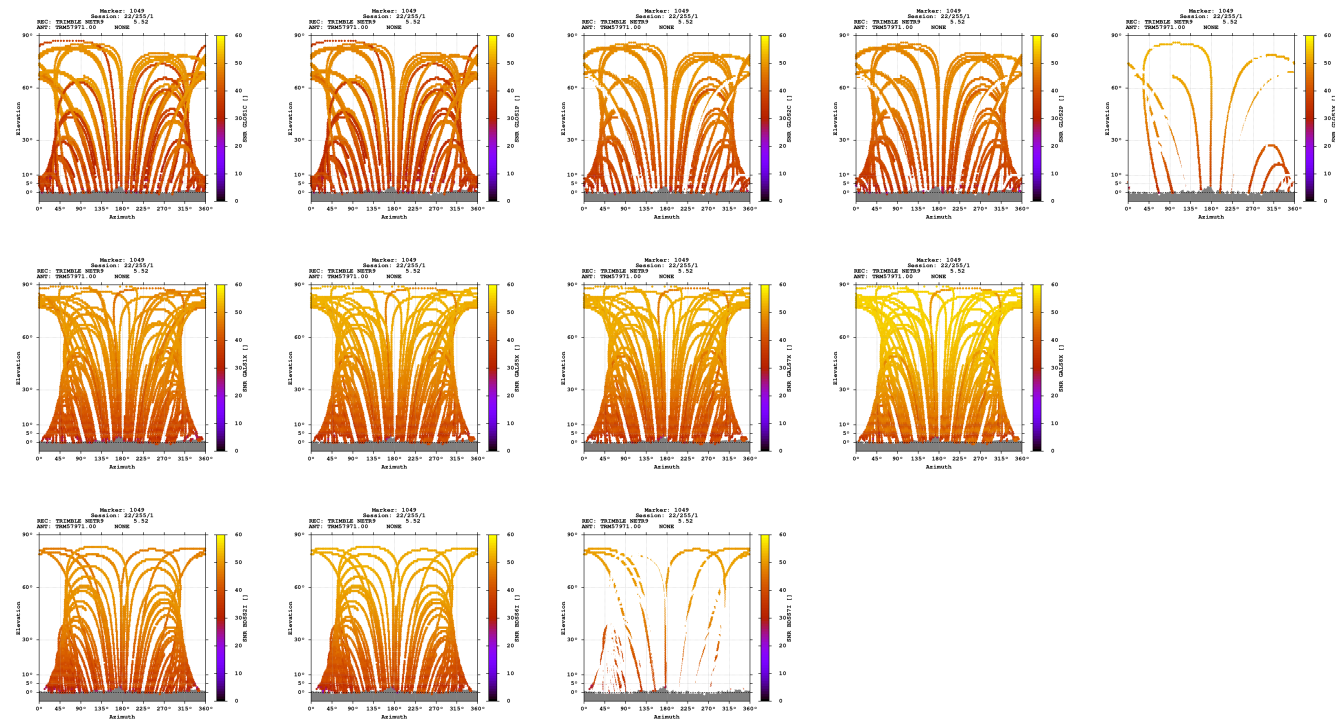

Estimates

2022-09-12 06:23:00	GPS	4270822.4177	605609.4824	4683361.2175	47.545498005	8.070825425	606.4802
2022-09-12 06:23:00	GLO	4270822.6989	605609.5000	4683361.4270	47.545497413	8.070825133	606.8244
2022-09-12 06:23:00	GAL	4270822.2818	605609.4319	4683361.0630	47.545498007	8.070825015	606.2706
2022-09-12 06:23:00	BDS	4270822.4821	605608.1340	4683363.2819	47.545511370	8.070807572	607.9186

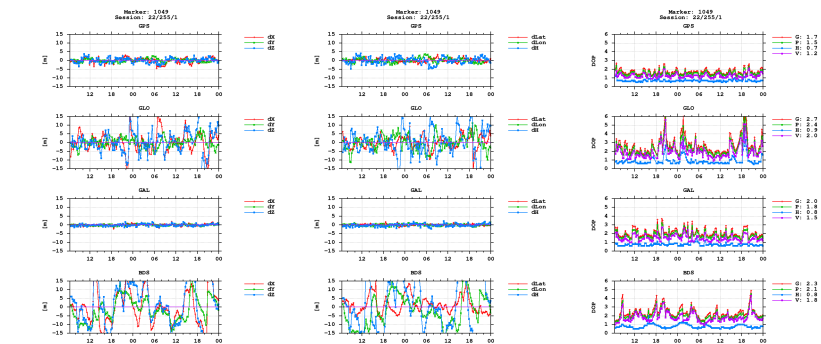

BNC

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)