


GNSS observation file monitoring for 0517


Last RINEX file: 05172561.220
RINEX version: 3.02
Marker: 1049
Receiver: 517 TRIMBLE NETR9 5.52
Antenna: 519 TRM57971.00 NONE

Epochs

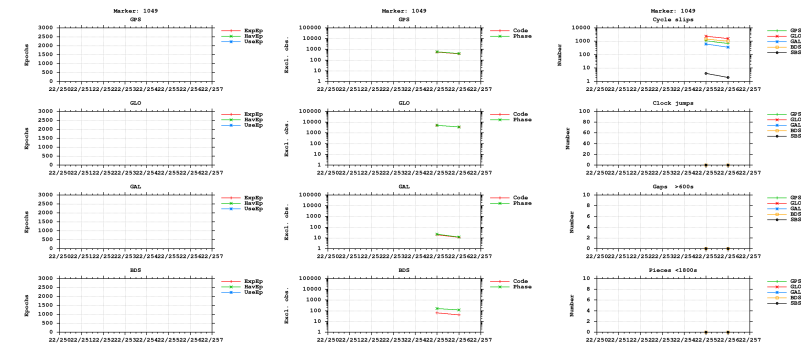



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

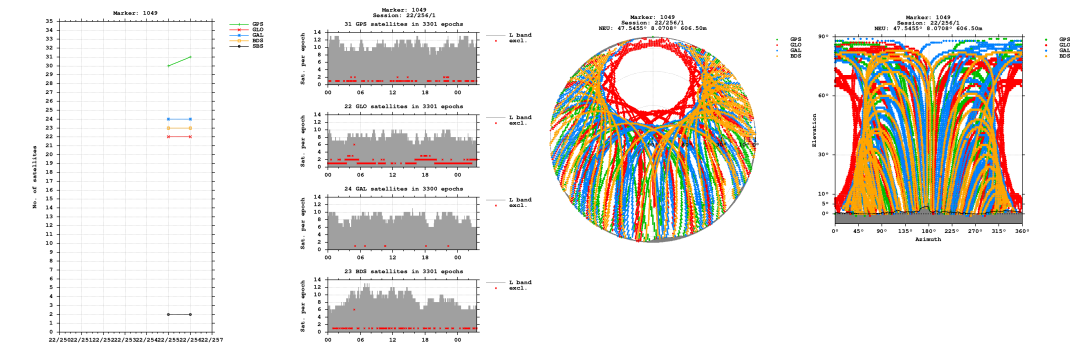


Bands

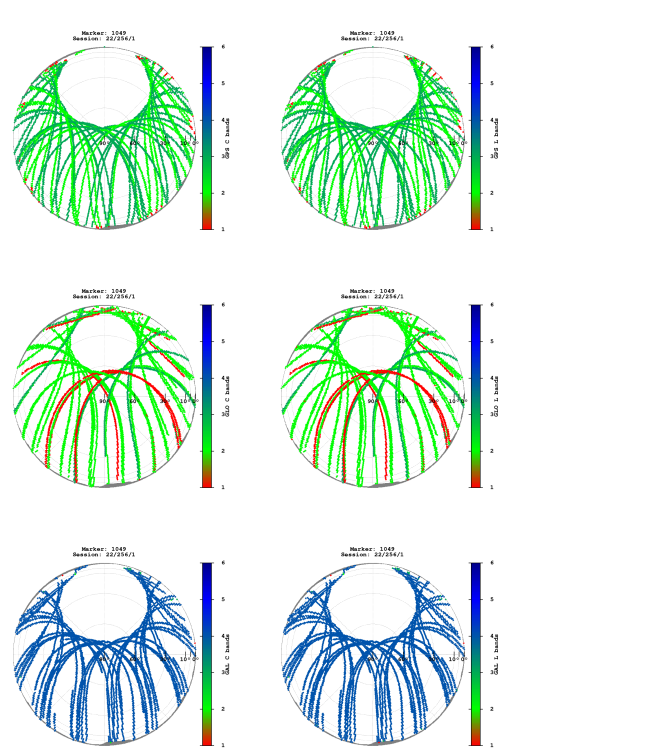


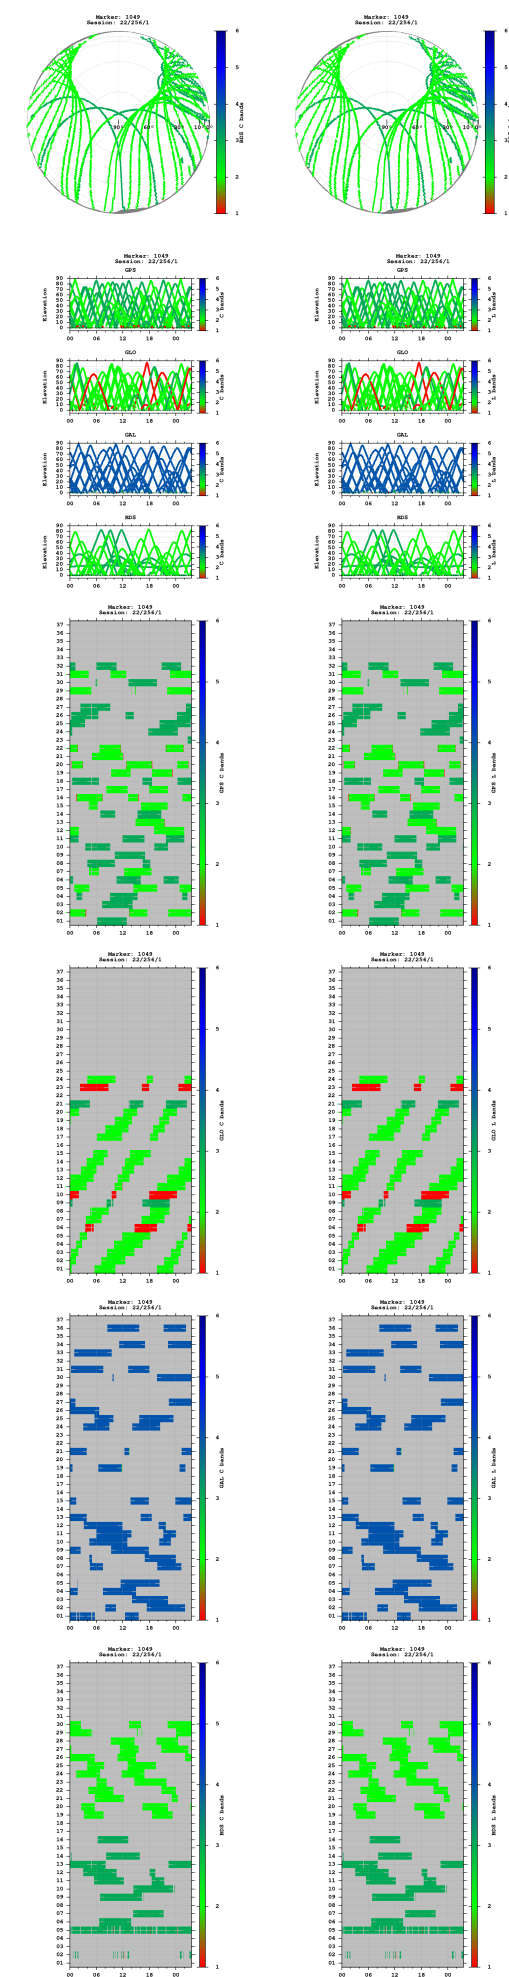


Observations

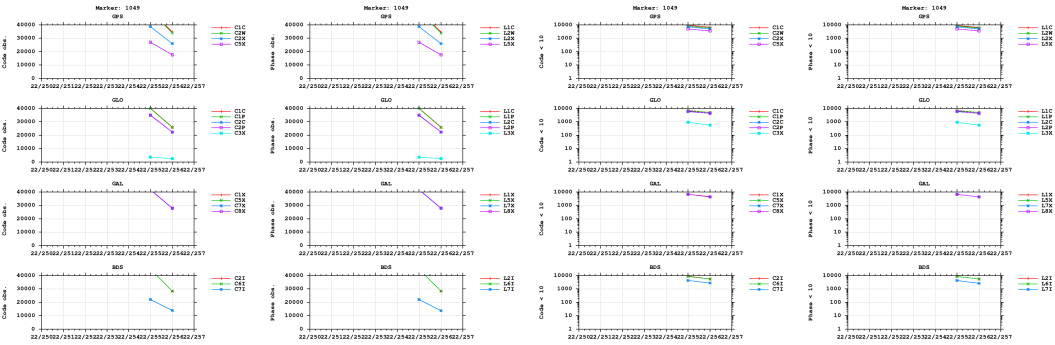


Multipath

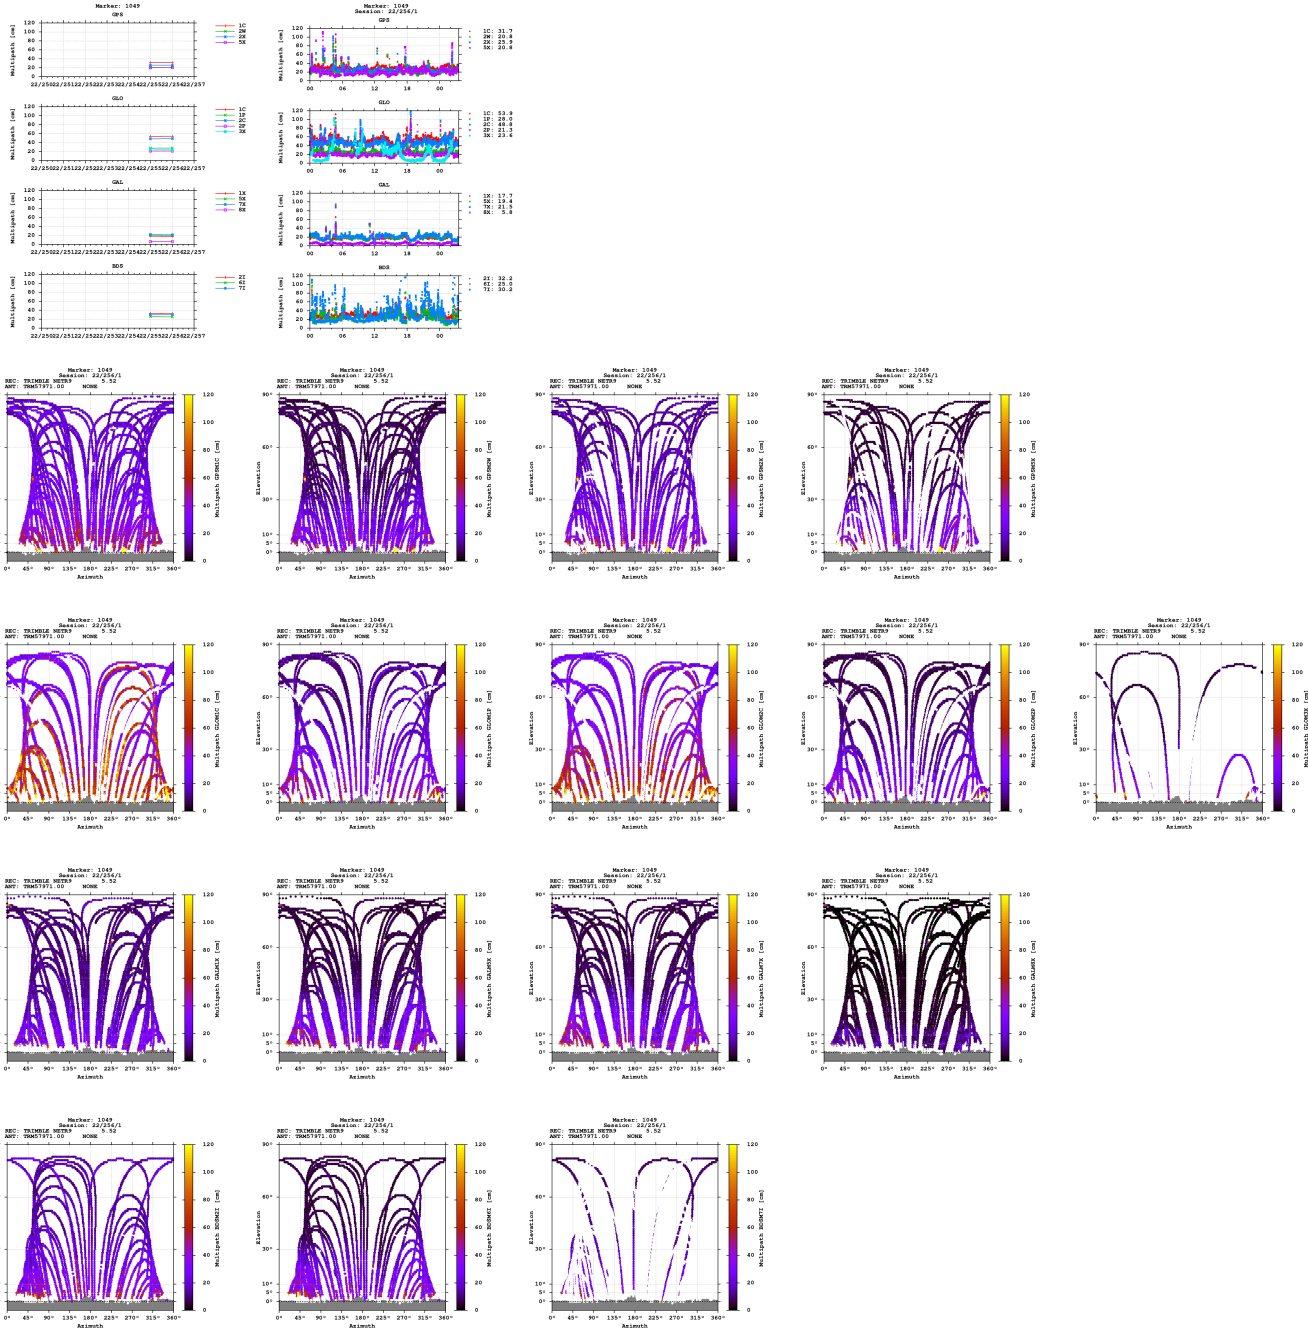


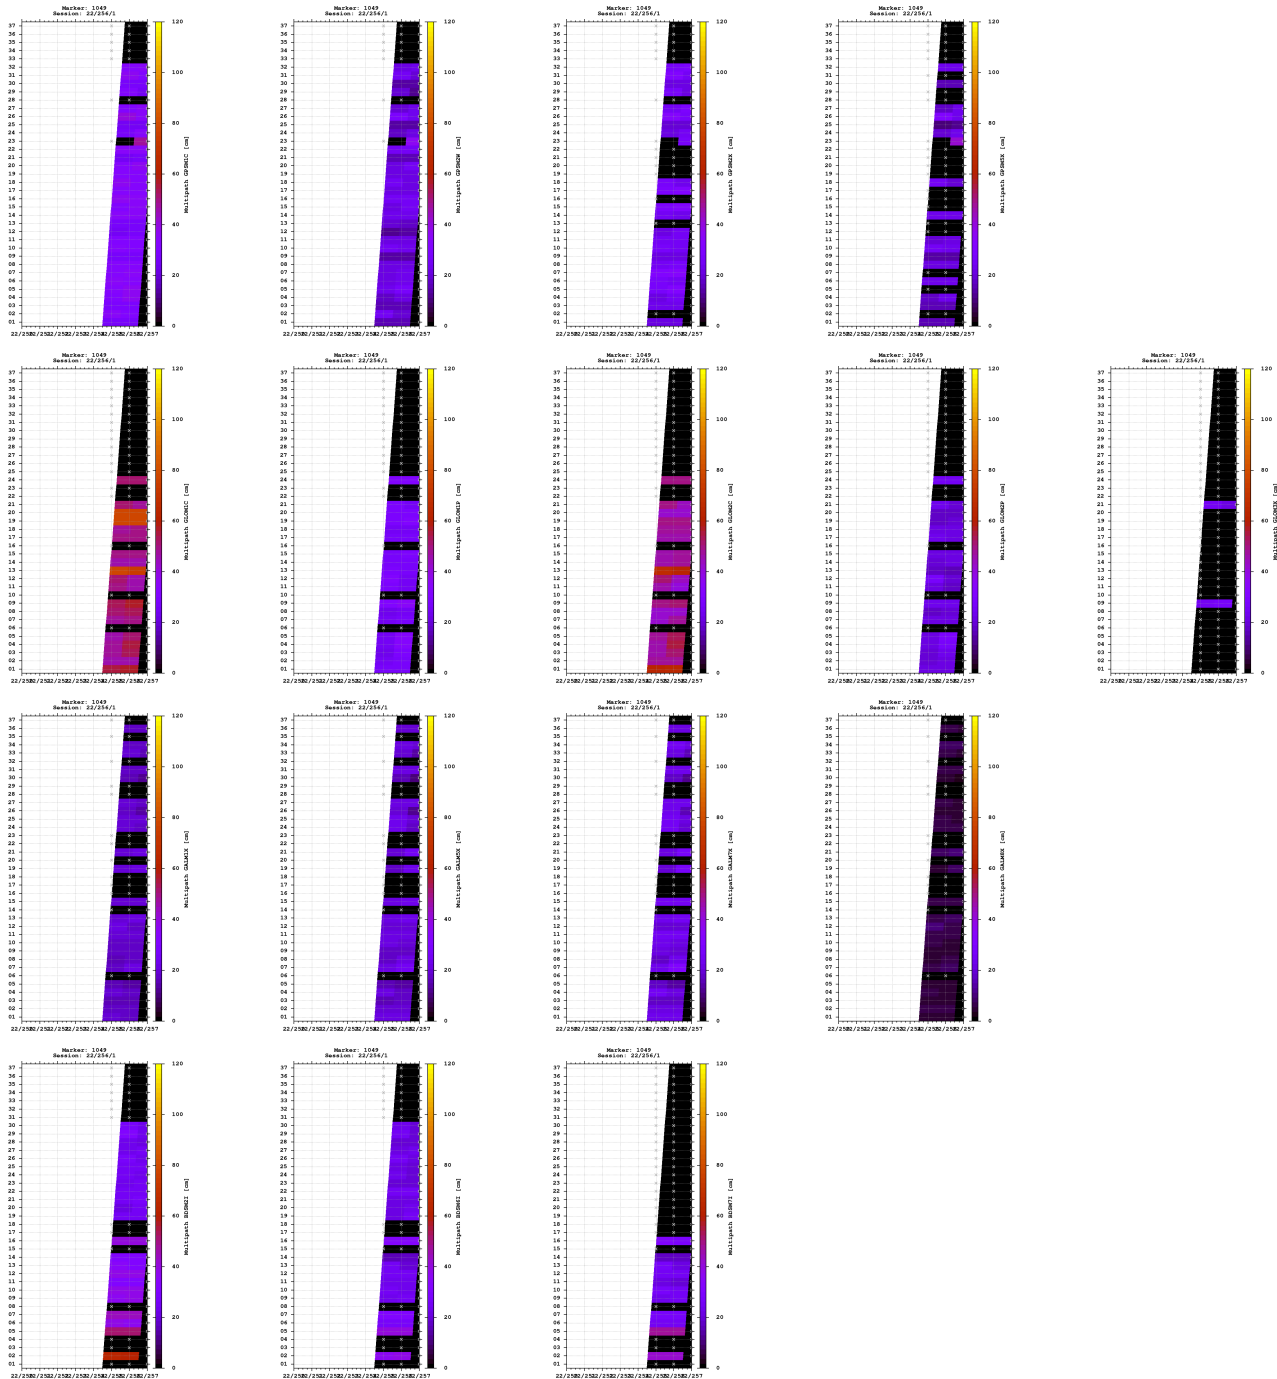


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

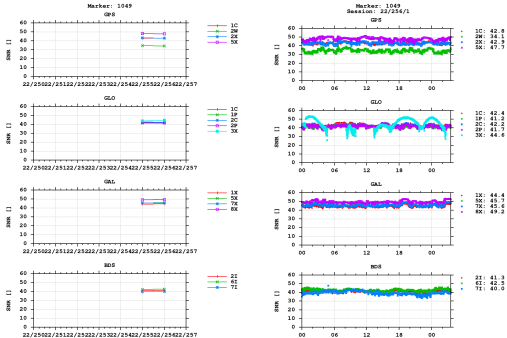


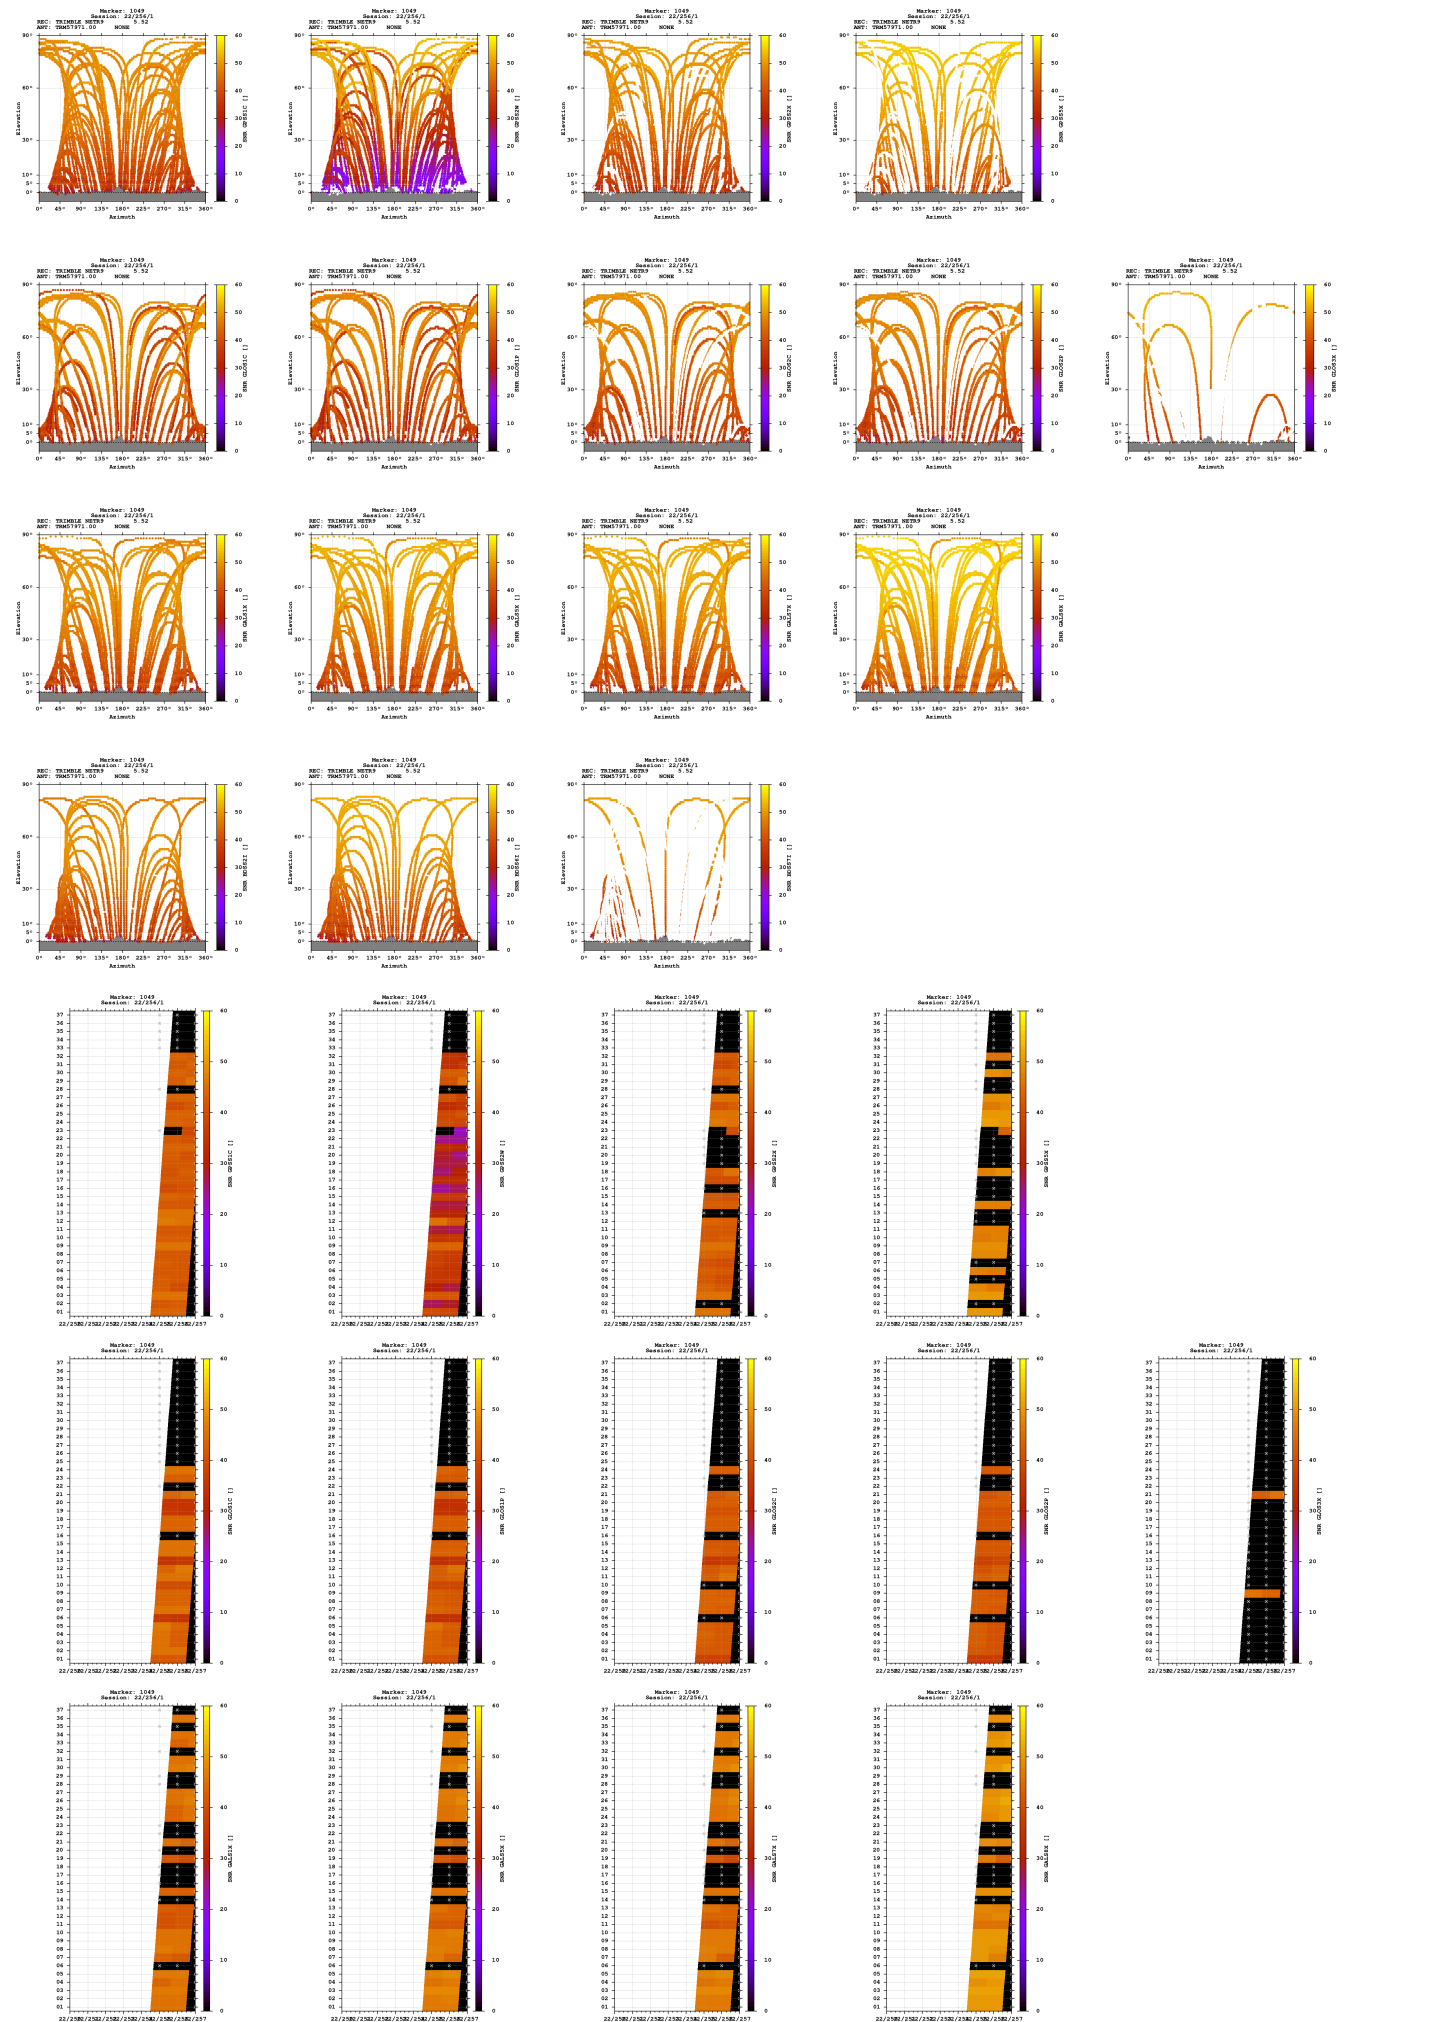

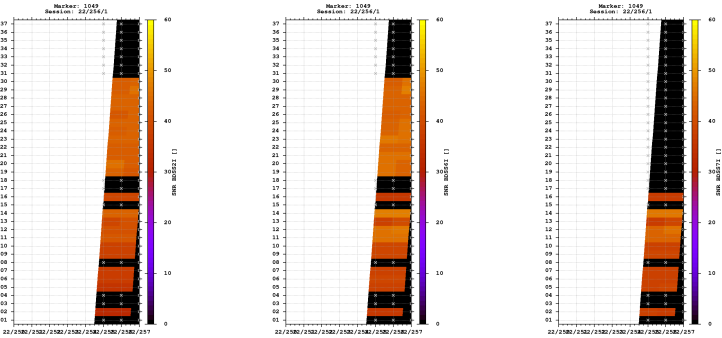



Estimates

2022-09-12 06:23:00	GPS	4270822.4088	605609.6732	4683361.2283	47.545497951	8.070827951	606.5003
2022-09-12 06:23:00	GLO	4270822.6810	605609.1378	4683361.6385	47.545499152	8.070820402	606.9342
2022-09-12 06:23:00	GAL	4270822.4773	605609.4717	4683361.2501	47.545497821	8.070825174	606.5431
2022-09-12 06:23:00	BDS	4270822.3959	605609.1189	4683364.5381	47.545518645	8.070820686	608.8812

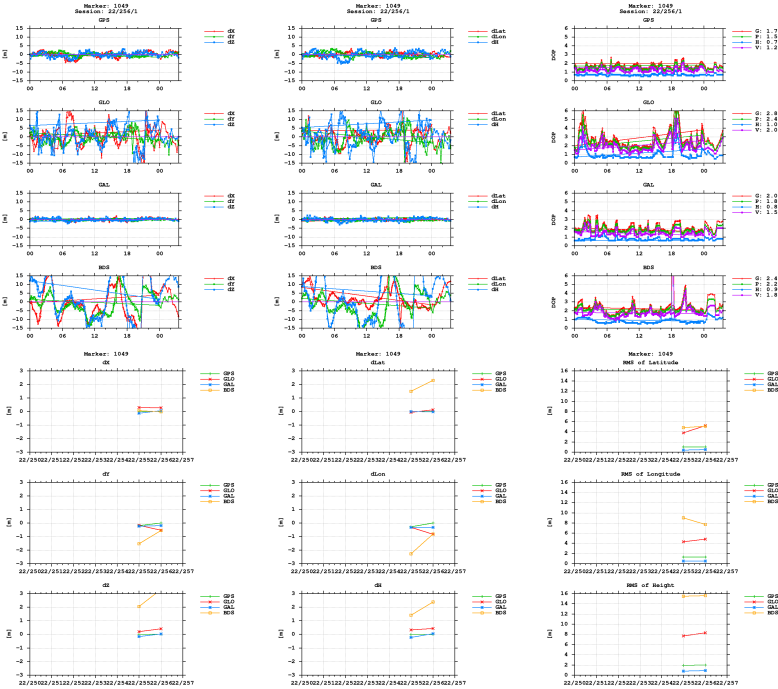

BNC

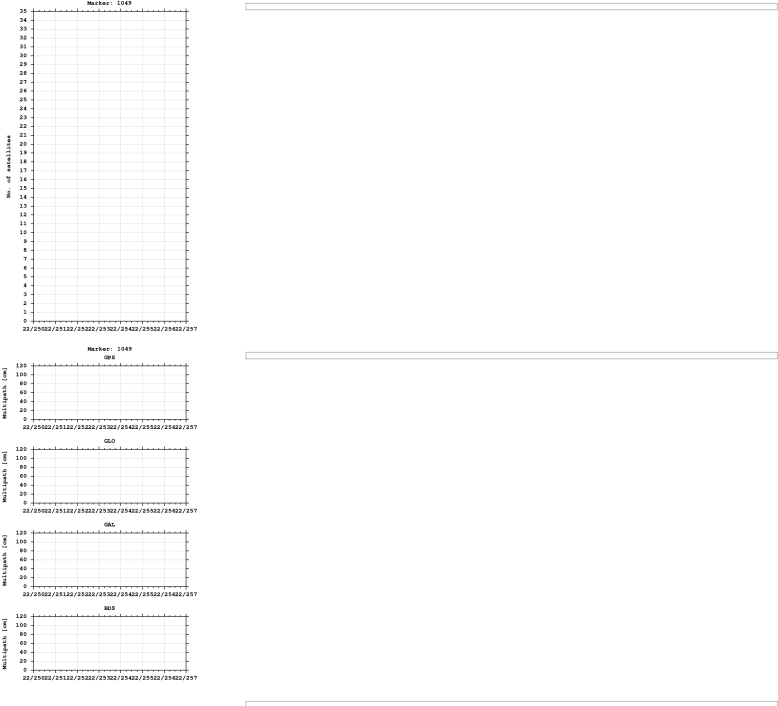

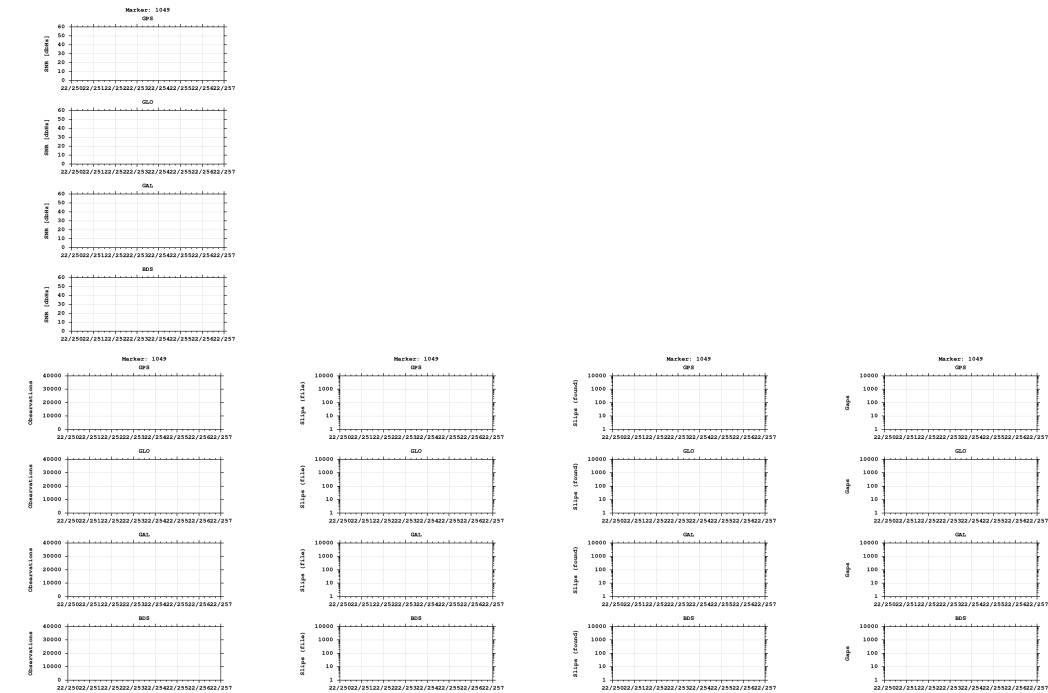

Equipment

2022-09-12 00:00:00 TRIMBLE NETR9 5.52 517 TRM57971.00 NONE 519

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)