


GNSS observation file monitoring for 0518


Last RINEX file: 05182551.22O
RINEX version: 3.02
Marker: 1049
Receiver: 518 TRIMBLE NETR9 5.52
Antenna: 518 TRM57971.00 NONE


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

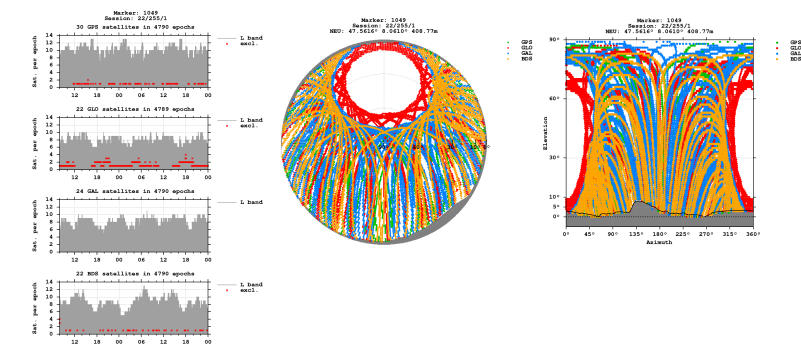


Bands

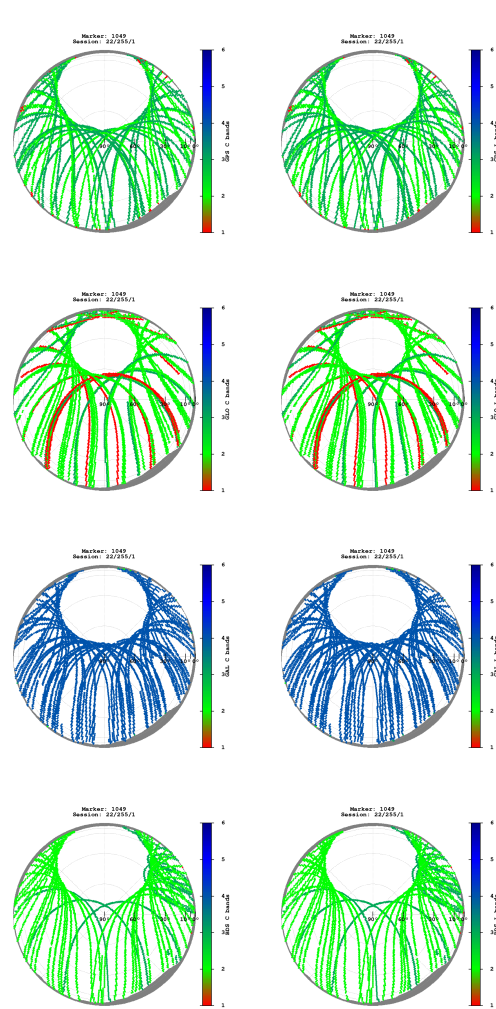

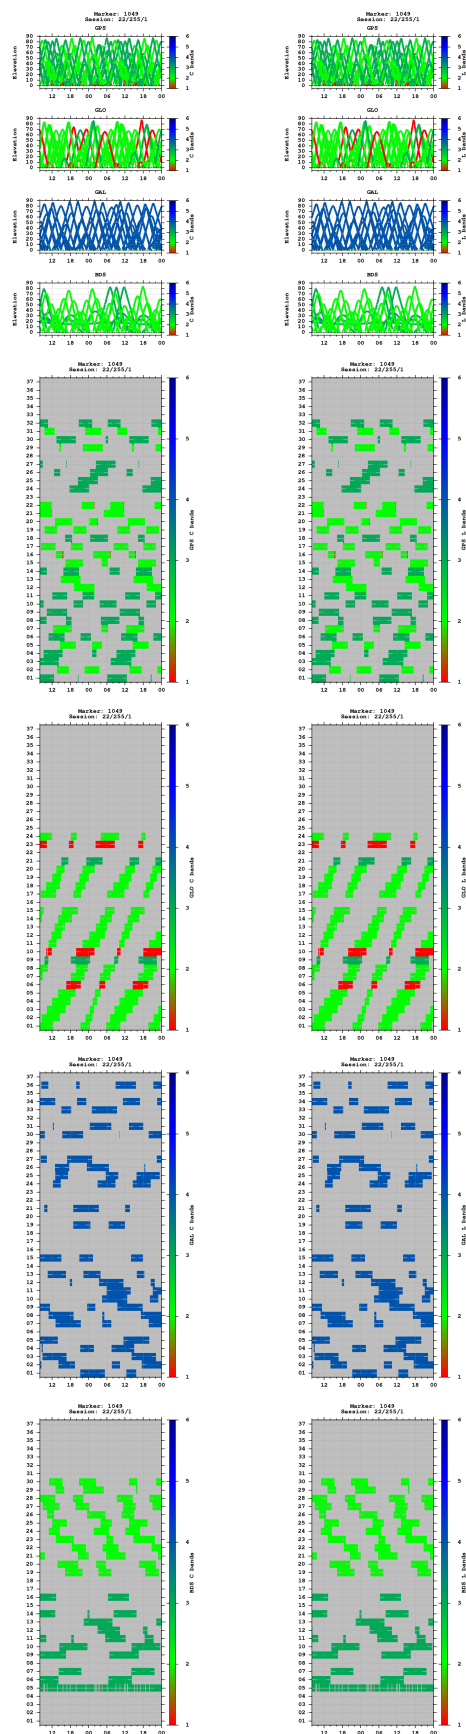



Multipath

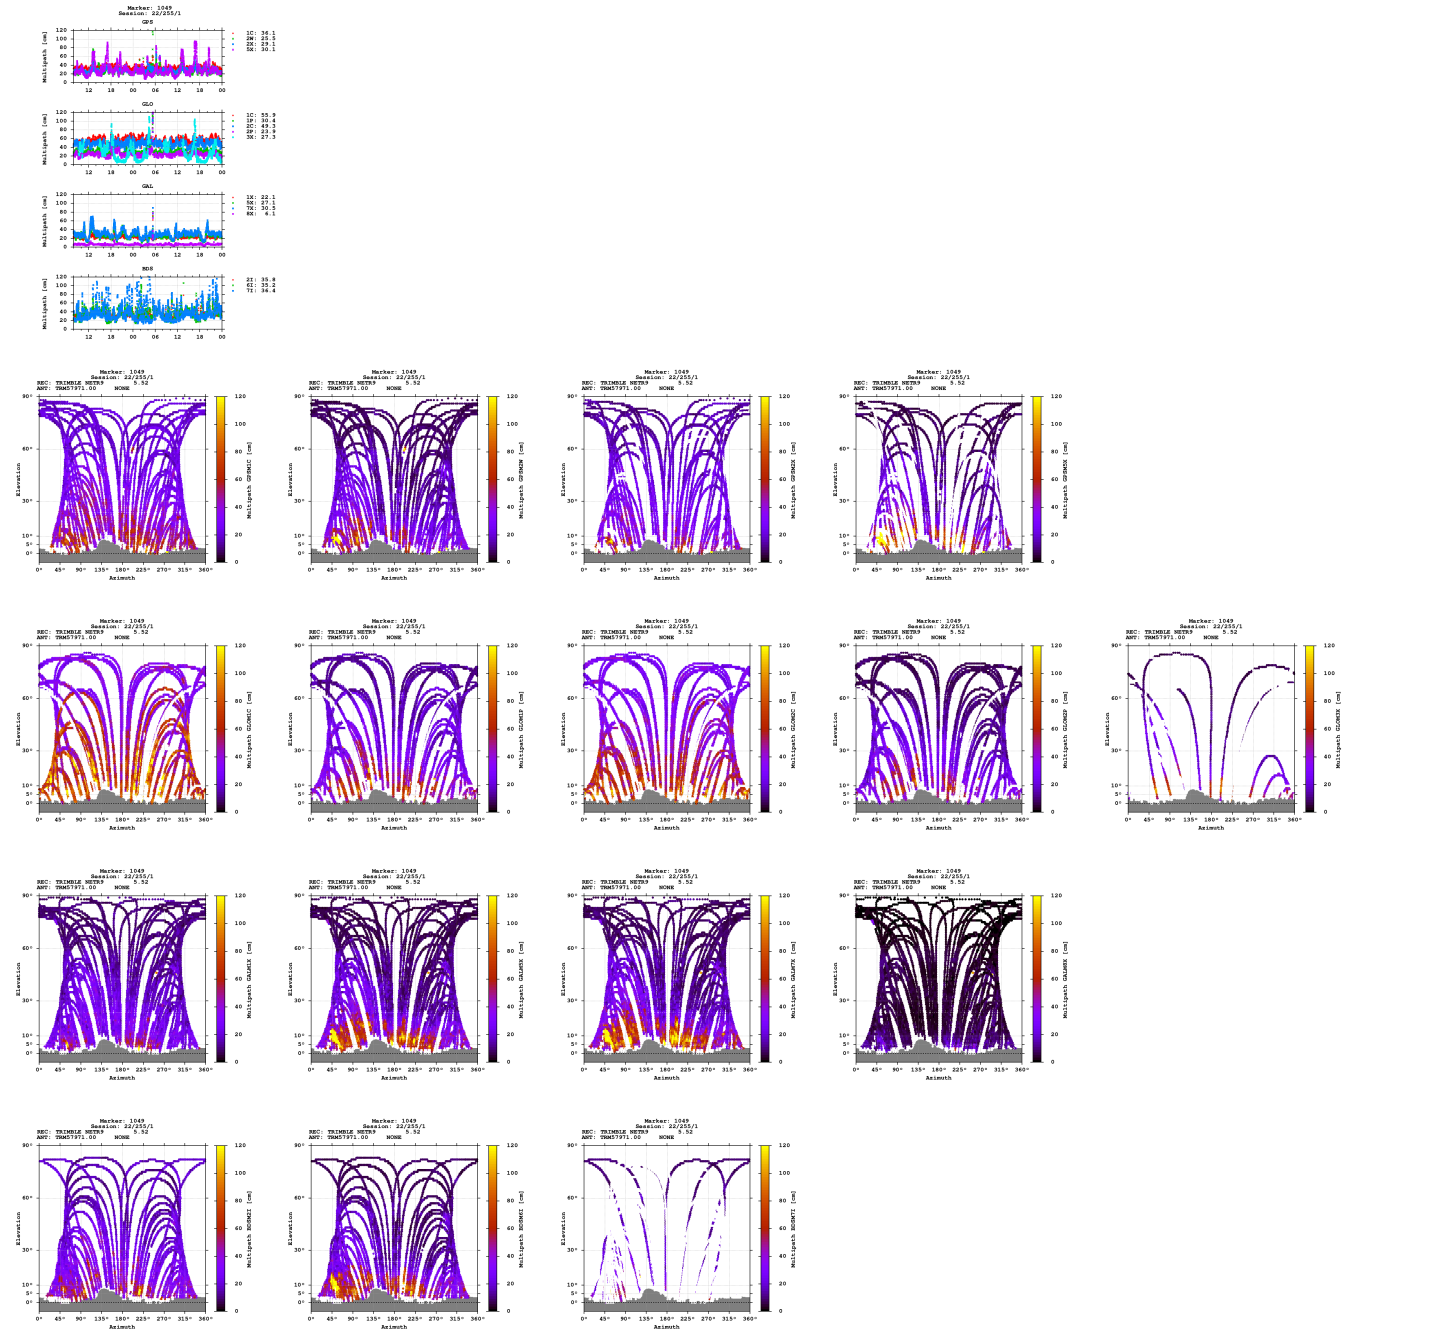

- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.


Signal-to-noise ratio

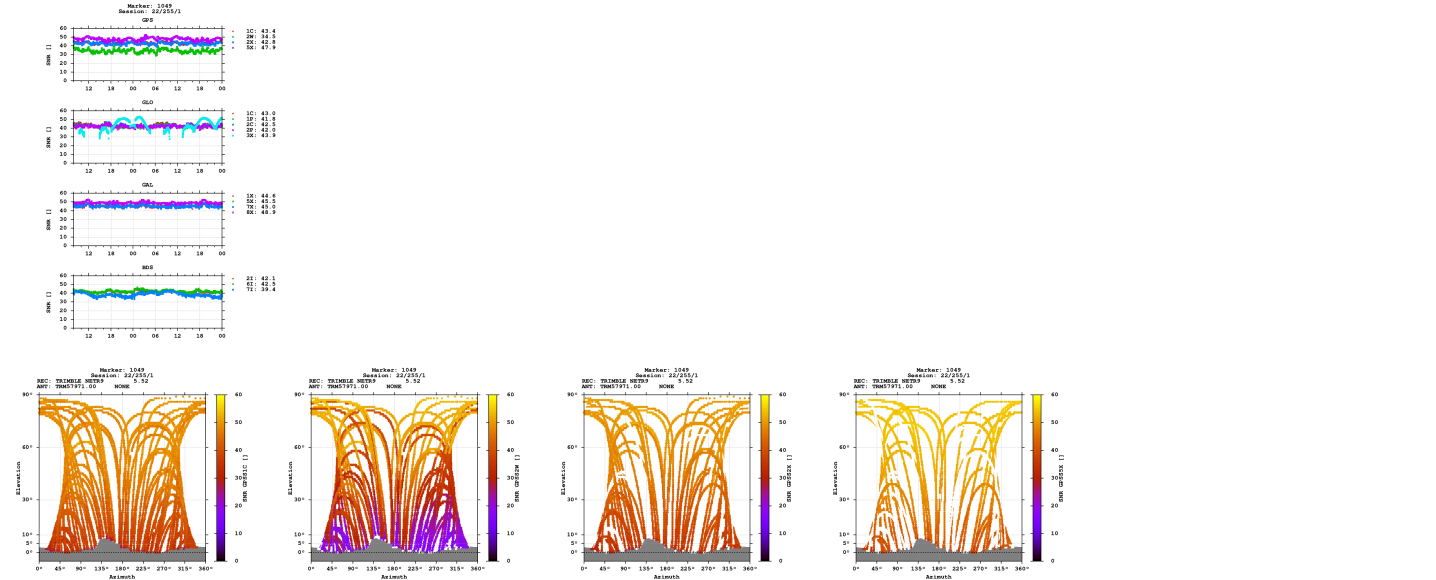

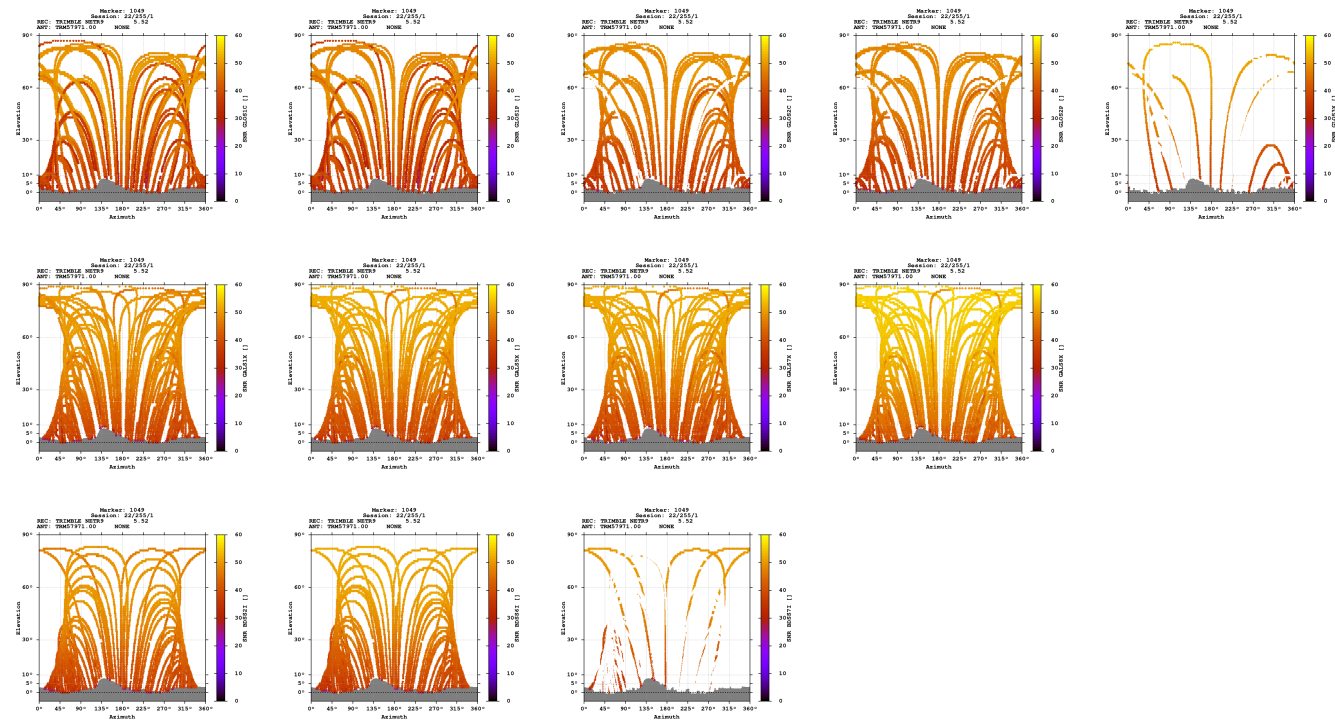

Estimates

2022-09-12 07:58:00	GPS	4269488.3689	604674.2213	4684421.3710	47.561569529	8.061010138	408.7659
2022-09-12 07:58:00	GLO	4269488.3525	604674.2471	4684421.6596	47.561571364	8.061010508	408.9703
2022-09-12 07:58:00	GAL	4269488.1090	604674.1402	4684420.9677	47.561568865	8.061009556	408.2869
2022-09-12 07:58:00	BDS	4269488.3887	604672.8974	4684423.1681	47.561581537	8.060992684	409.9800

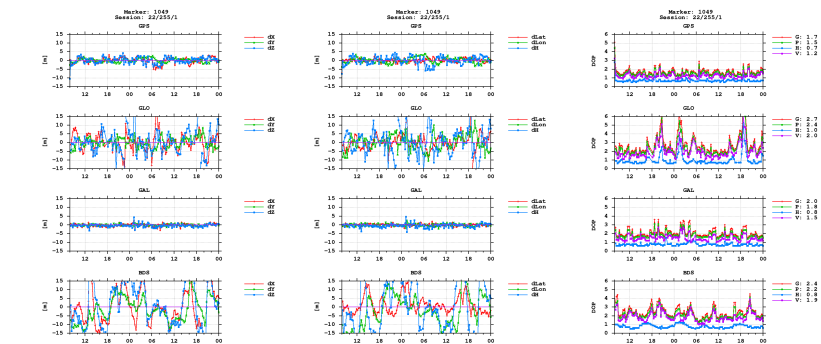

BNC

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)