


GNSS observation file monitoring for 0518


Last RINEX file: 05182561.220
RINEX version: 3.02
Marker: 1049
Receiver: 518 TRIMBLE NETR9 5.52
Antenna: 518 TRM57971.00 NONE

Epochs

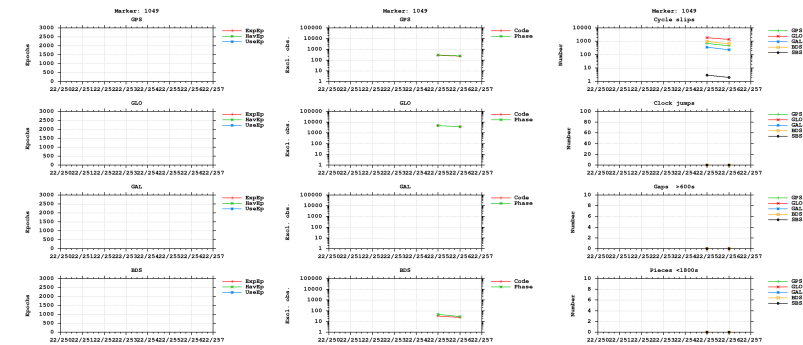



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

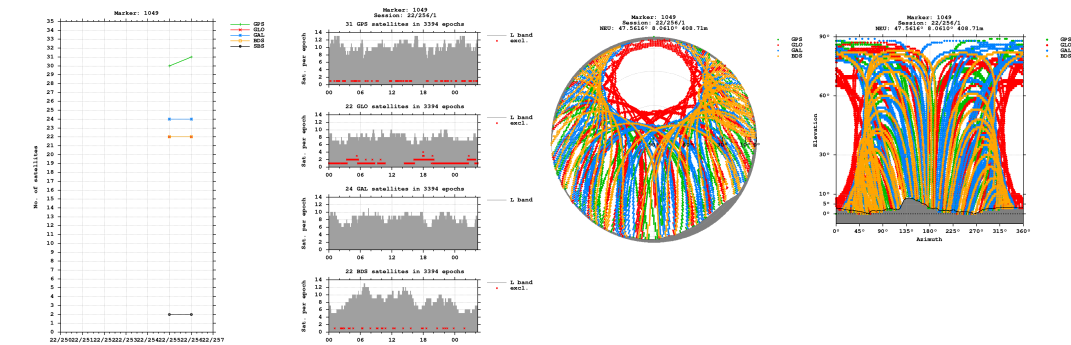


Bands

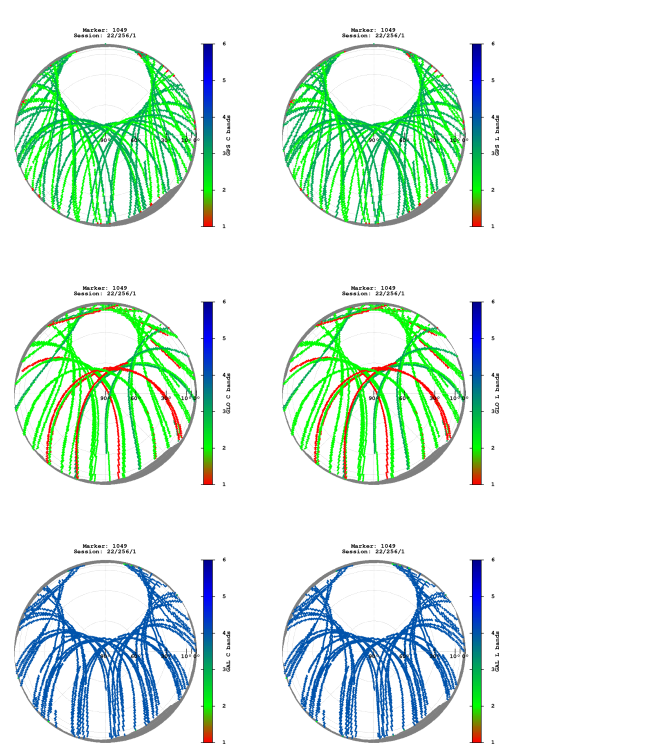


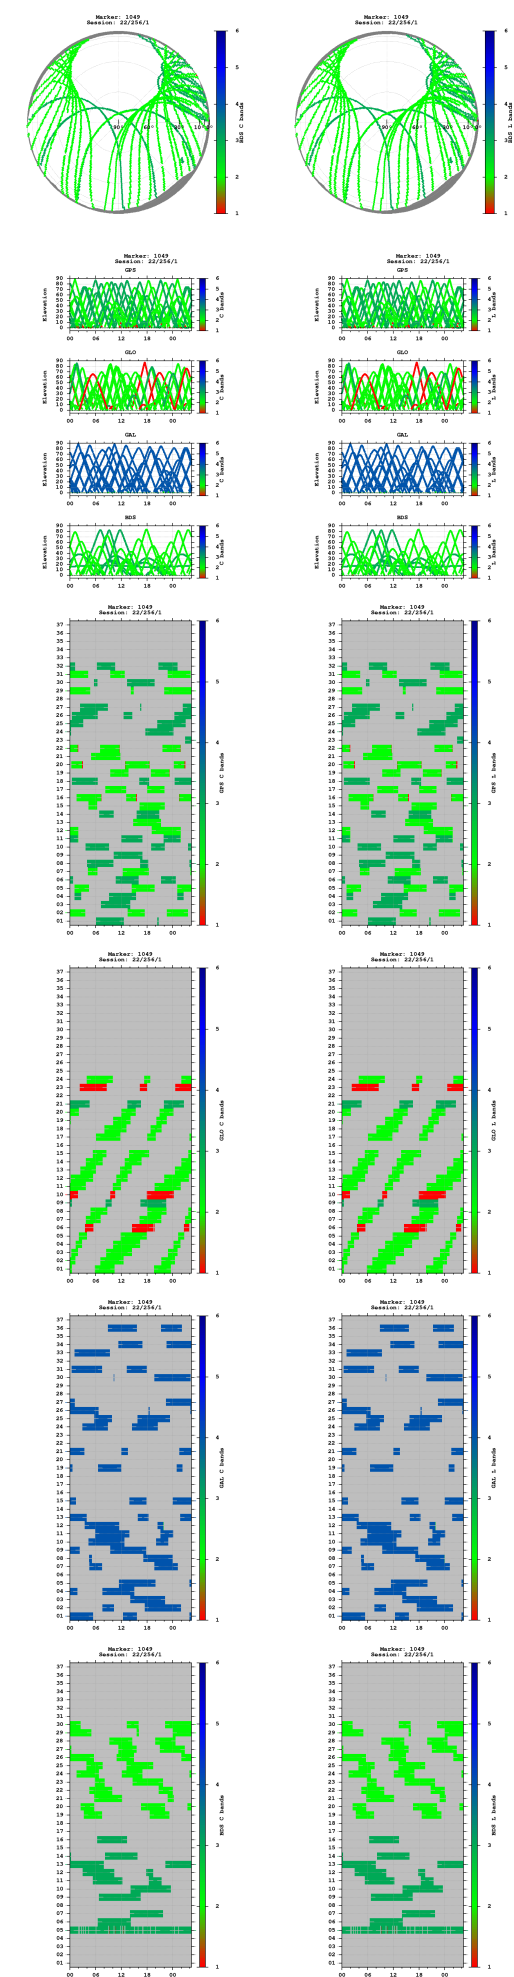


Observations

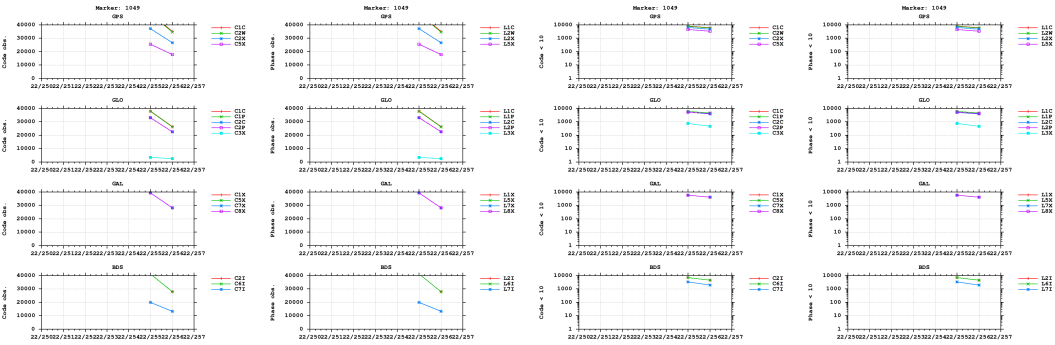


Multipath

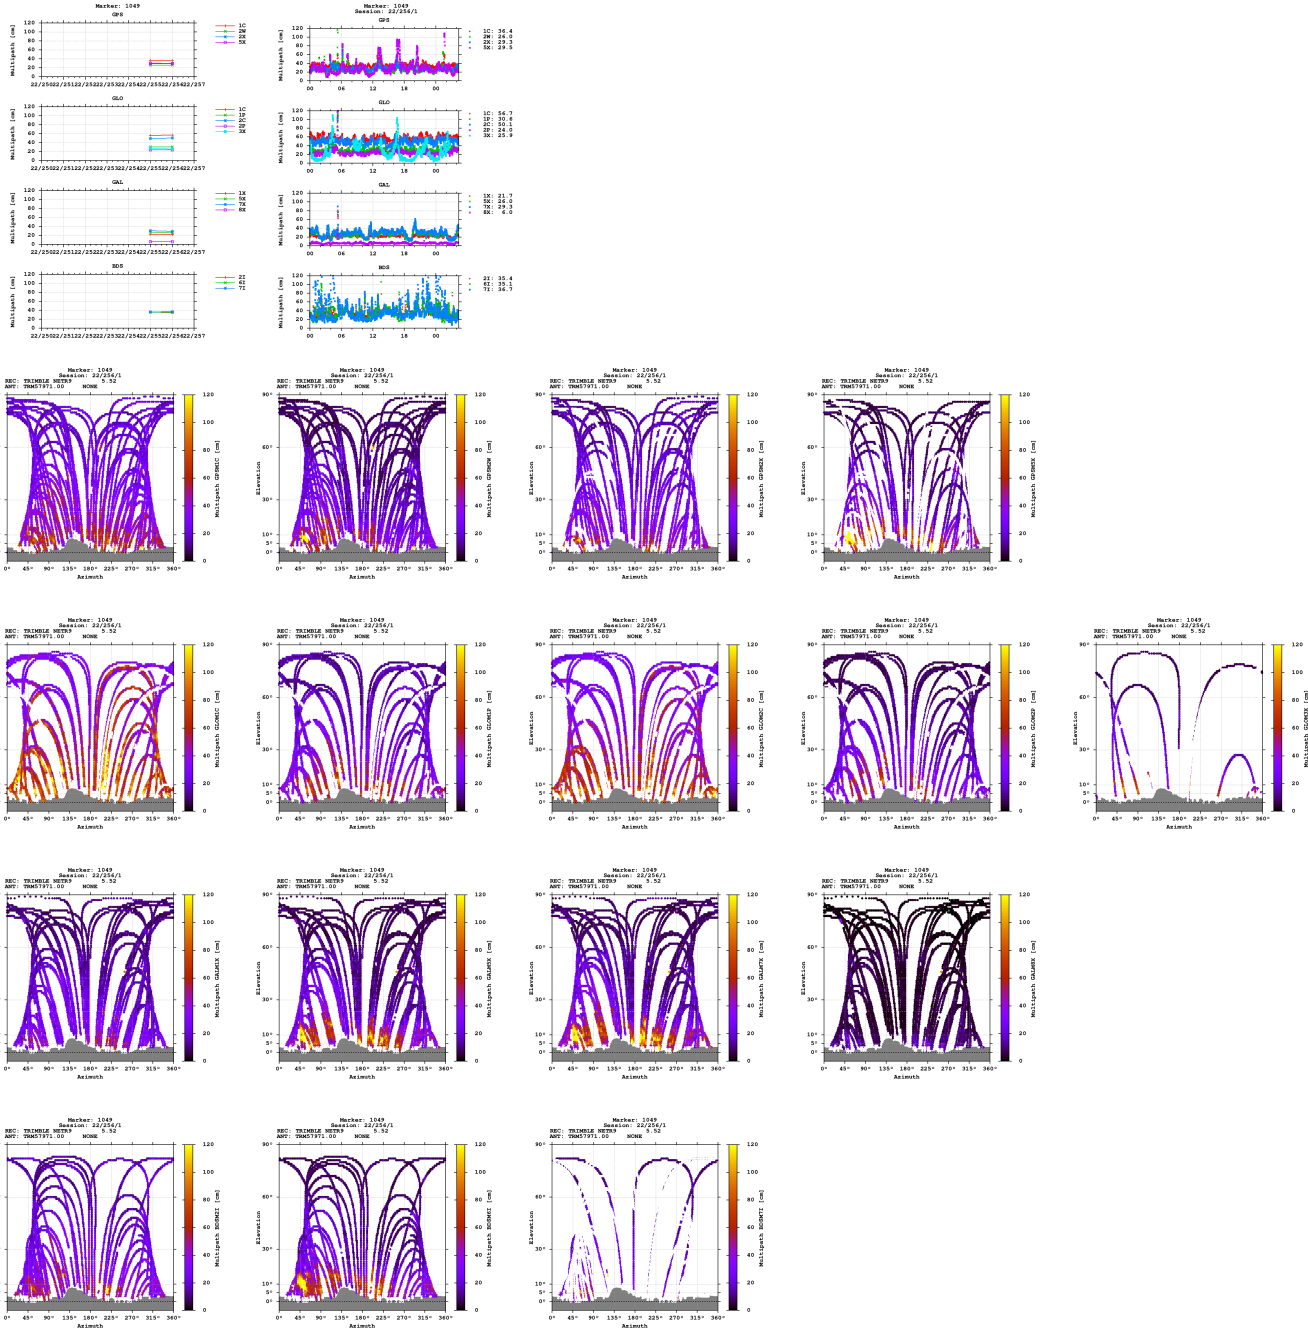


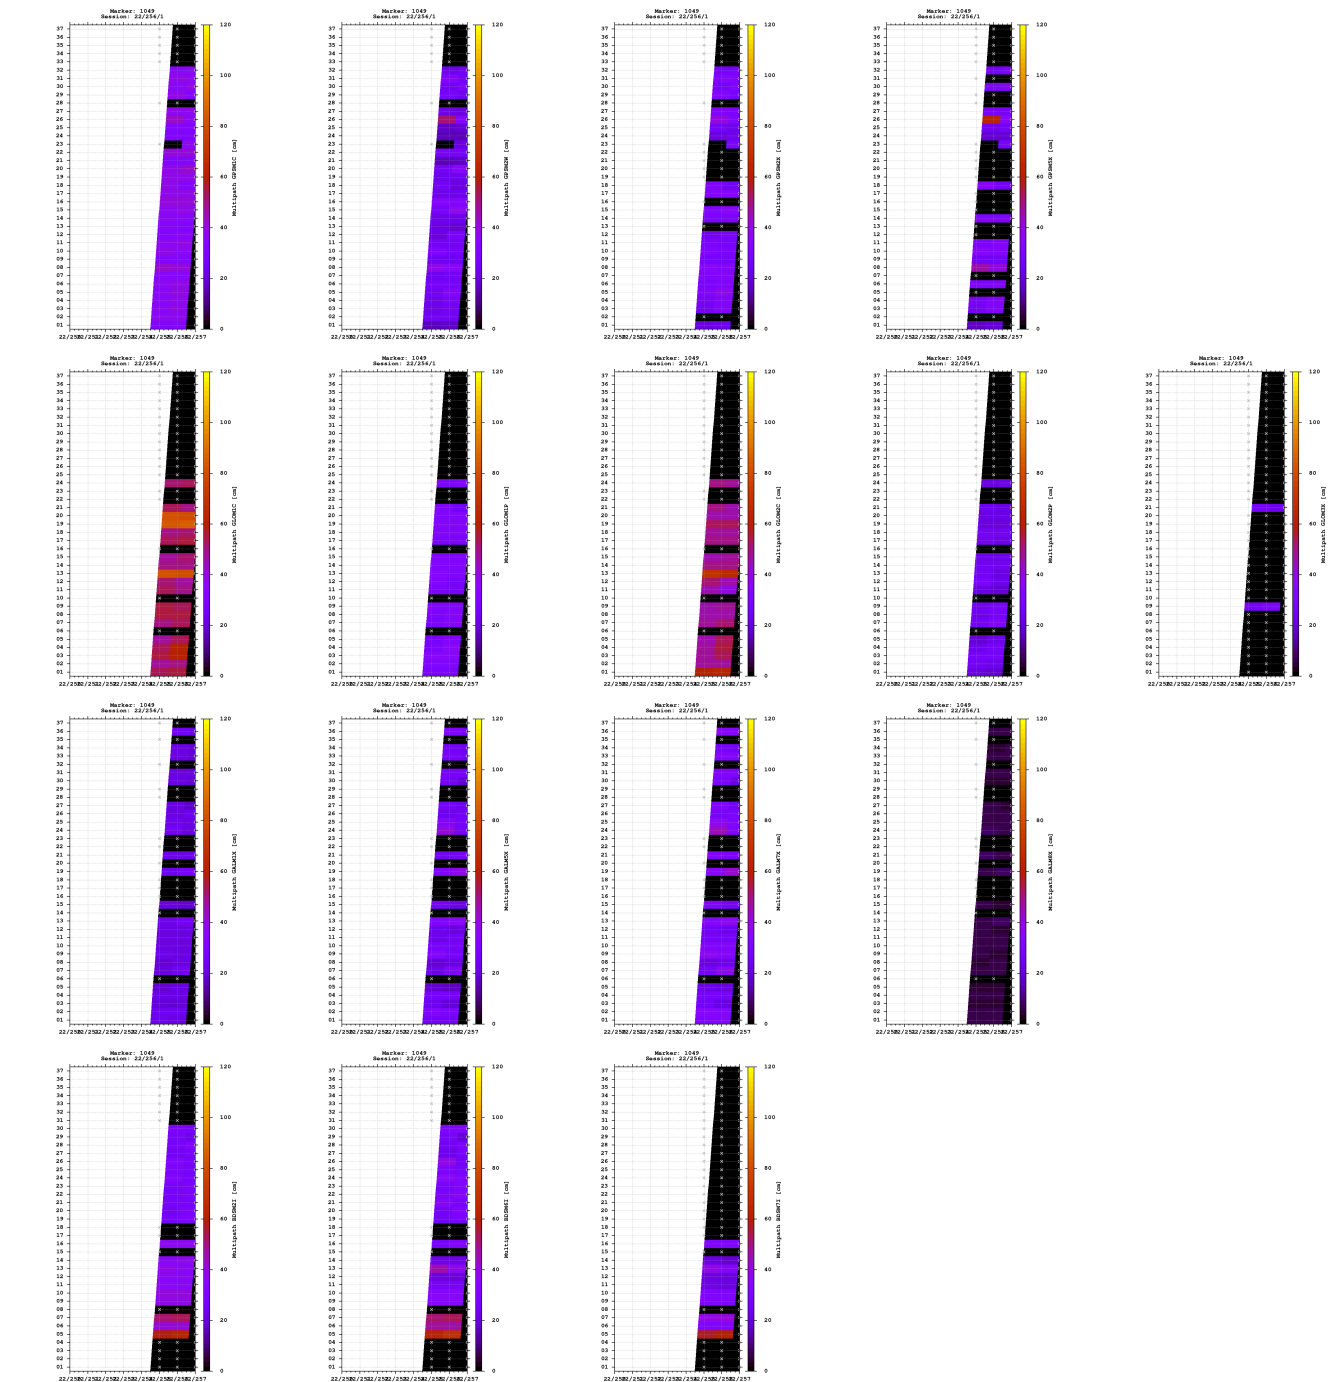


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

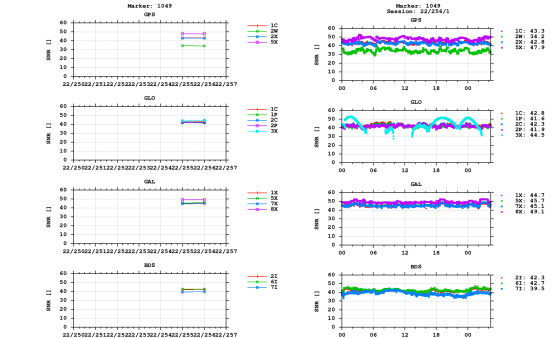


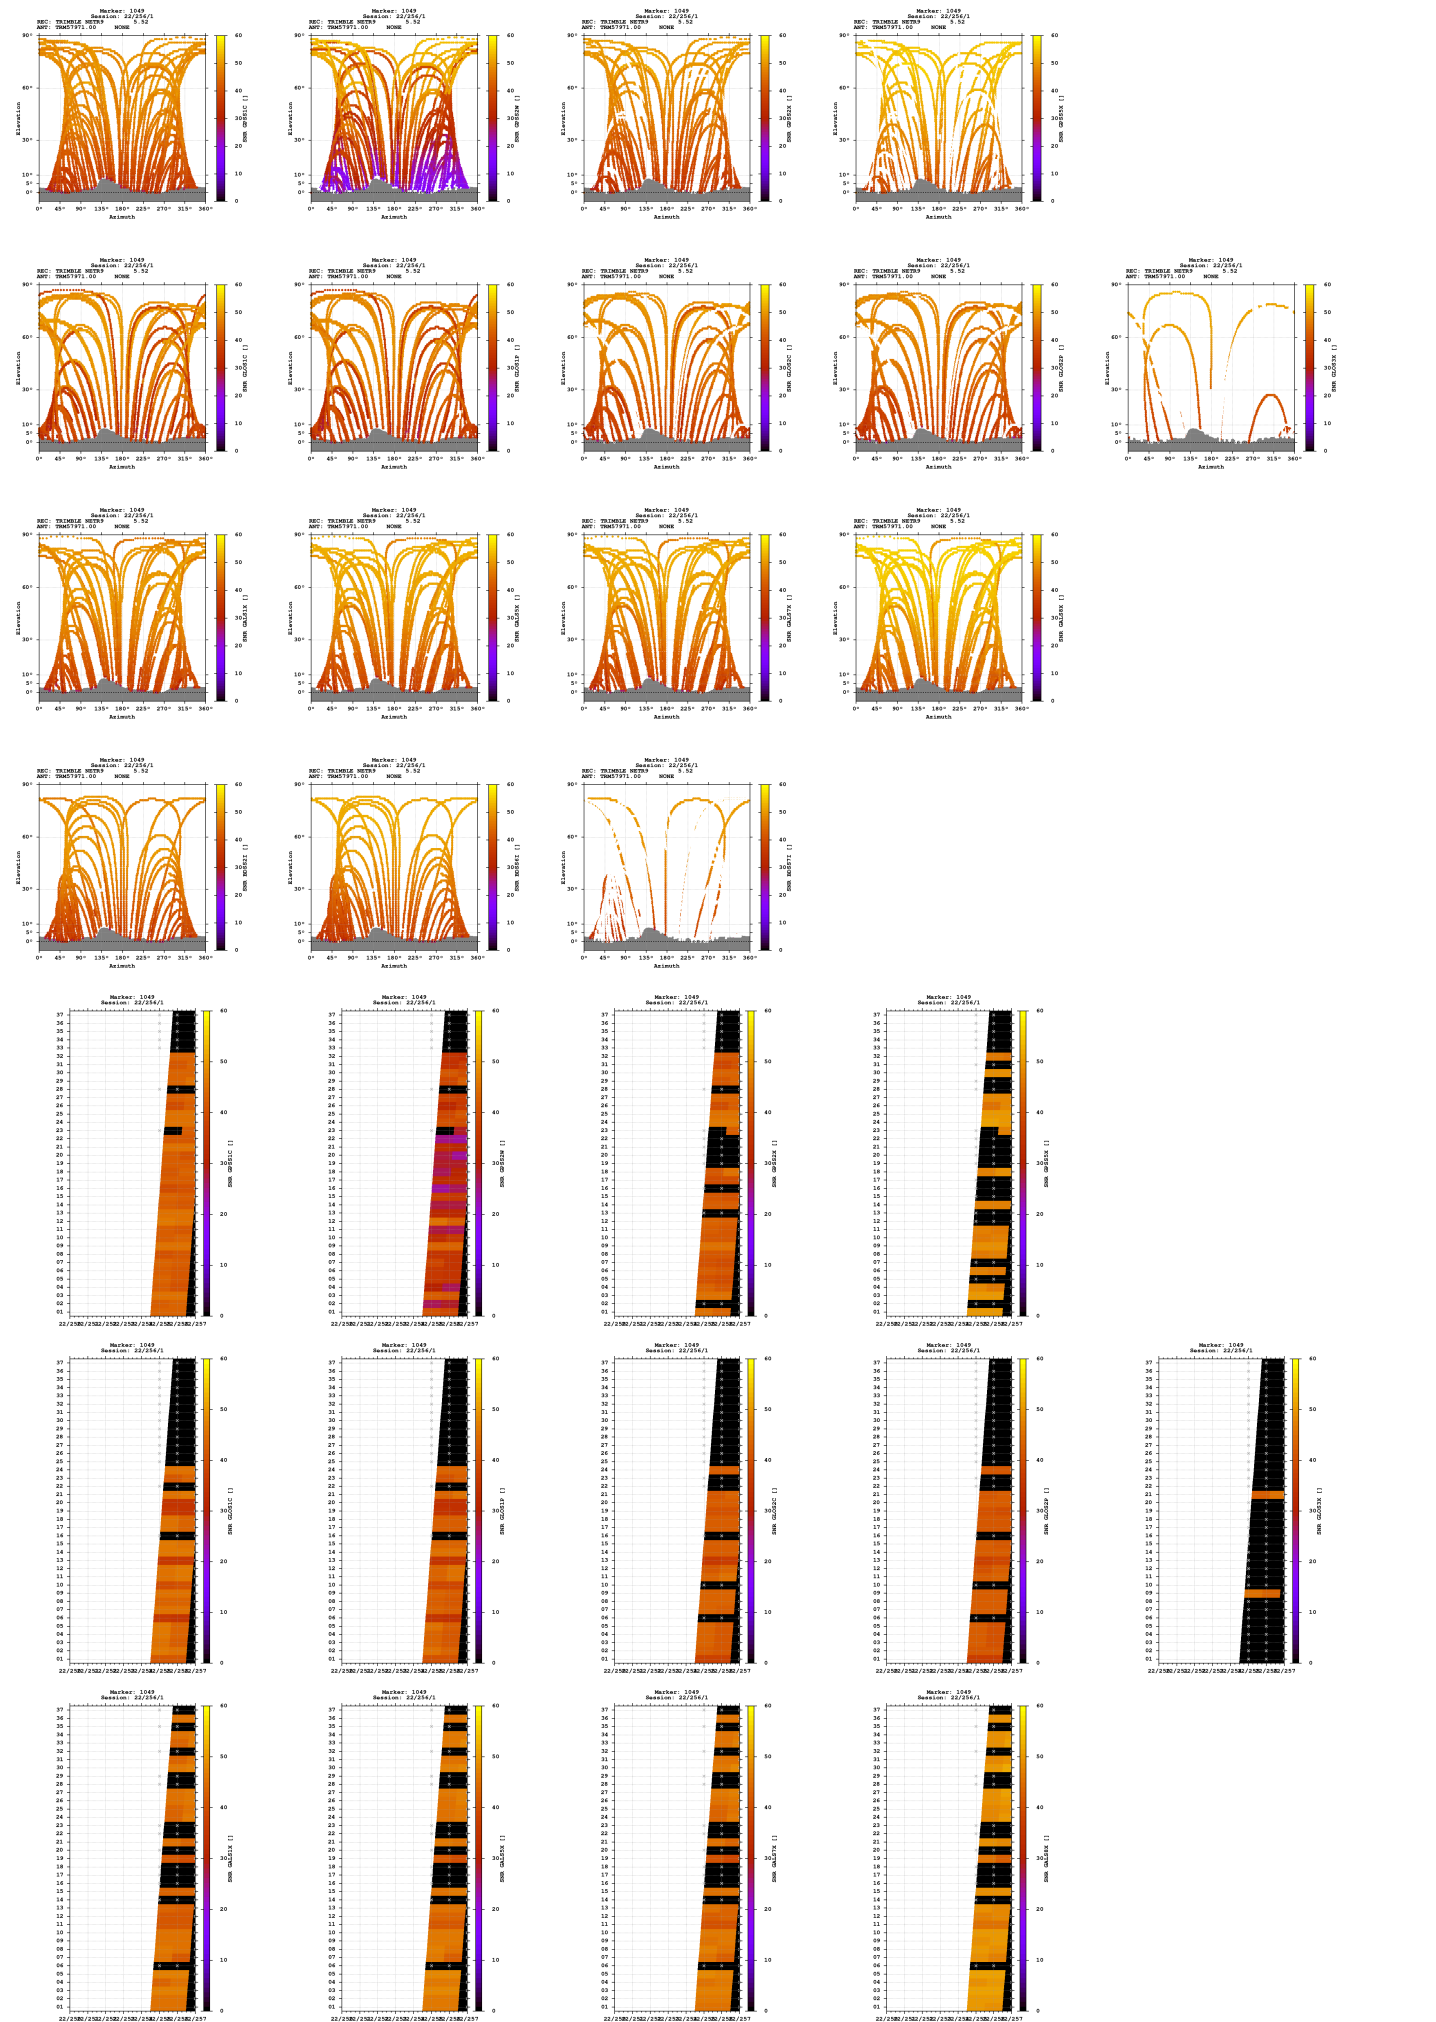

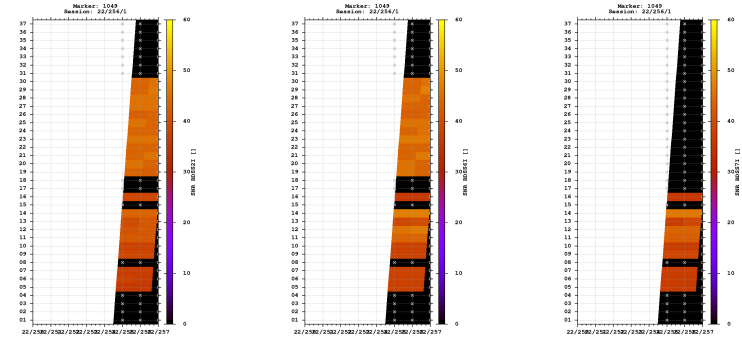



Estimates

2022-09-12 07:58:00	GPS	4269488.3400	604674.3888	4684421.3026	47.561569148	8.061012396	408.7119
2022-09-12 07:58:00	GLO	4269489.3629	604673.9119	4684422.7901	47.561571896	8.061004216	410.4480
2022-09-12 07:58:00	GAL	4269488.2911	604674.1799	4684421.2382	47.561569273	8.061009738	408.6120
2022-09-12 07:58:00	BDS	4269488.2104	604673.8153	4684425.0180	47.561593081	8.061005092	411.3131

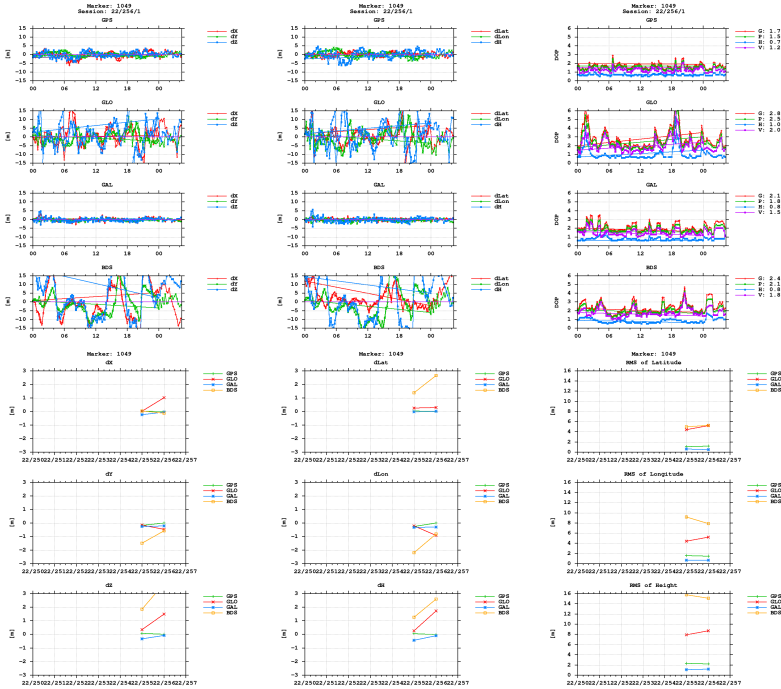

BNC

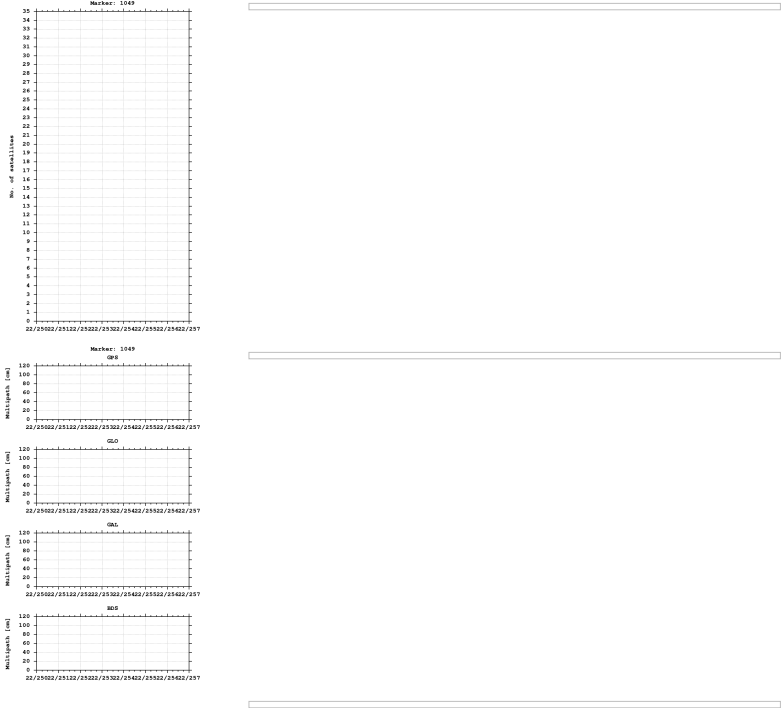

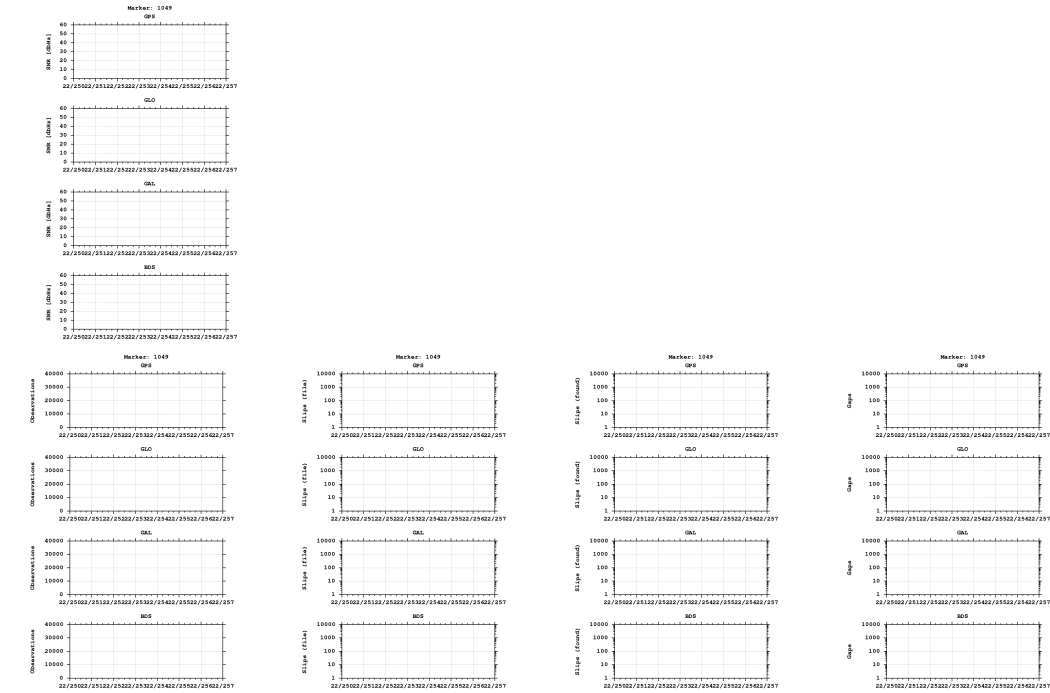

Equipment

2022-09-12 00:00:00 TRIMBLE NETR9 5.52 518 TRM57971.00 NONE 518

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)