

GNSS observation file monitoring for 0518

Last RINEX file: 05182571.220

RINEX version: 3.02

Marker: 1067

Receiver: 518

Antenna: 518


TRIMBLE NETR9

5.52

TRM57971.00


NONE

Epochs

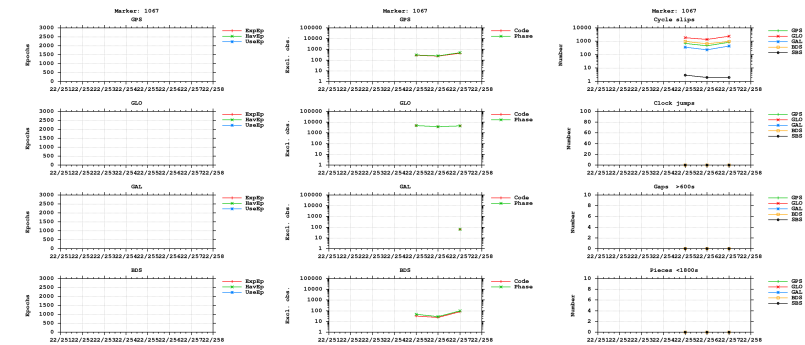



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

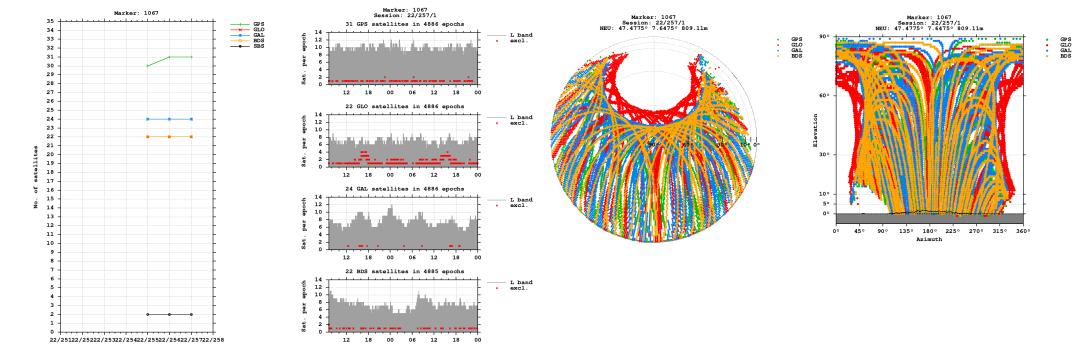


Bands

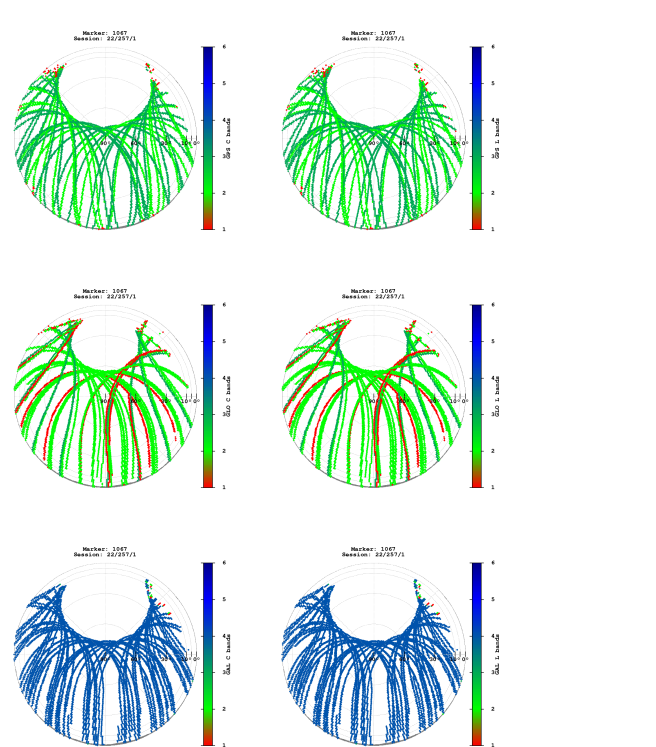


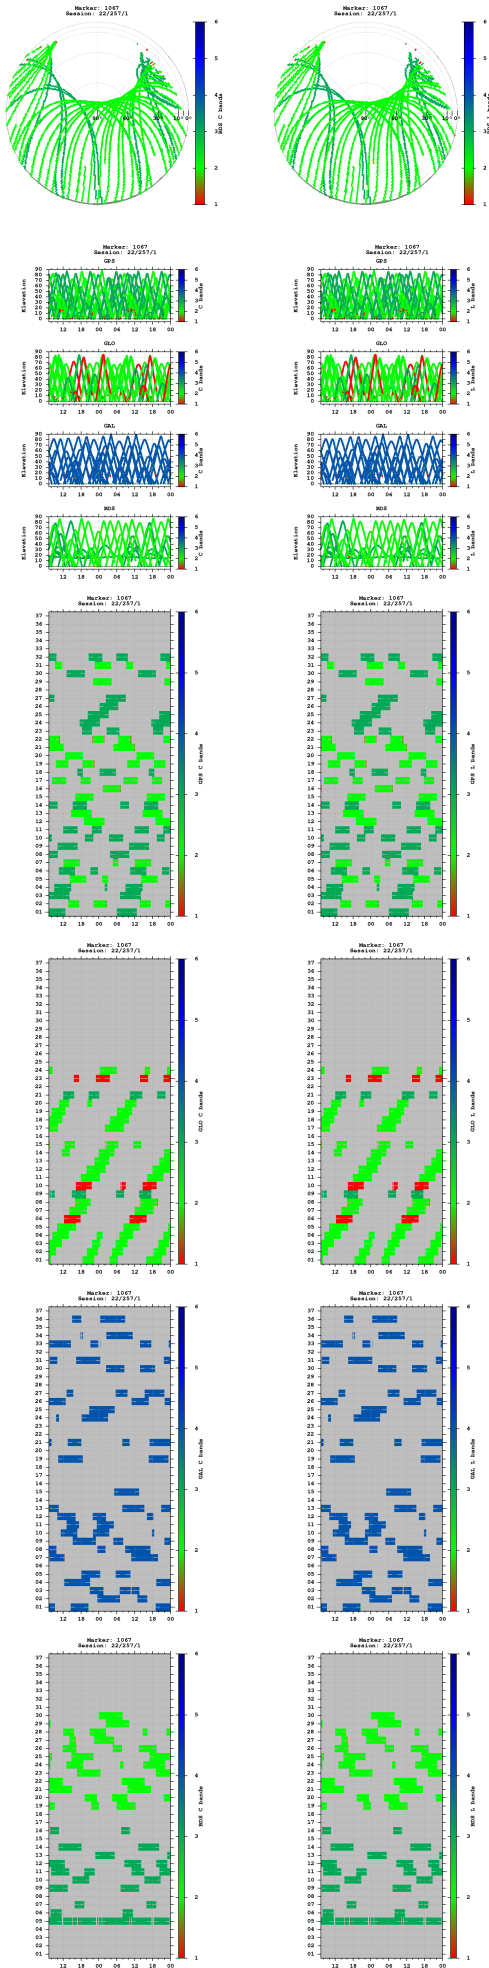


Observations

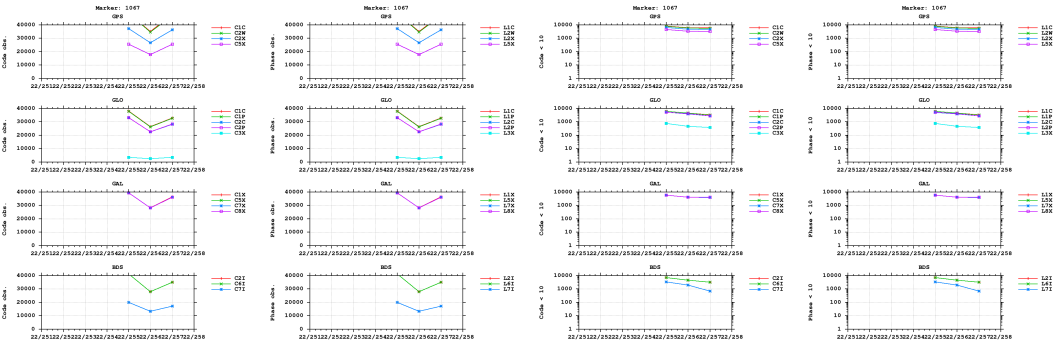


Multipath

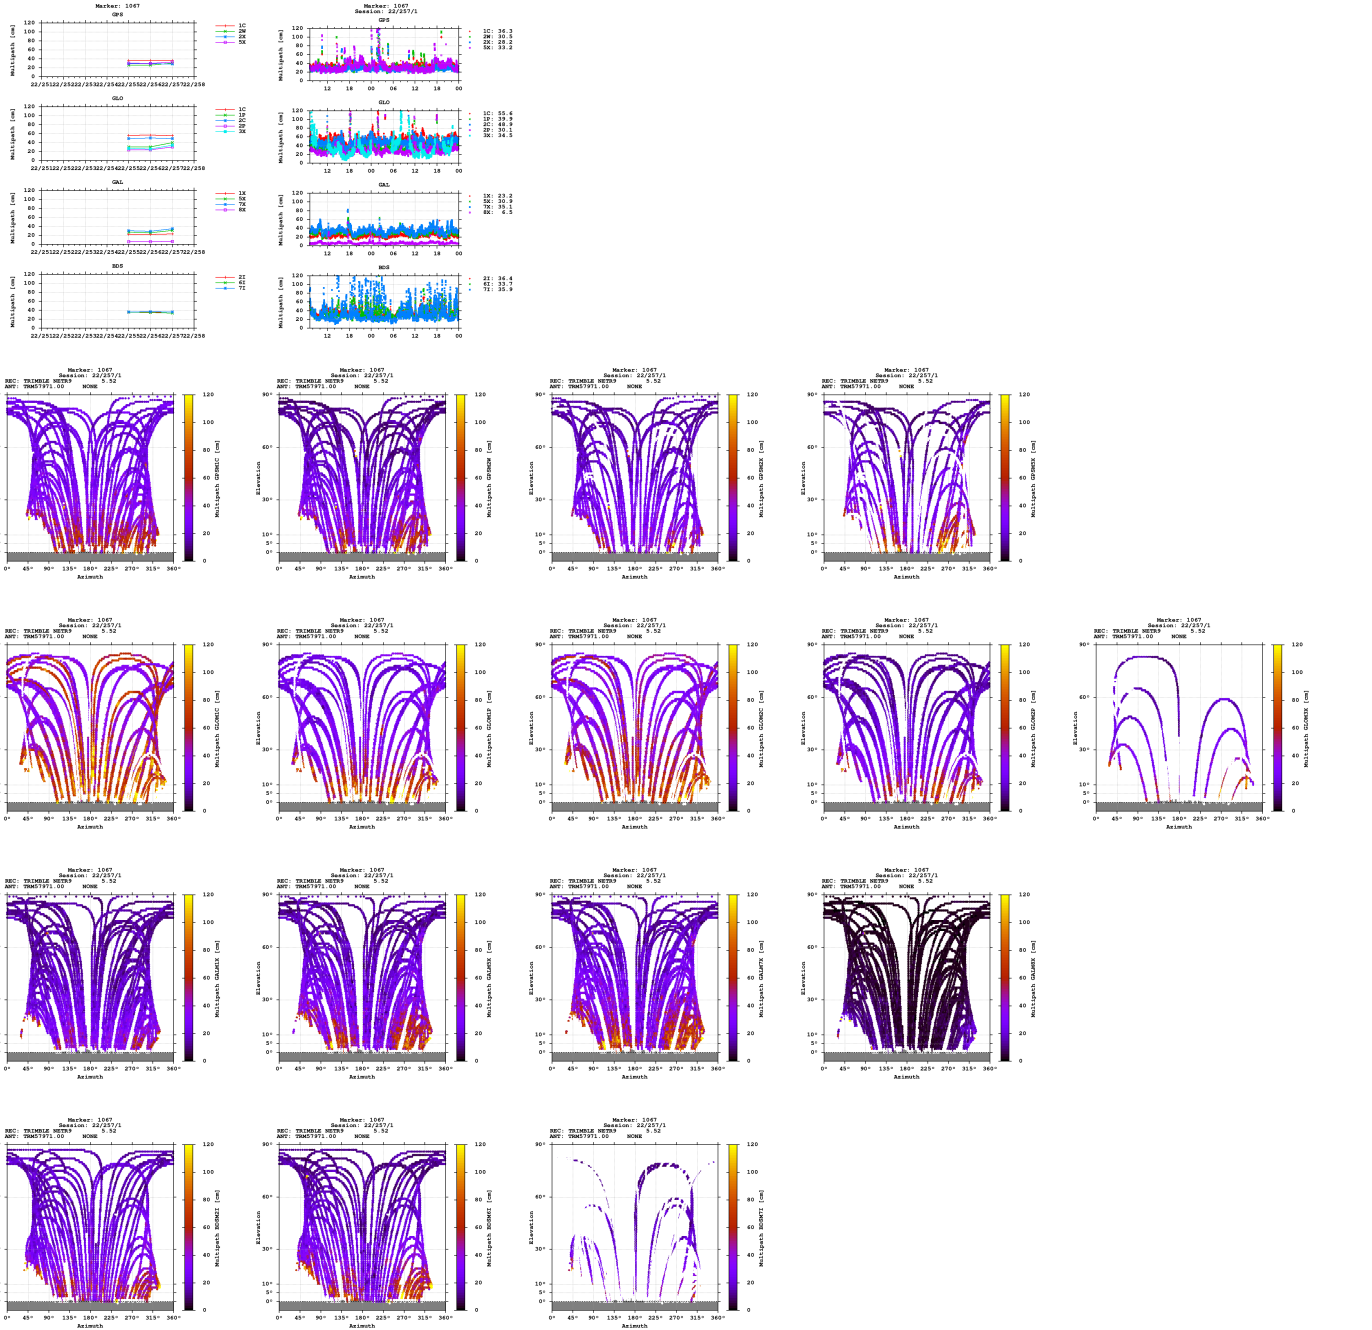


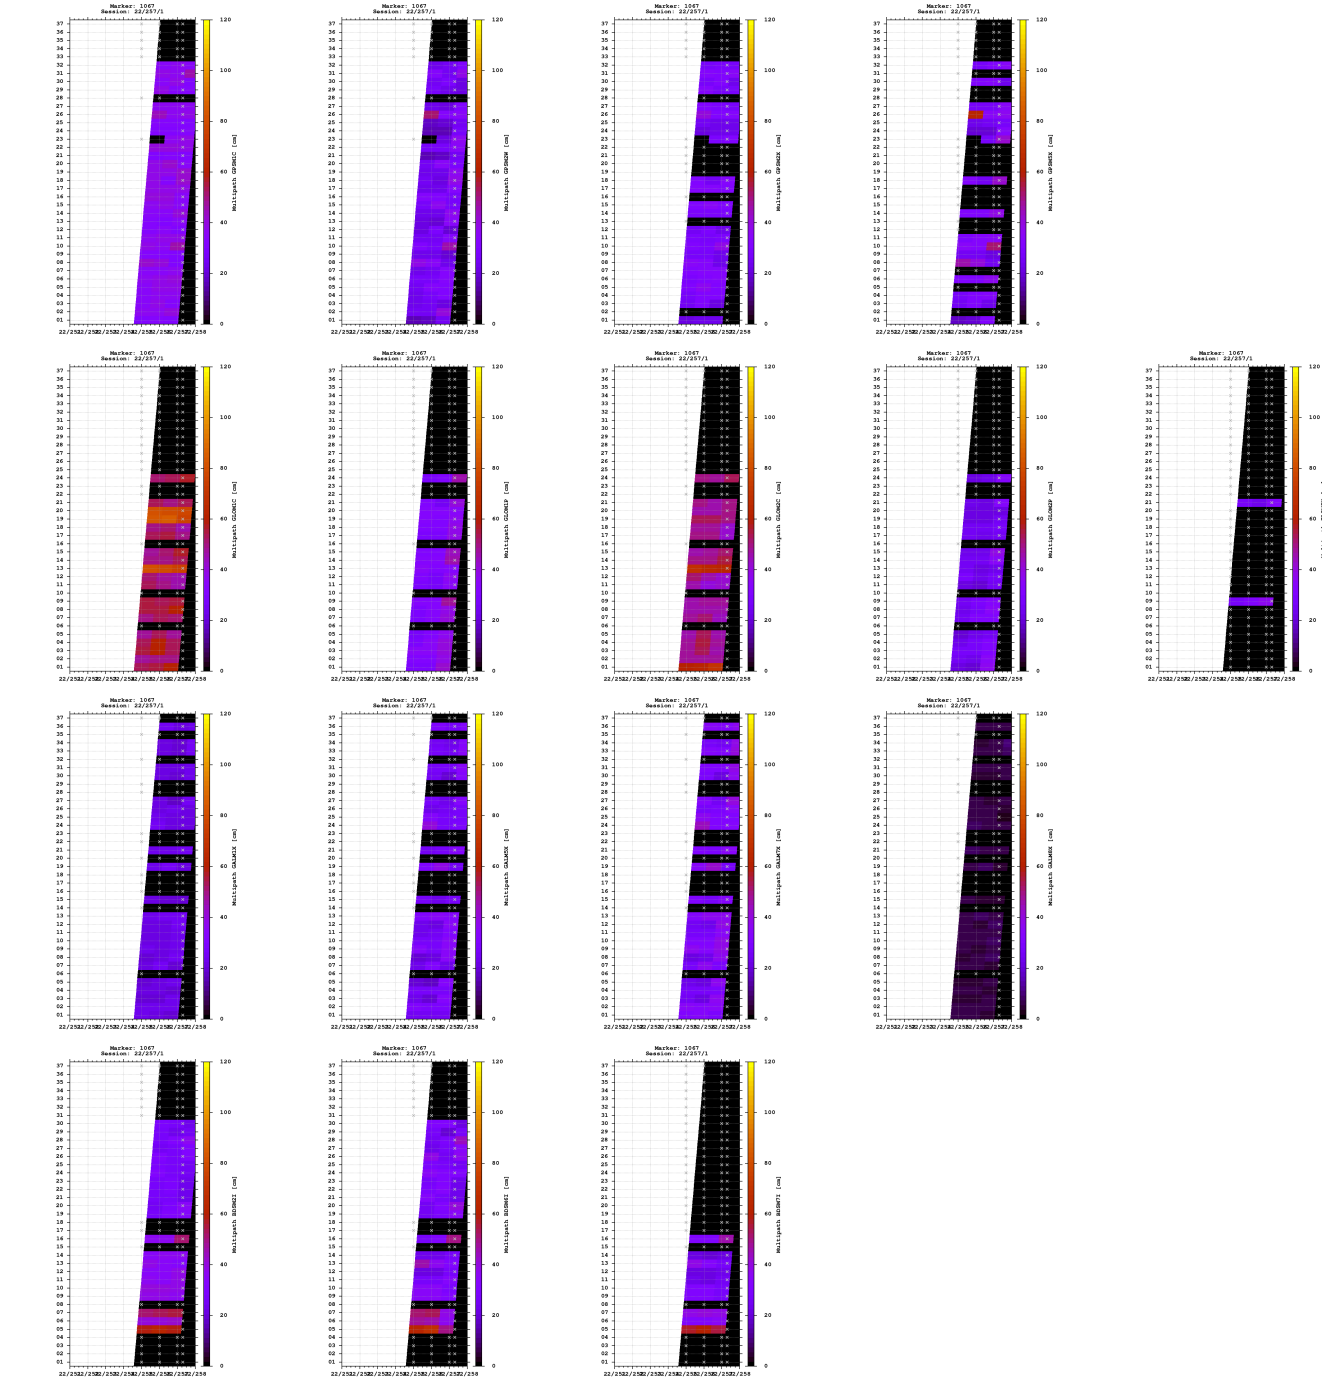


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

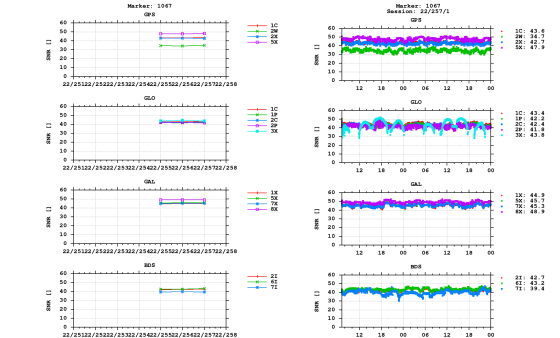


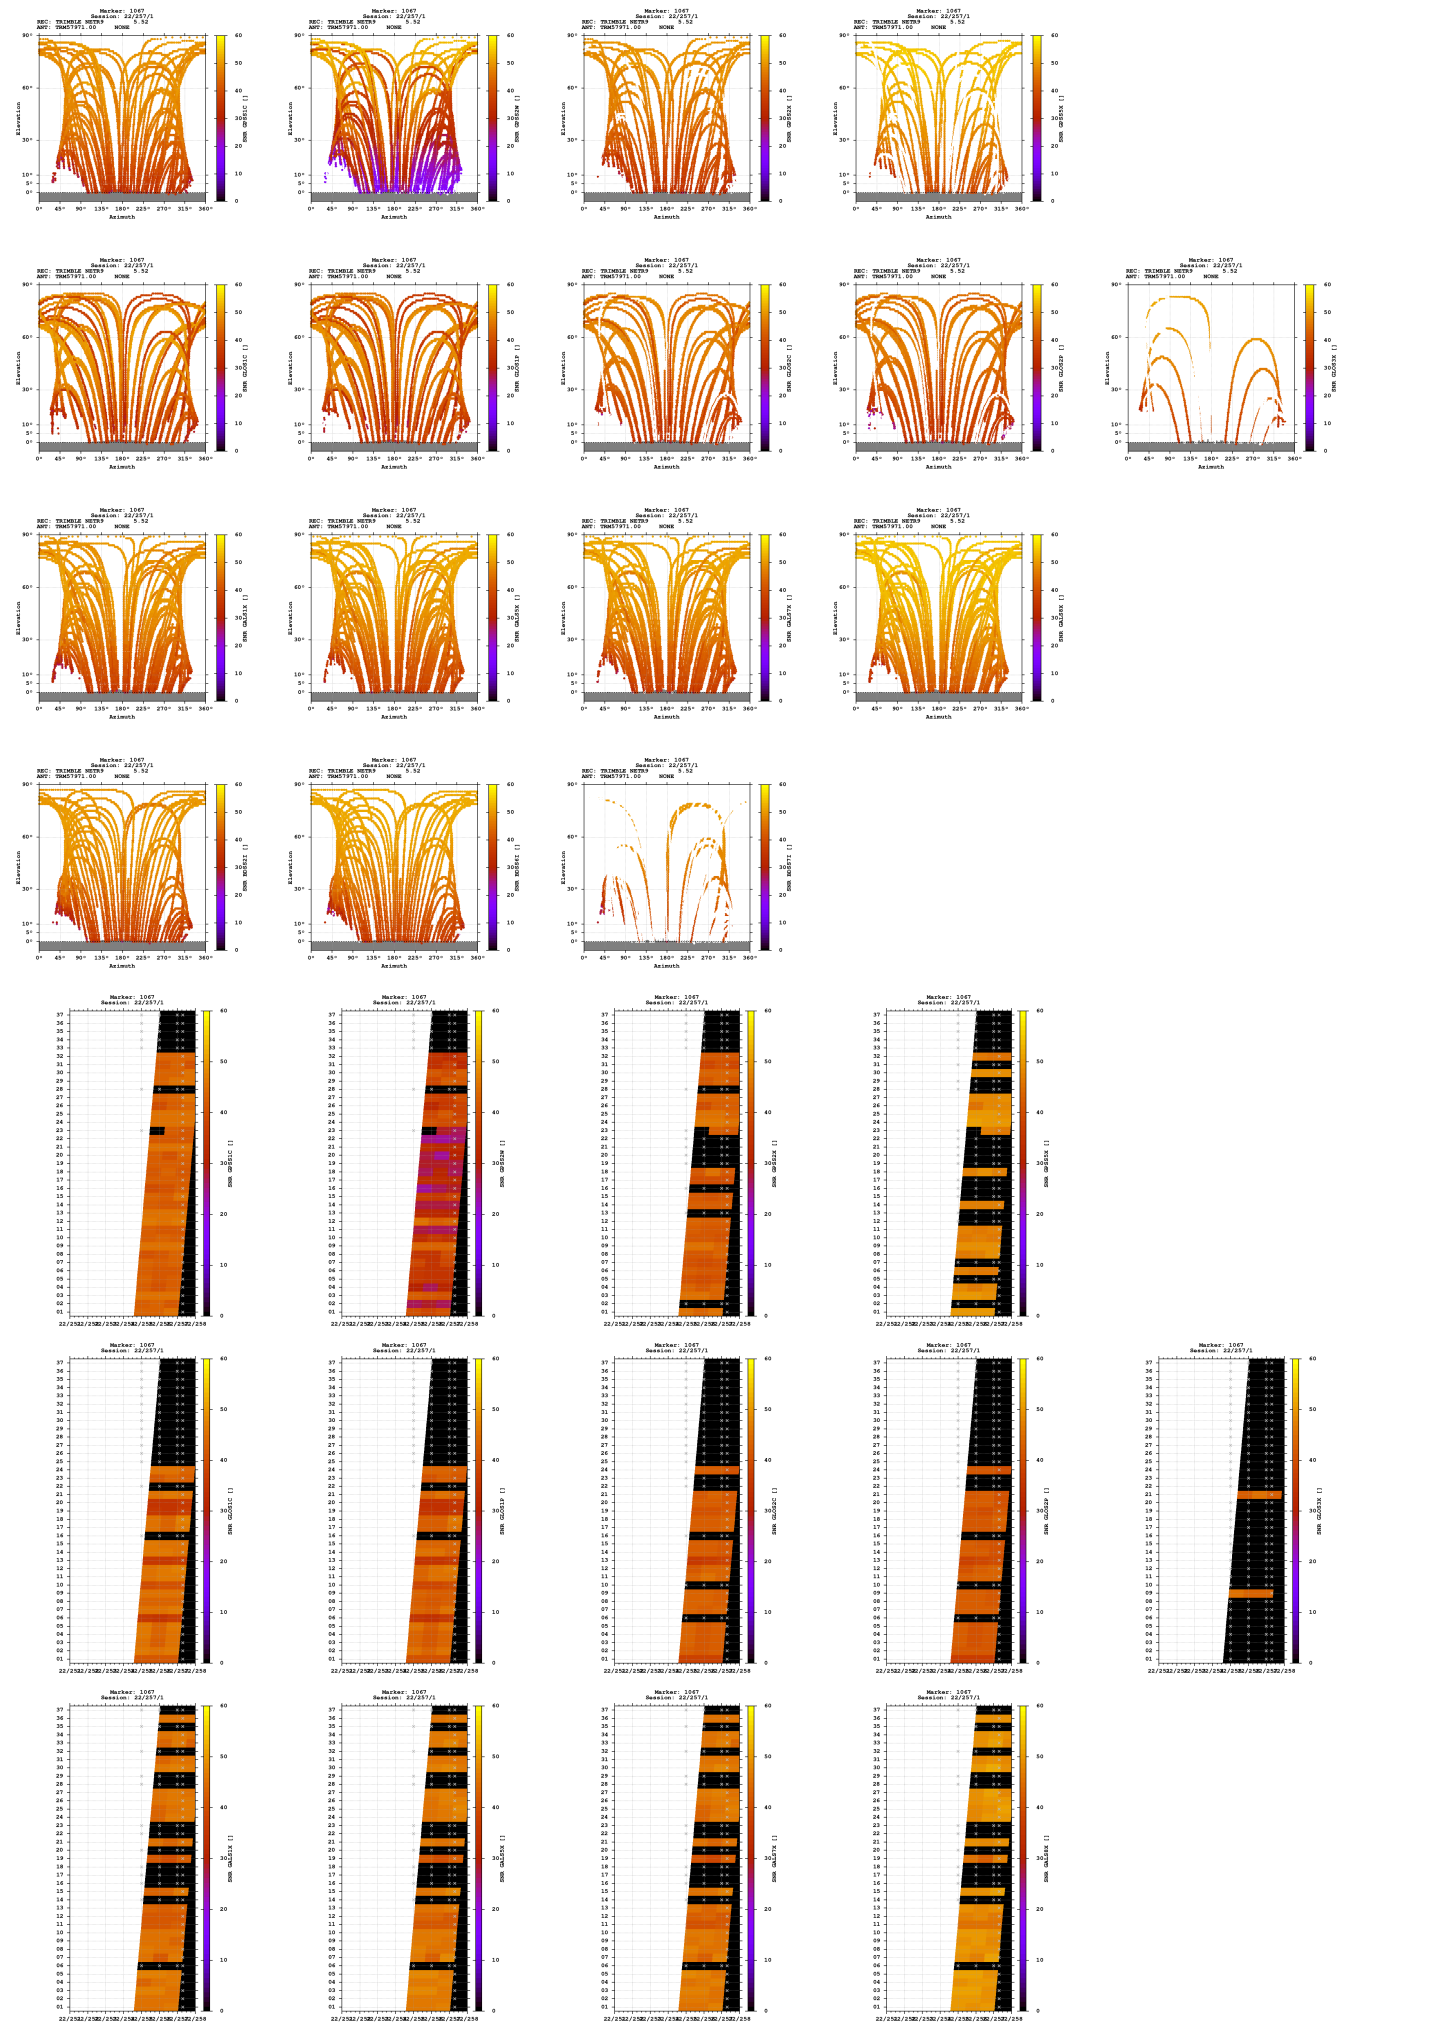

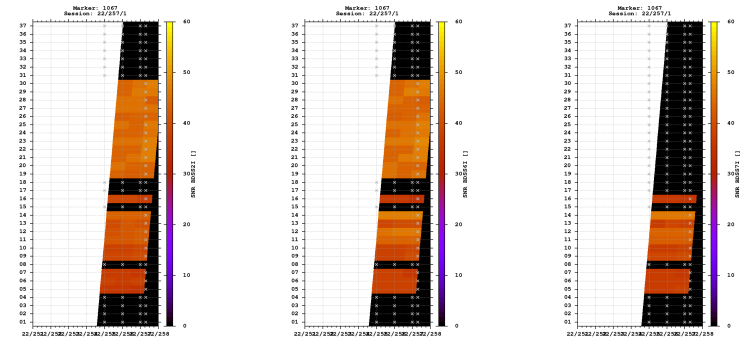



Estimates

2022-09-14 07:13:30	GPS	4280839.9270	574796.2480	4678405.7672	47.477527750	7.647469998	809.1131
2022-09-14 07:13:30	GLO	4280839.6428	574795.1976	4678405.5506	47.477529227	7.647456689	808.6686
2022-09-14 07:13:30	GAL	4280839.6693	574796.2078	4678405.5420	47.477528110	7.647469924	808.7709
2022-09-14 07:13:30	BDS	4280839.7393	574797.2020	4678406.9887	47.477535566	7.647482871	809.9735

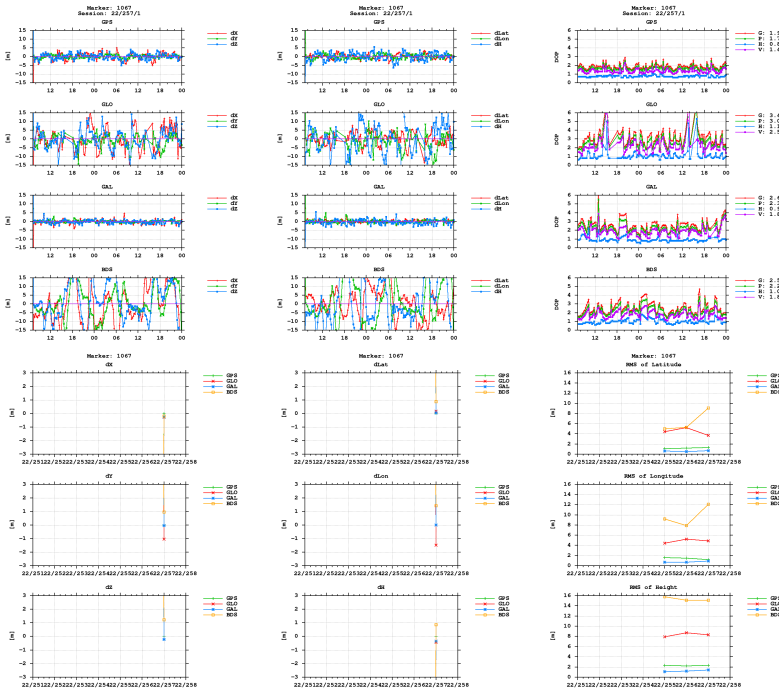

BNC

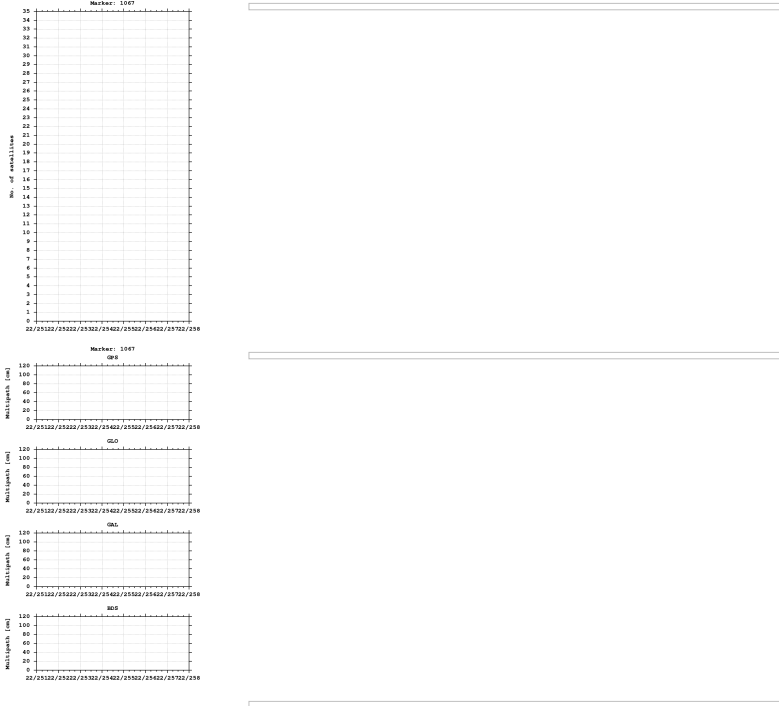

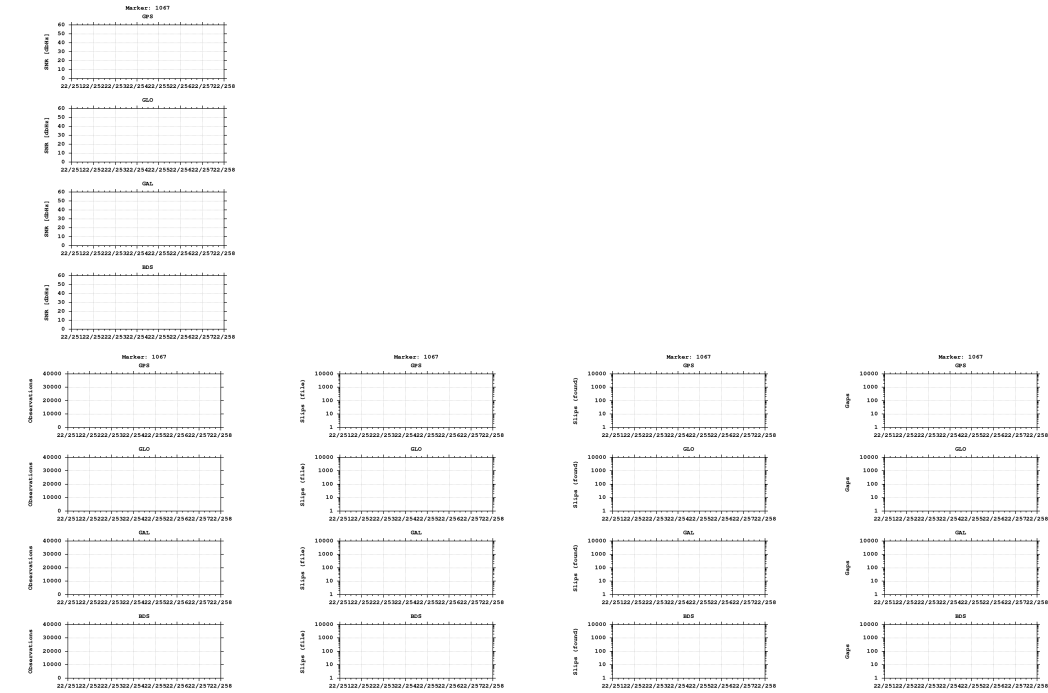

Equipment

2022-09-12 00:00:00 TRIMBLE NETR9 5.52 518 TRM57971.00 NONE 518

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)