


GNSS observation file monitoring for 0518


Last RINEX file: 05182581.220
RINEX version: 3.02
Marker: 1067
Receiver: 518 TRIMBLE NETR9 5.52
Antenna: 518 TRM57971.00 NONE

Epochs

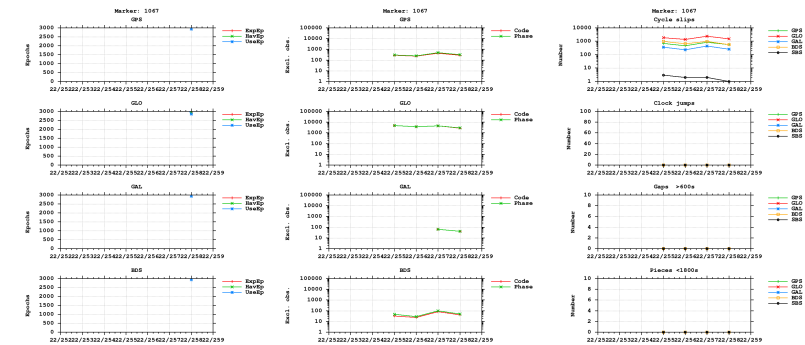



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

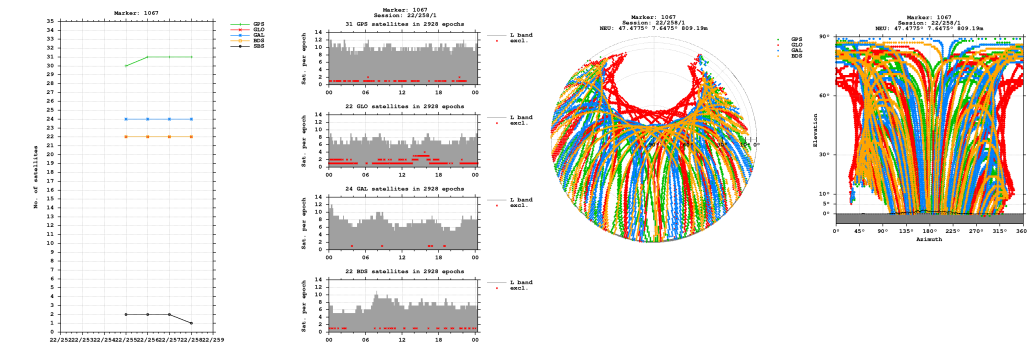


Bands

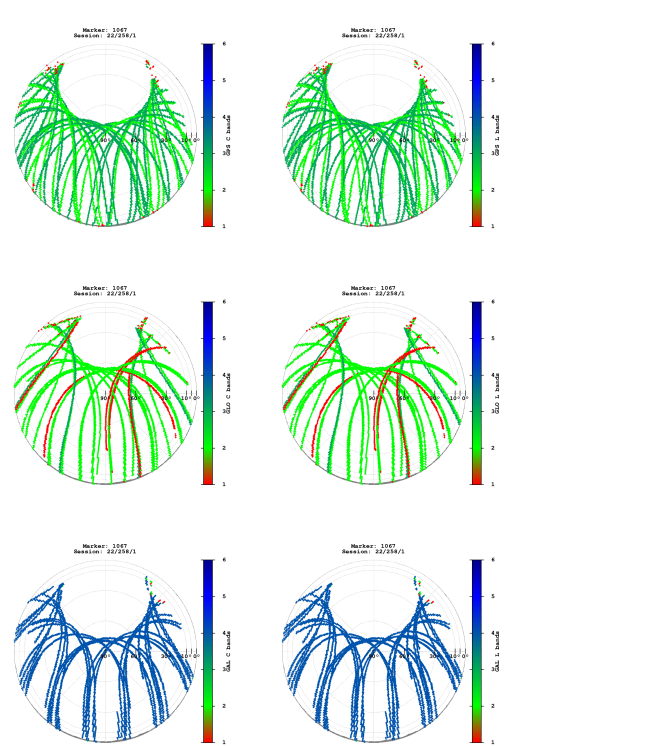


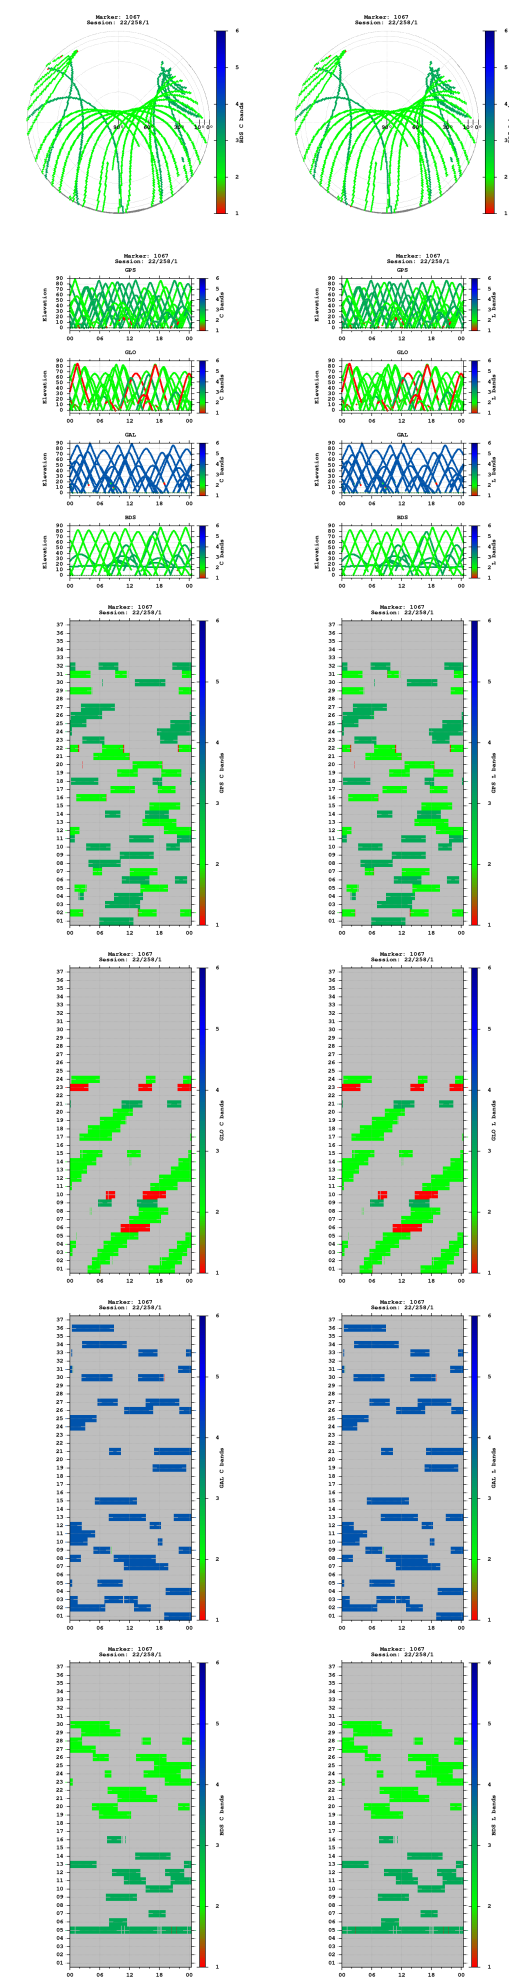


Observations

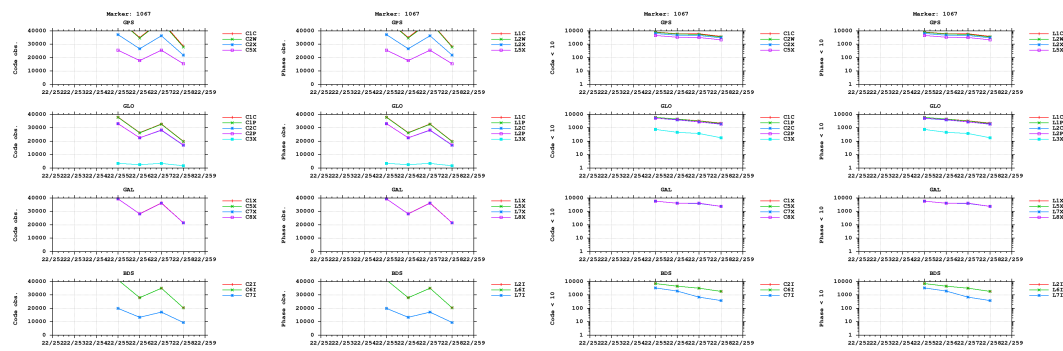


Multipath

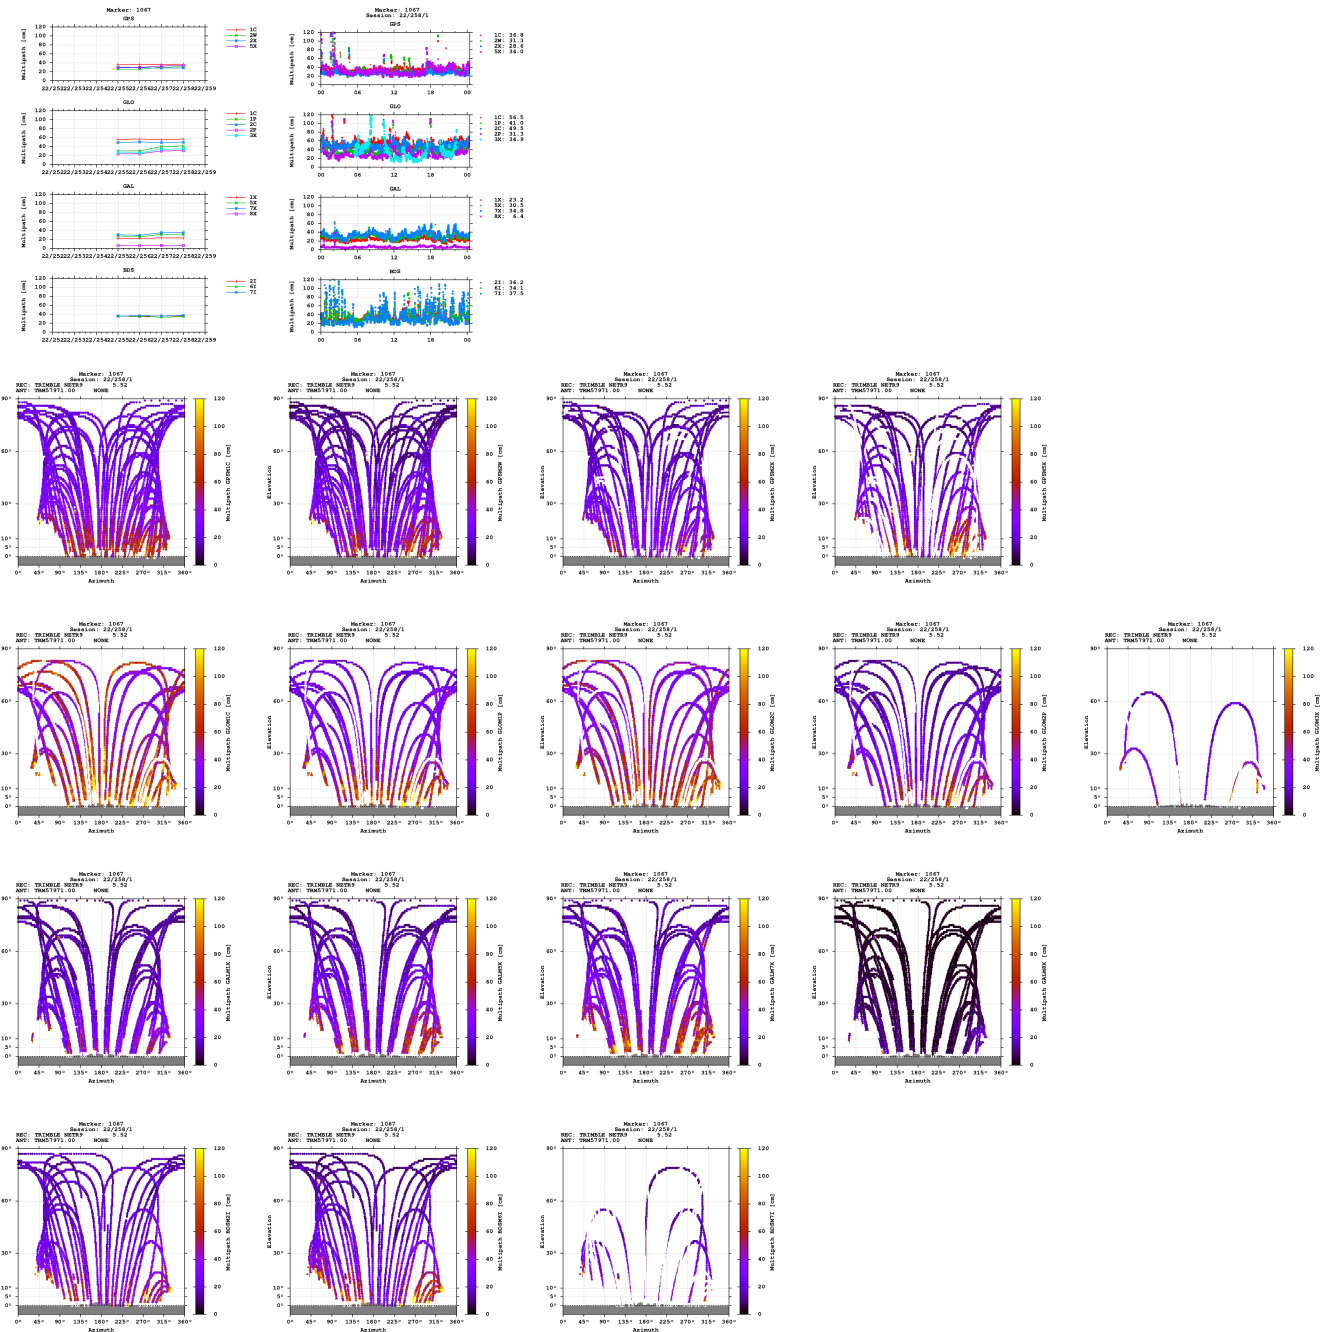


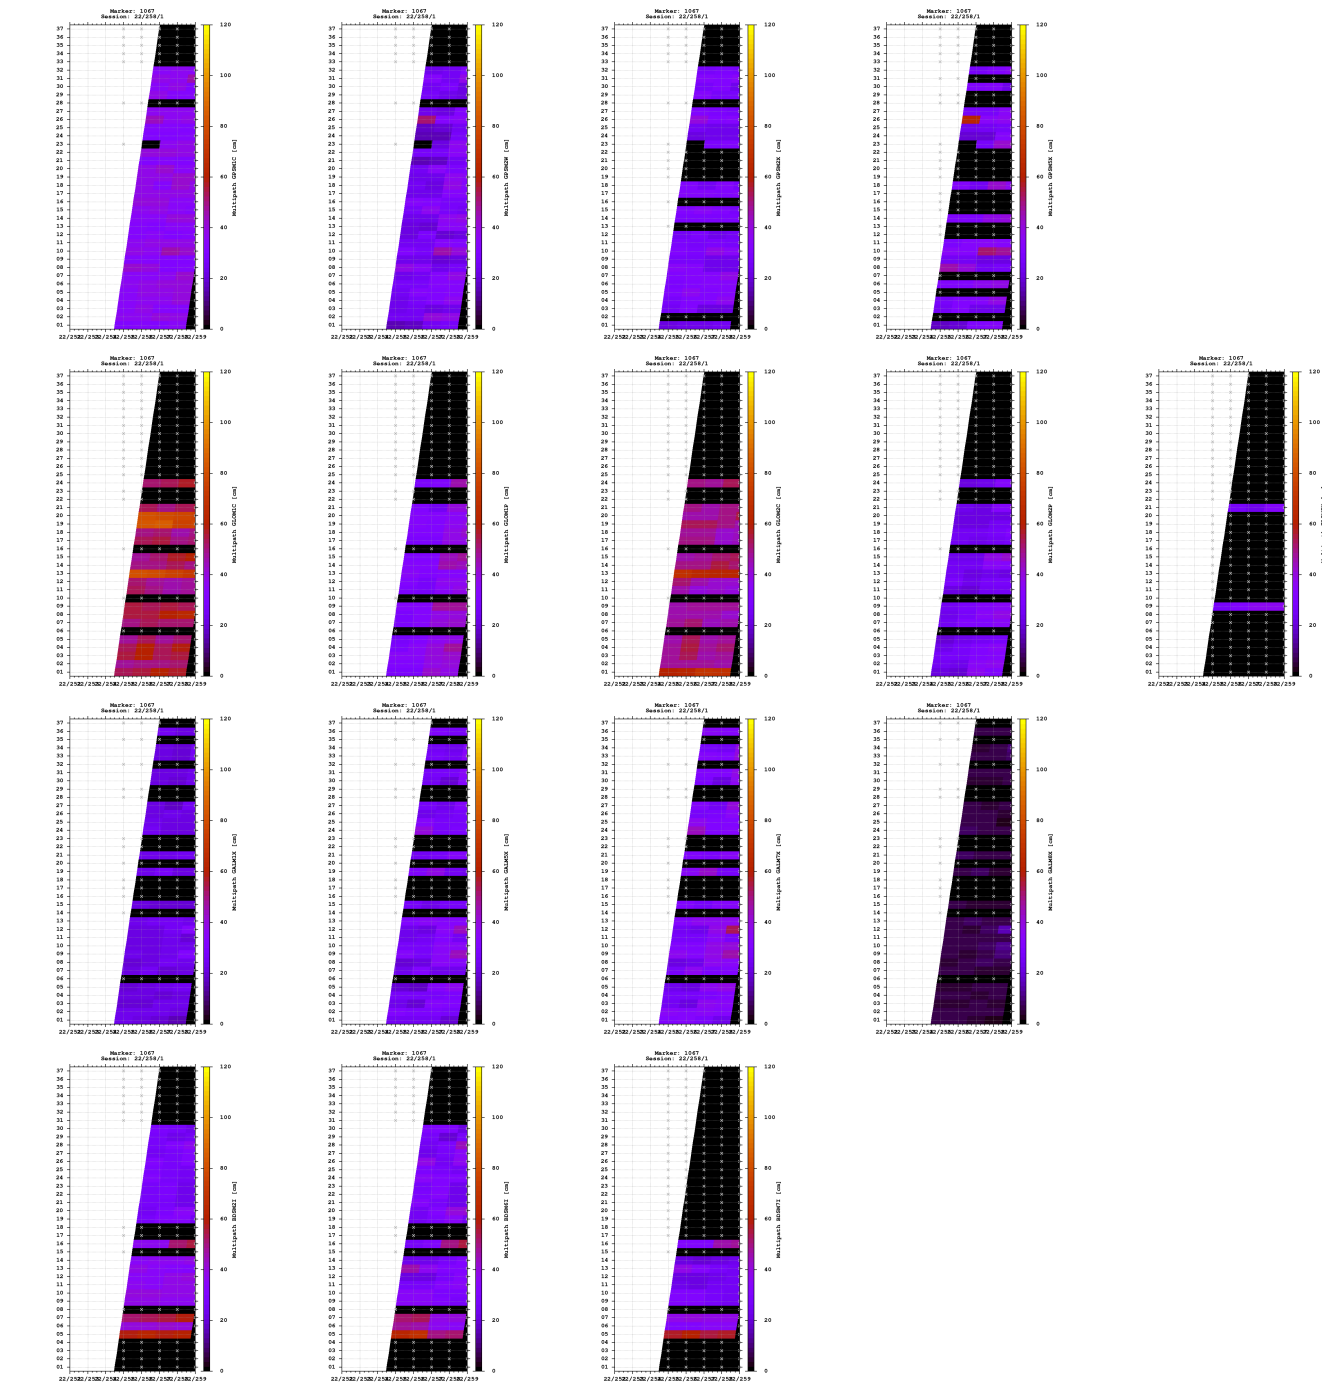


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

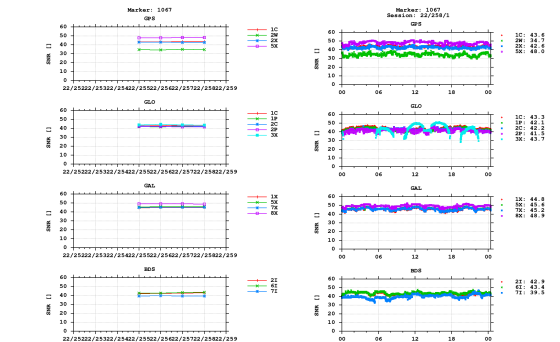


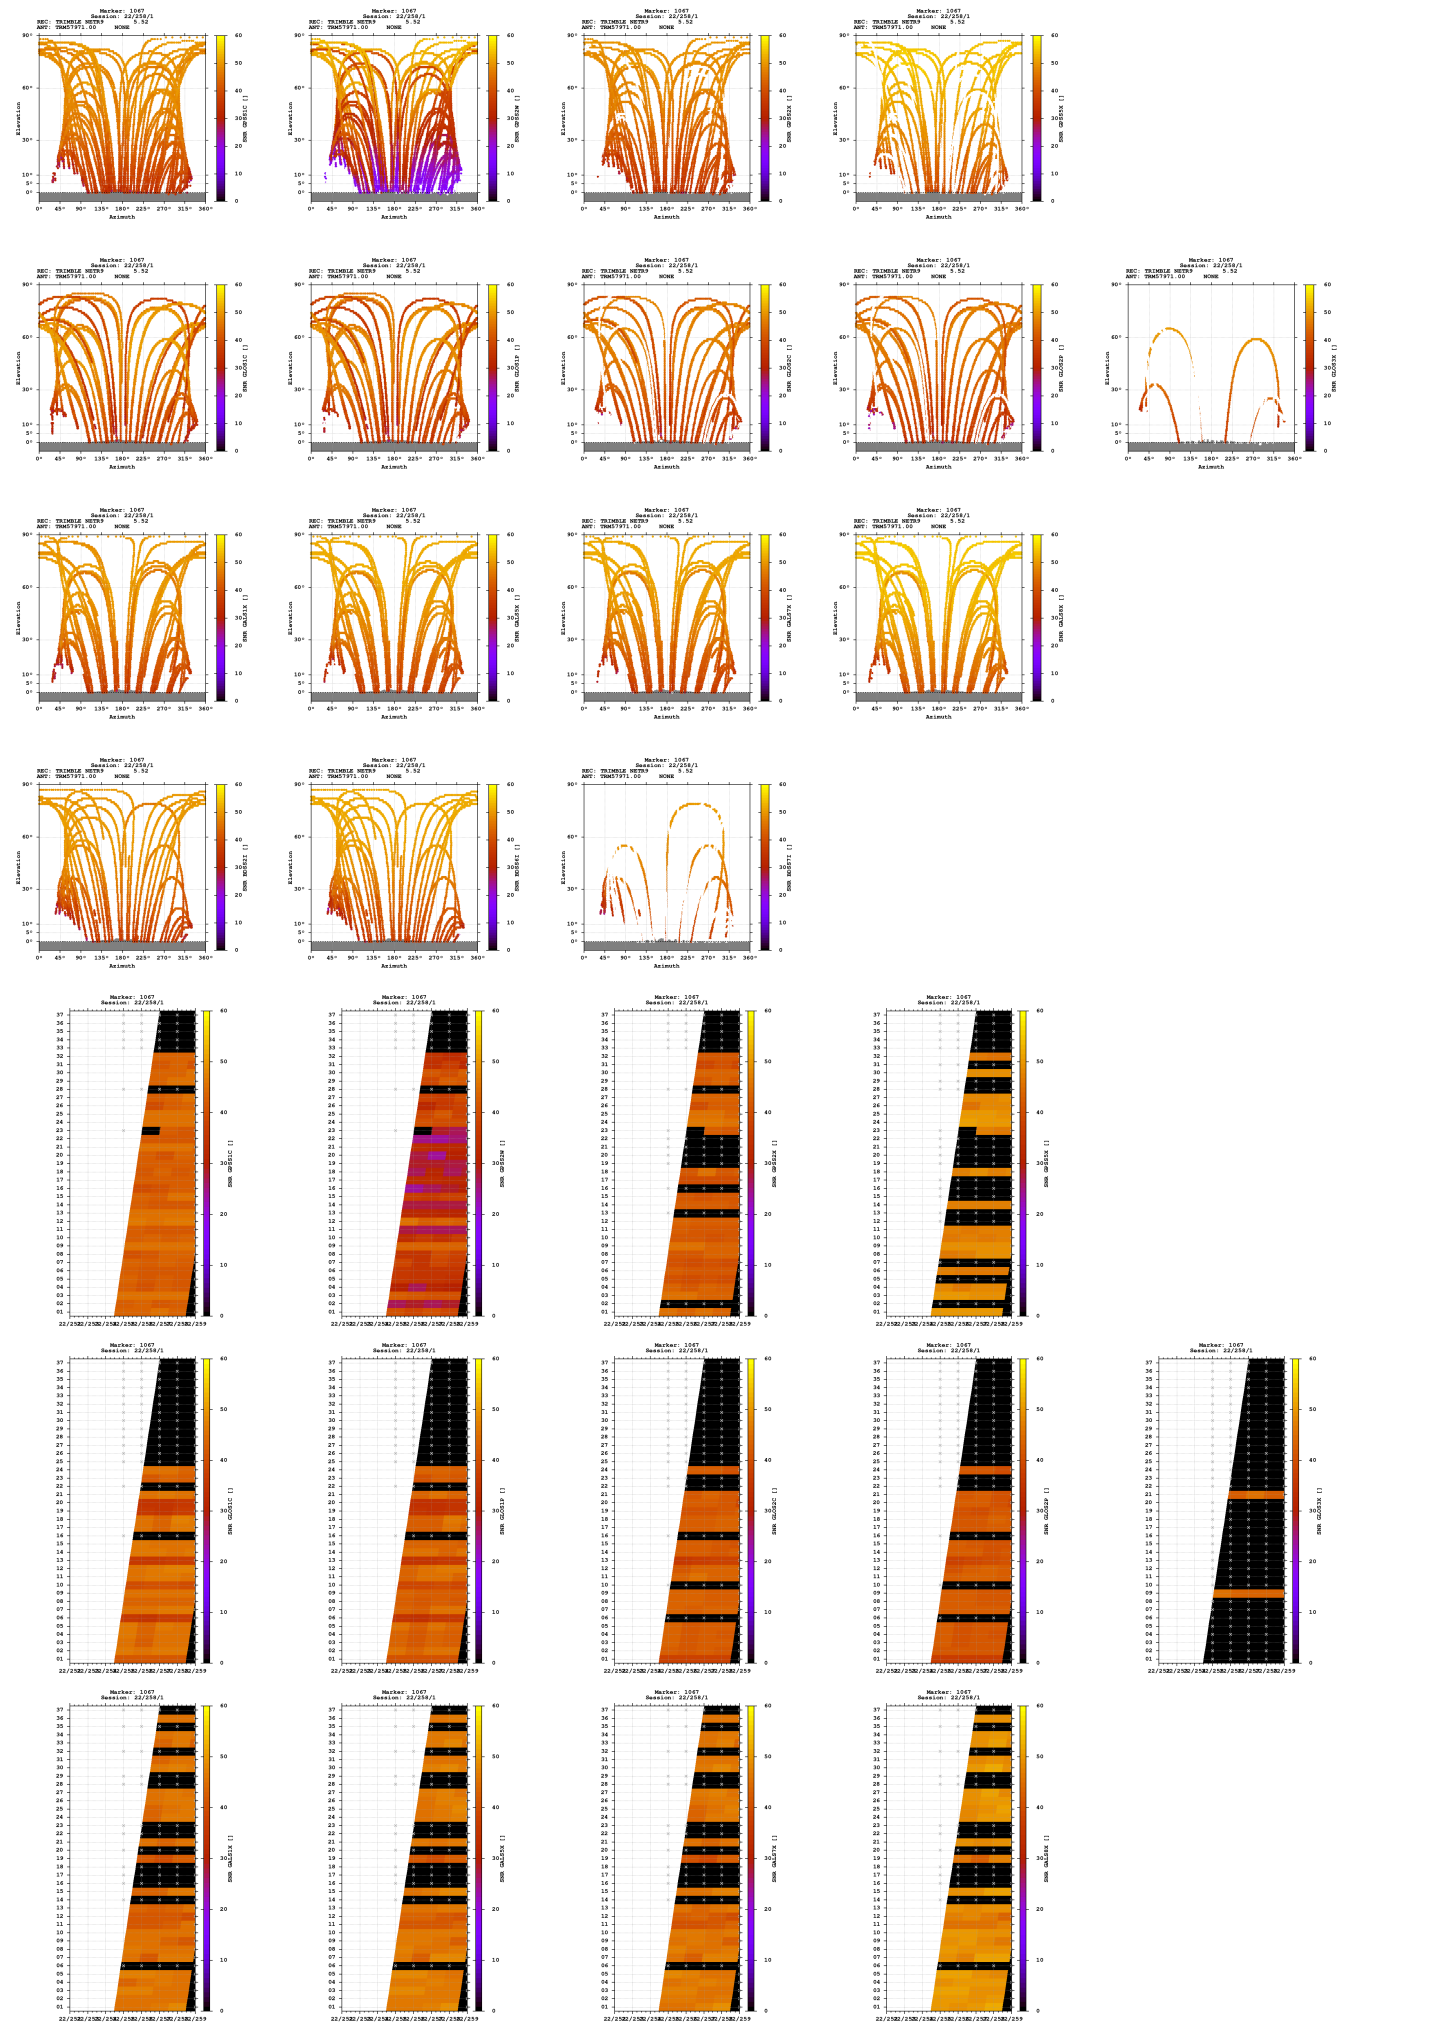

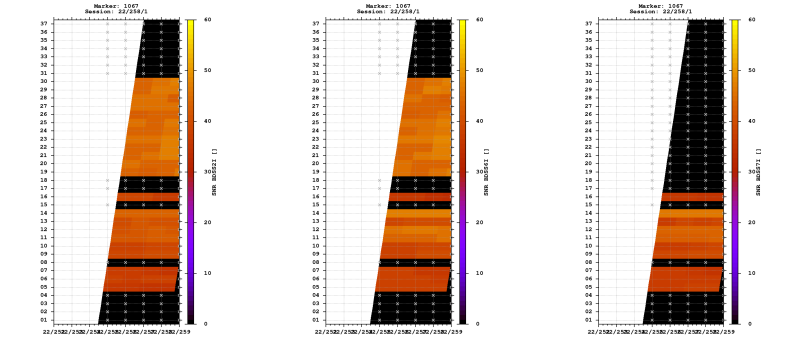


Estimates

2022-09-14 07:13:30	GPS	4280840.0202	574796.2539	4678405.7835	47.477527232	7.647469911	809.1881
2022-09-14 07:13:30	GLO	4280840.0708	574795.3407	4678405.8185	47.477527918	7.647457815	809.1656
2022-09-14 07:13:30	GAL	4280839.6536	574796.1226	4678405.4679	47.477527837	7.647468831	808.6981
2022-09-14 07:13:30	BDS	4280840.0834	574797.1321	4678408.3297	47.477541519	7.647481344	811.1860

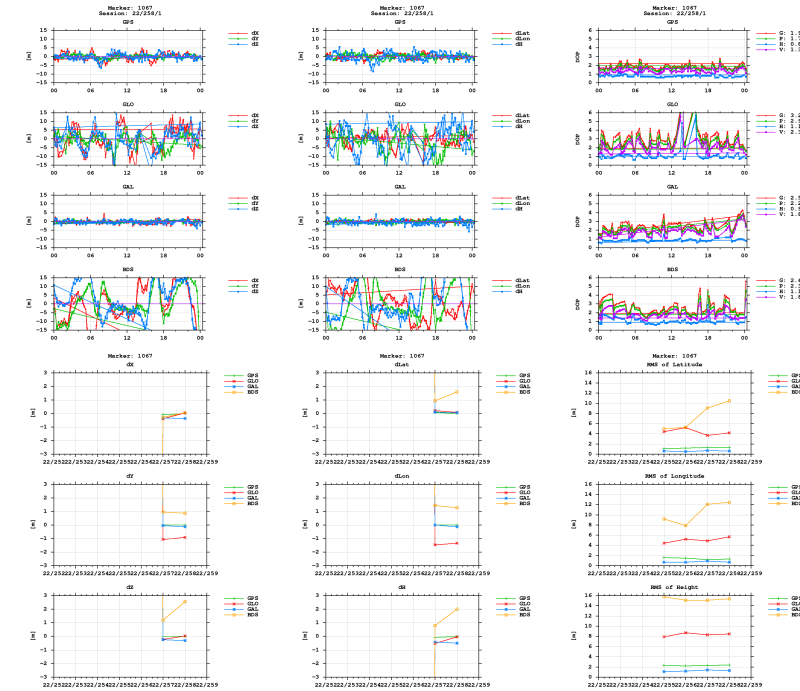

BNC



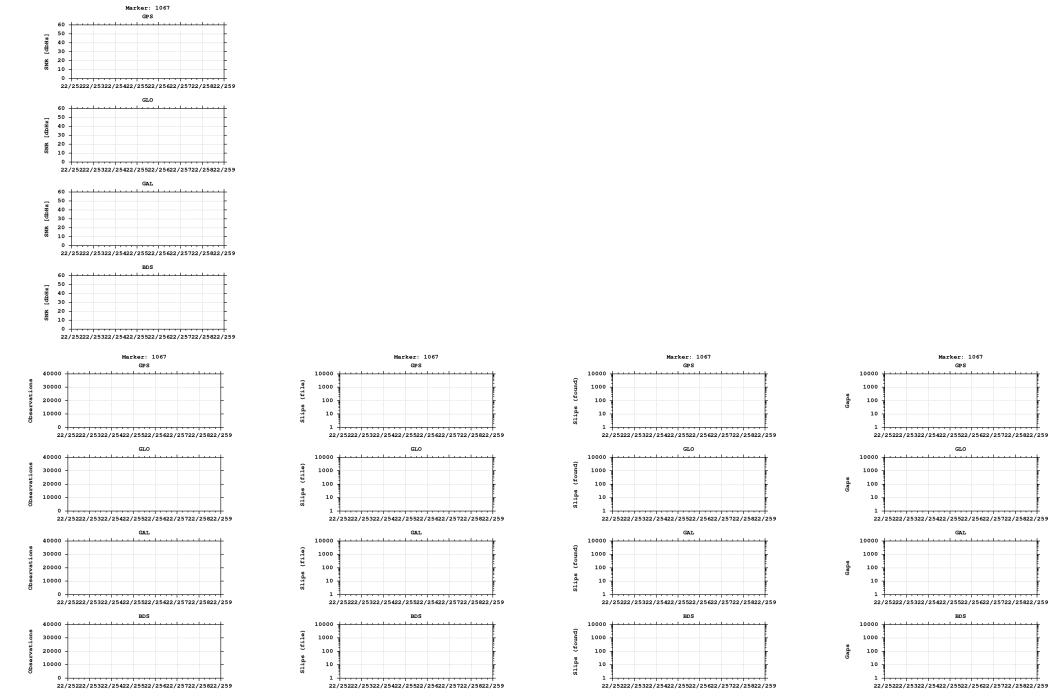

Equipment

2022-09-12 00:00:00 TRIMBLE NETR9 5.52 518 TRM57971.00 NONE 518

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)