


GNSS observation file monitoring for 0511


Last RINEX file: 05112761.22O
RINEX version: 3.02
Marker: 1113
Receiver: 511 TRIMBLE NETR9 5.52
Antenna: 511 TRM57971.00 NONE


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites


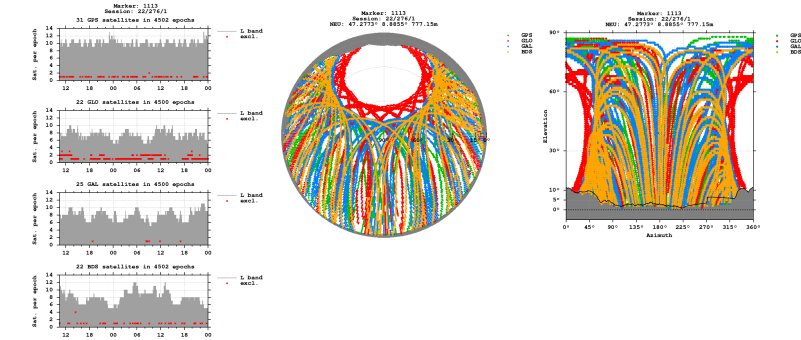


Bands

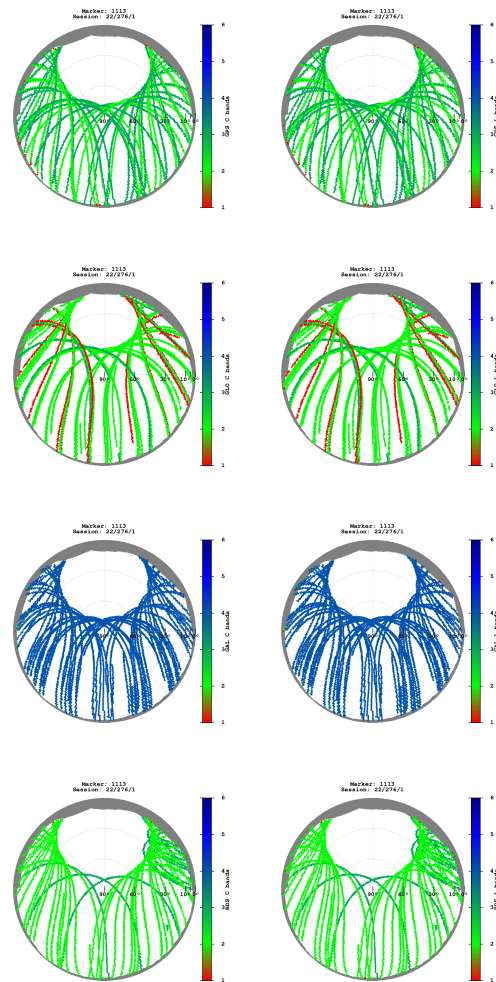

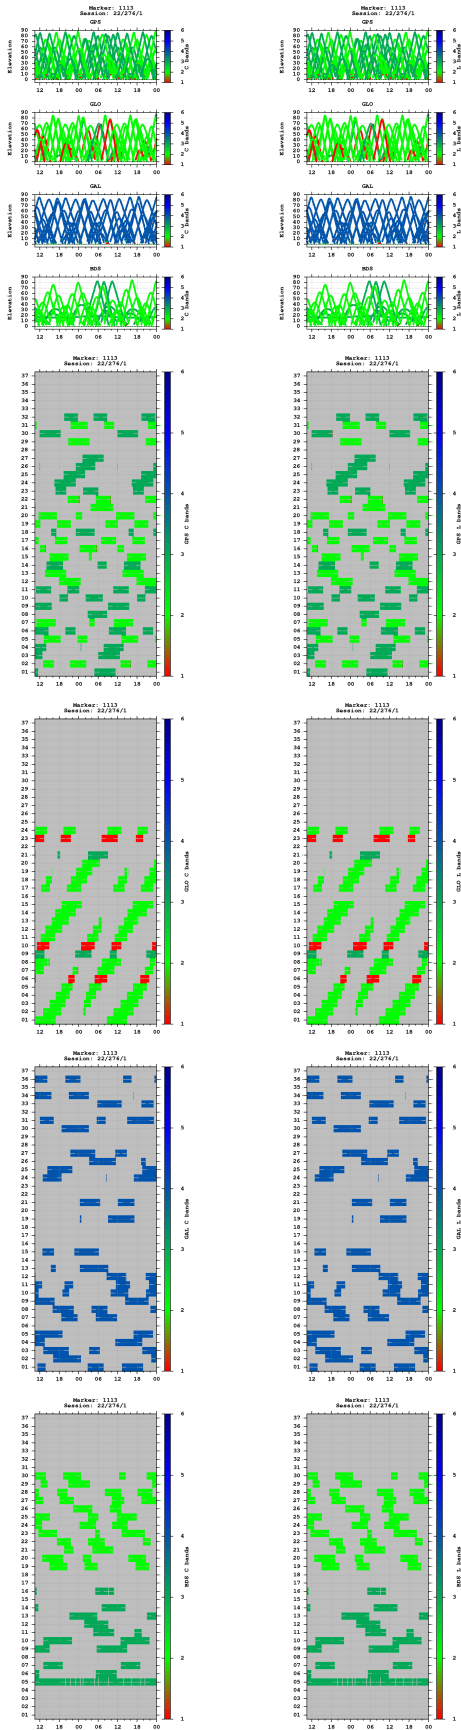



Multipath

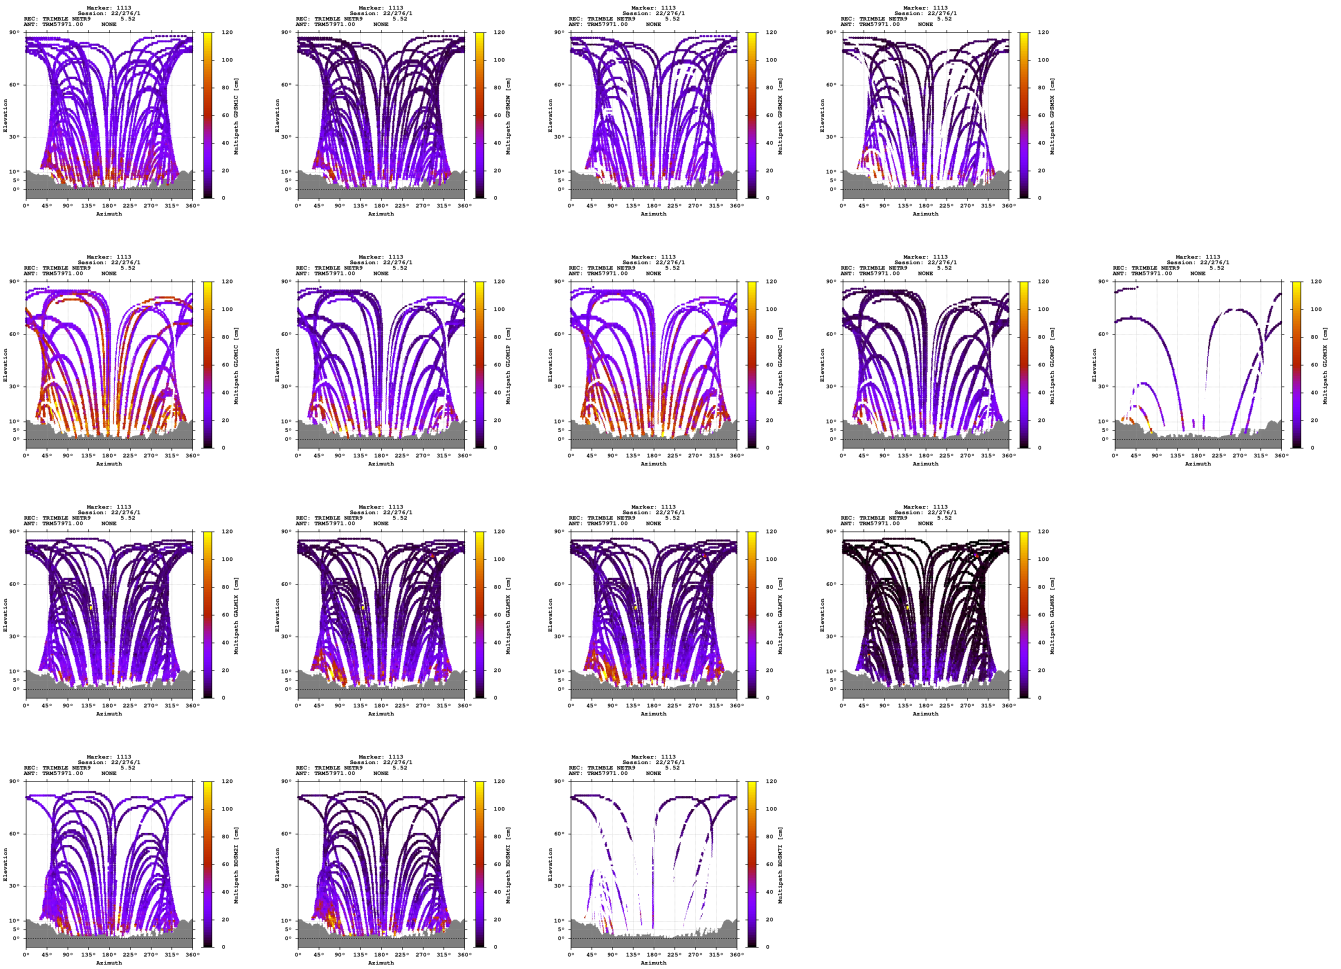

- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.


Signal-to-noise ratio

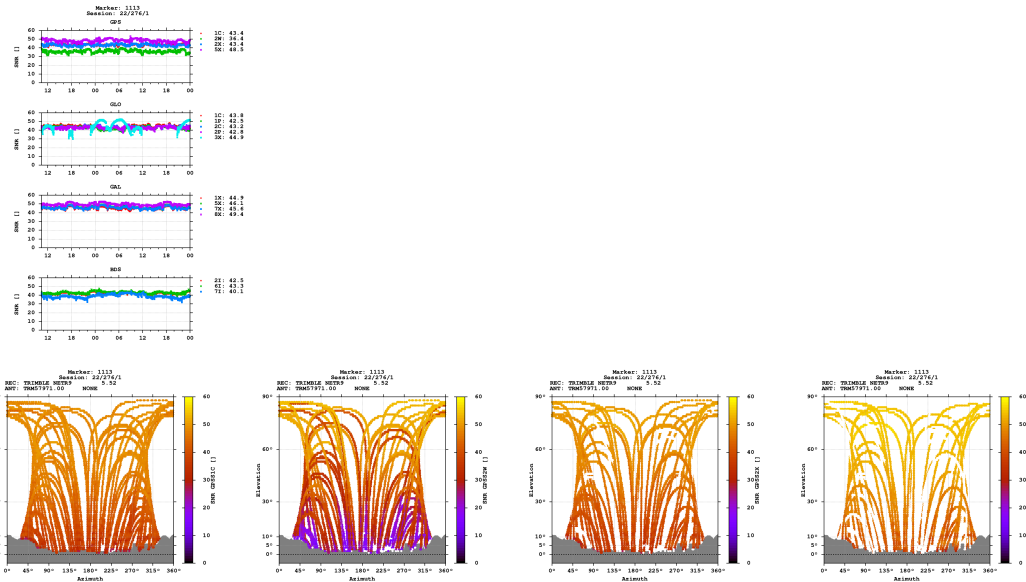

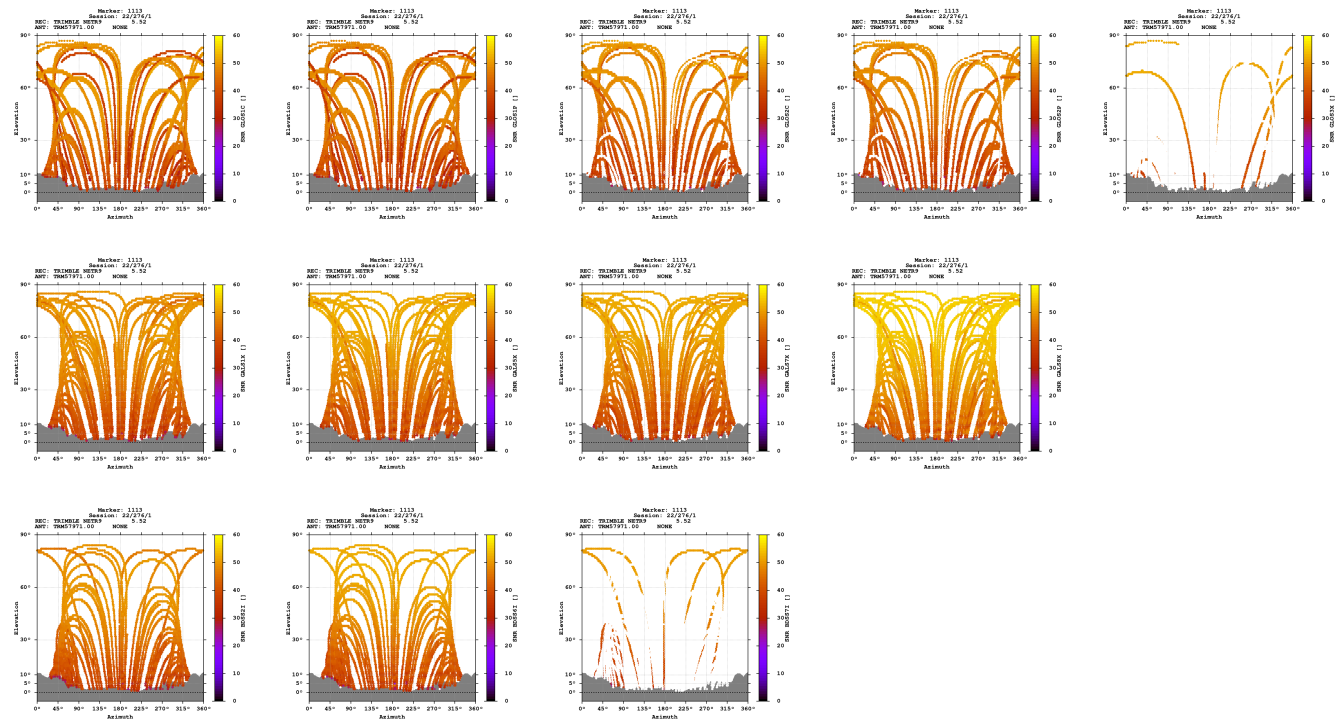

Estimates

2022-10-03 10:26:00	GPS	4283586.6885	669681.2582	4663305.2537	47.277289961	8.885501077	777.1501
2022-10-03 10:26:00	GLO	4283587.1963	669681.2973	4663305.0883	47.277285597	8.885500550	777.3731
2022-10-03 10:26:00	GAL	4283586.7473	669681.3128	4663304.8759	47.277287216	8.885501670	776.9176
2022-10-03 10:26:00	BDS	4283587.4604	669681.3639	4663307.9953	47.277301543	8.885500881	779.6927

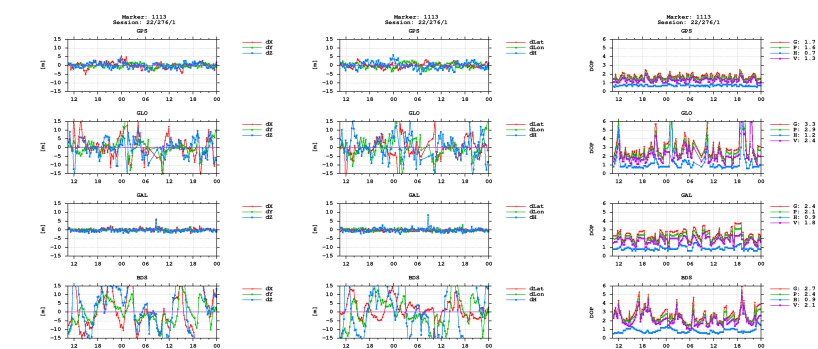

BNC

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)