


GNSS observation file monitoring for 0511


Last RINEX file: 05112781.220
RINEX version: 3.02
Marker: 1052
Receiver: 511 TRIMBLE NETR9 5.52
Antenna: 511 TRM57971.00 NONE

Epochs

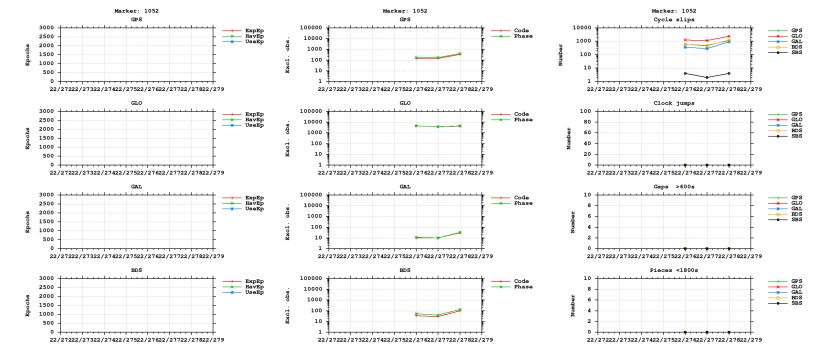



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

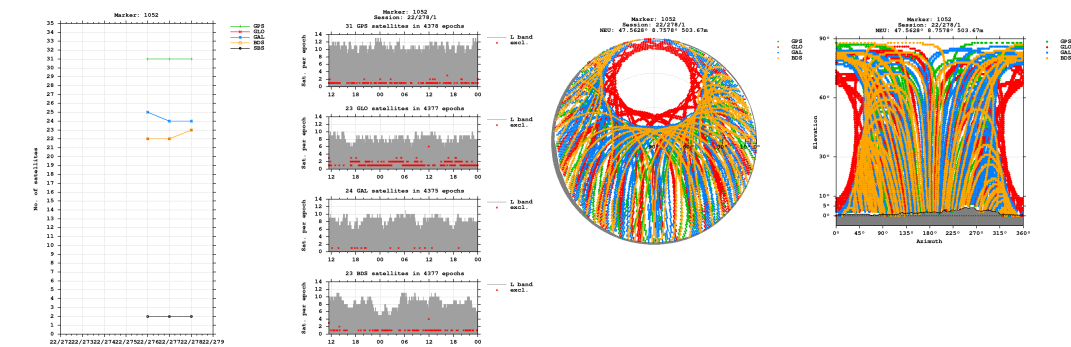


Bands

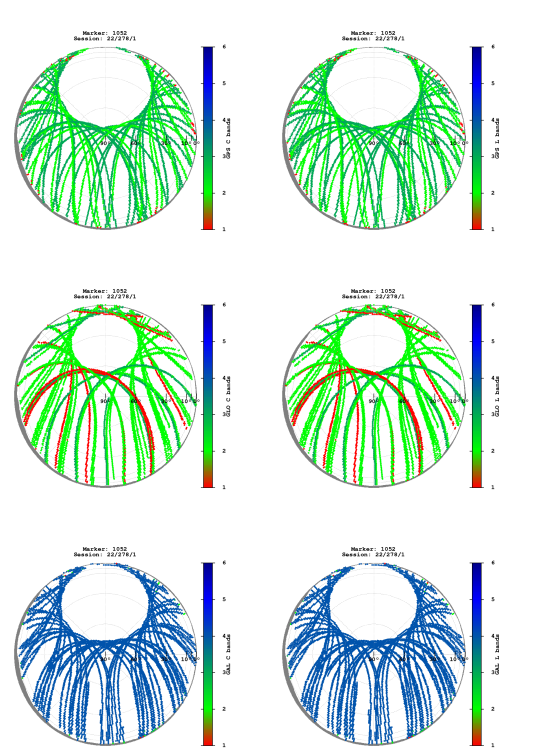


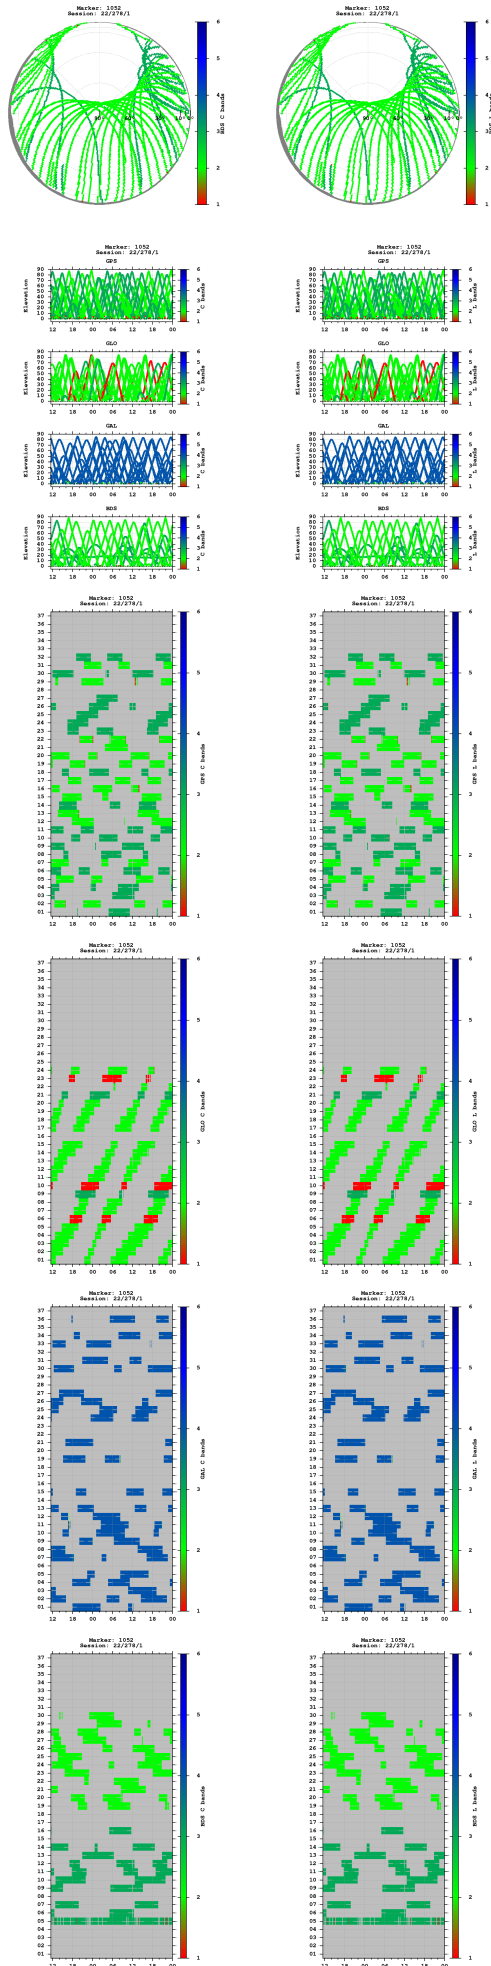


Observations

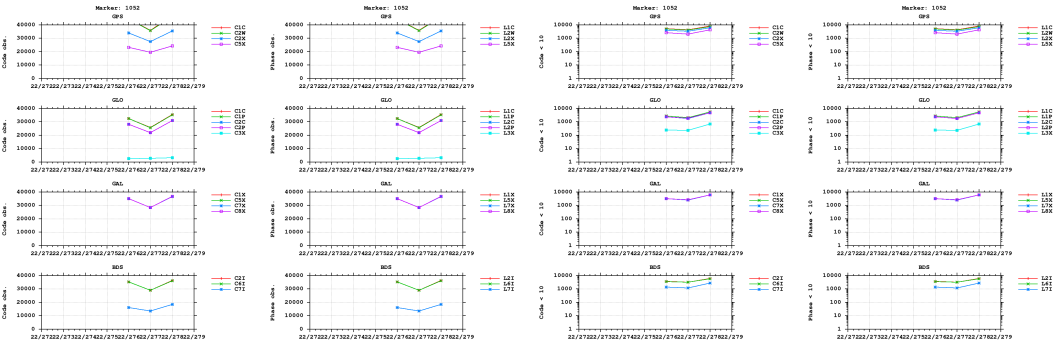


Multipath

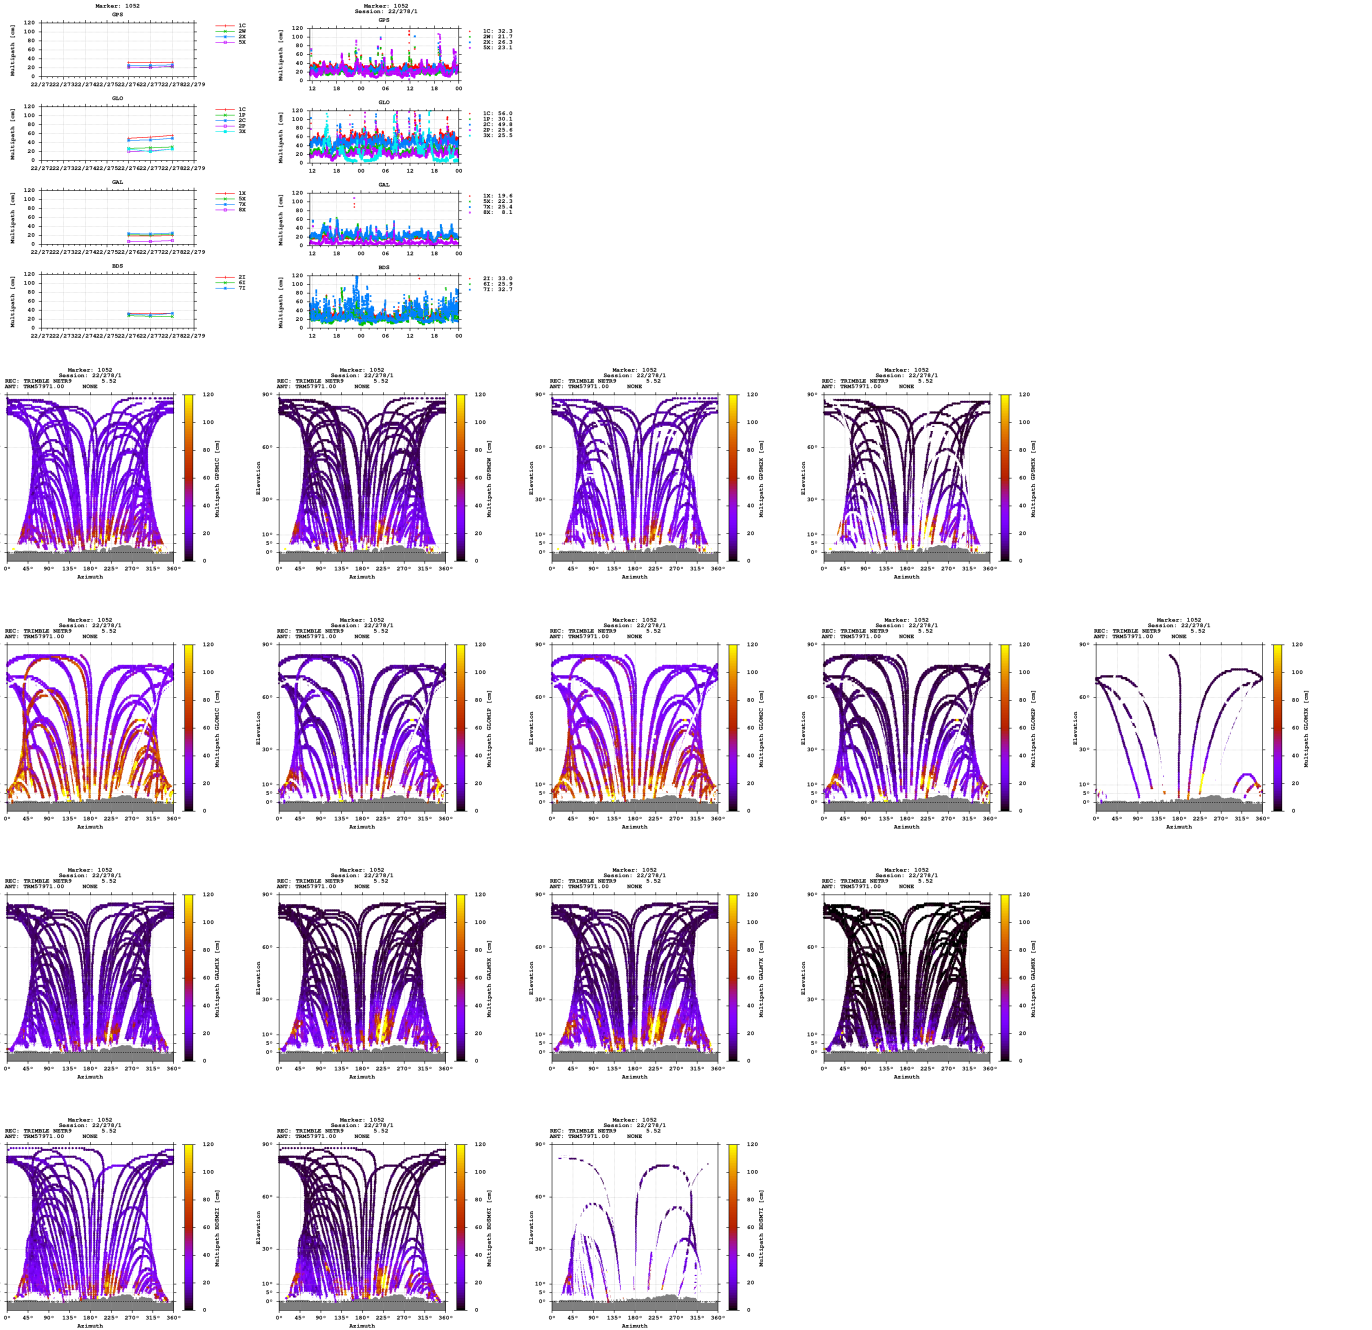


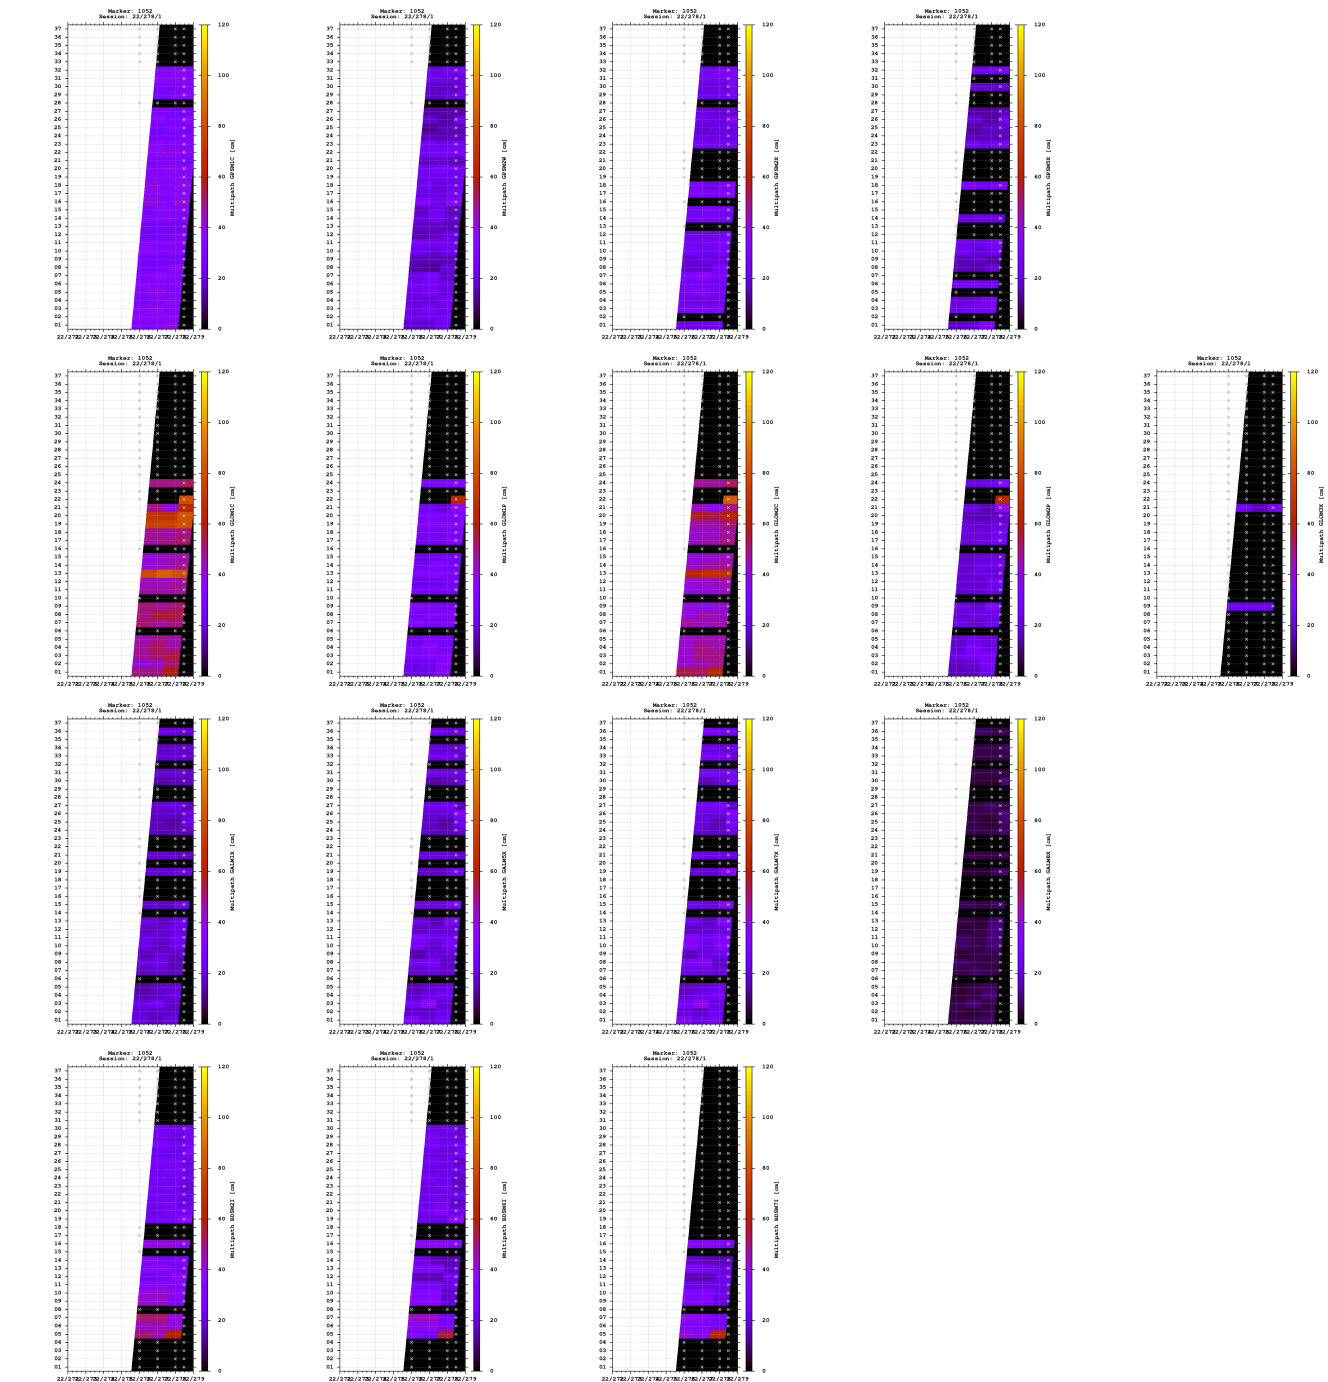


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

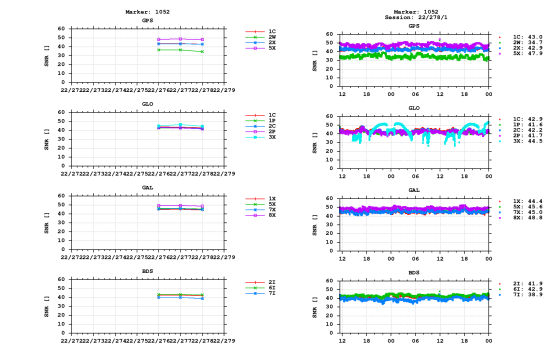


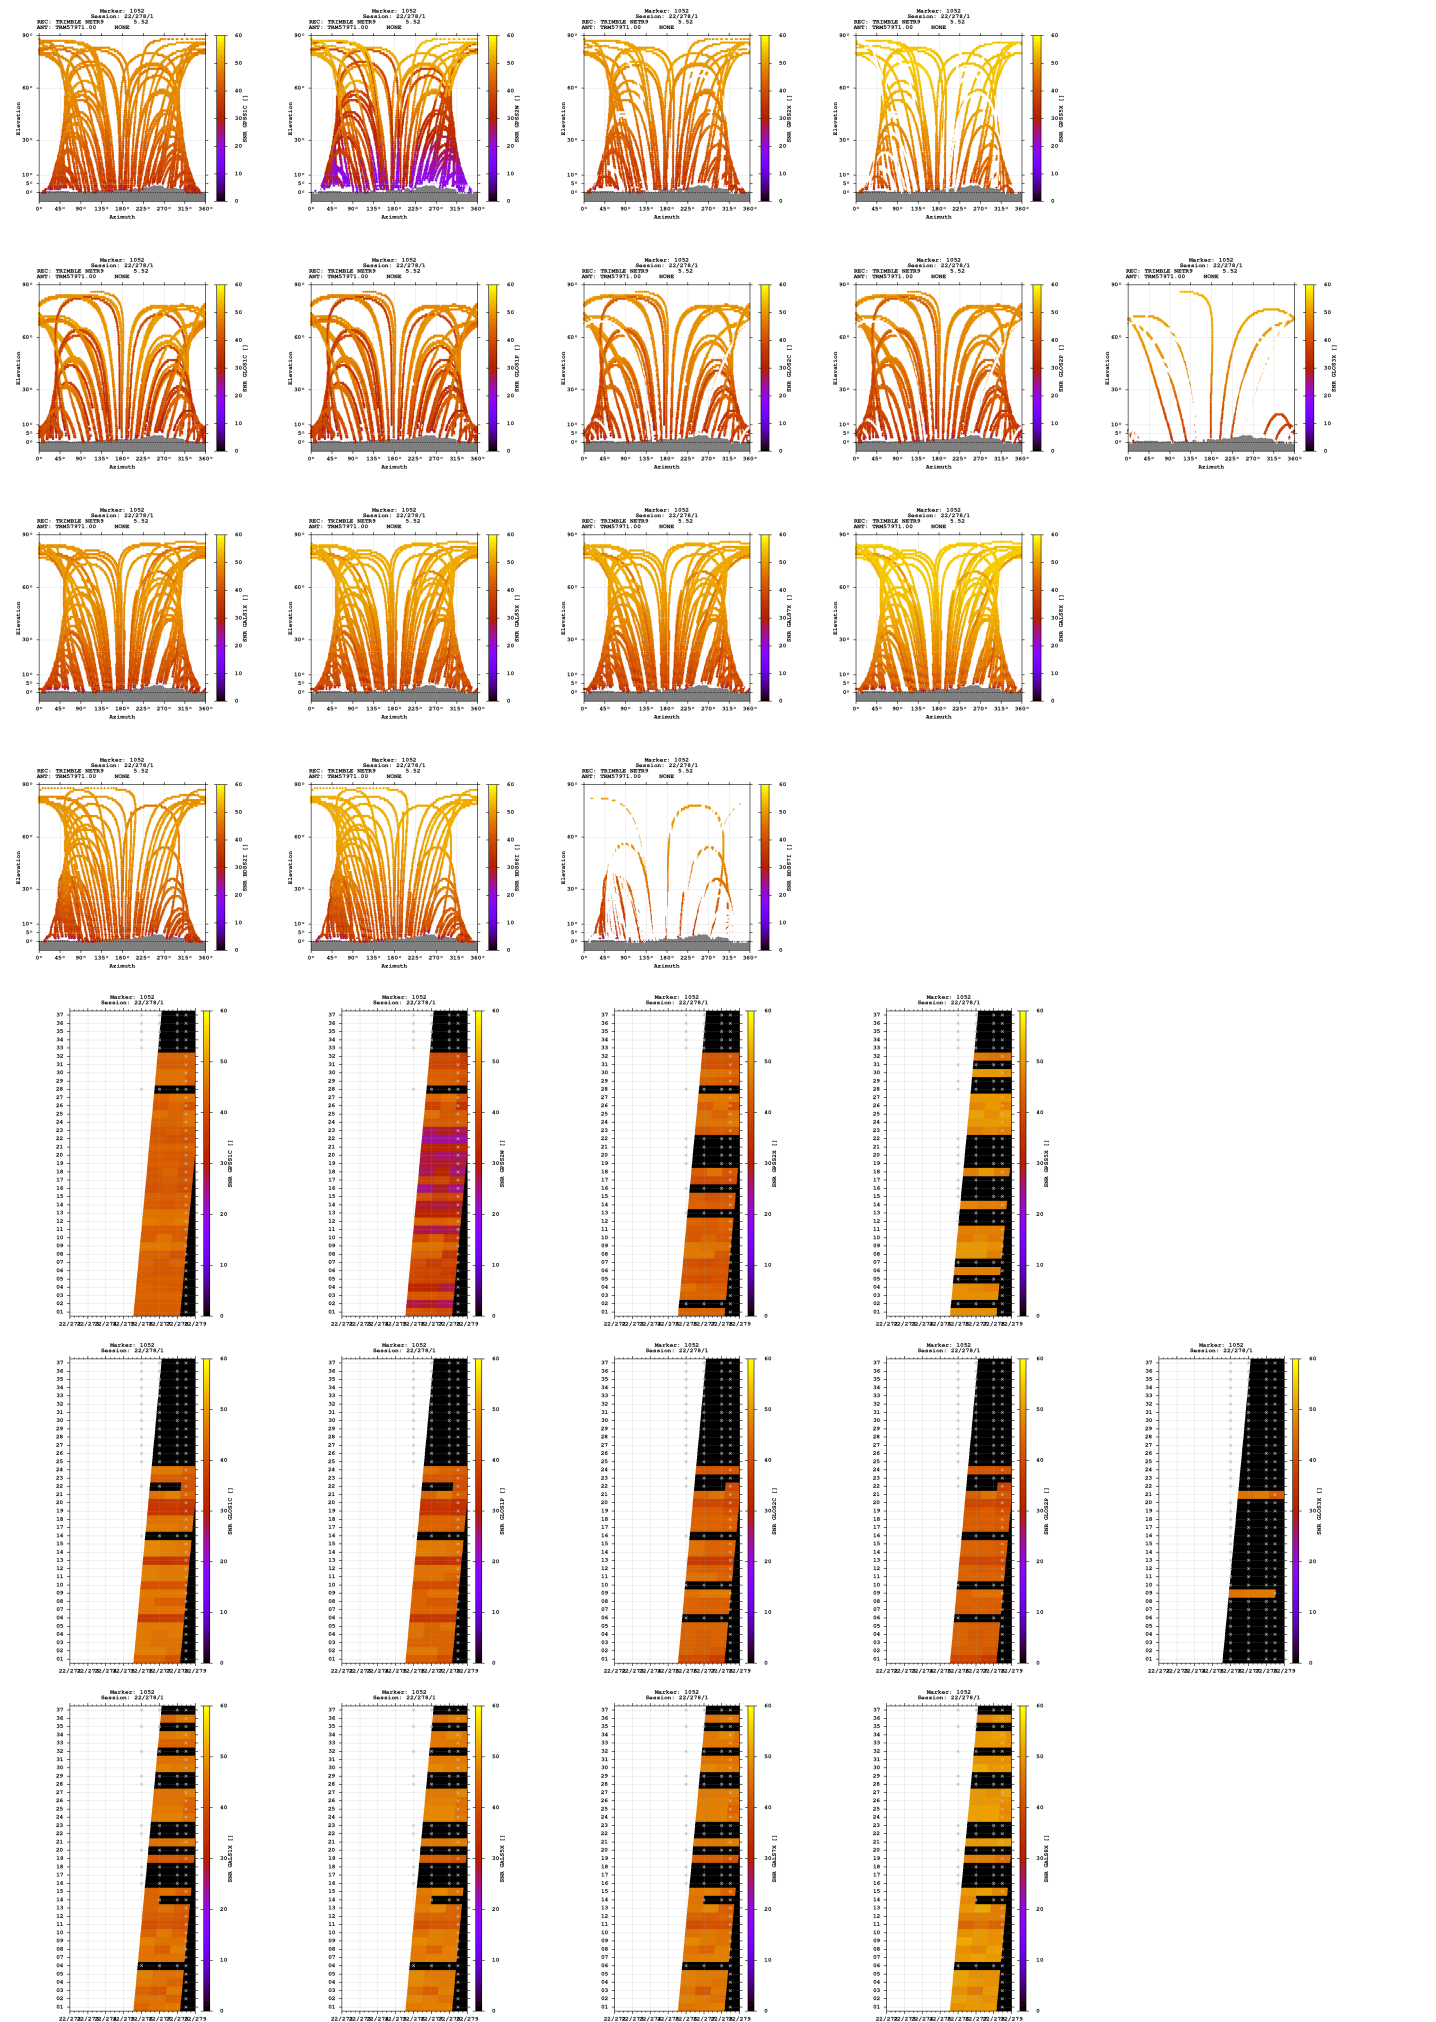

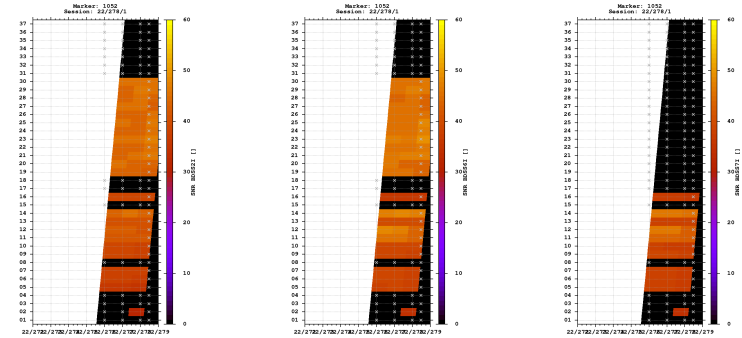



Estimates

2022-10-05 11:27:00	GPS	4261784.3402	656543.6878	4684582.4554	47.562782987	8.757779017	503.6683
2022-10-05 11:27:00	GLO	4261783.7385	656543.5343	4684582.0827	47.562784828	8.757778218	502.9762
2022-10-05 11:27:00	GAL	4261784.1827	656543.7232	4684581.9670	47.562781021	8.757779800	503.2065
2022-10-05 11:27:00	BDS	4261784.7472	656544.7562	4684584.5116	47.562791716	8.757792223	505.5670

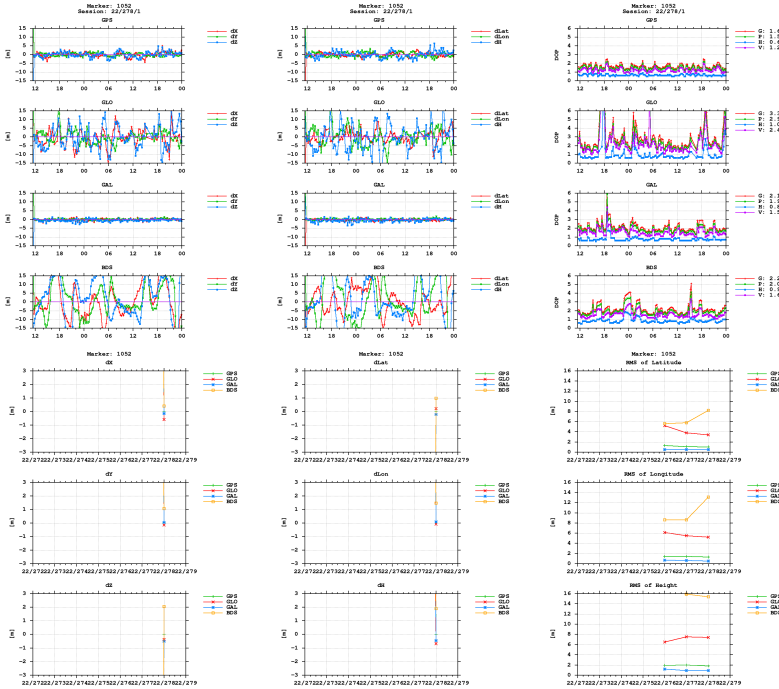

BNC

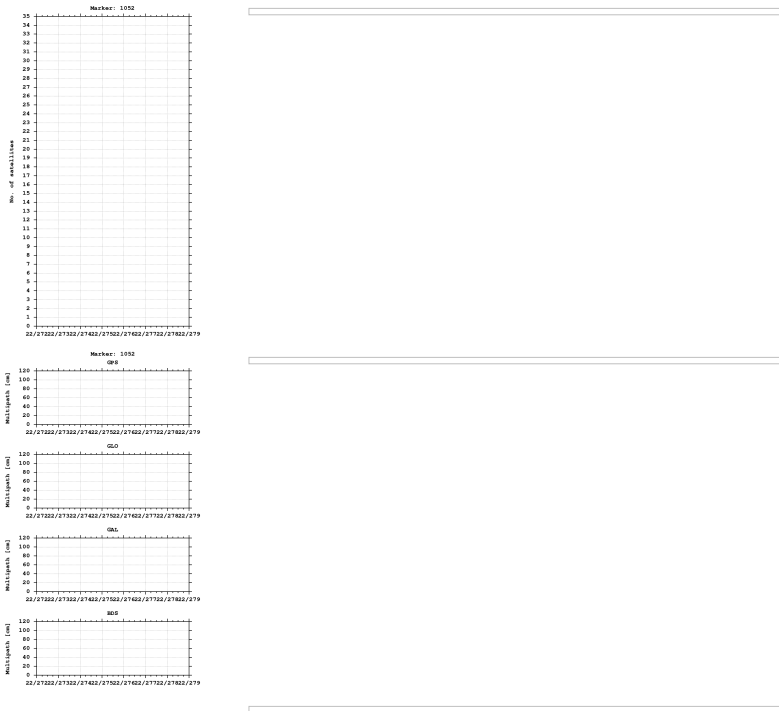

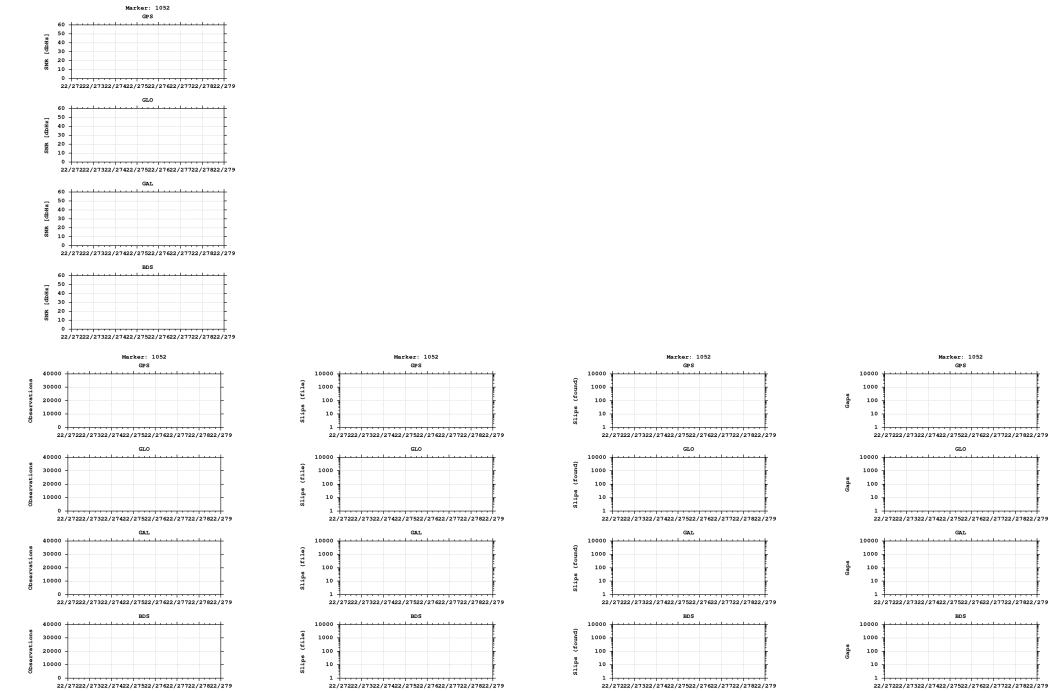

Equipment

2022-10-03 00:00:00 TRIMBLE NETR9 5.52 511 TRM57971.00 NONE 511

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)