

GNSS observation file monitoring for 0512

Last RINEX file: 05122771.220


RINEX version: 3.02

Marker: 1092

Receiver: 512 TRIMBLE NETR9 5.52


Antenna: 512 TRM57971.00 NONE

Epochs

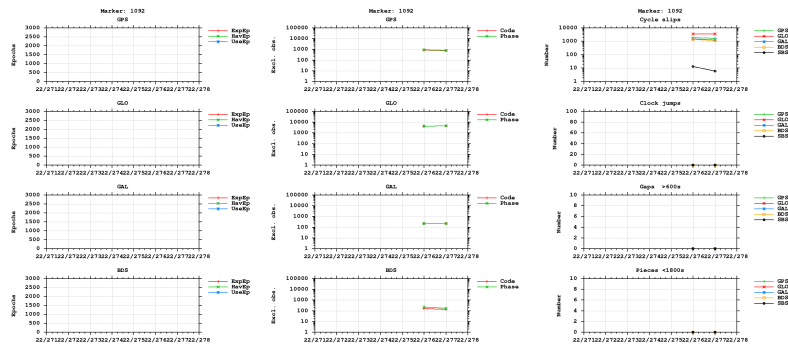



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

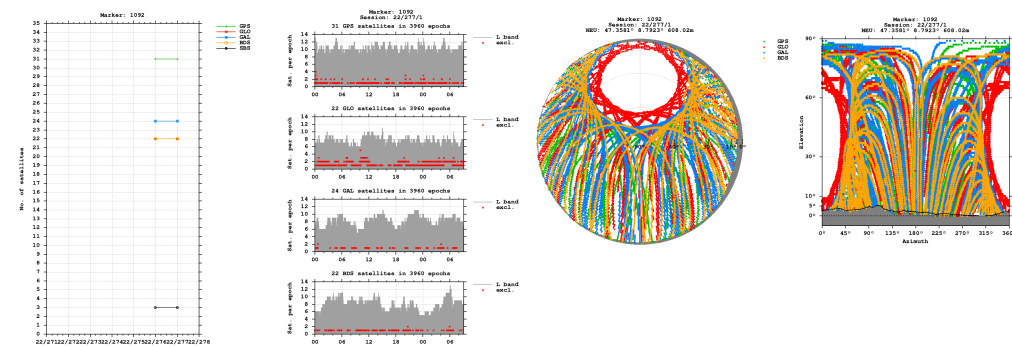


Bands

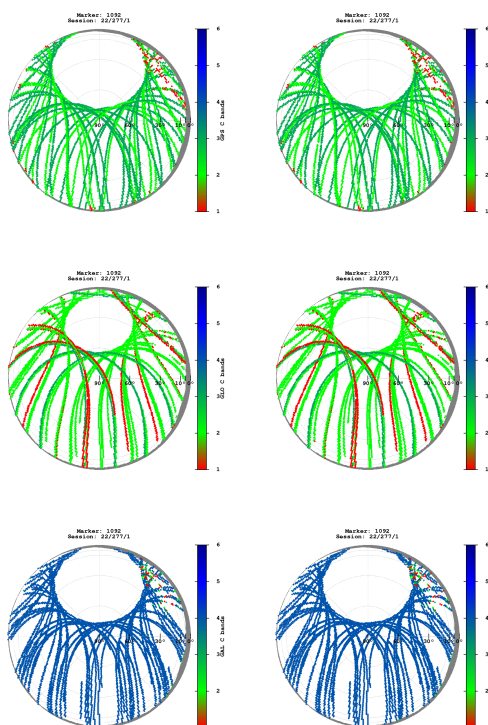


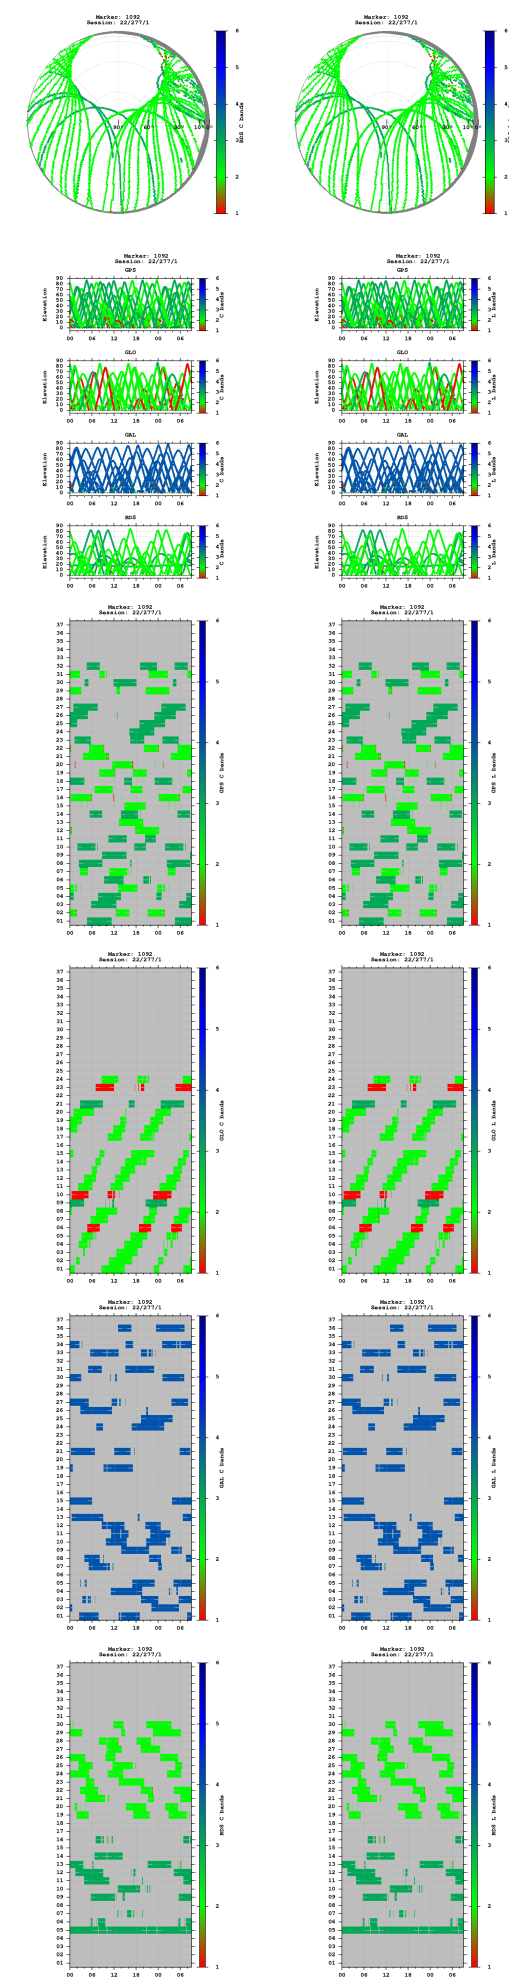


Observations

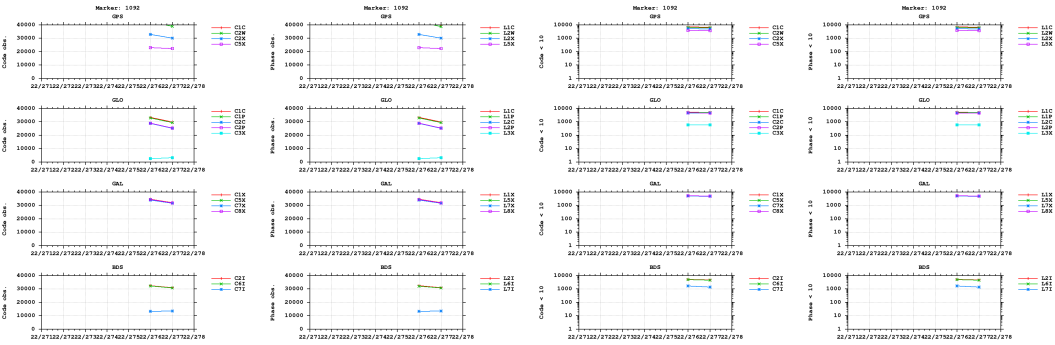


Multipath

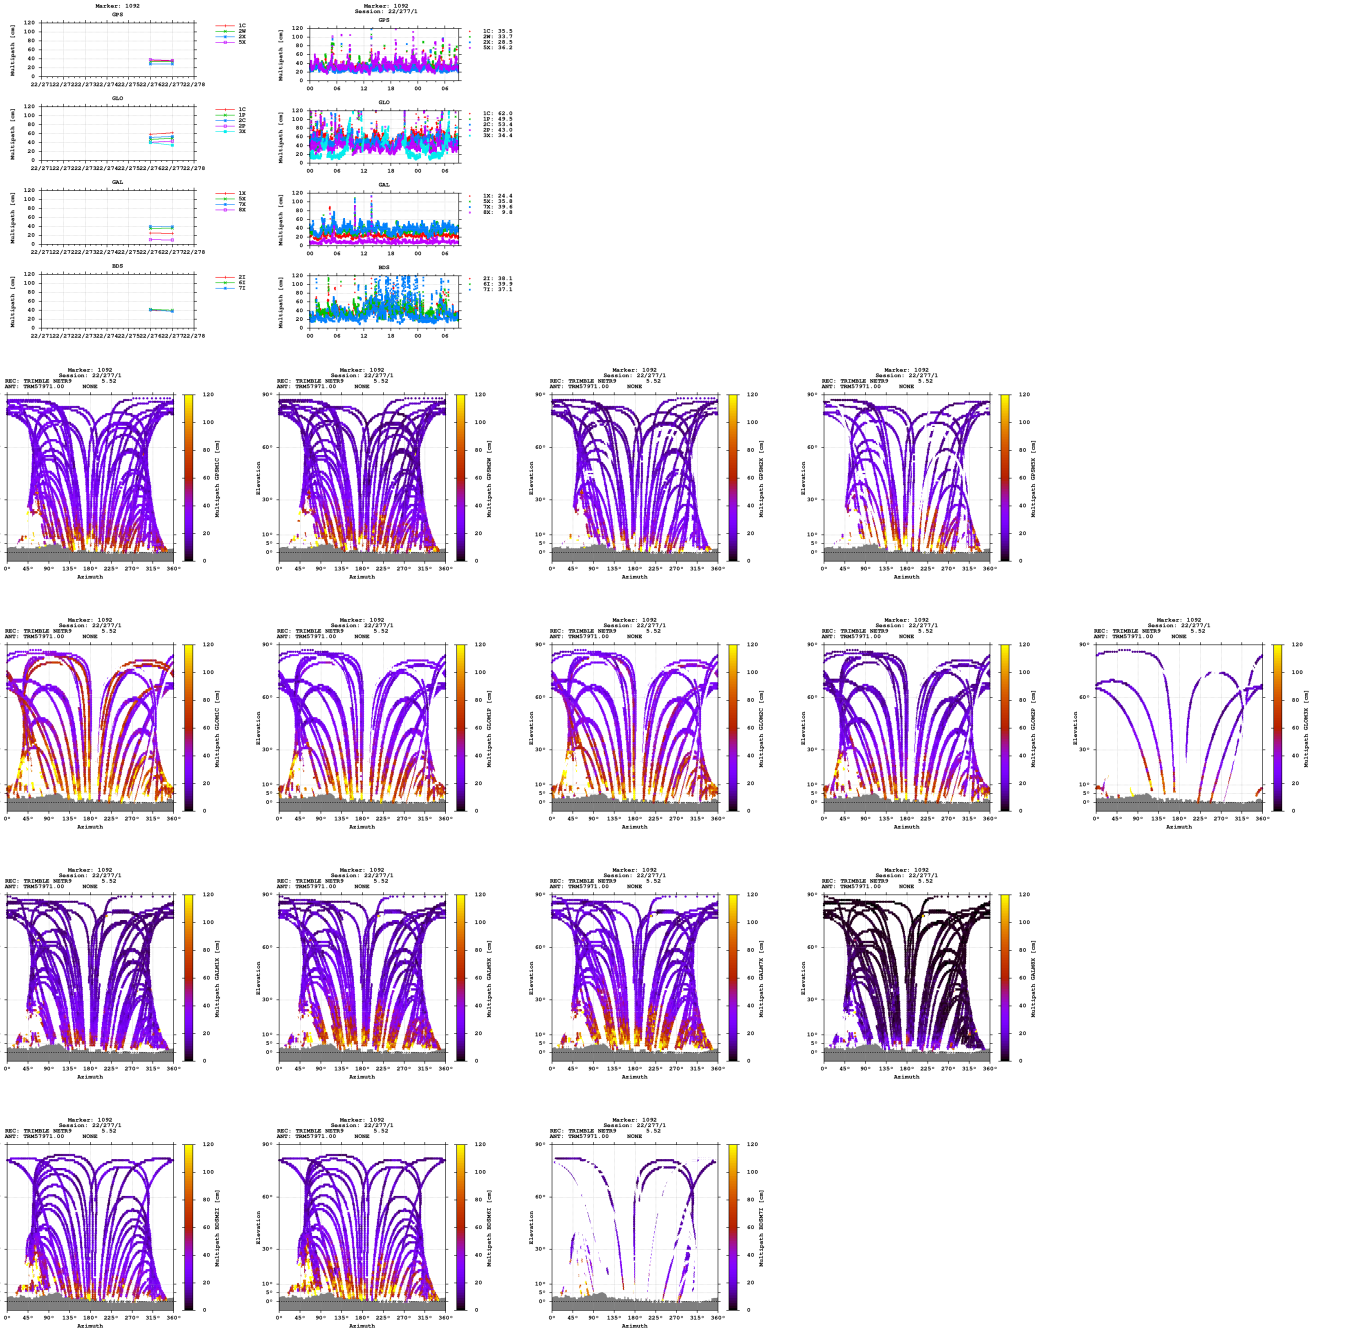


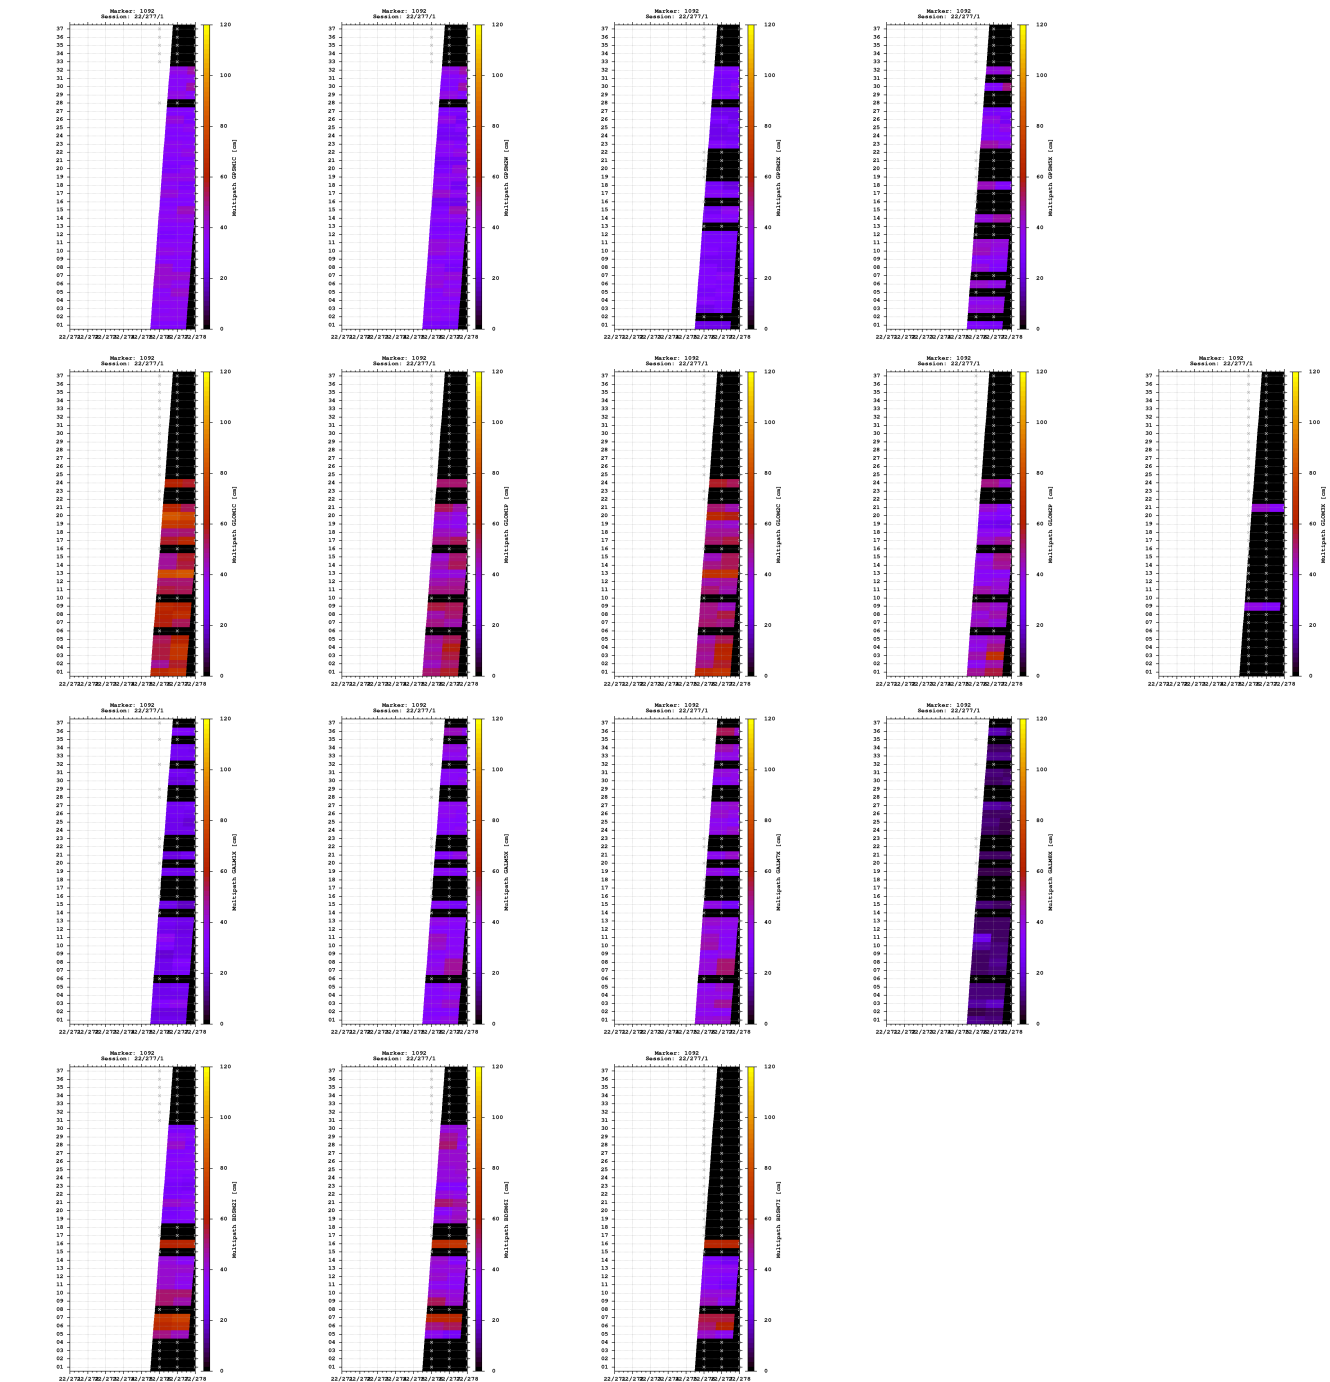


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

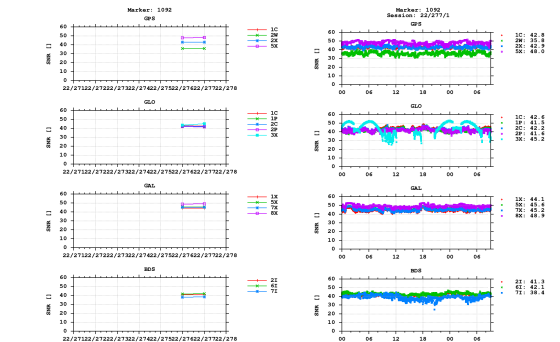


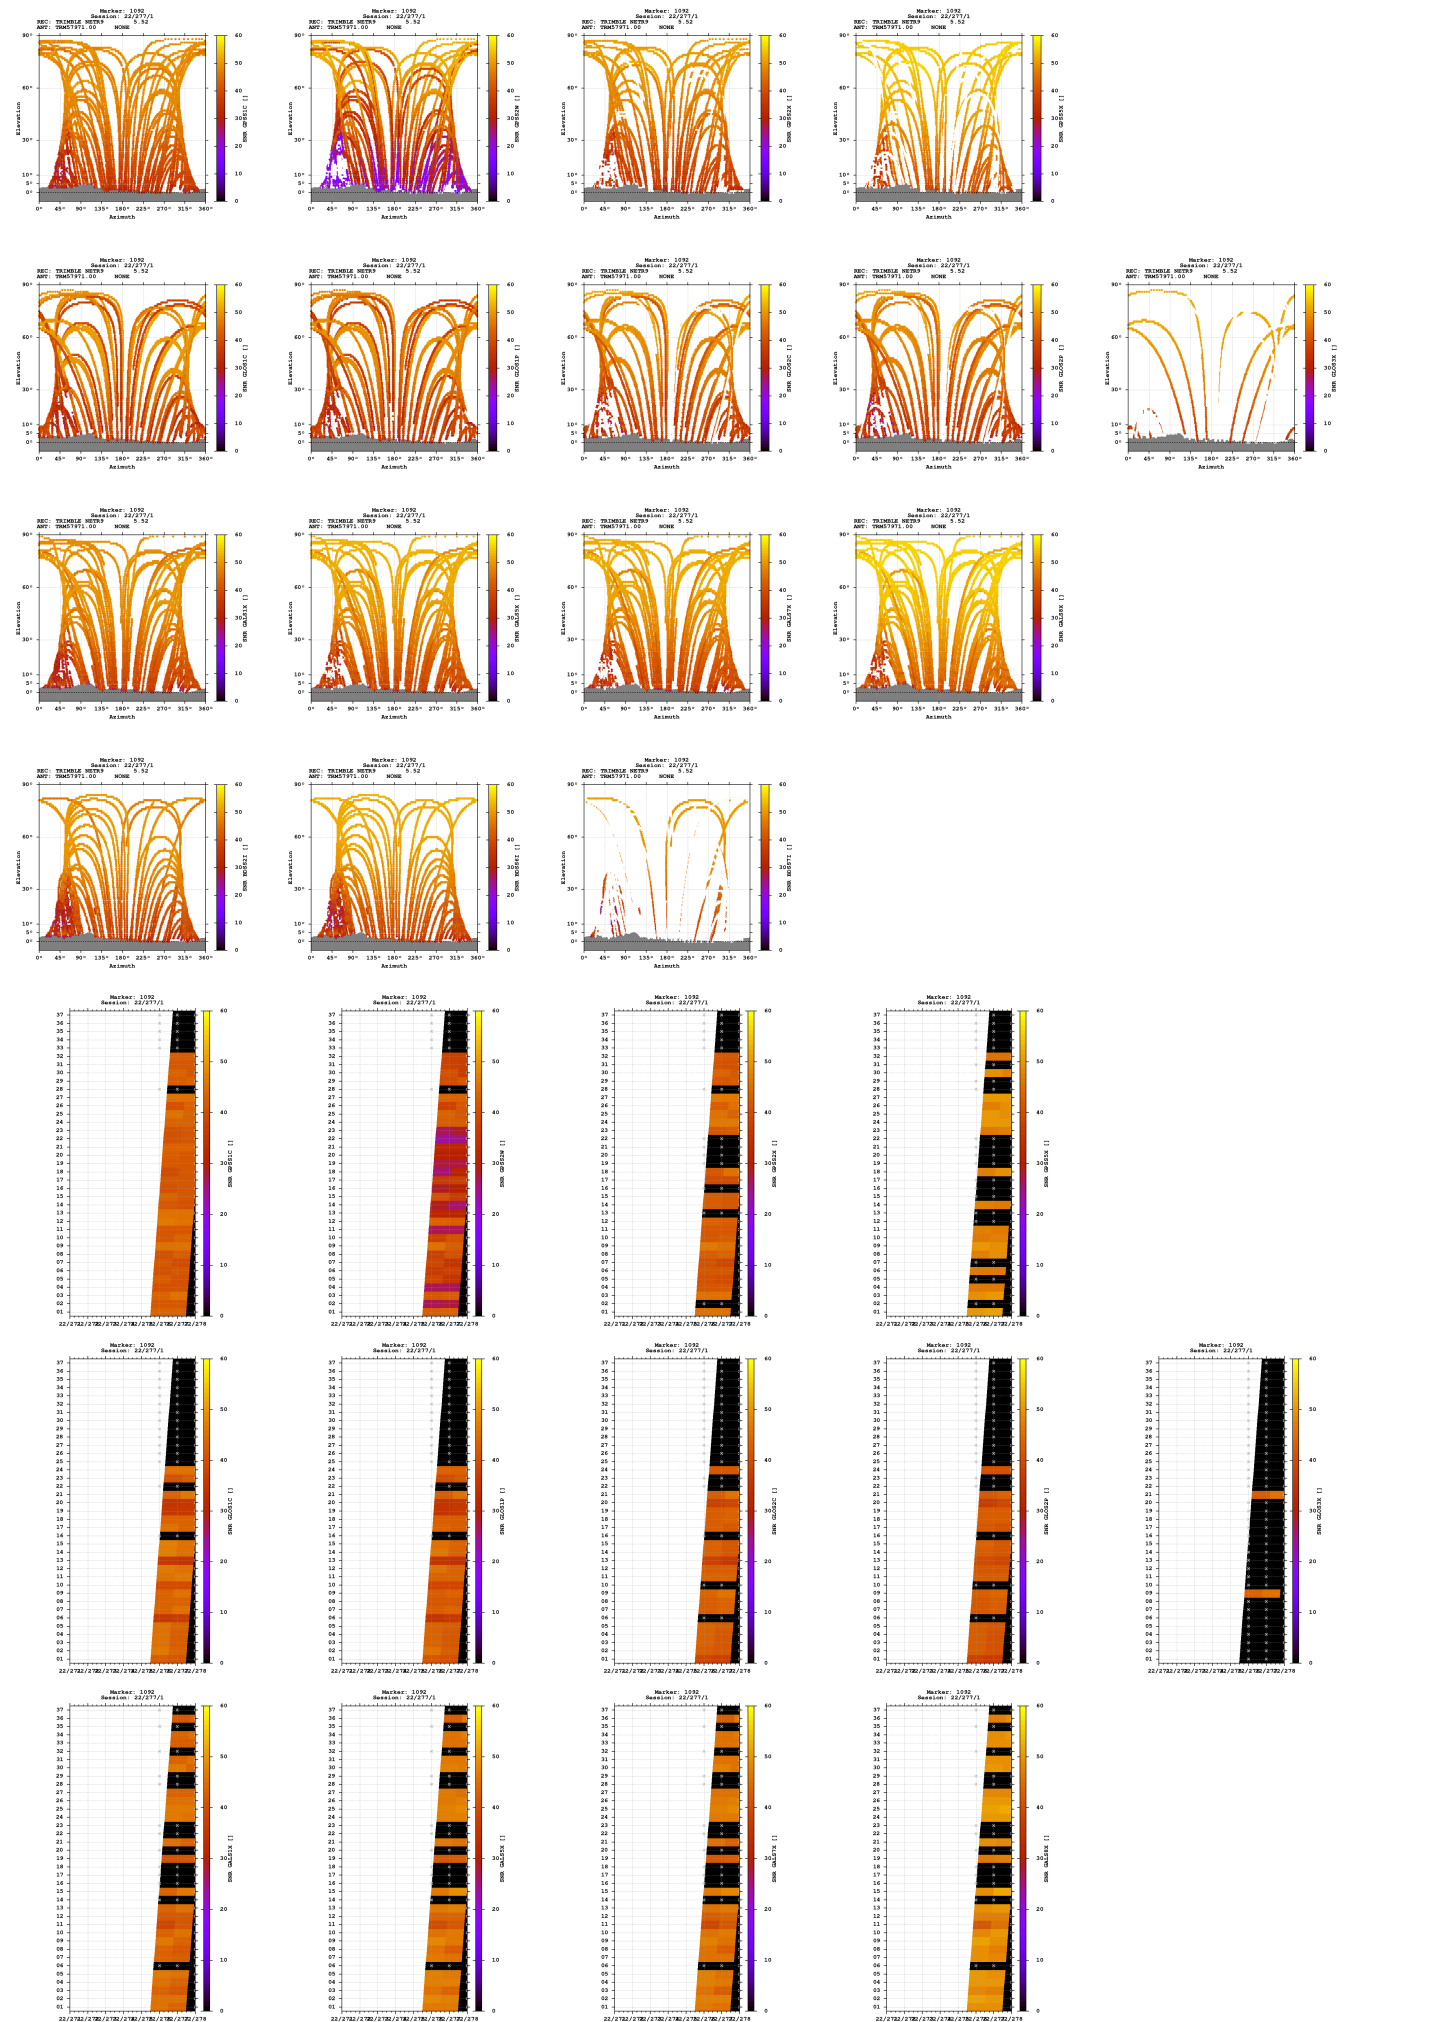

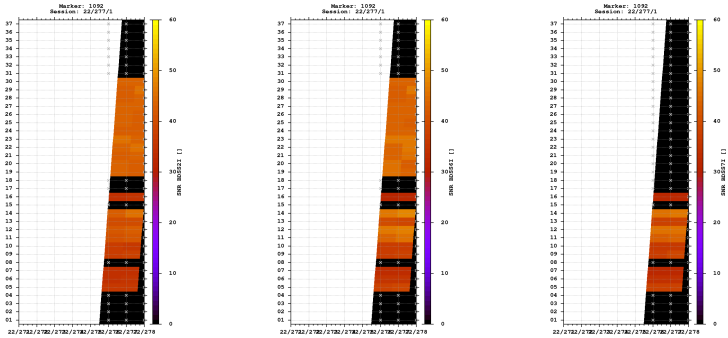



Estimates

2022-10-03 12:01:30	GPS	4278028.9895	661683.8066	4669272.9001	47.358108196	8.792281956	608.0230
2022-10-03 12:01:30	GLO	4278029.3723	661683.7100	4669273.4508	47.358109146	8.792279918	608.6743
2022-10-03 12:01:30	GAL	4278029.4476	661683.7961	4669272.9662	47.358105615	8.792280892	608.3772
2022-10-03 12:01:30	BDS	4278028.6747	661683.3891	4669273.5672	47.358114741	8.792277132	608.2597

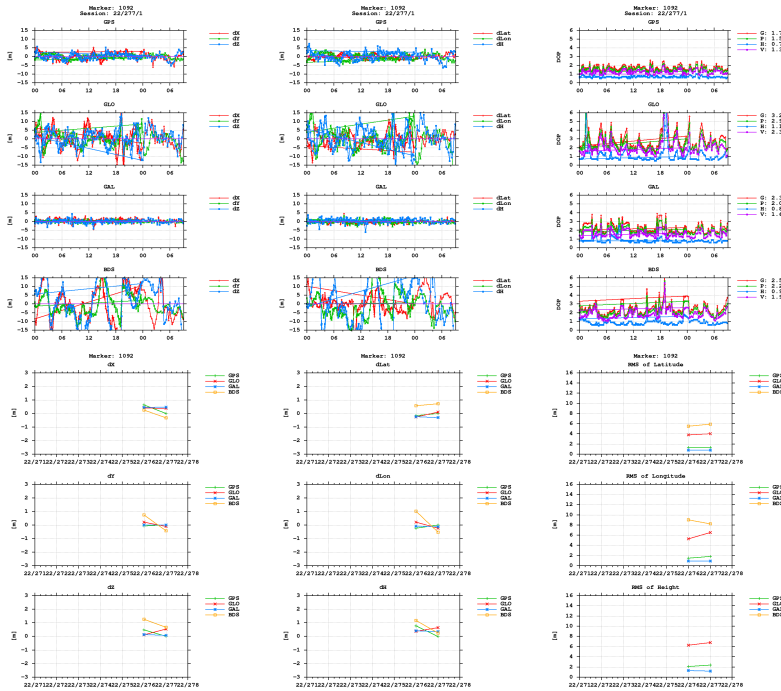

BNC

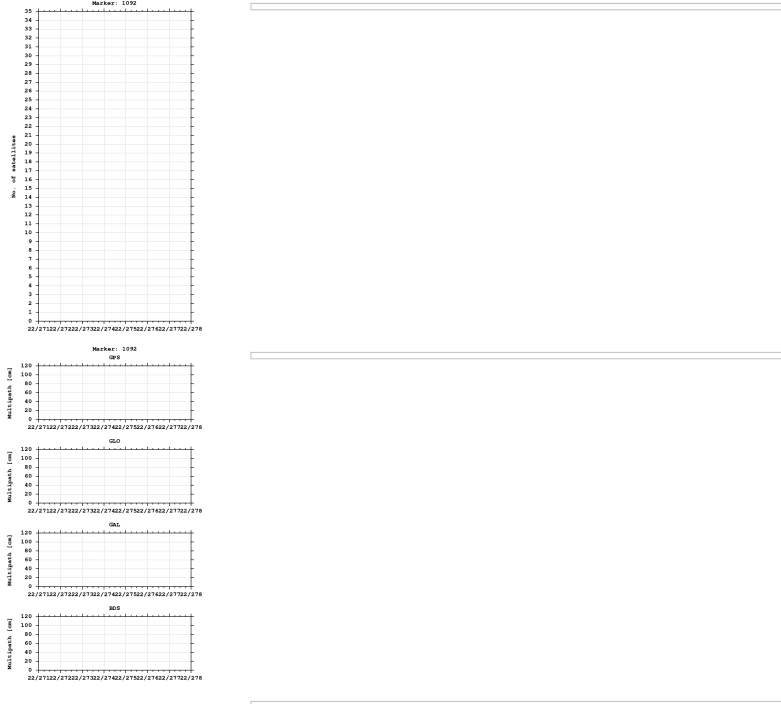

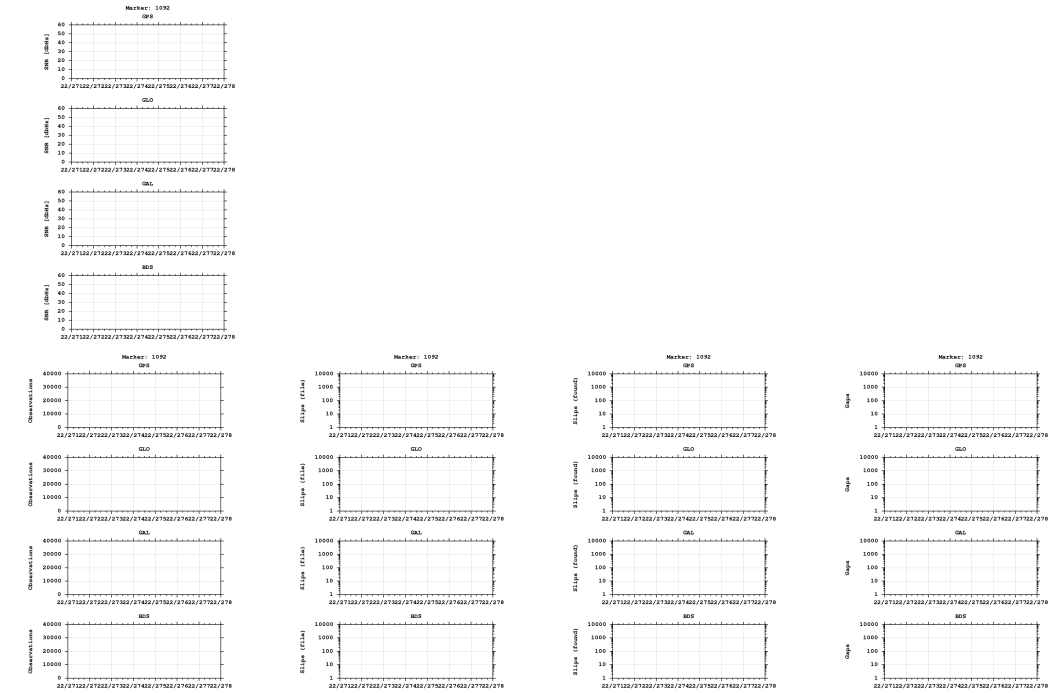

Equipment

2022-10-03 00:00:00 TRIMBLE NETR9 5.52 512 TRM57971.00 NONE 512

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)