

GNSS observation file monitoring for 0512

Last RINEX file: 05122781.220


RINEX version: 3.02

Marker: 1072

Receiver: 512 TRIMBLE NETR9 5.52

Antenna: 512 TRM57971.00 NONE


Epochs

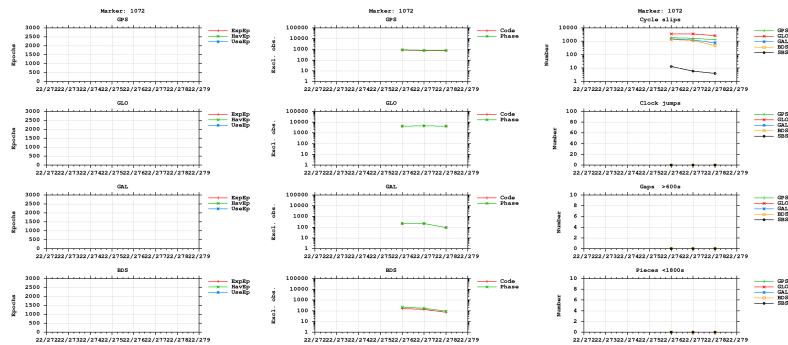


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.


- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

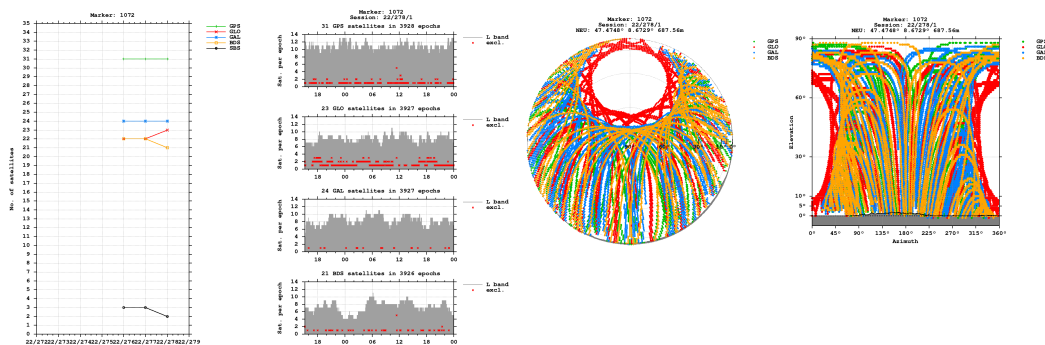


Bands

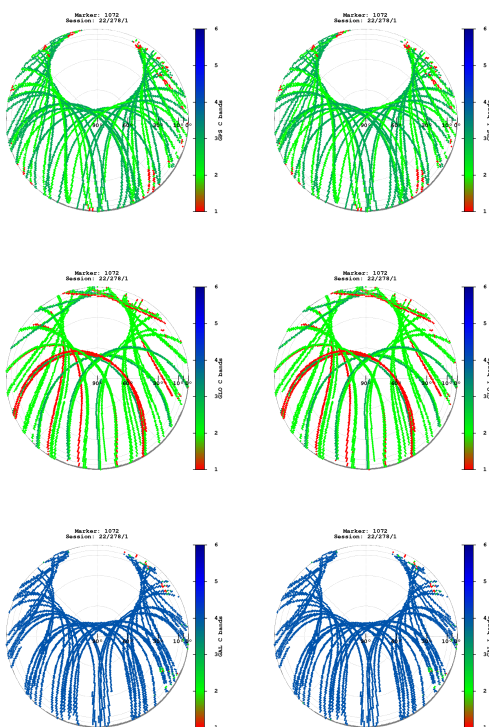


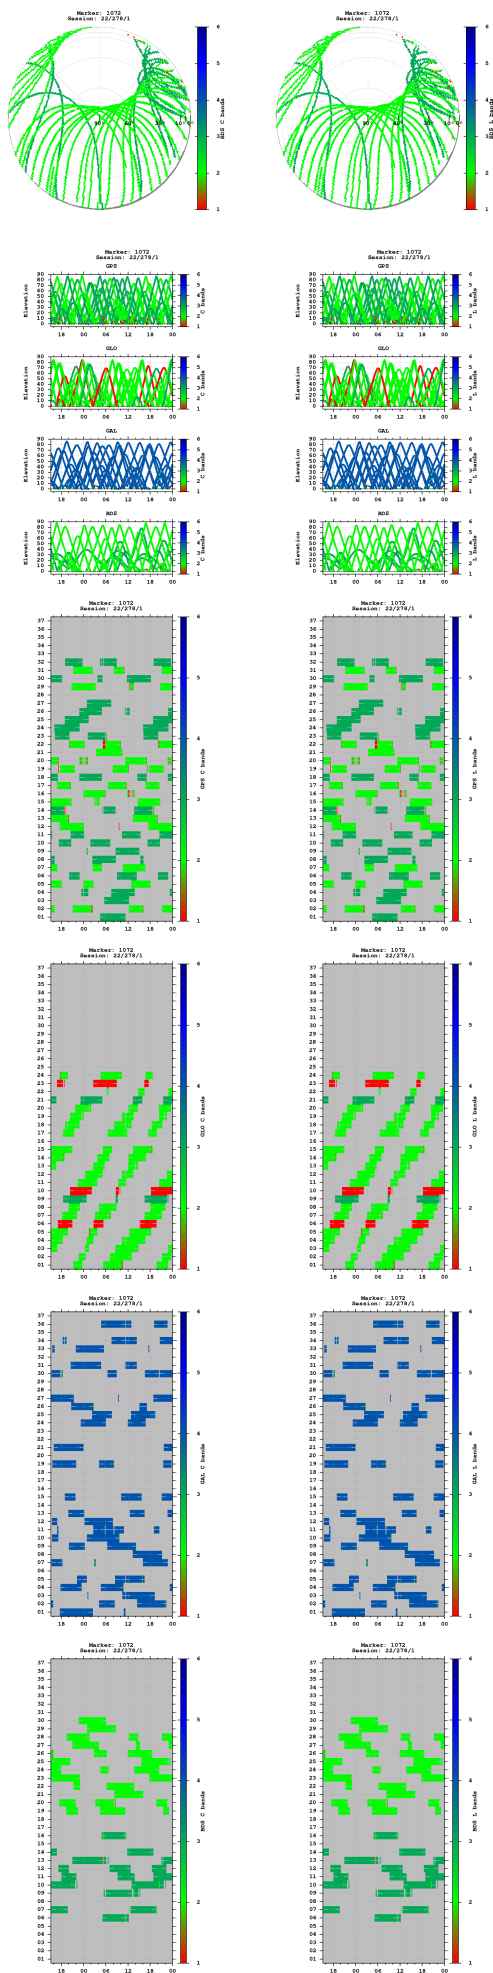


Observations

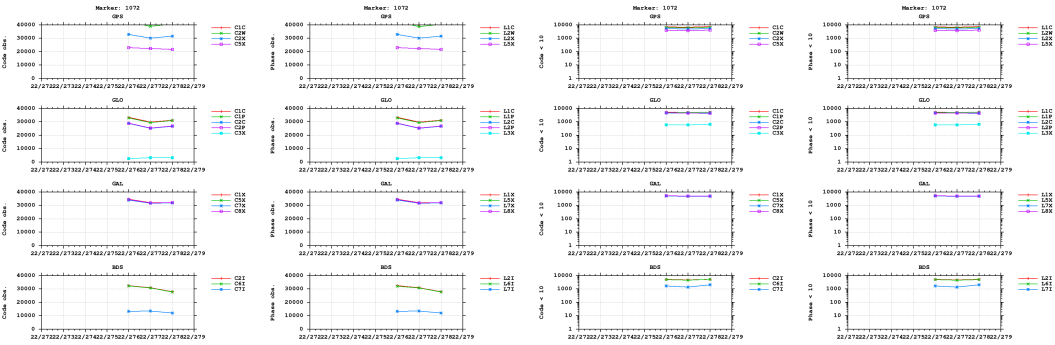


Multipath

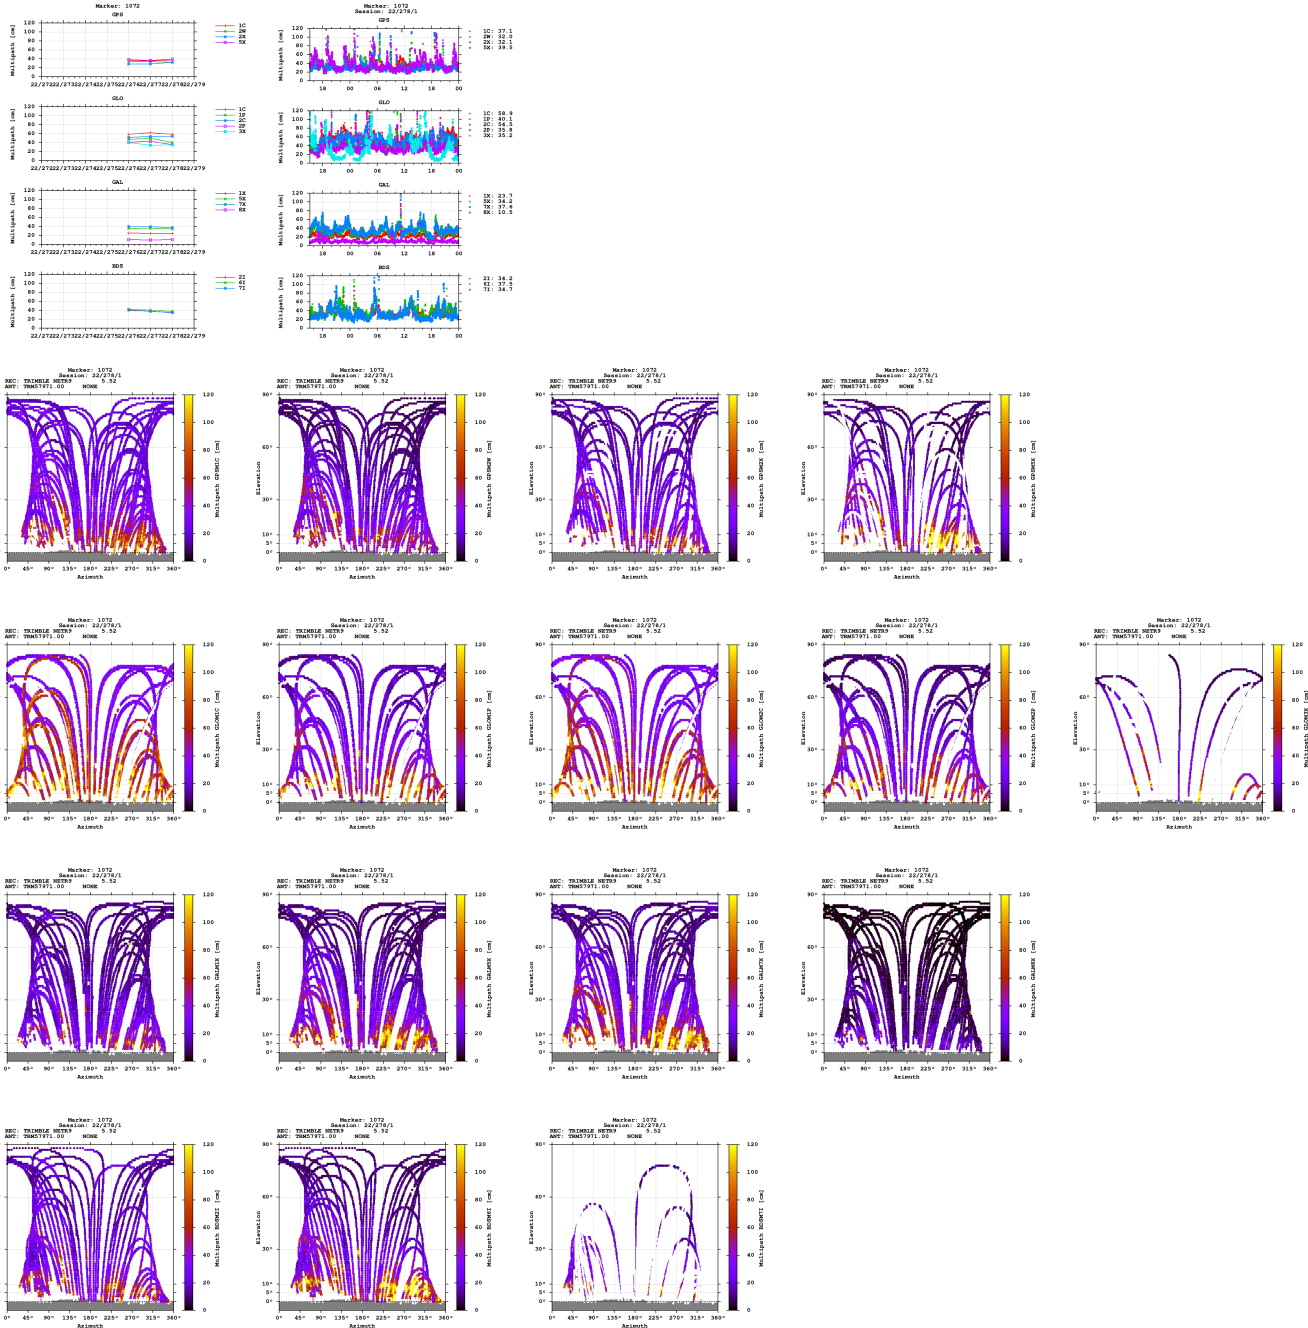


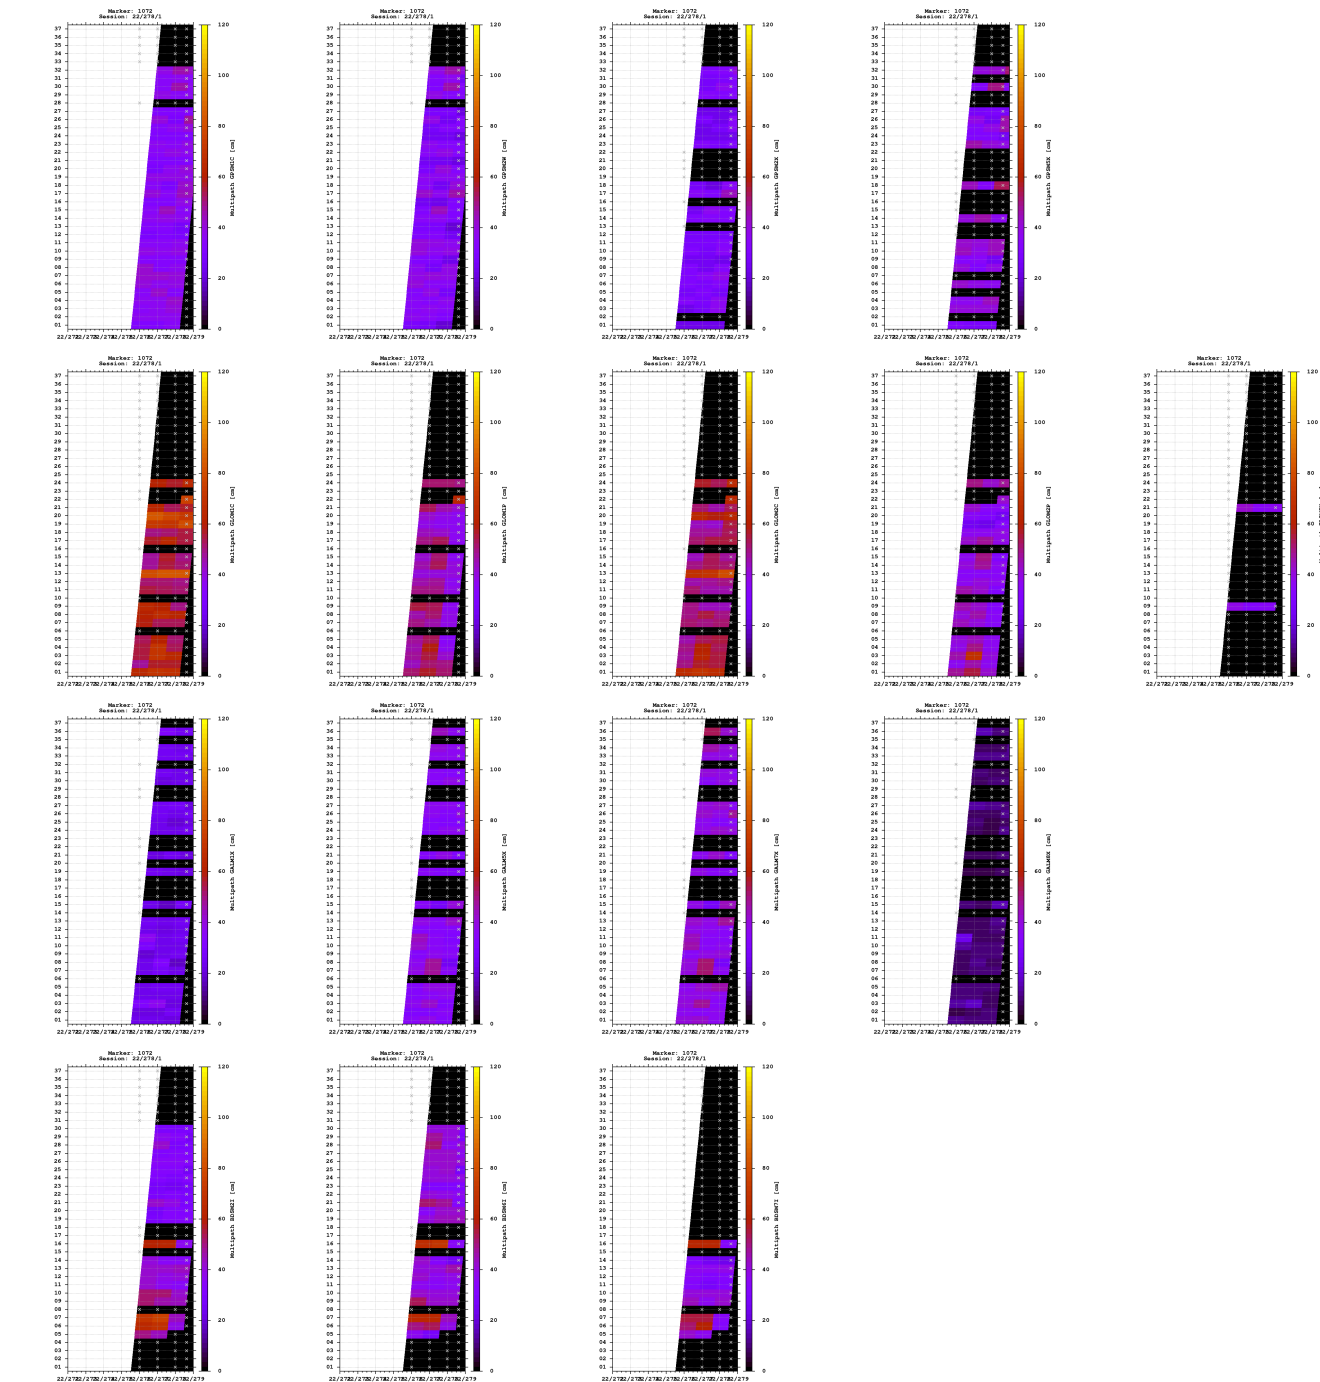


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

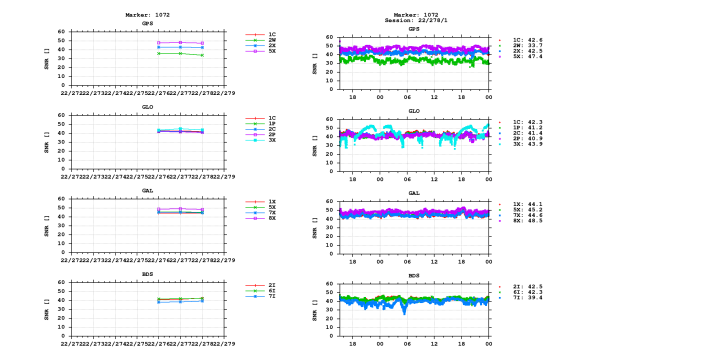


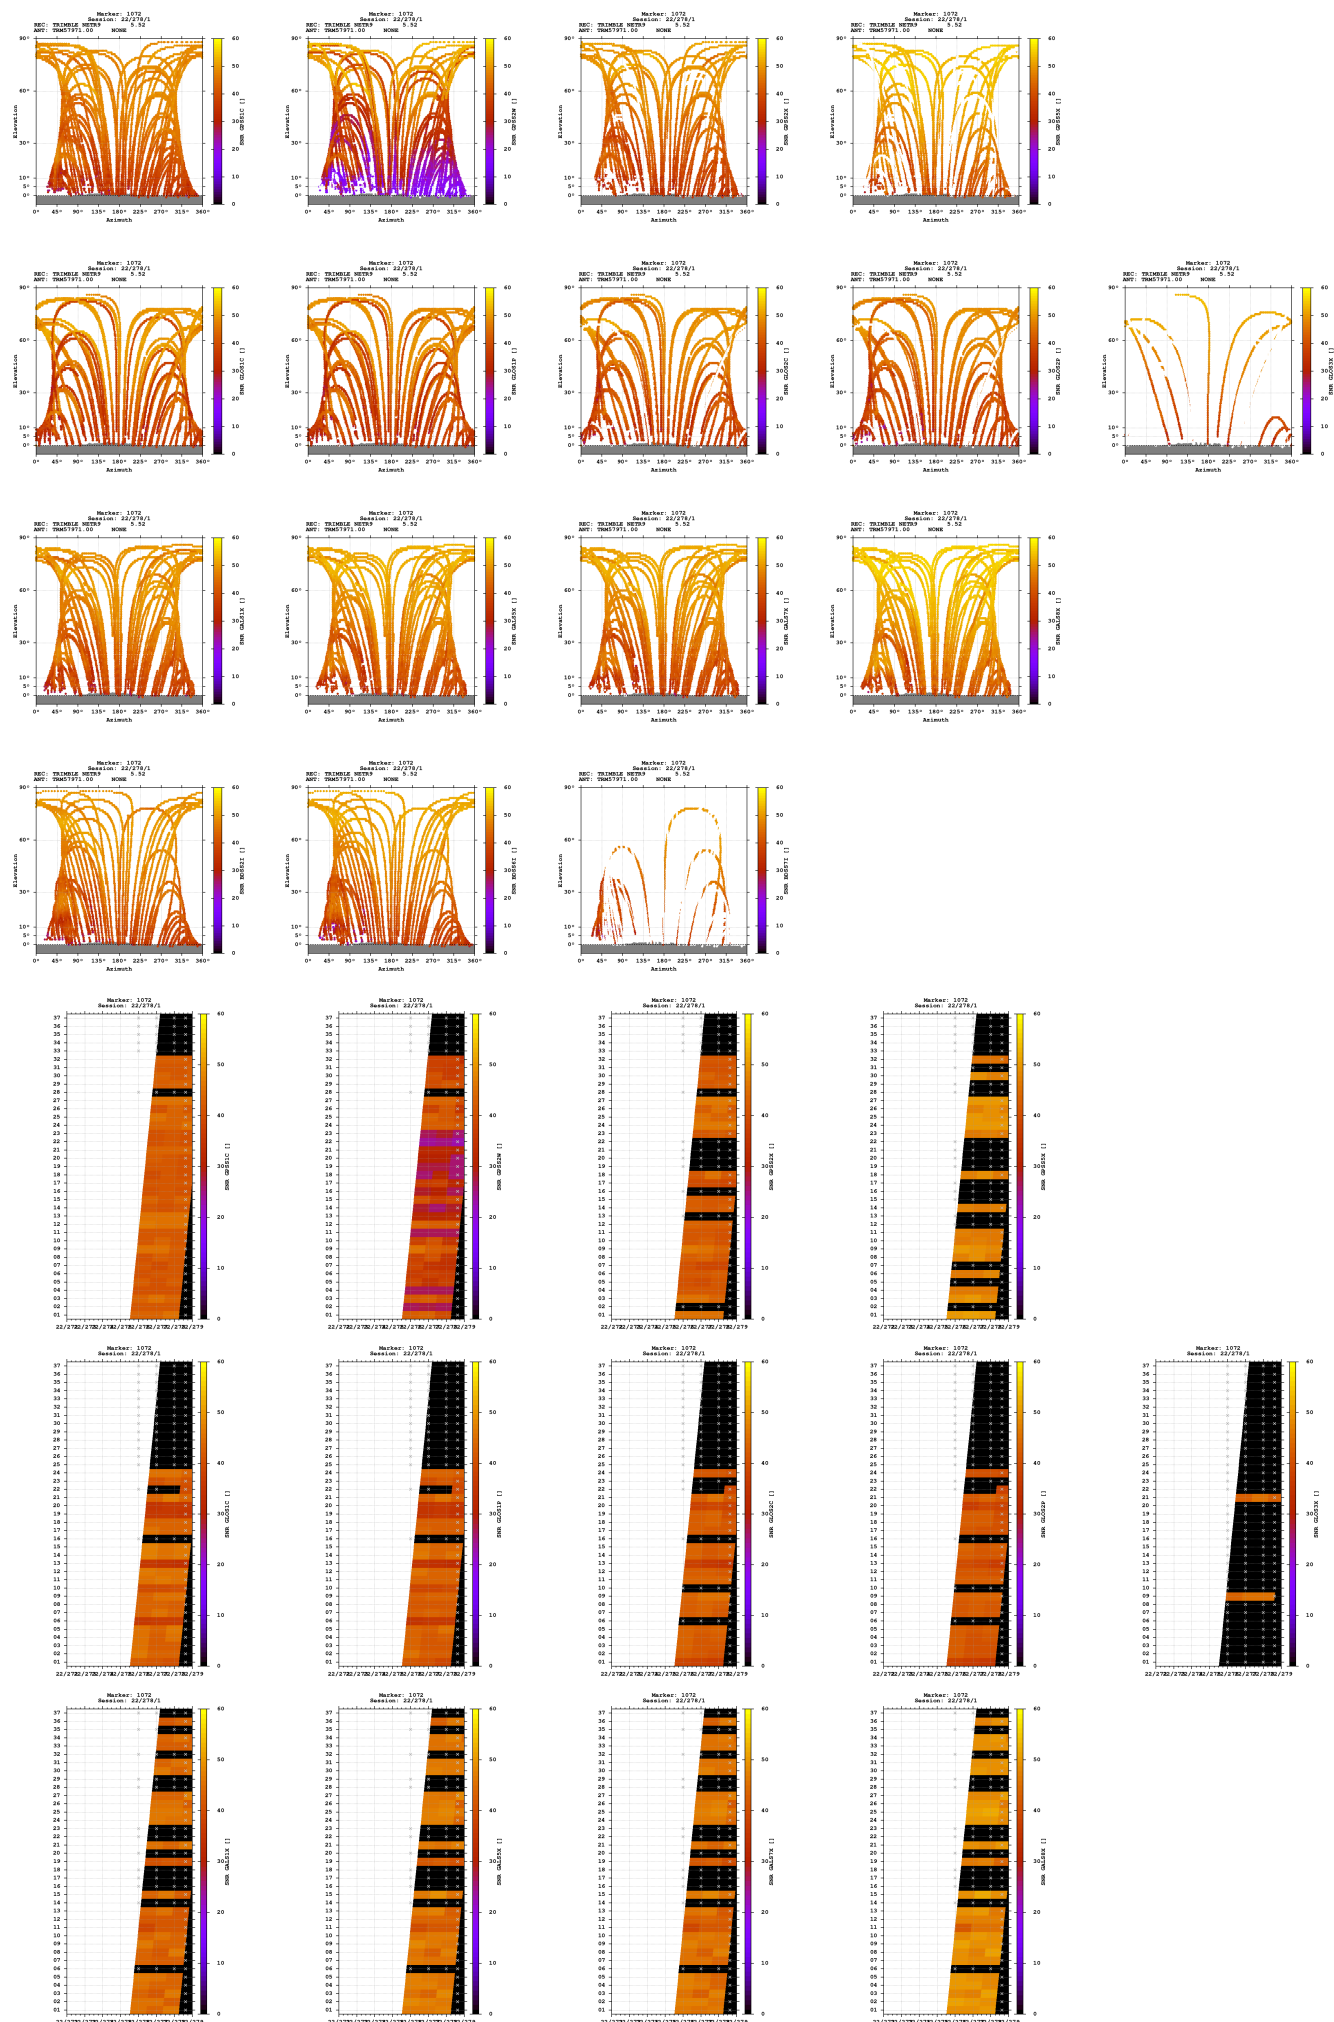

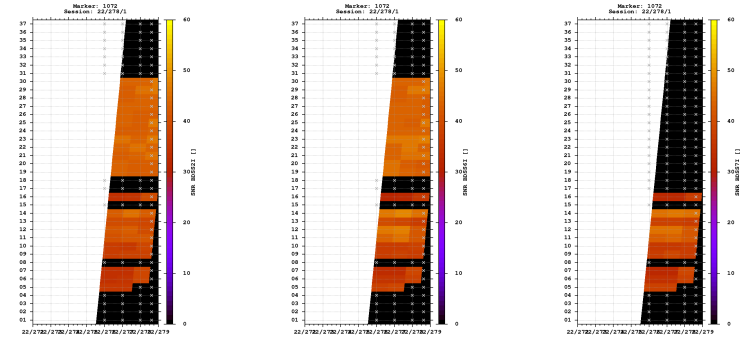



Estimates

2022-10-05 15:11:30	GPS	4270009.7929	651335.6828	4678109.1308	47.474772765	8.672888927	687.5587
2022-10-05 15:11:30	GLO	4270009.2338	651335.4188	4678108.8693	47.474775103	8.672886583	686.9655
2022-10-05 15:11:30	GAL	4270009.5185	651335.7808	4678108.6931	47.474771804	8.672890762	687.0628
2022-10-05 15:11:30	BDS	4270009.5134	651338.3740	4678110.0998	47.474777798	8.672924777	688.3604

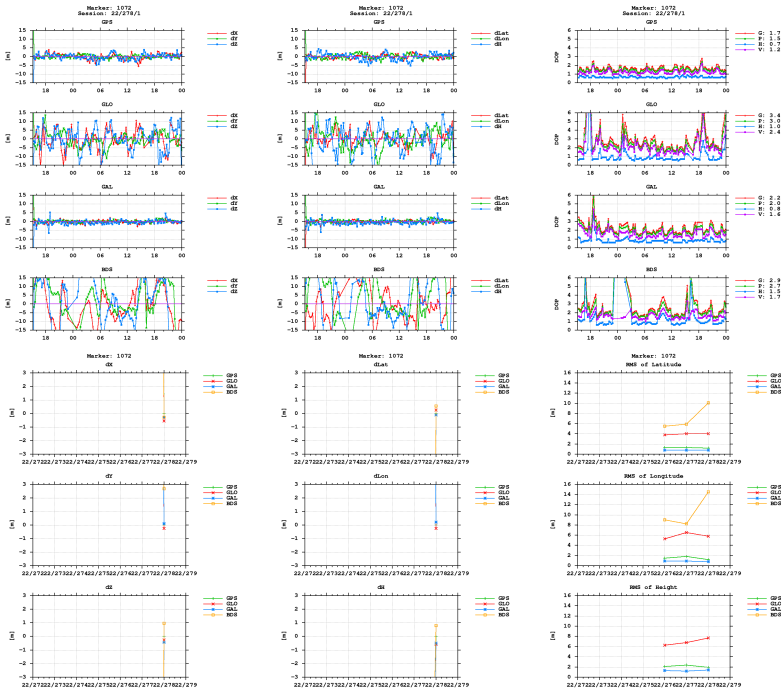

BNC

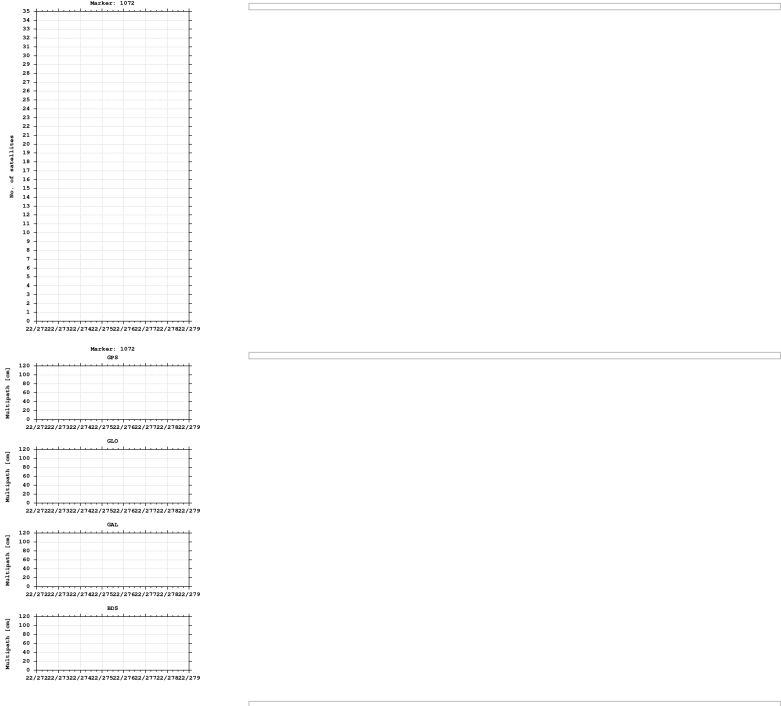

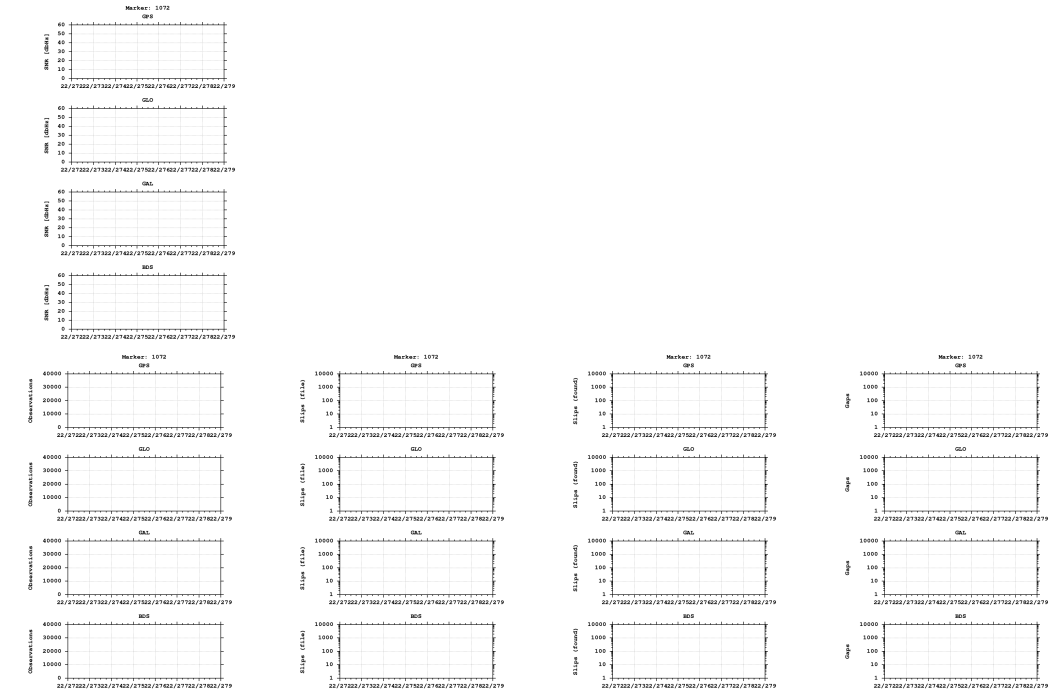

Equipment

2022-10-03 00:00:00 TRIMBLE NETR9 5.52 512 TRM57971.00 NONE 512

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)