

GNSS observation file monitoring for 0512

Last RINEX file: 05122791.220


RINEX version: 3.02

Marker: 1072

Receiver: 512 TRIMBLE NETR9 5.52


Antenna: 512 TRM57971.00 NONE

Epochs

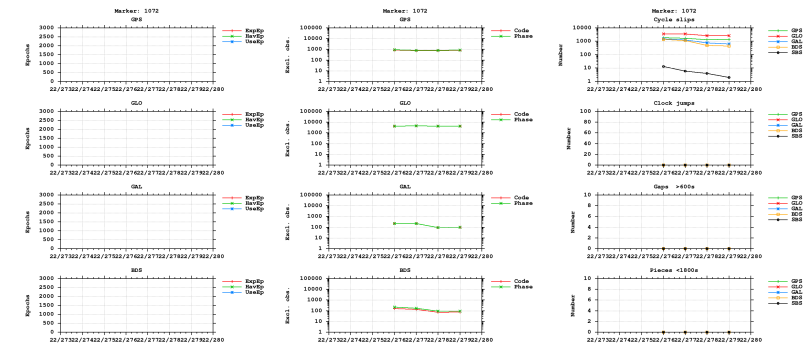



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

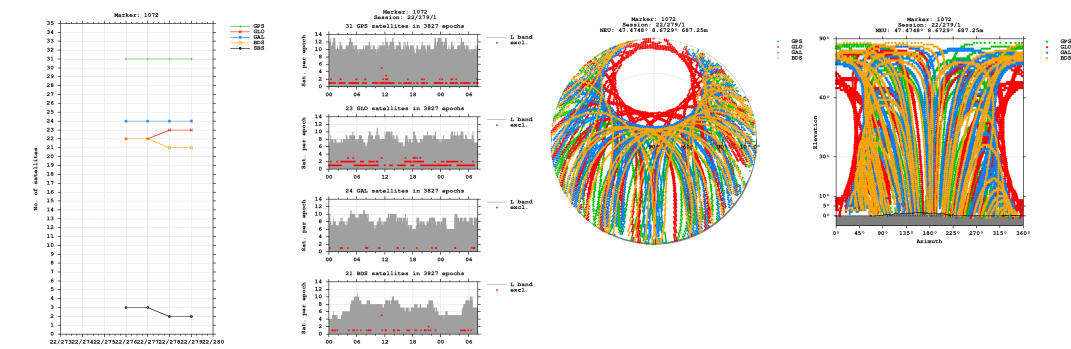


Bands

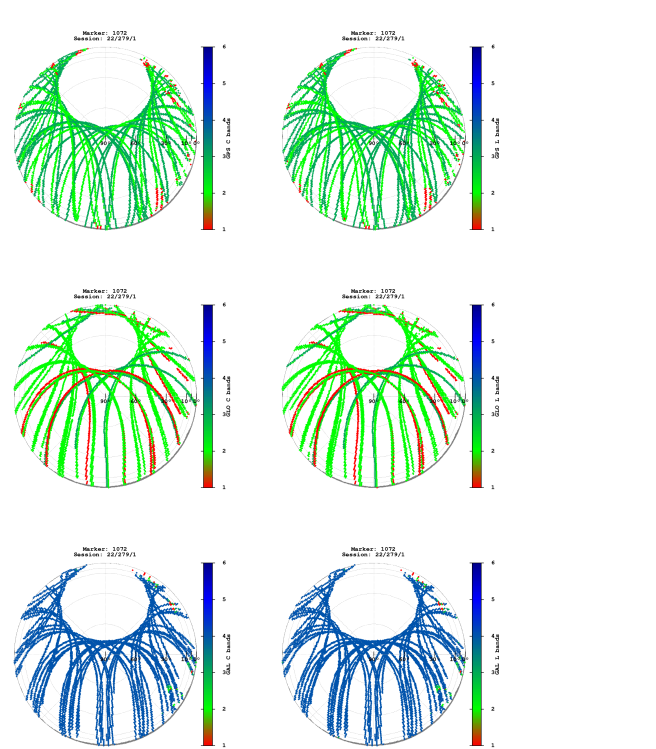


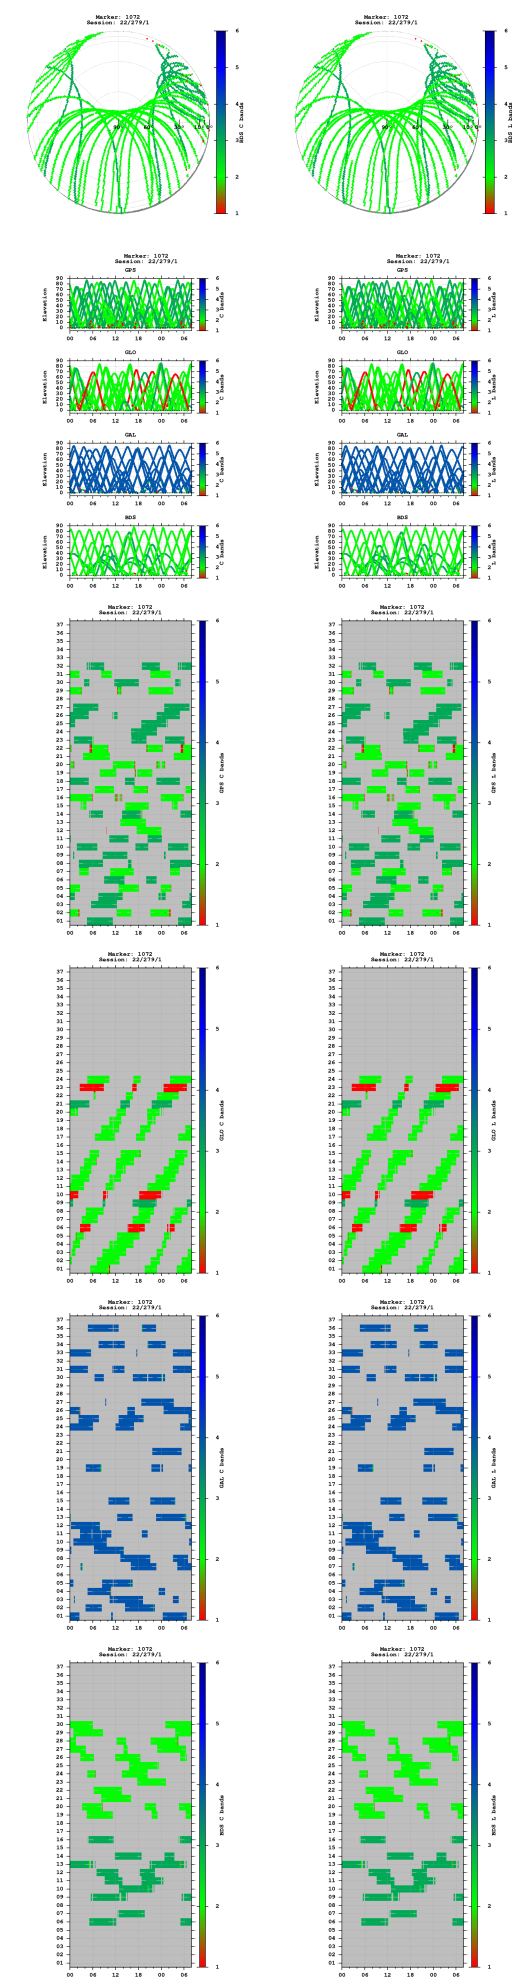


Observations

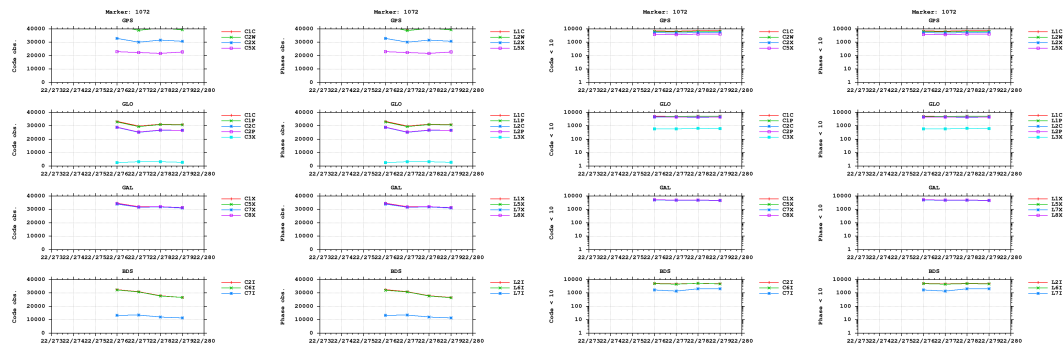


Multipath

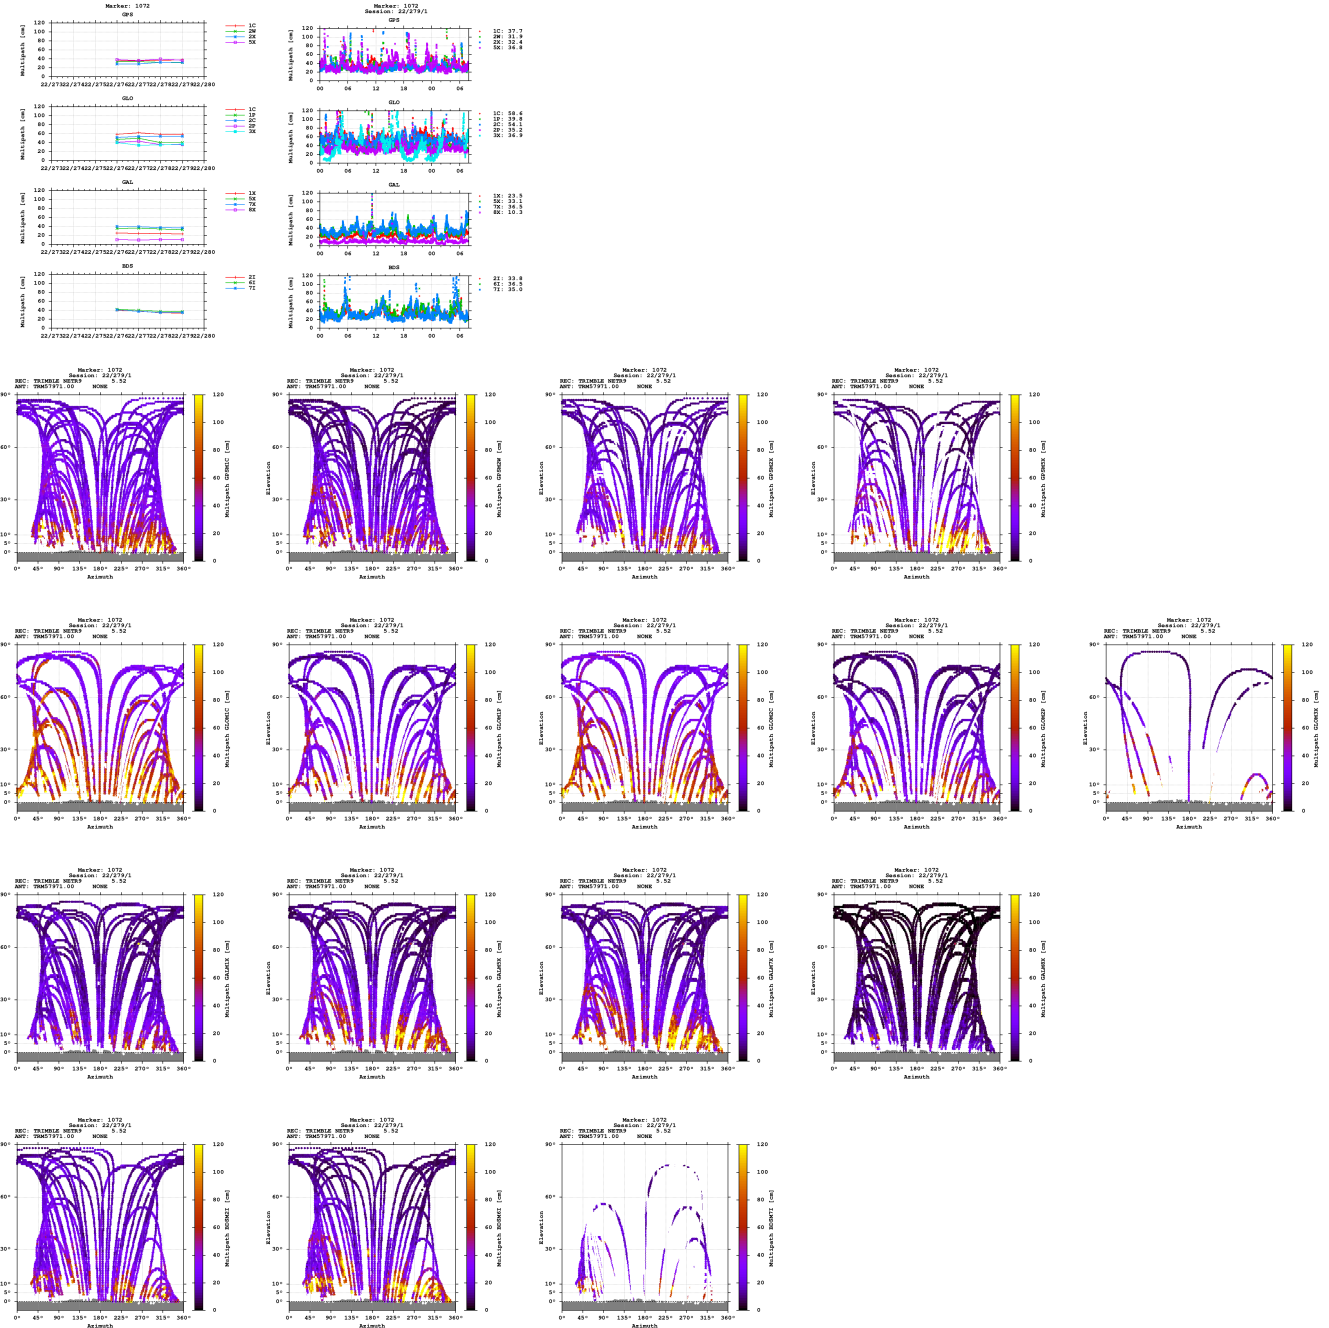


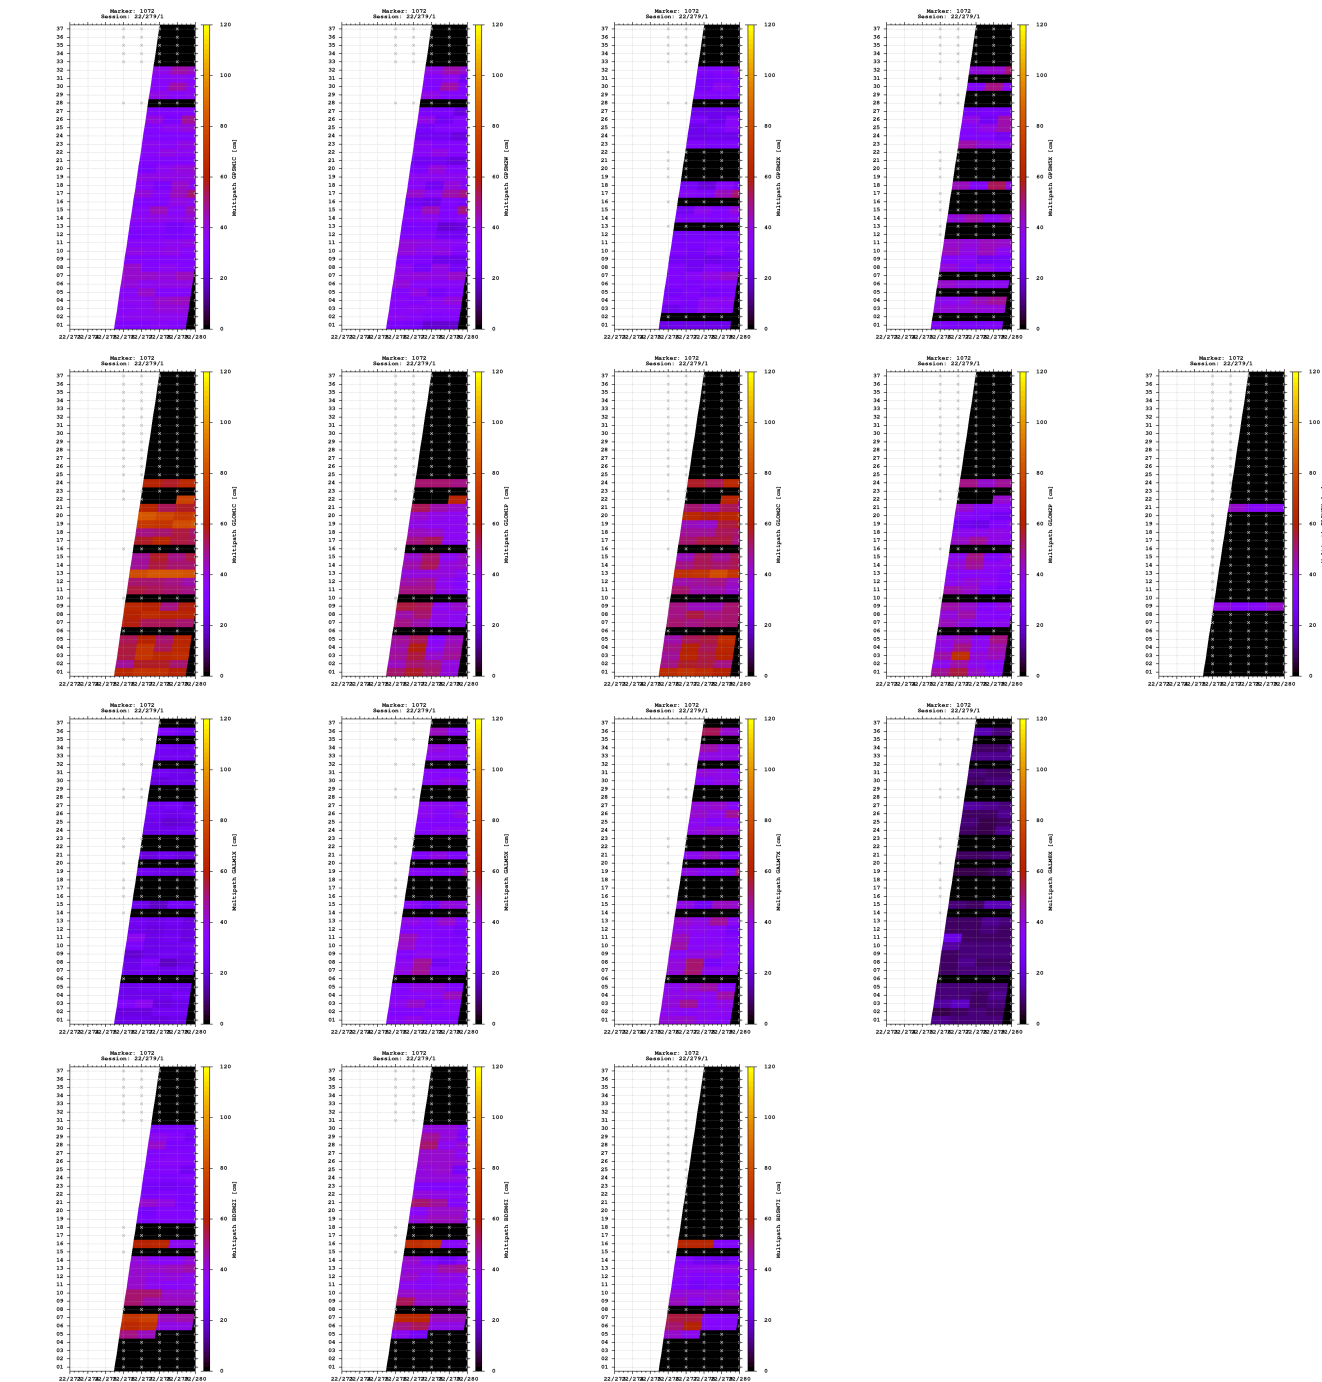


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

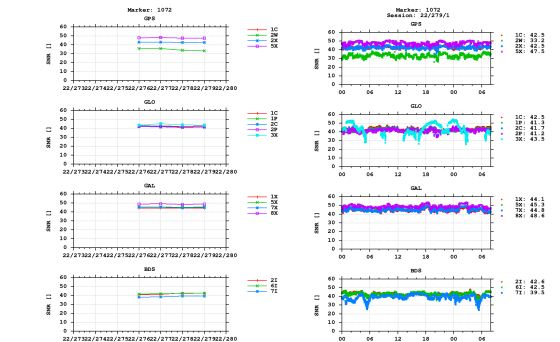


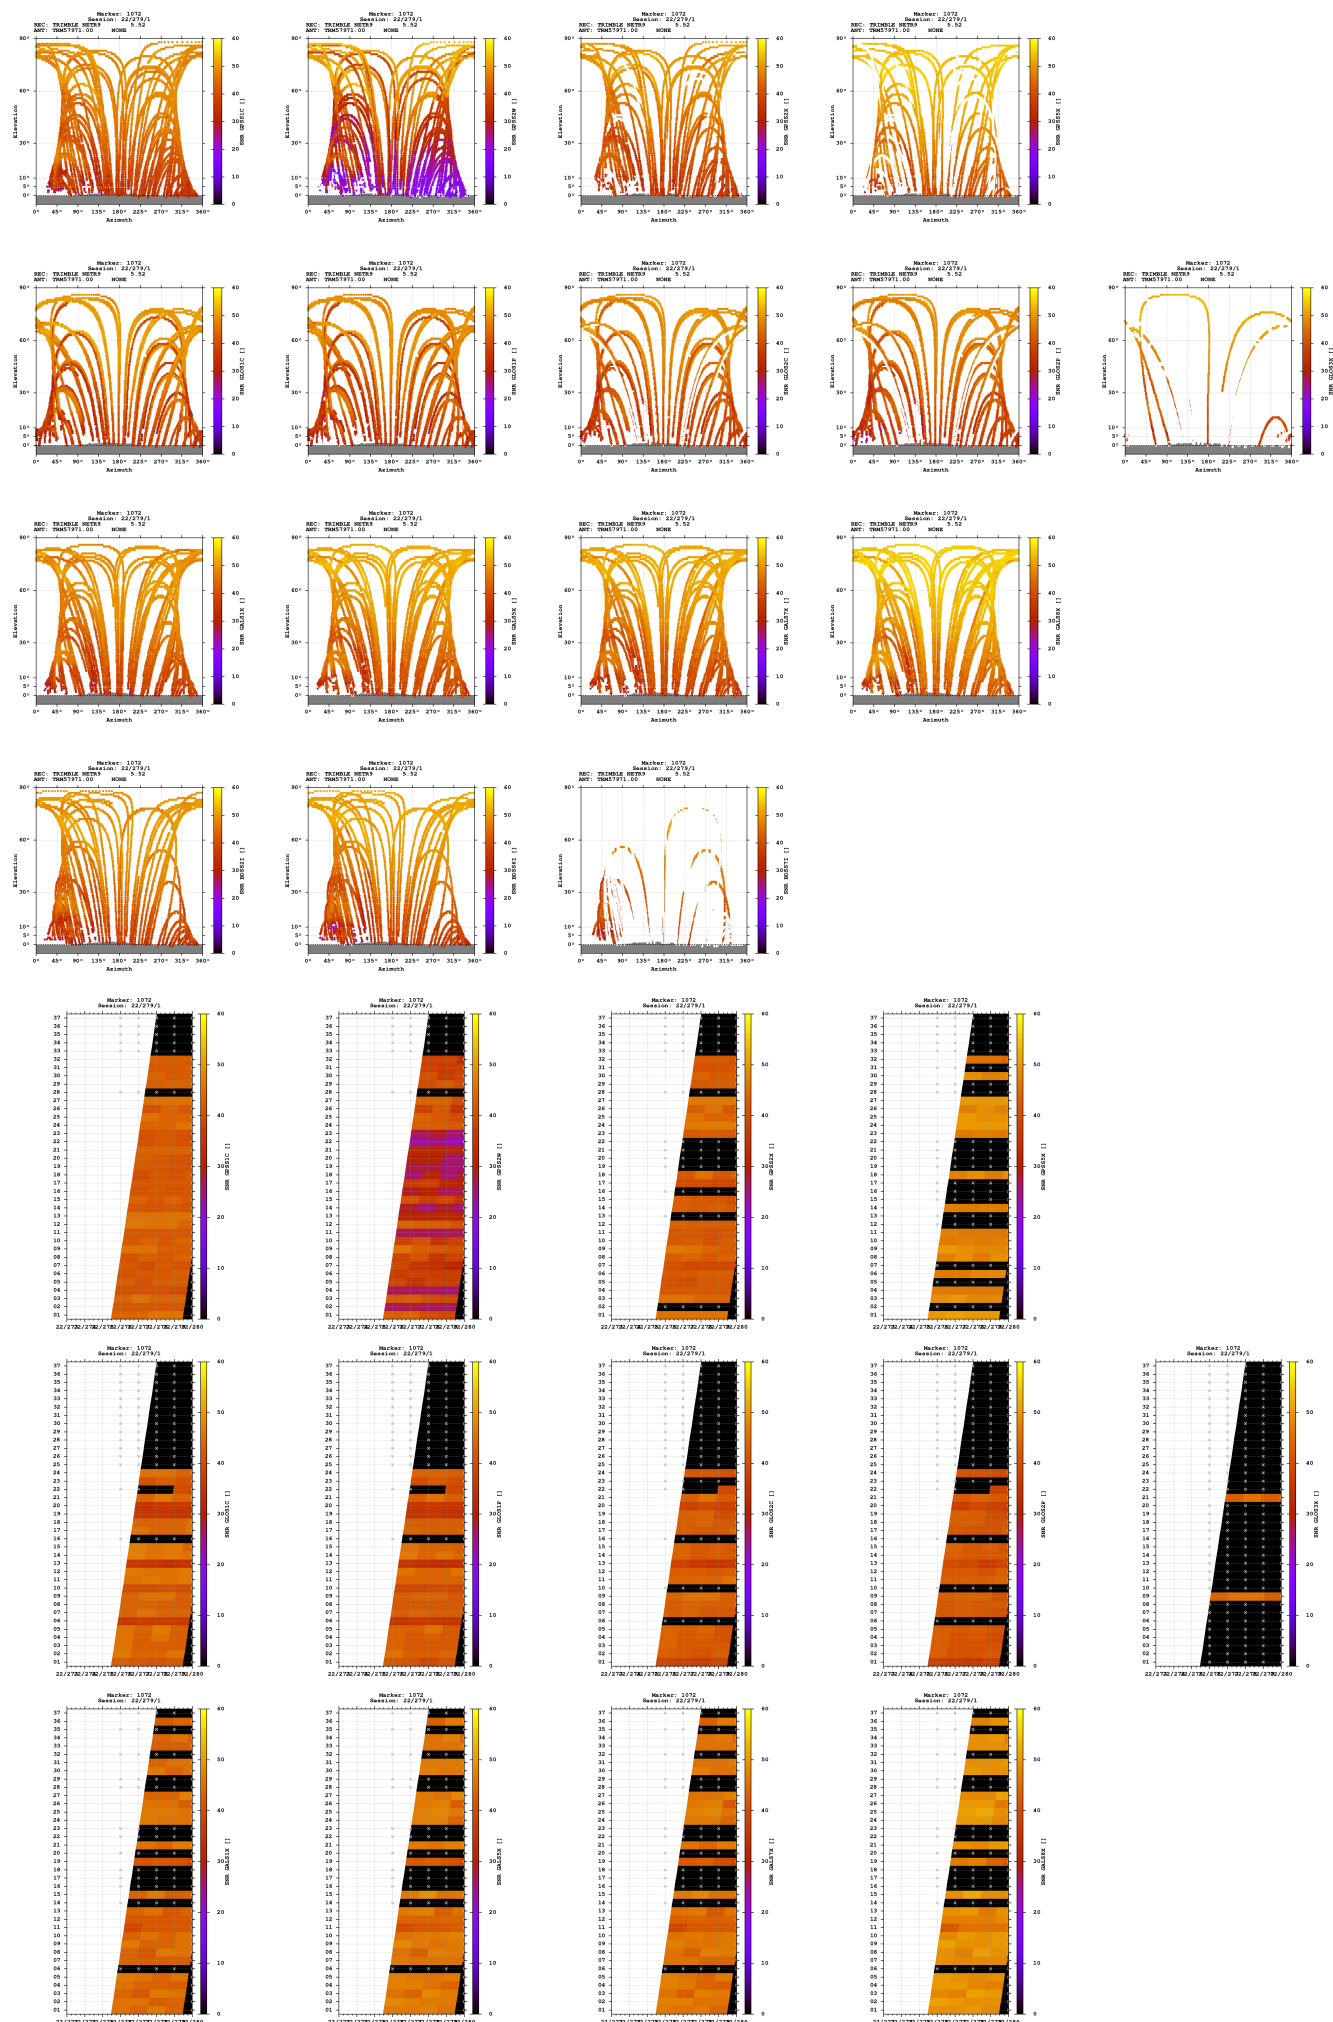

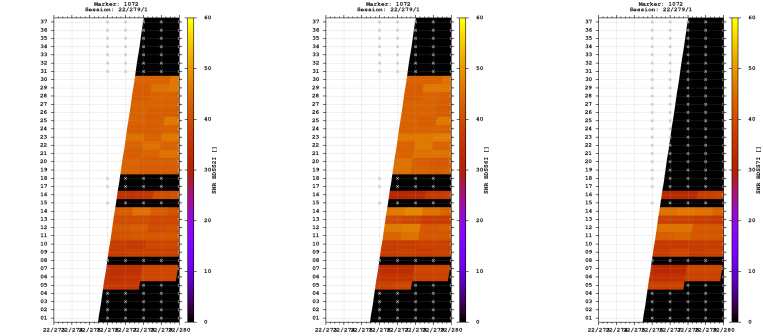


Estimates

2022-10-05 15:11:30	GPS	4270009.4428	651335.9241	4678108.9905	47.474773966	8.672892792	687.2459
2022-10-05 15:11:30	GLO	4270009.8925	651334.8386	4678108.2992	47.474767901	8.672877658	686.9263
2022-10-05 15:11:30	GAL	4270009.4129	651335.6687	4678108.7049	47.474772681	8.672889503	686.9894
2022-10-05 15:11:30	BDS	4270008.4059	651336.1328	4678113.4723	47.474807795	8.672897603	689.8774

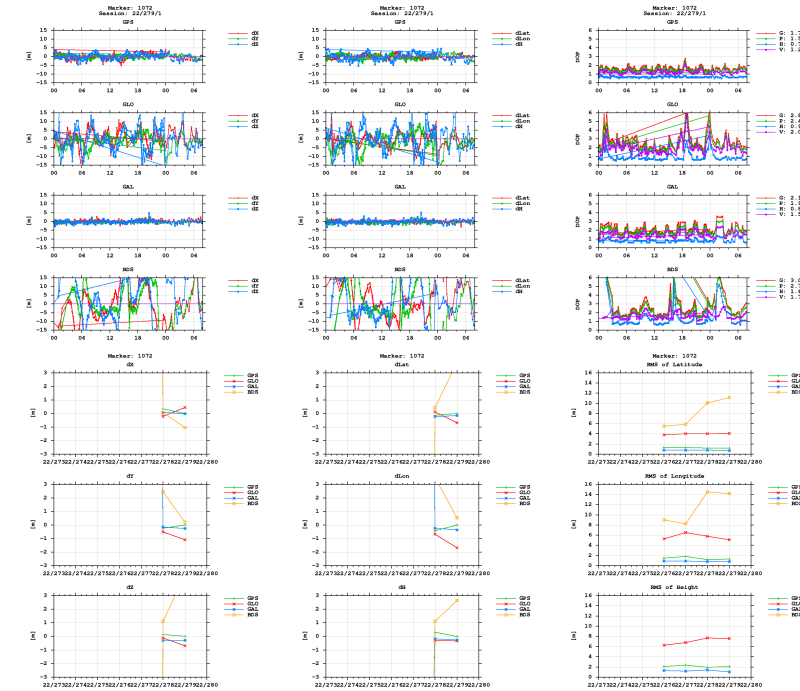

BNC



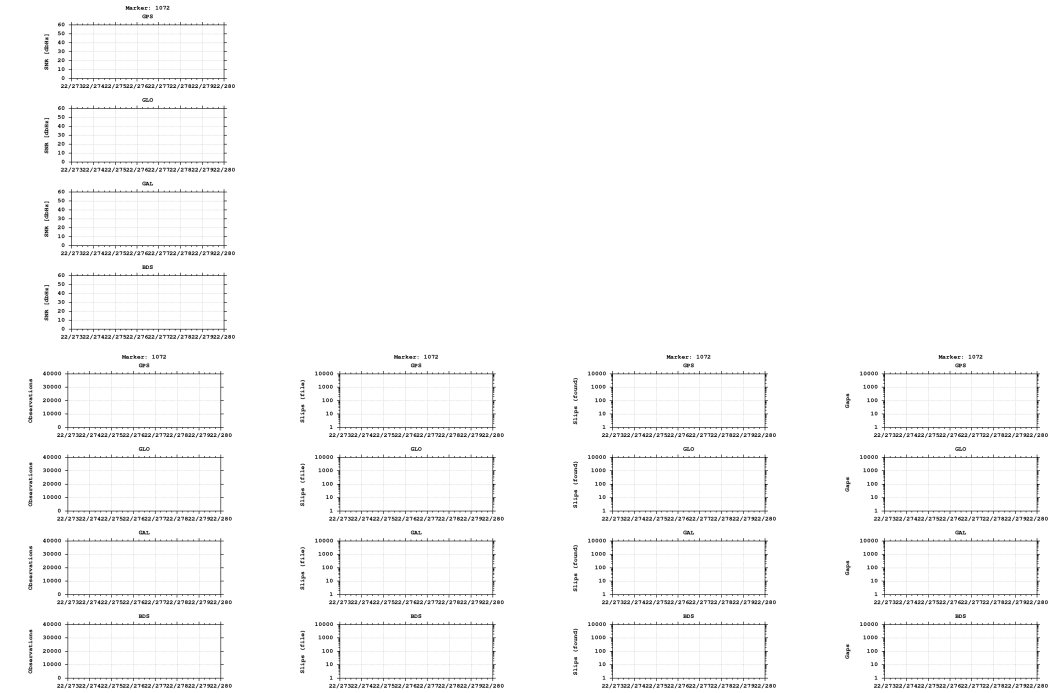

Equipment

2022-10-03 00:00:00 TRIMBLE NETR9 5.52 512 TRM57971.00 NONE 512

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)