

GNSS observation file monitoring for 0514

Last RINEX file: 05142801.220

RINEX version: 3.02

Marker: 1071

Receiver: 514

Antenna: 514


TRIMBLE NETR9

5.52

TRM57971.00


NONE

Epochs

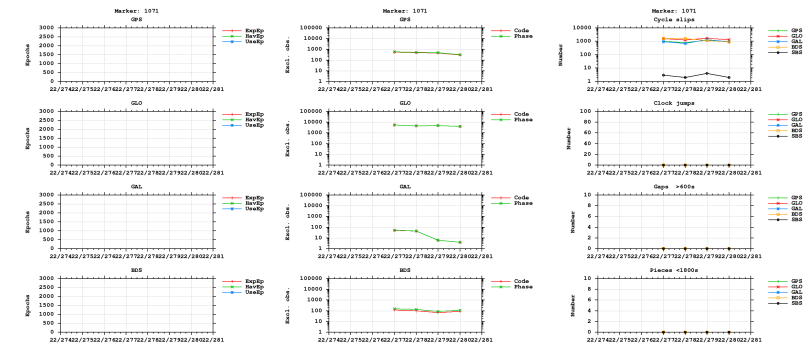



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

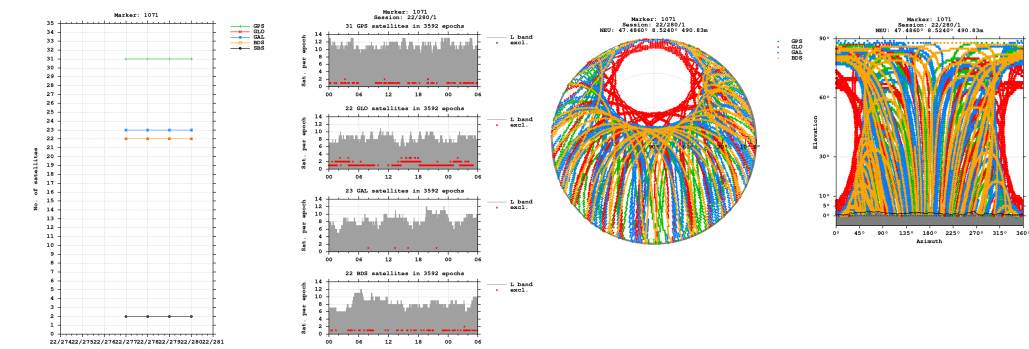


Bands

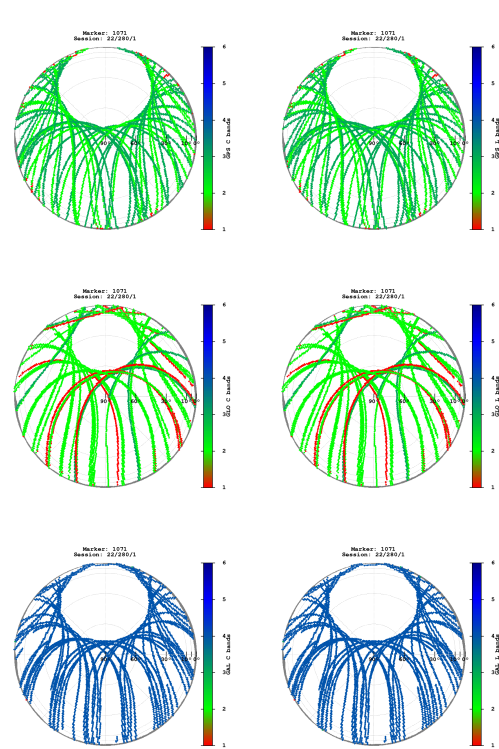


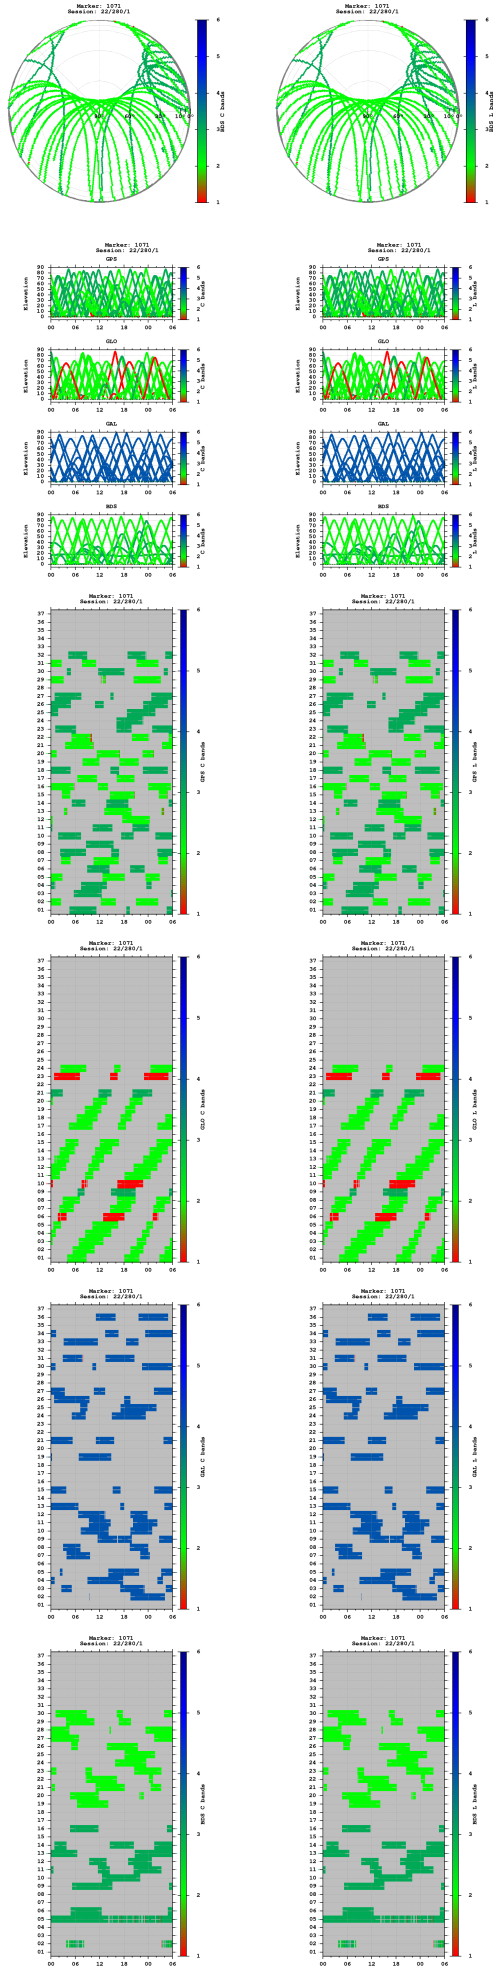


Observations

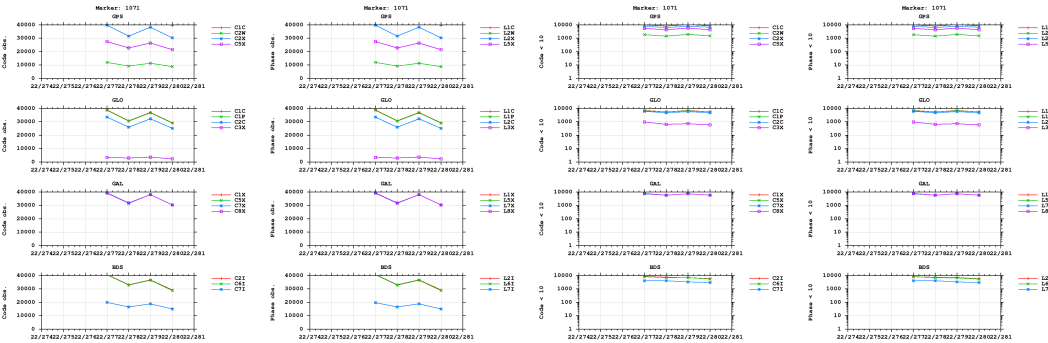


Multipath

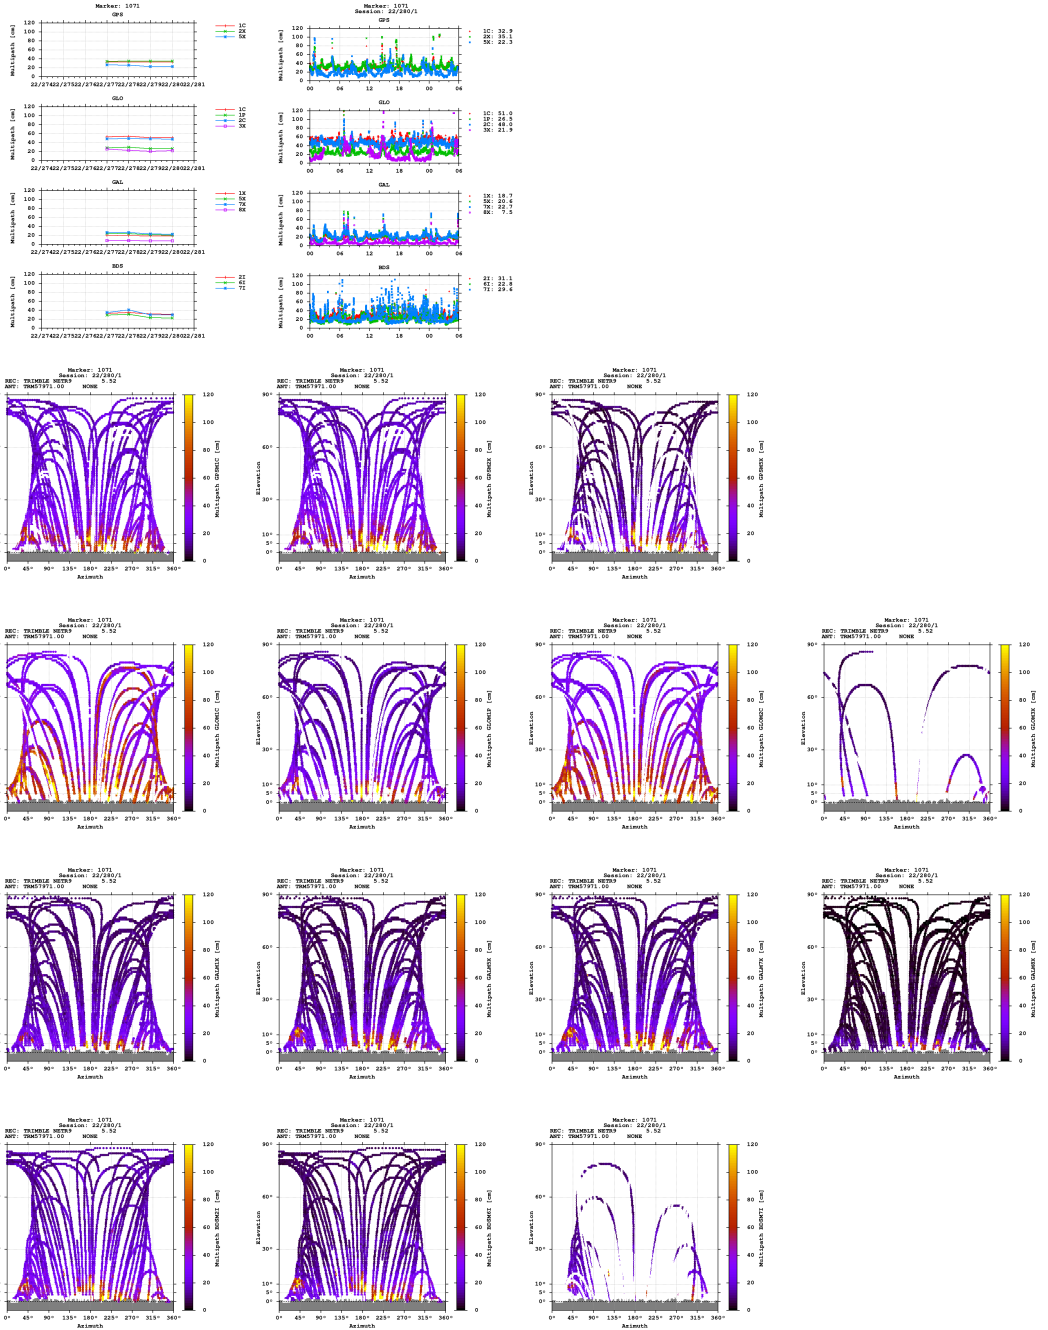


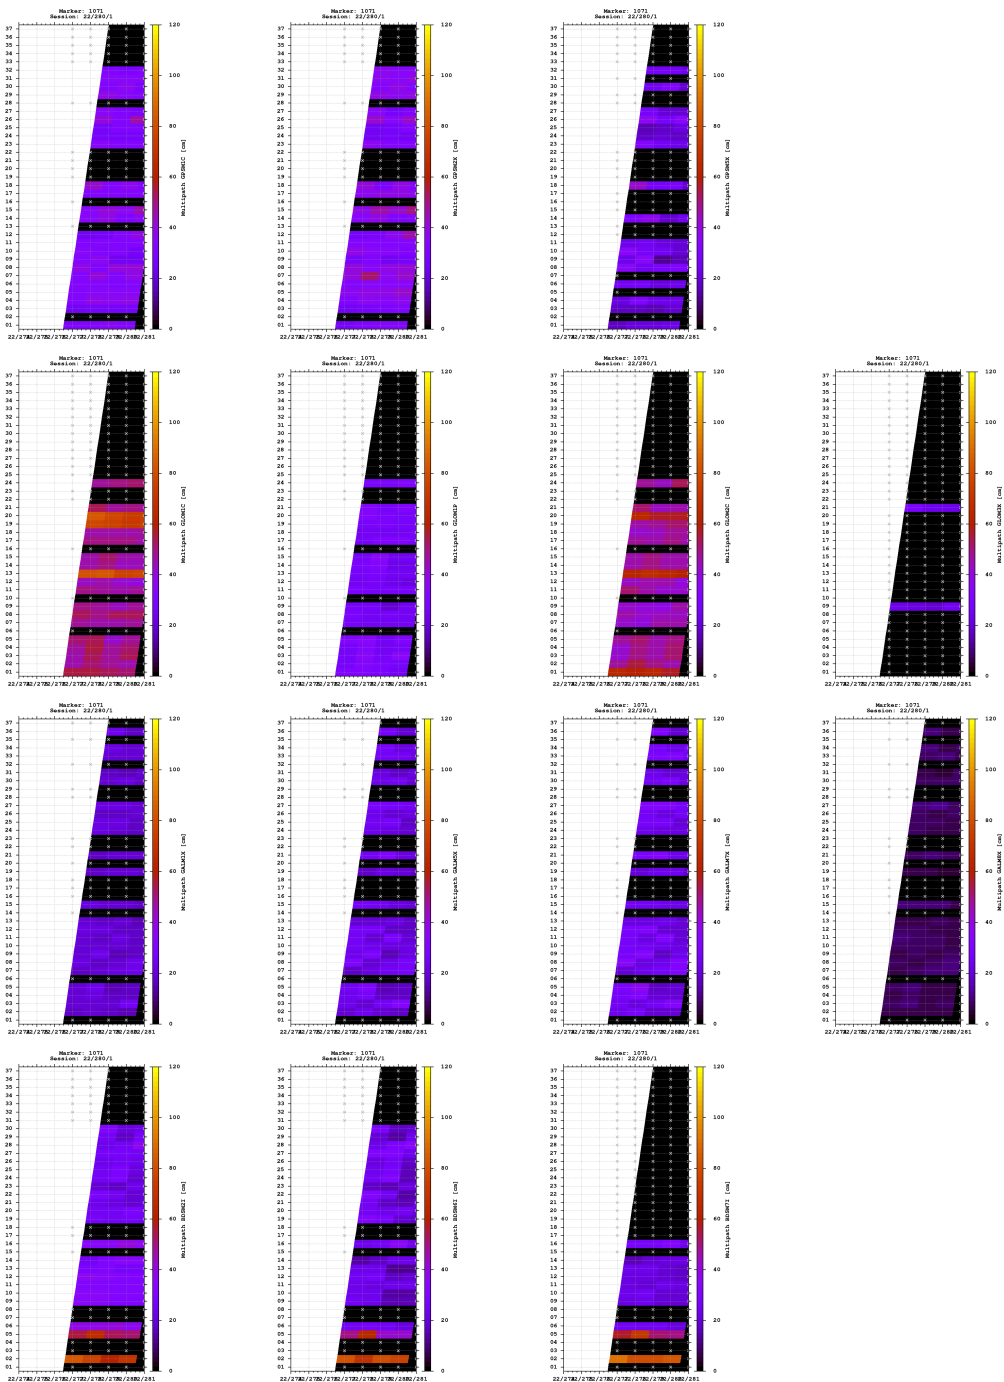


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

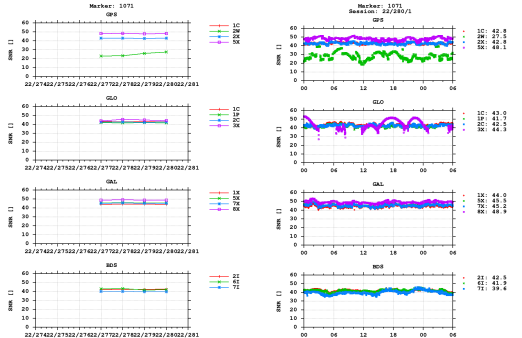


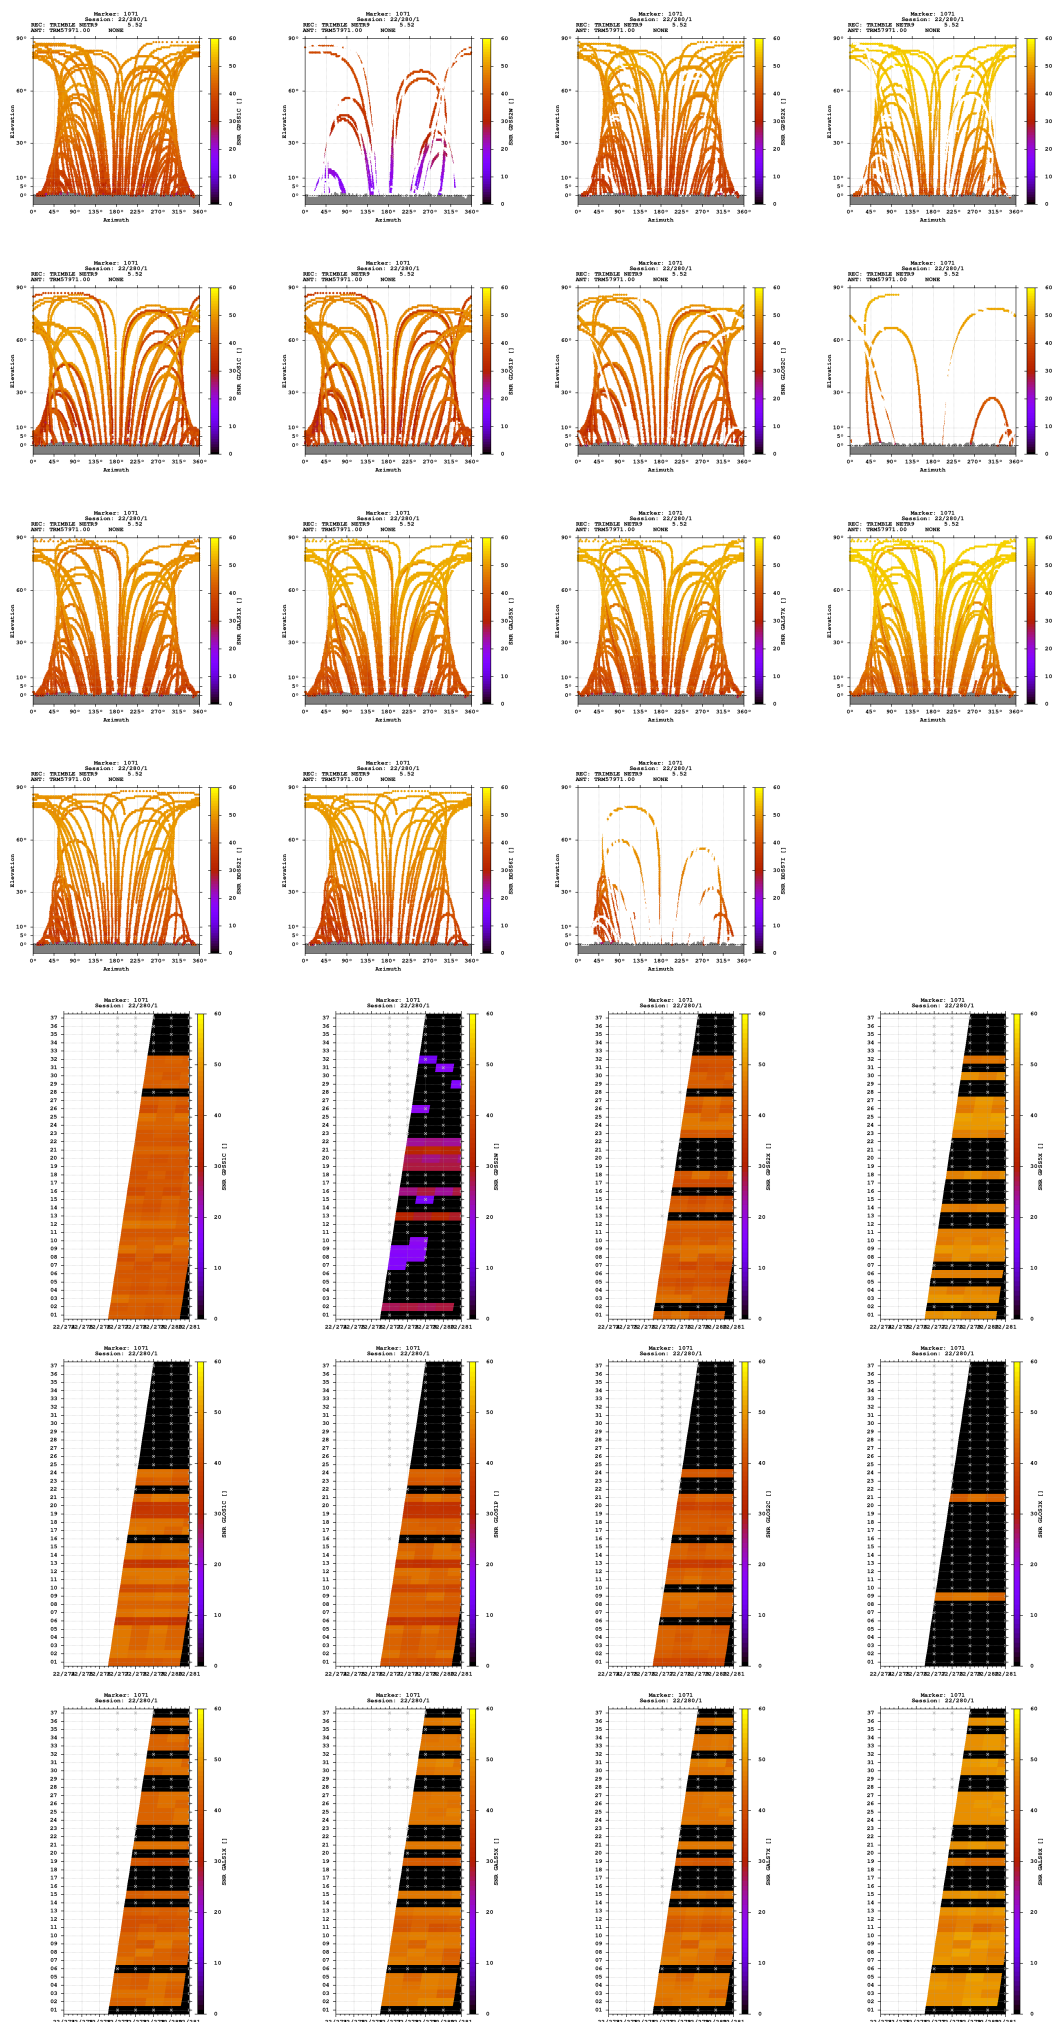

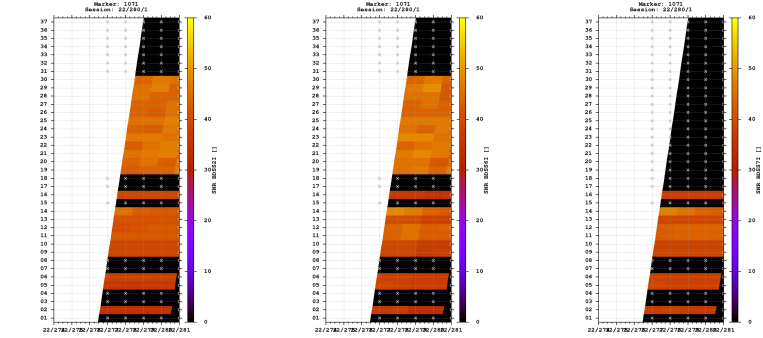


Estimates

2022-10-06 10:15:30	GPS	4270650.5128	640080.4204	4678804.3259	47.485953388	8.523979905	490.8294
2022-10-06 10:15:30	GLO	4270650.7107	640079.3431	4678804.4829	47.485954104	8.523965380	490.9695
2022-10-06 10:15:30	GAL	4270650.2612	640080.1861	4678804.2018	47.485954514	8.523977325	490.5463
2022-10-06 10:15:30	BDS	4270649.2531	640080.0878	4678807.1707	47.485979264	8.523978017	492.0512

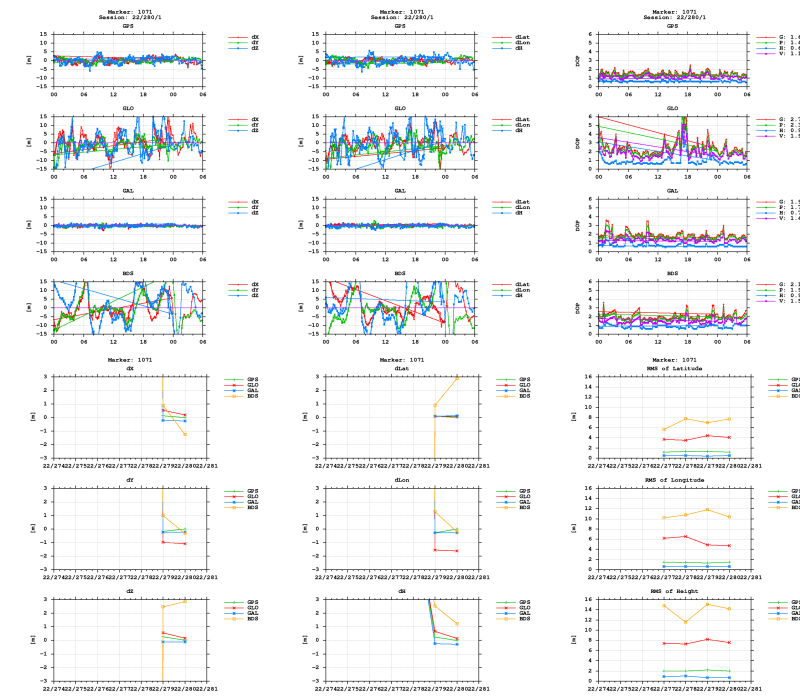

BNC



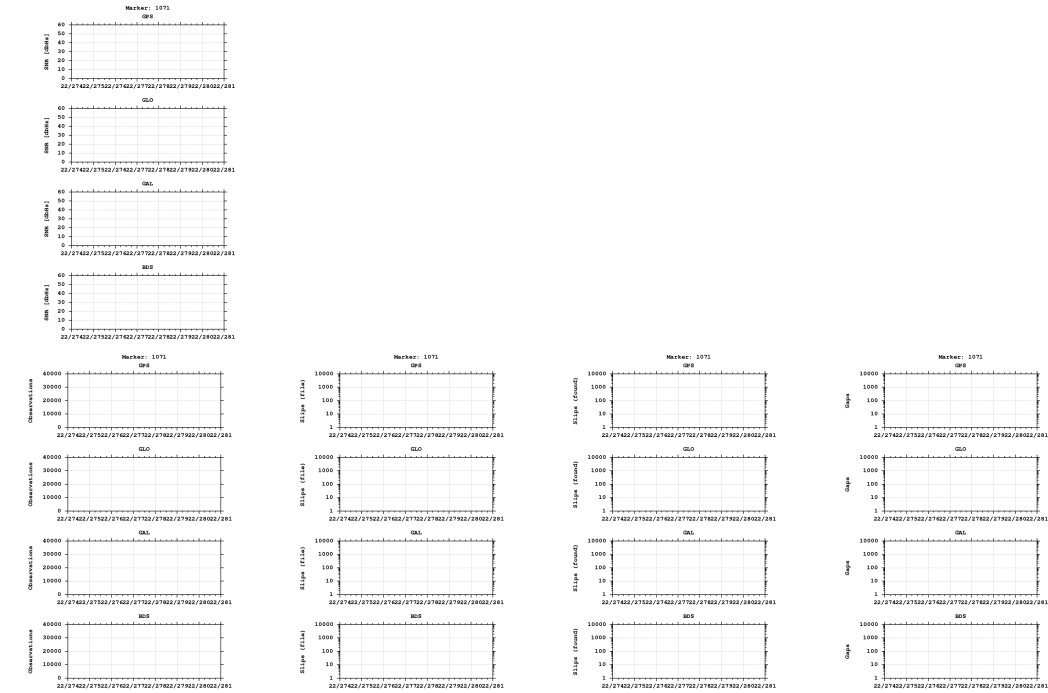

Equipment

2022-10-04 00:00:00 TRIMBLE NETR9 5.52 514 TRM57971.00 NONE 514

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)