


GNSS observation file monitoring for 0515


Last RINEX file: 05152761.22O
RINEX version: 3.02
Marker: 1071
Receiver: 515 TRIMBLE NETR9 5.52
Antenna: 515 TRM57971.00 NONE


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

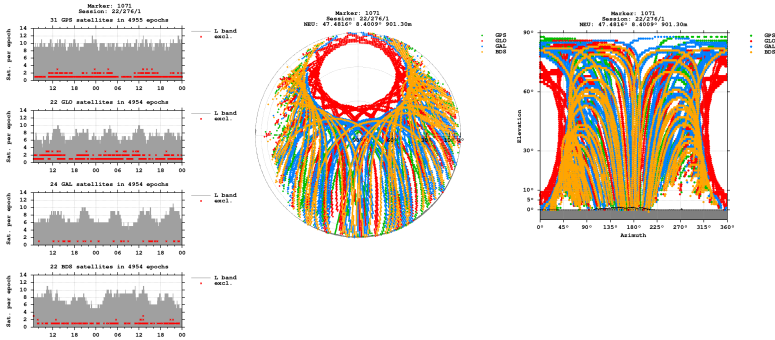


Bands

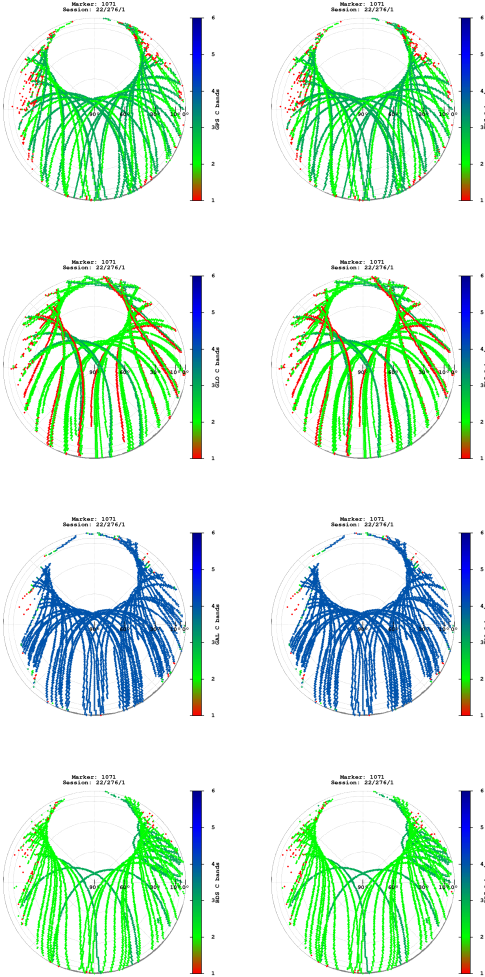

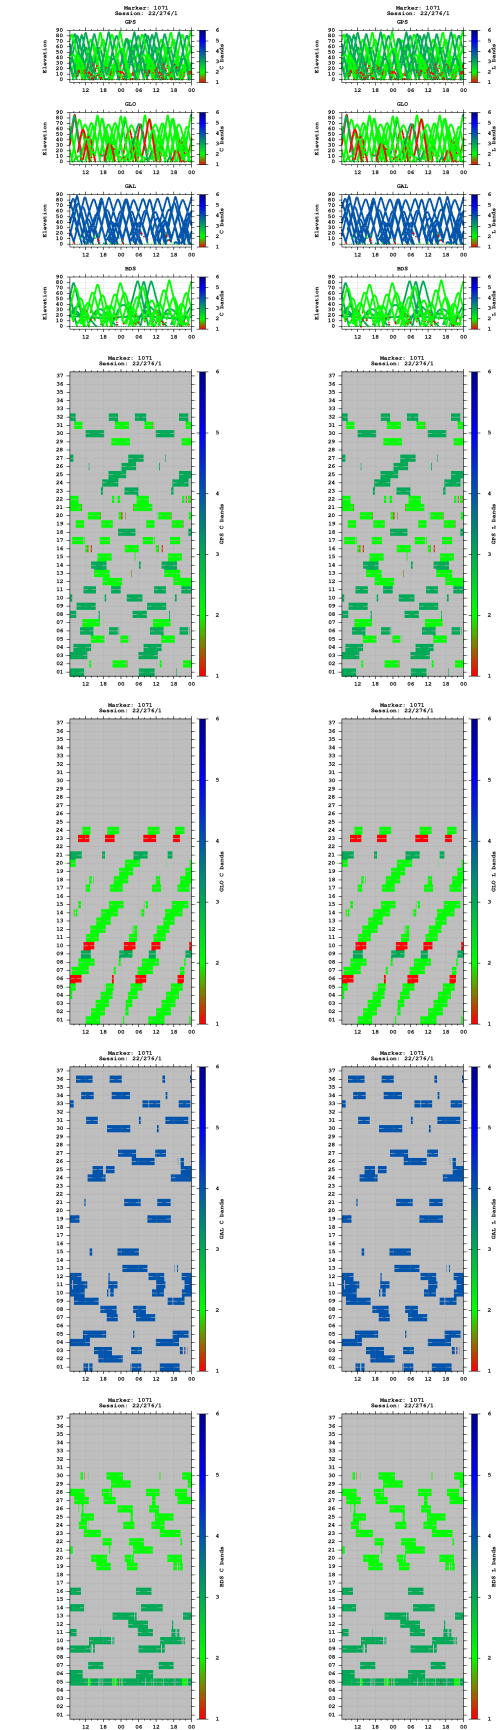



Multipath

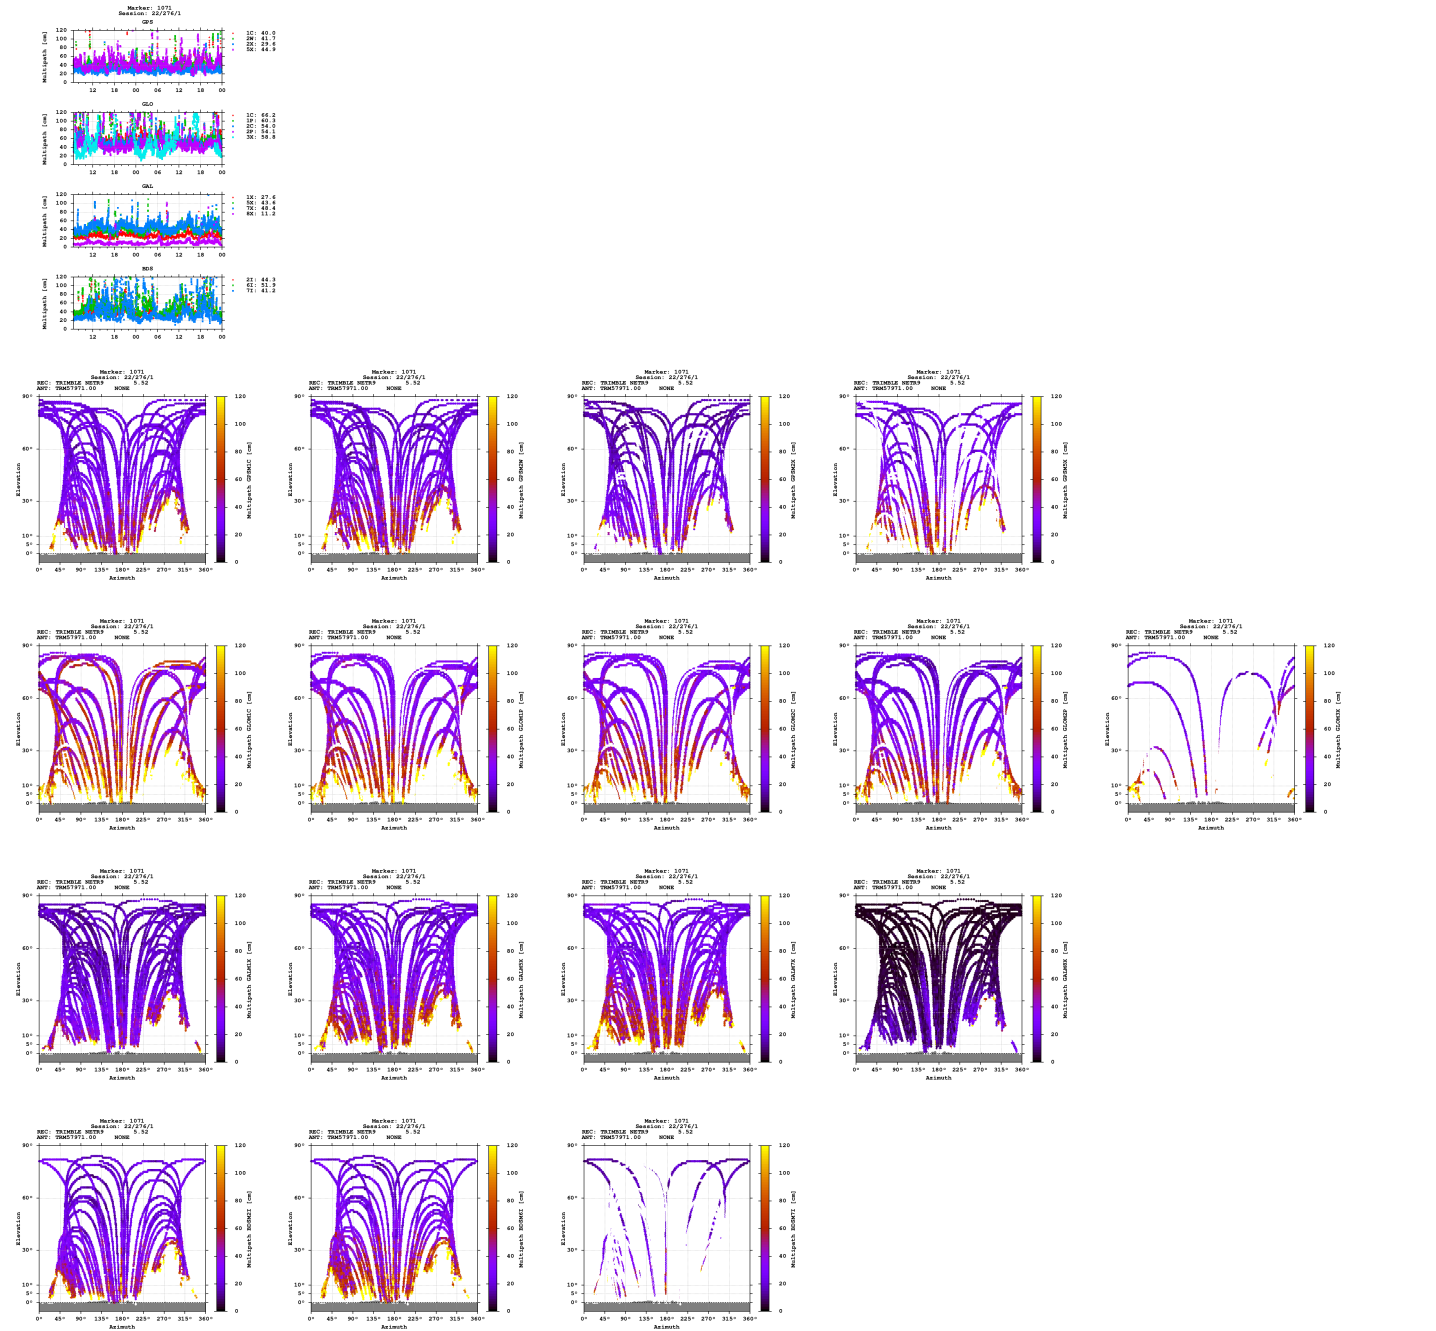

- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.


Signal-to-noise ratio

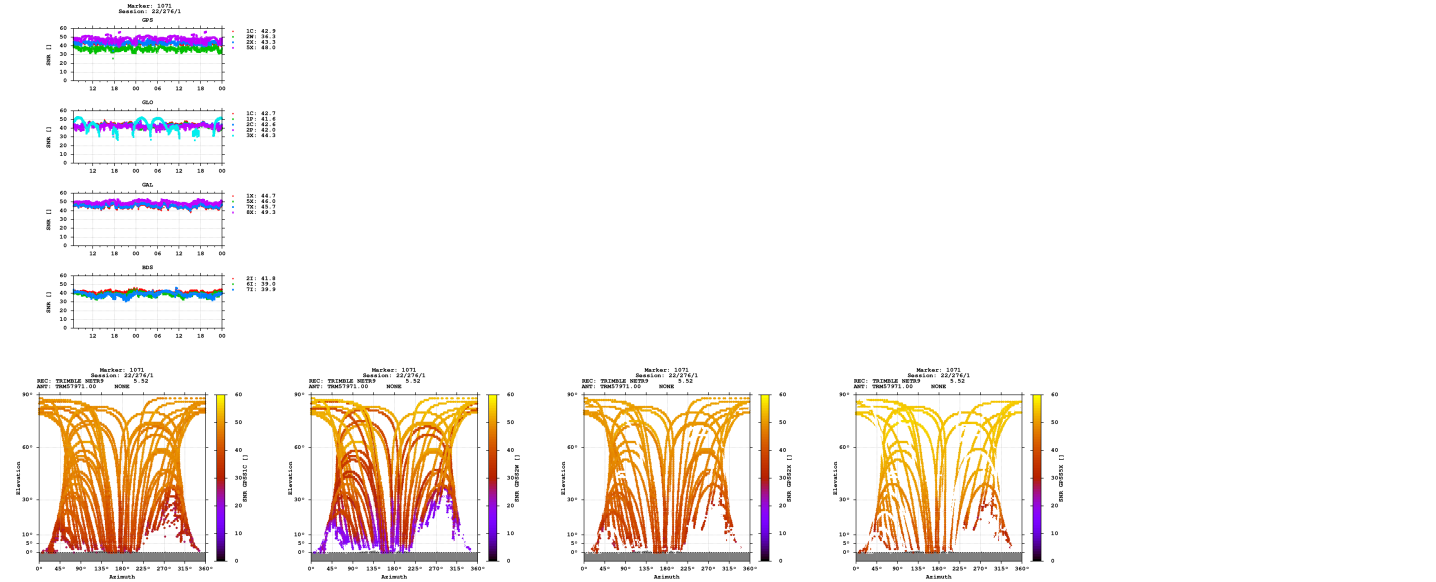

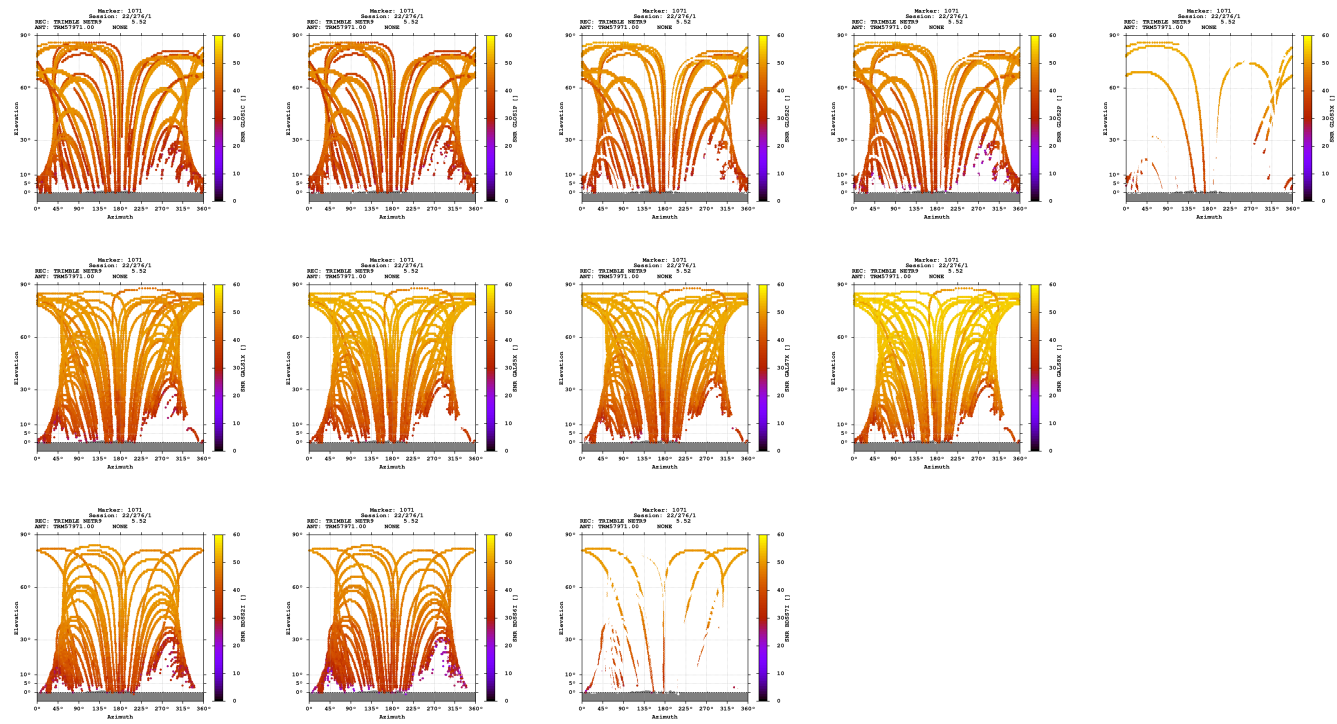

Estimates

2022-10-03 06:39:30	GPS	4272644.2874	630995.7440	4678778.8546	47.481588156	8.400873094	901.2951
2022-10-03 06:39:30	GLO	4272644.5639	630995.9111	4678778.3919	47.481583369	8.400874751	901.1555
2022-10-03 06:39:30	GAL	4272644.0259	630995.8974	4678778.4451	47.481587233	8.400875614	900.8337
2022-10-03 06:39:30	BDS	4272643.7286	630996.0119	4678778.5035	47.481589427	8.400877693	900.6892

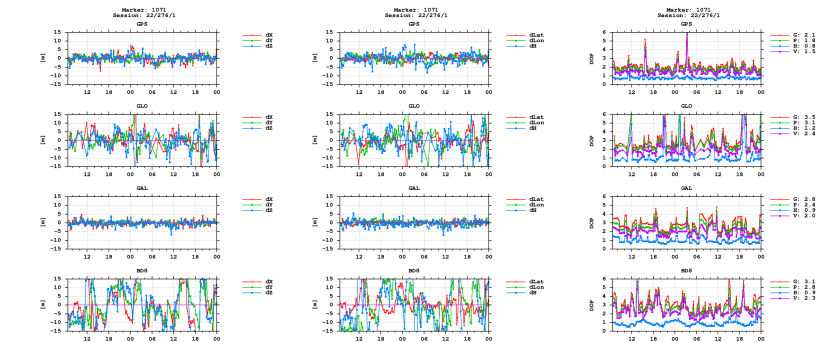

BNC

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)