


GNSS observation file monitoring for 0515


Last RINEX file: 05152771.220
RINEX version: 3.02
Marker: 1071
Receiver: 515 TRIMBLE NETR9 5.52
Antenna: 515 TRM57971.00 NONE

Epochs

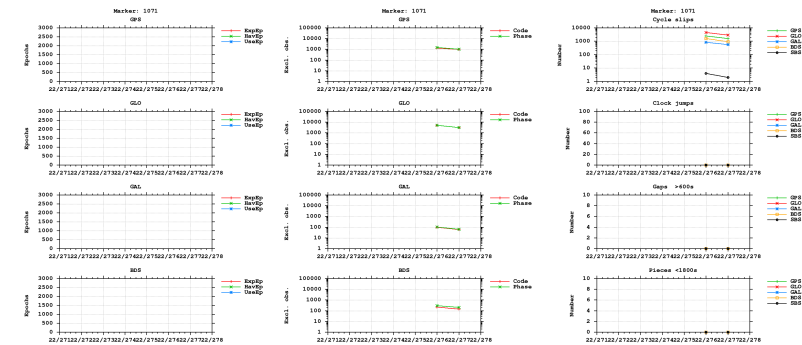



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.


Satellites

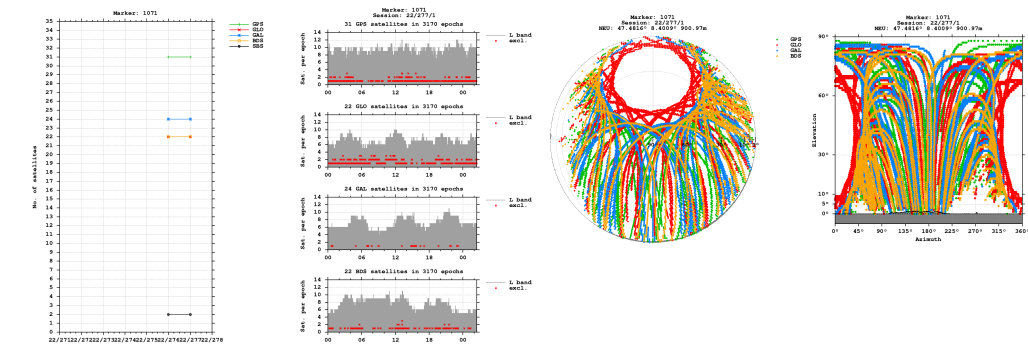


Bands

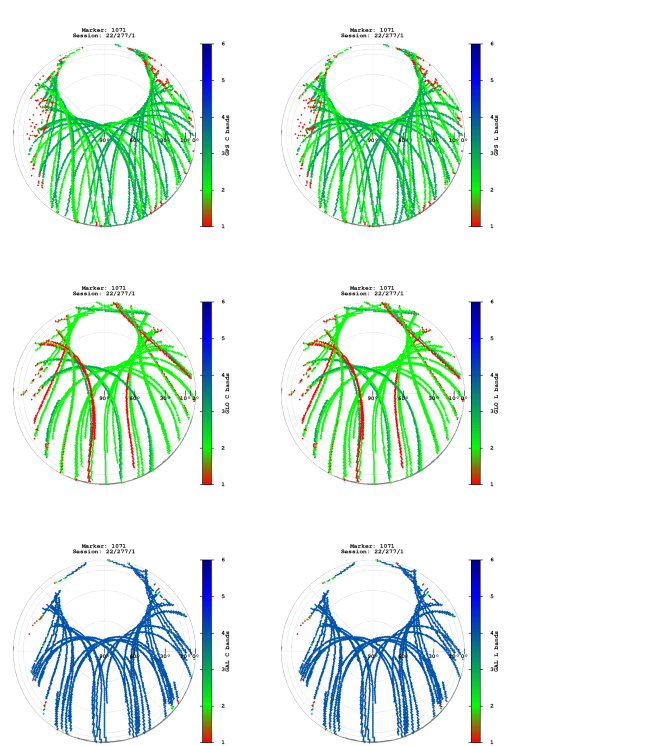


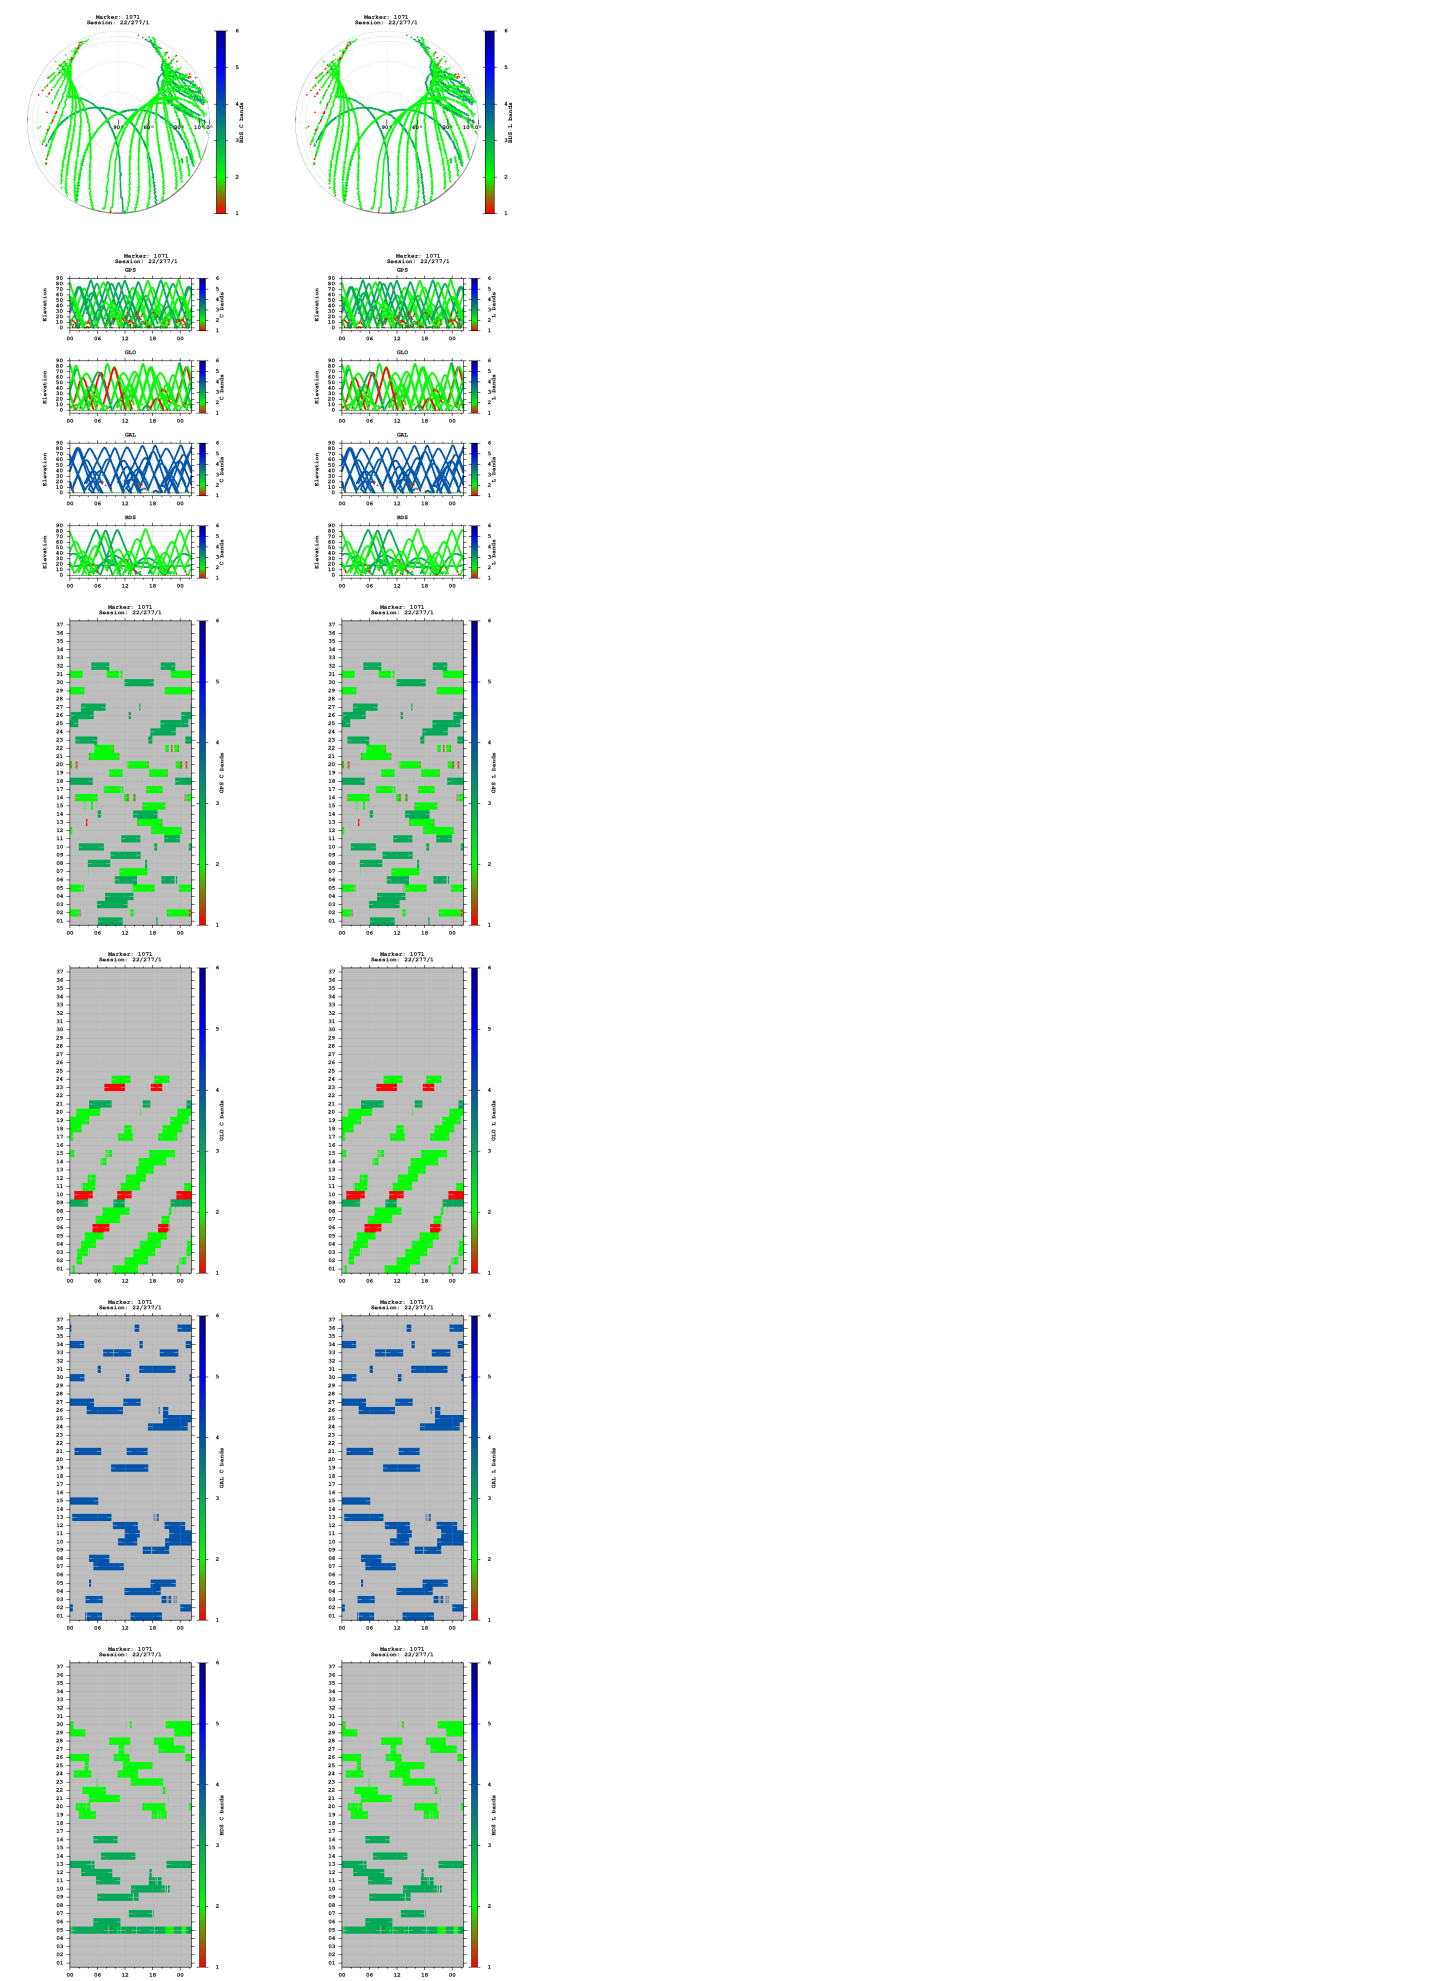

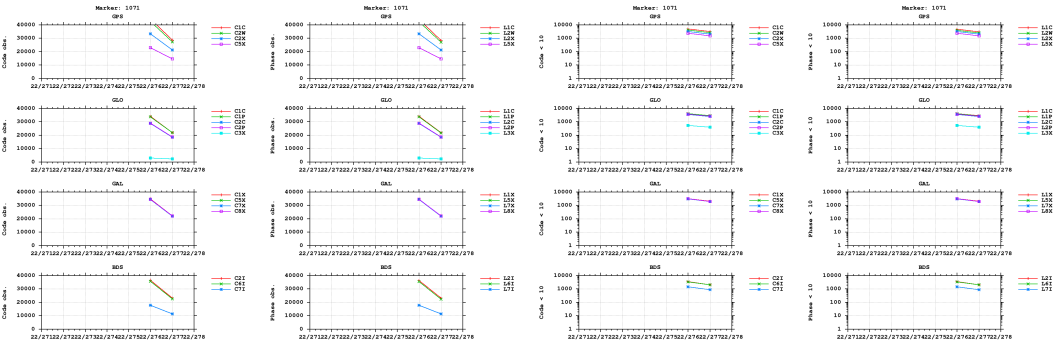


Multipath

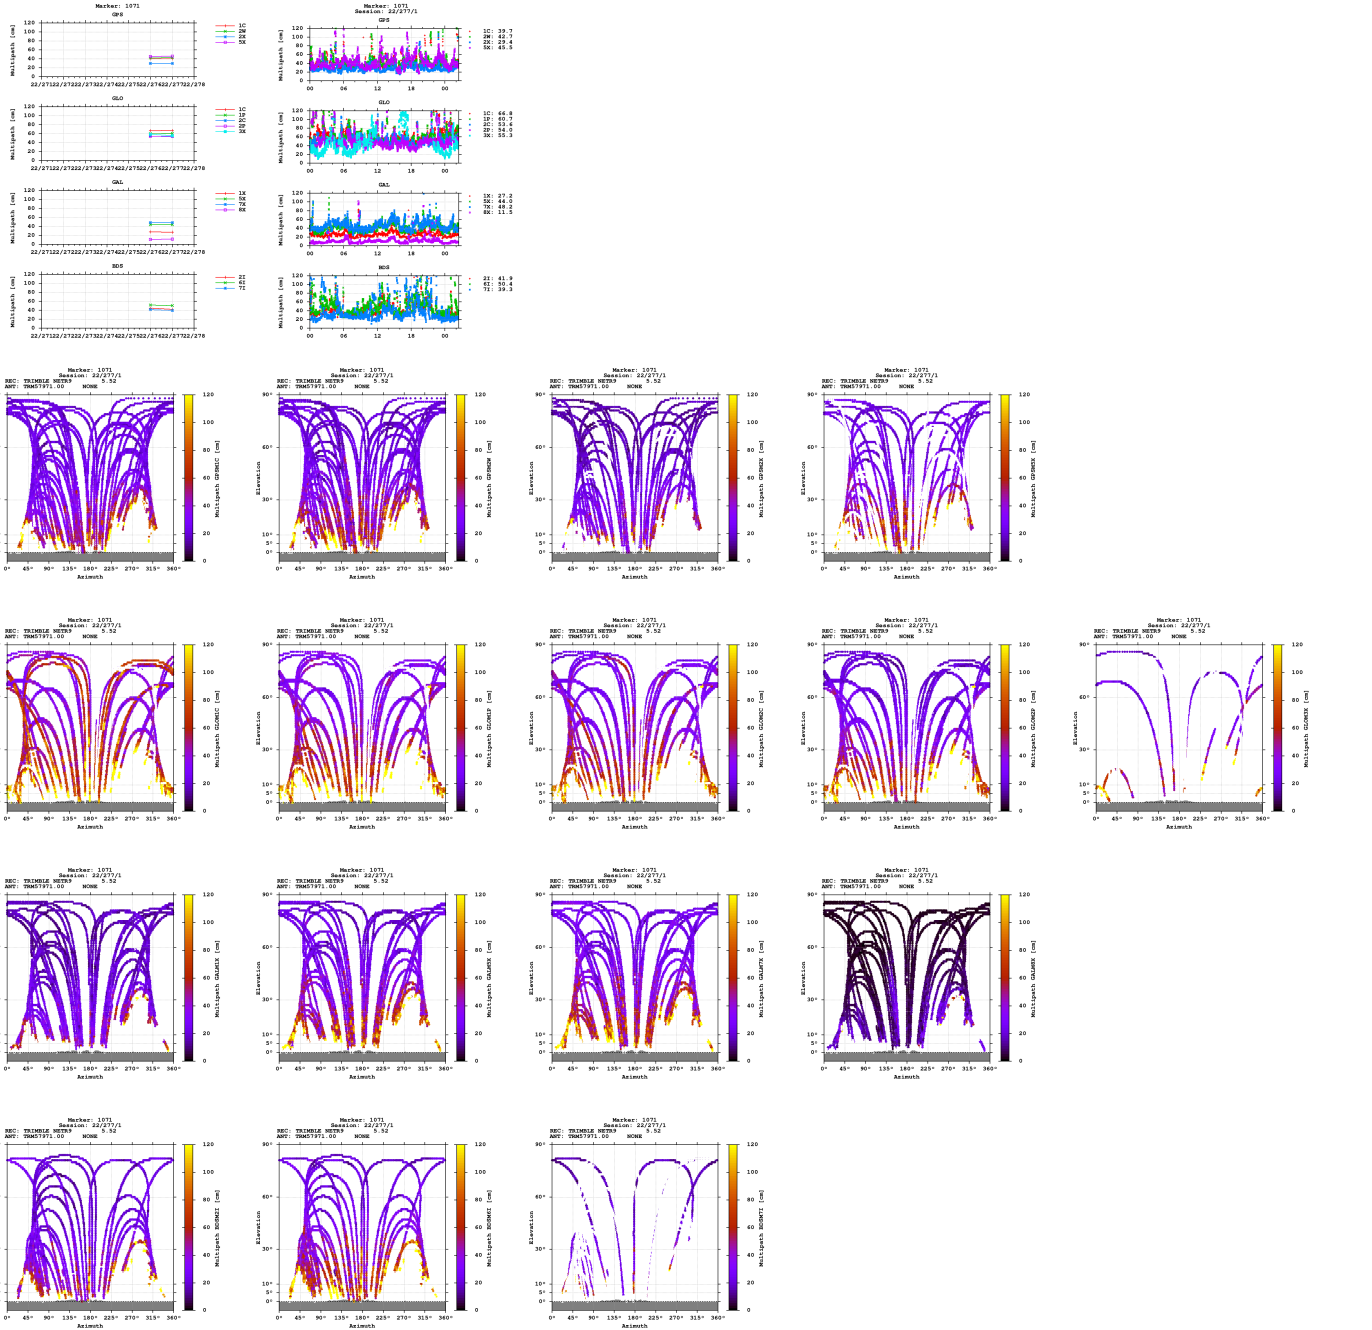


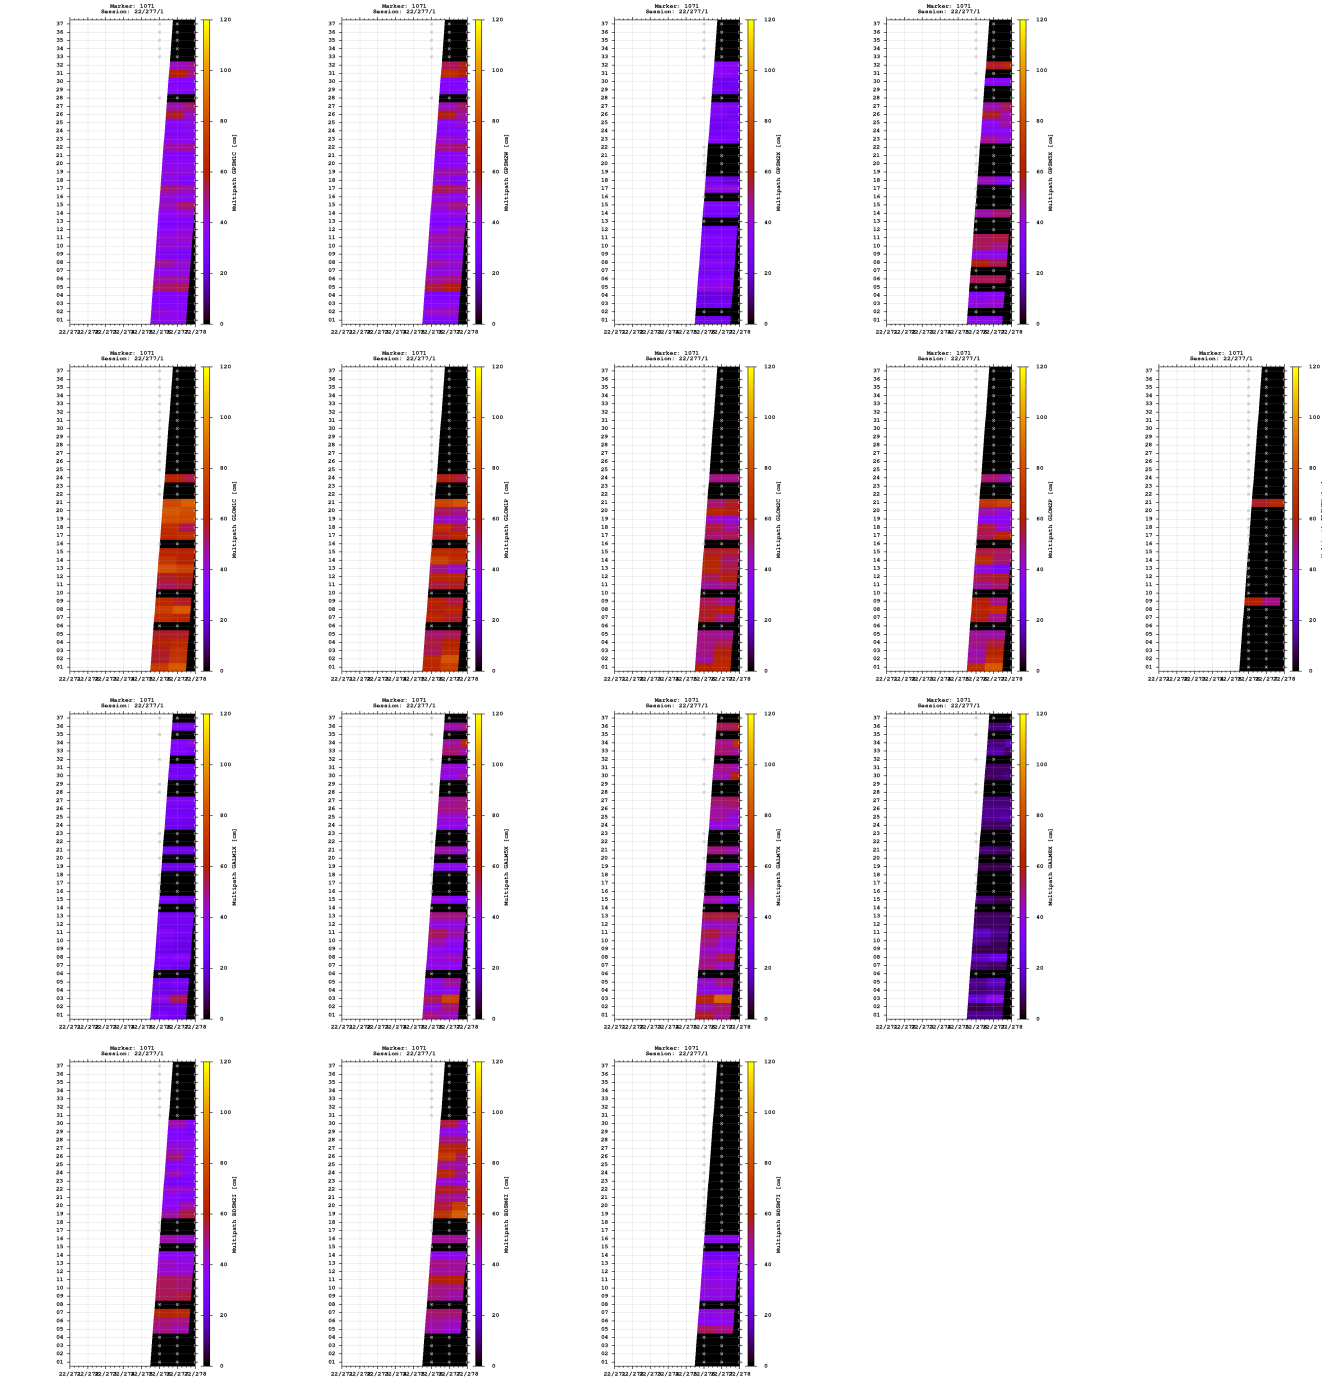


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

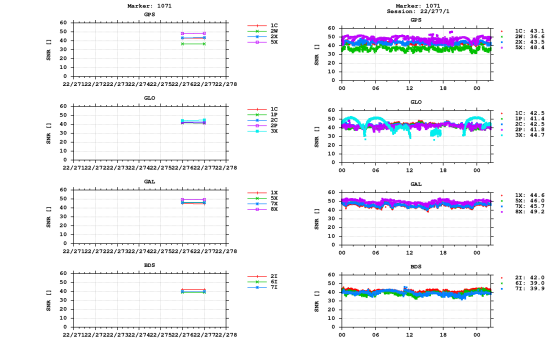


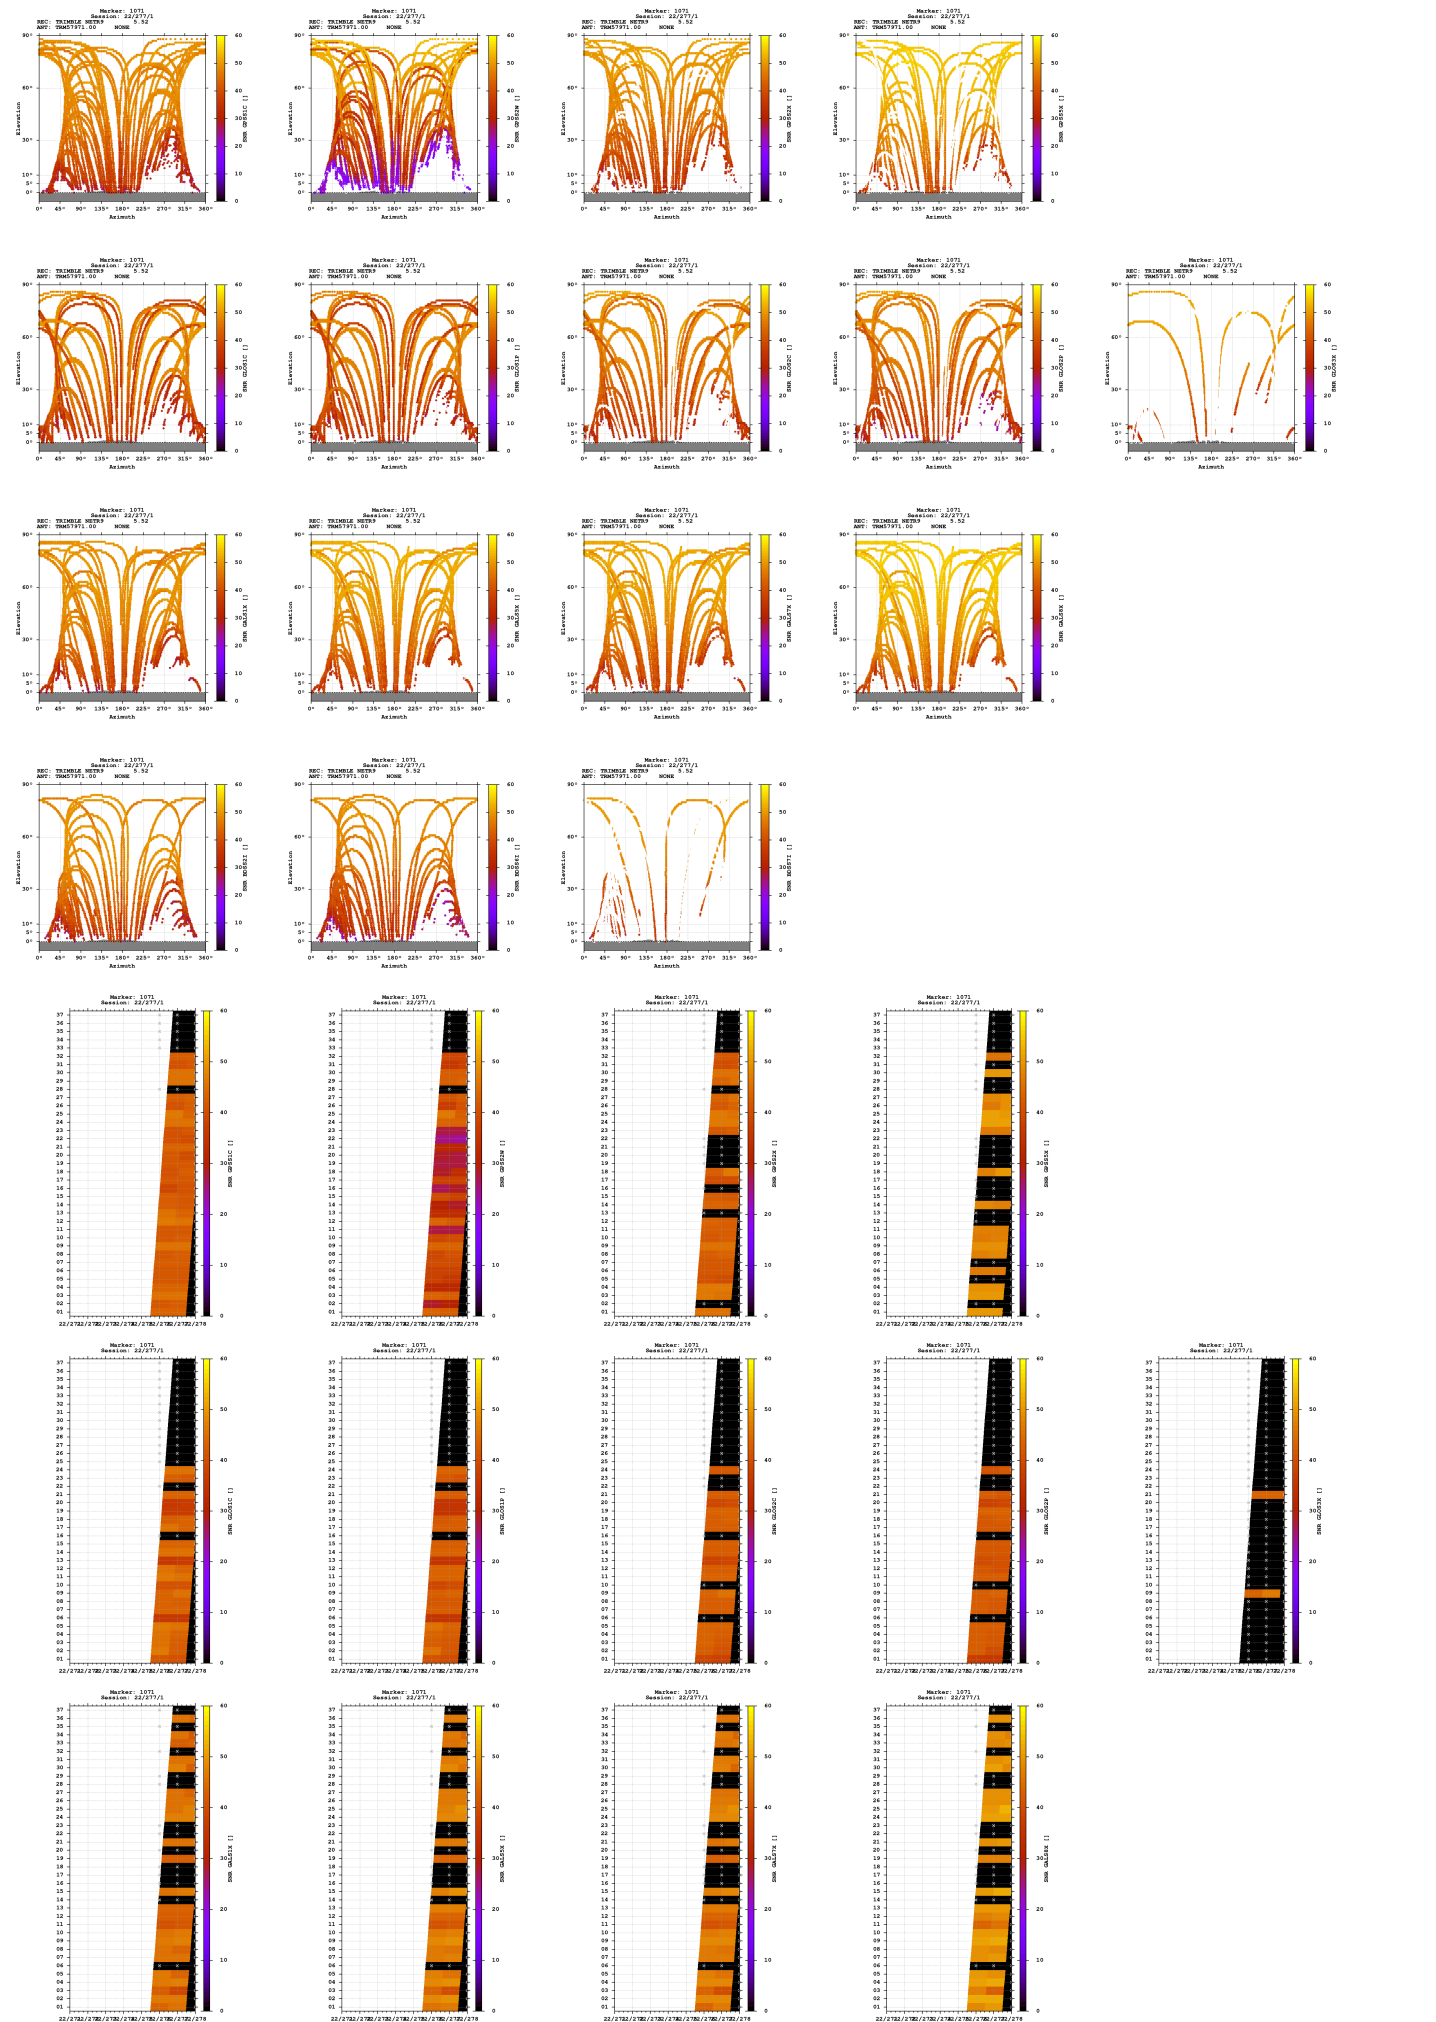

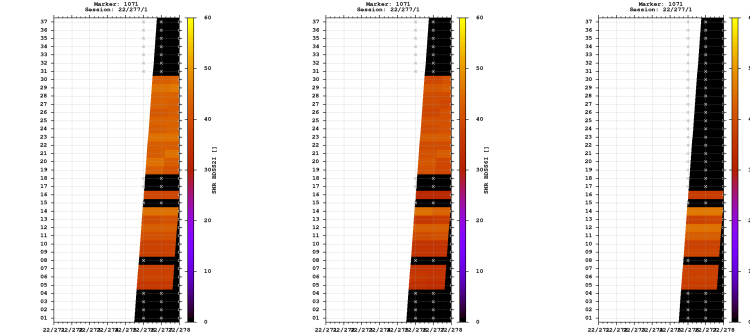


Estimates

2022-10-03 06:39:30	GPS	4272643.8894	630995.5685	4678778.7995	47.481590601	8.400871562	900.9711
2022-10-03 06:39:30	GLO	4272644.6195	630995.7590	4678778.6158	47.481584512	8.400872647	901.3427
2022-10-03 06:39:30	GAL	4272643.8215	630995.7479	4678778.6488	47.481589957	8.400874048	900.8324
2022-10-03 06:39:30	BDS	4272644.7652	630997.9112	4678779.4617	47.481586614	8.400900609	902.2760

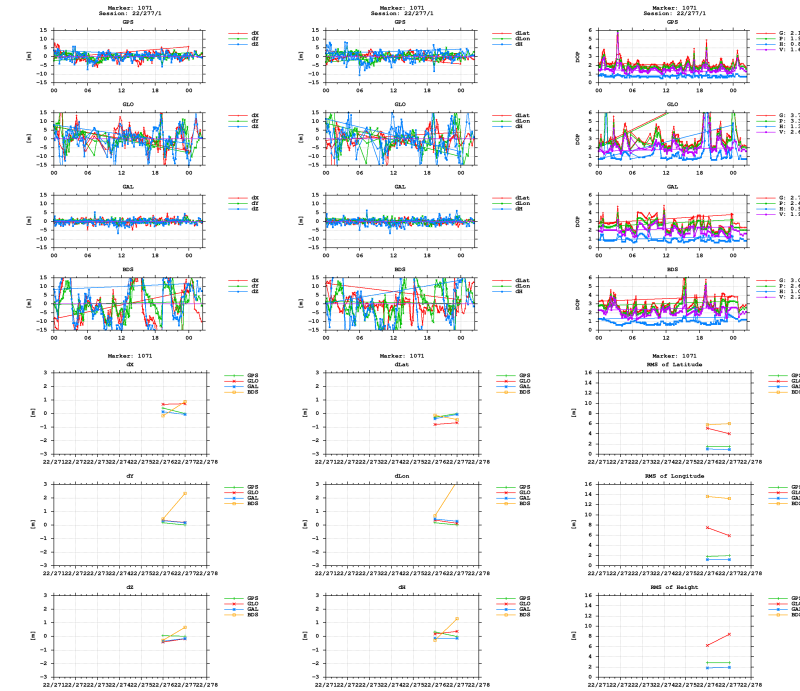

BNC



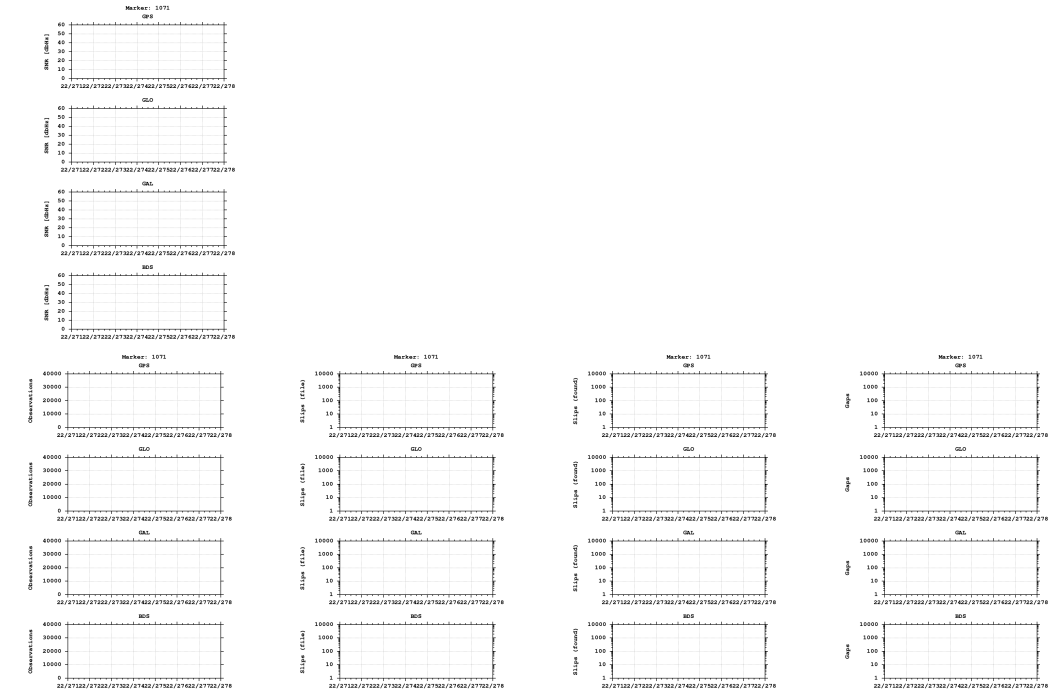

Equipment

2022-10-03 00:00:00 TRIMBLE NETR9 5.52 515 TRM57971.00 NONE 515

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)