

GNSS observation file monitoring for 0515

Last RINEX file: 05152781.220


RINEX version: 3.02

Marker: 1091

Receiver: 515 TRIMBLE NETR9 5.52

Antenna: 515 TRM57971.00 NONE


Epochs

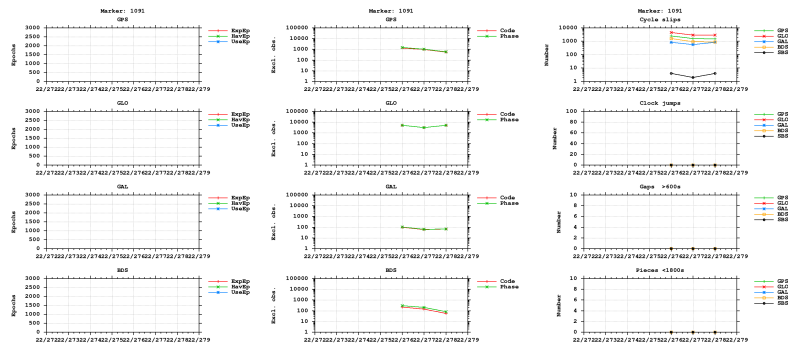


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.


- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

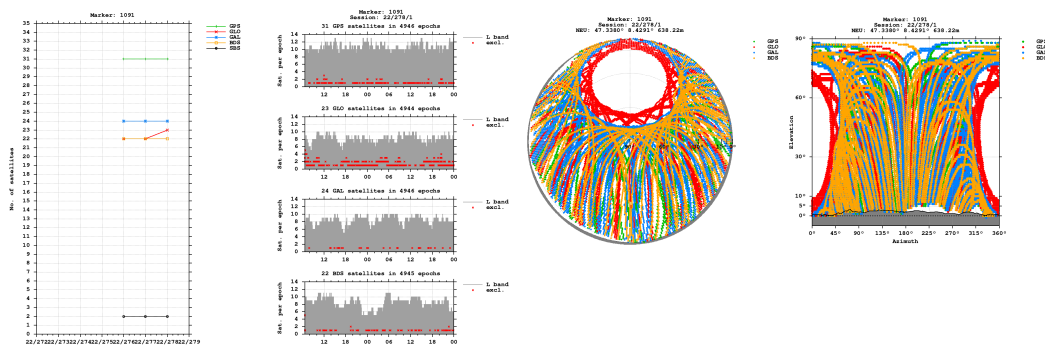


Bands

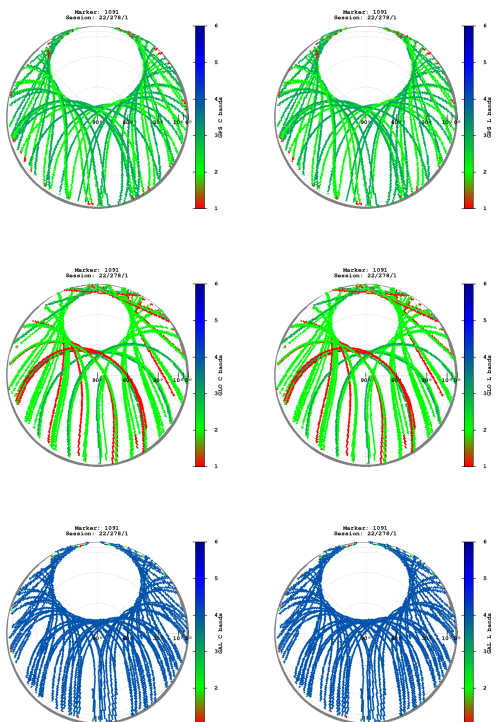


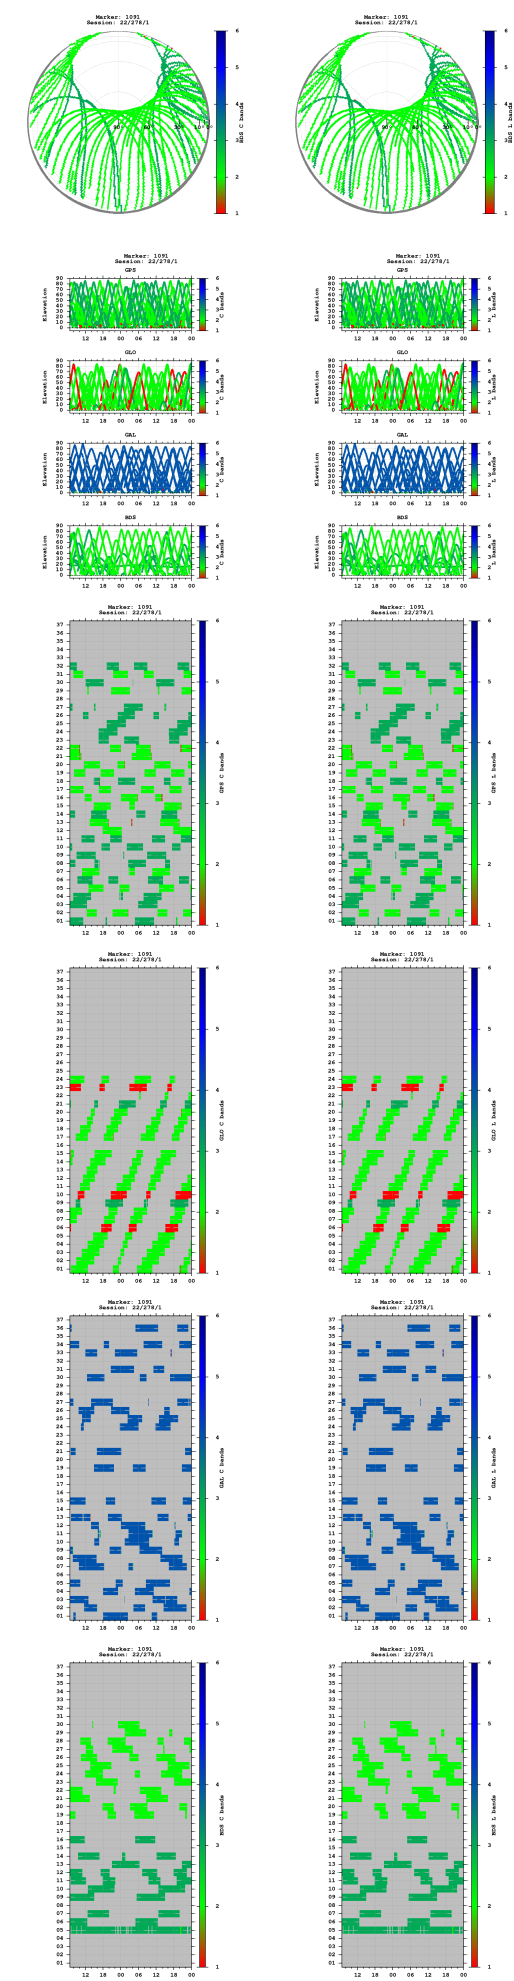


Observations

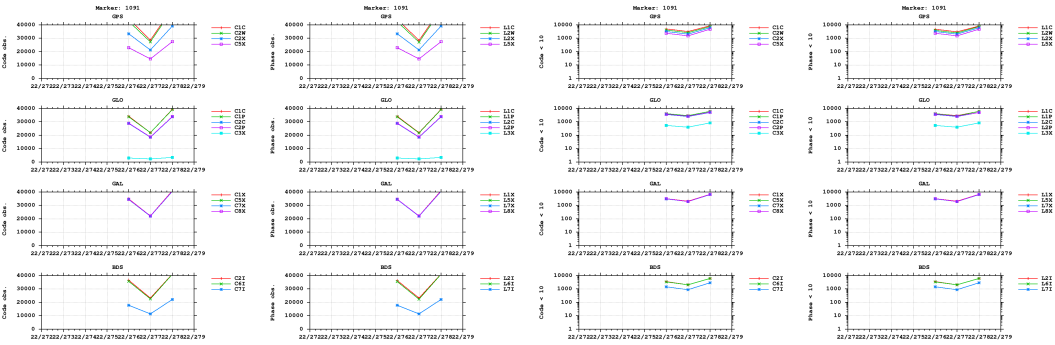


Multipath

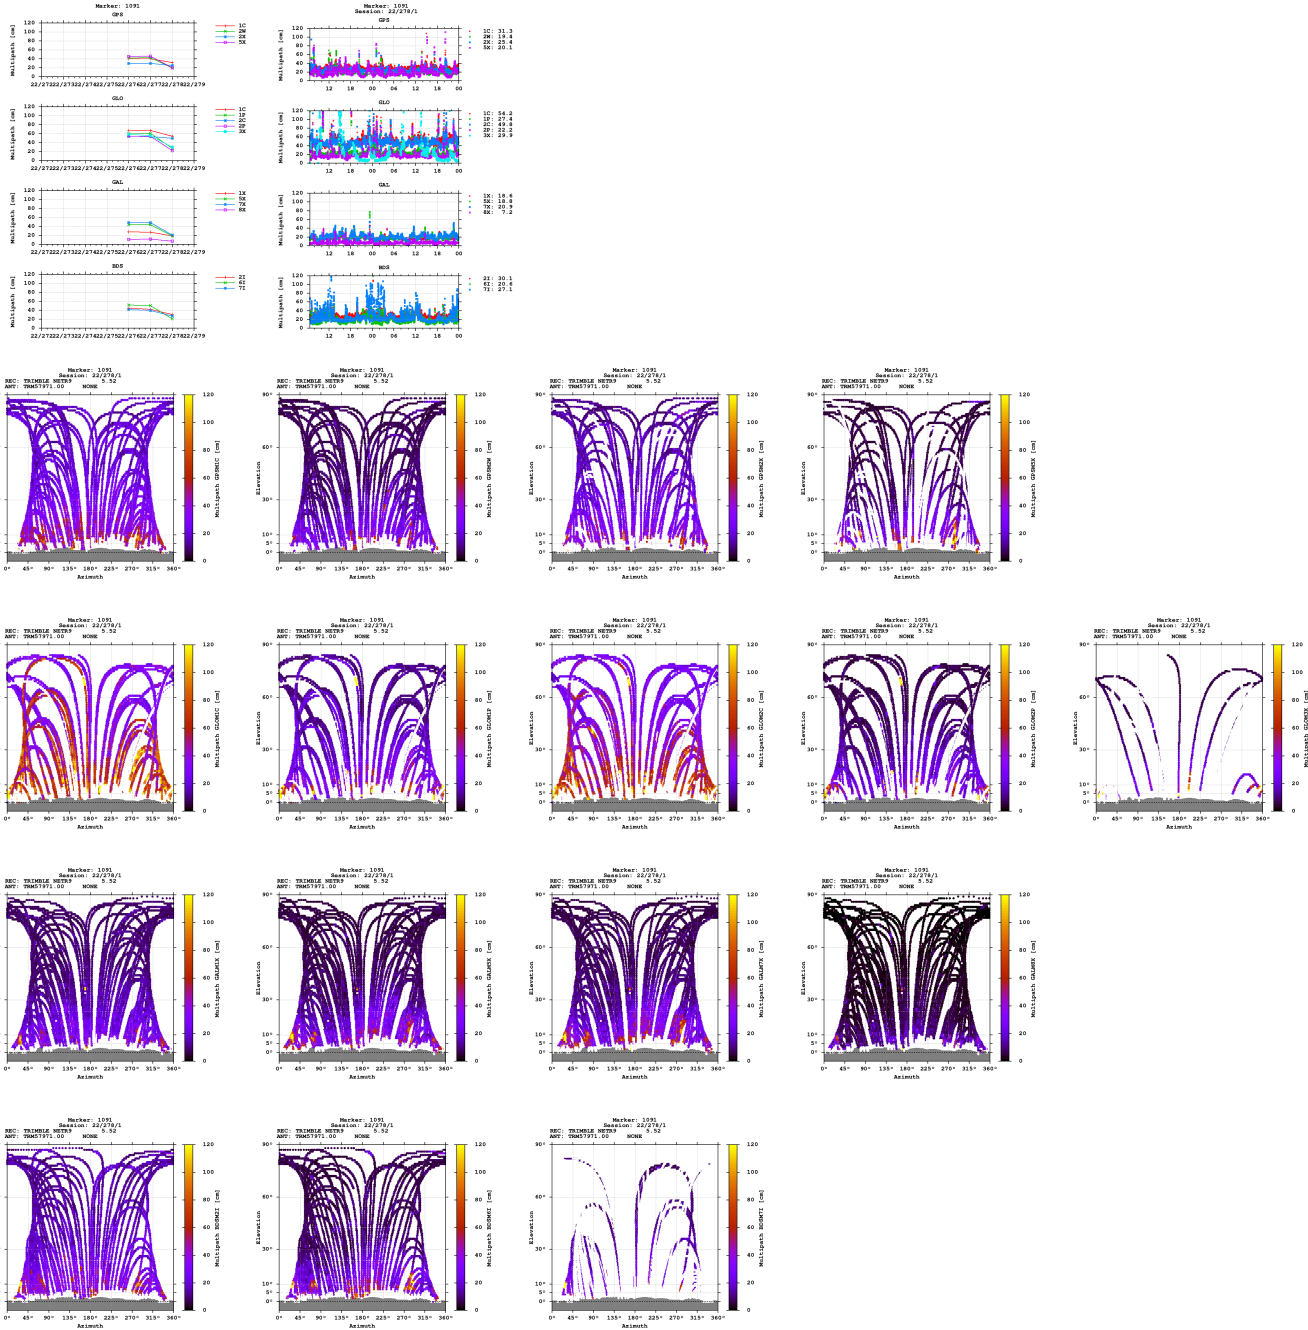


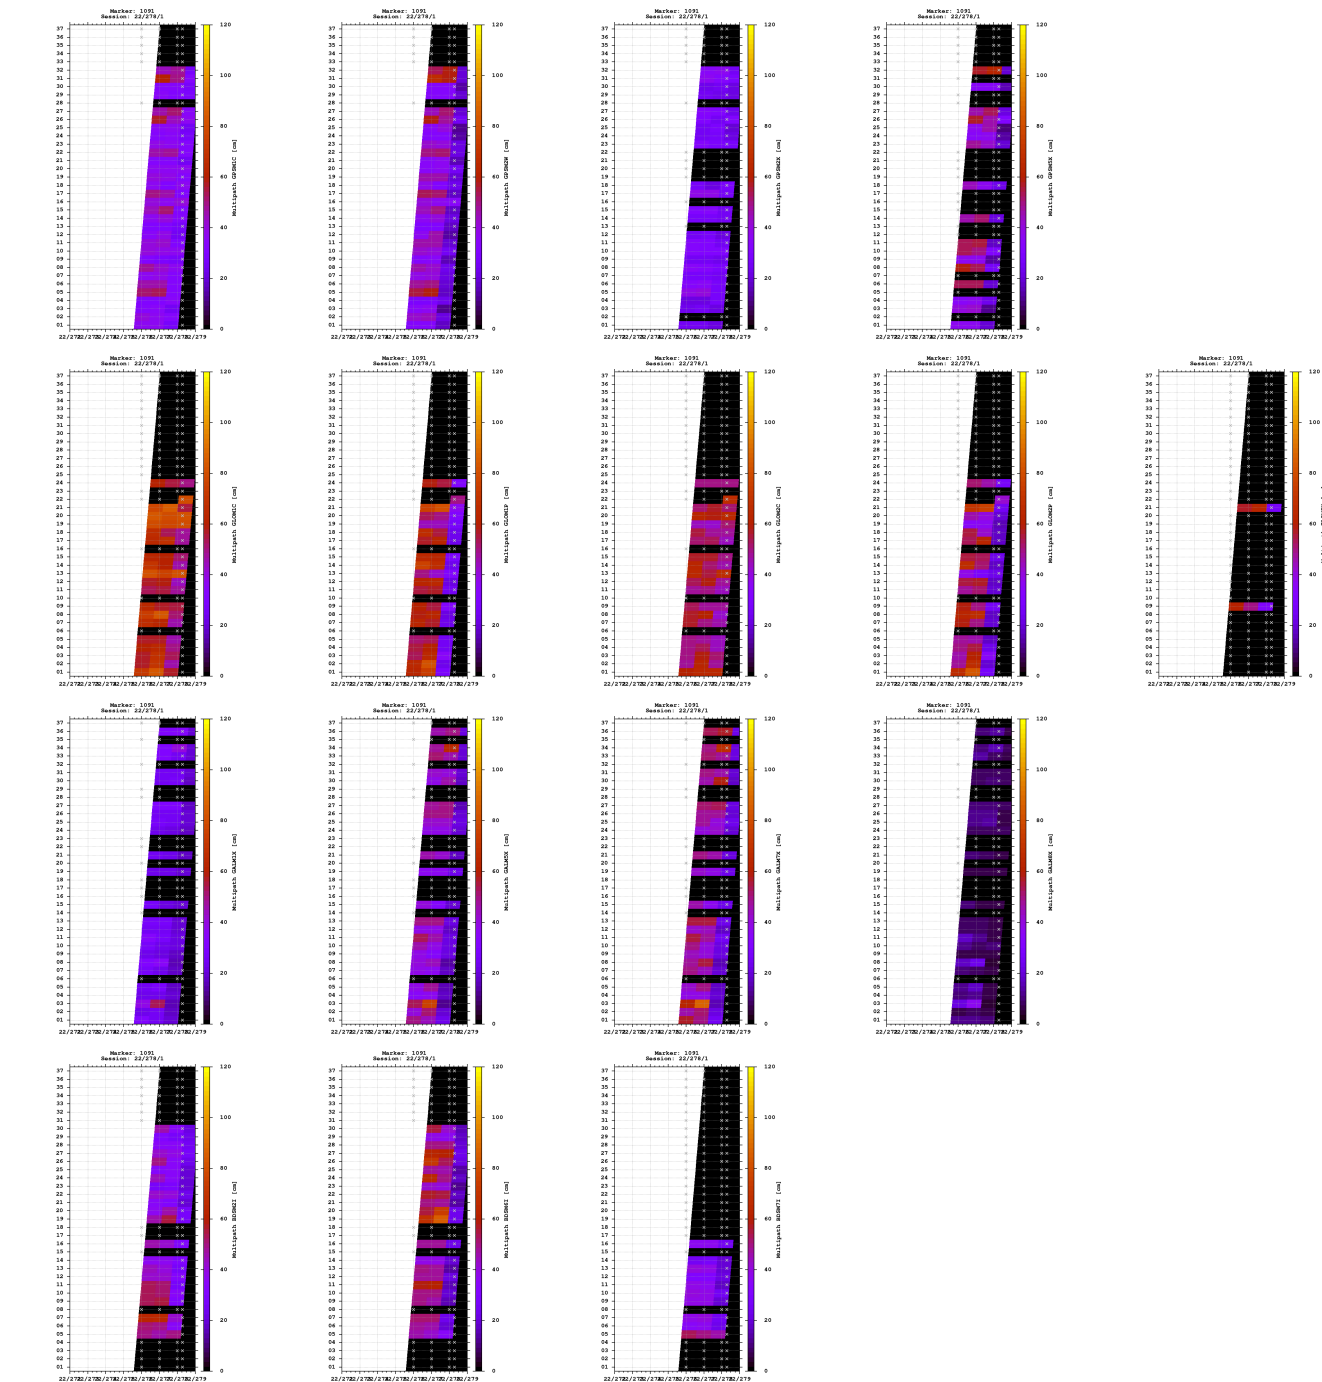


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

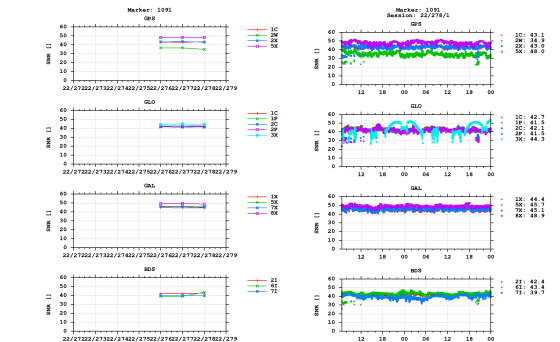


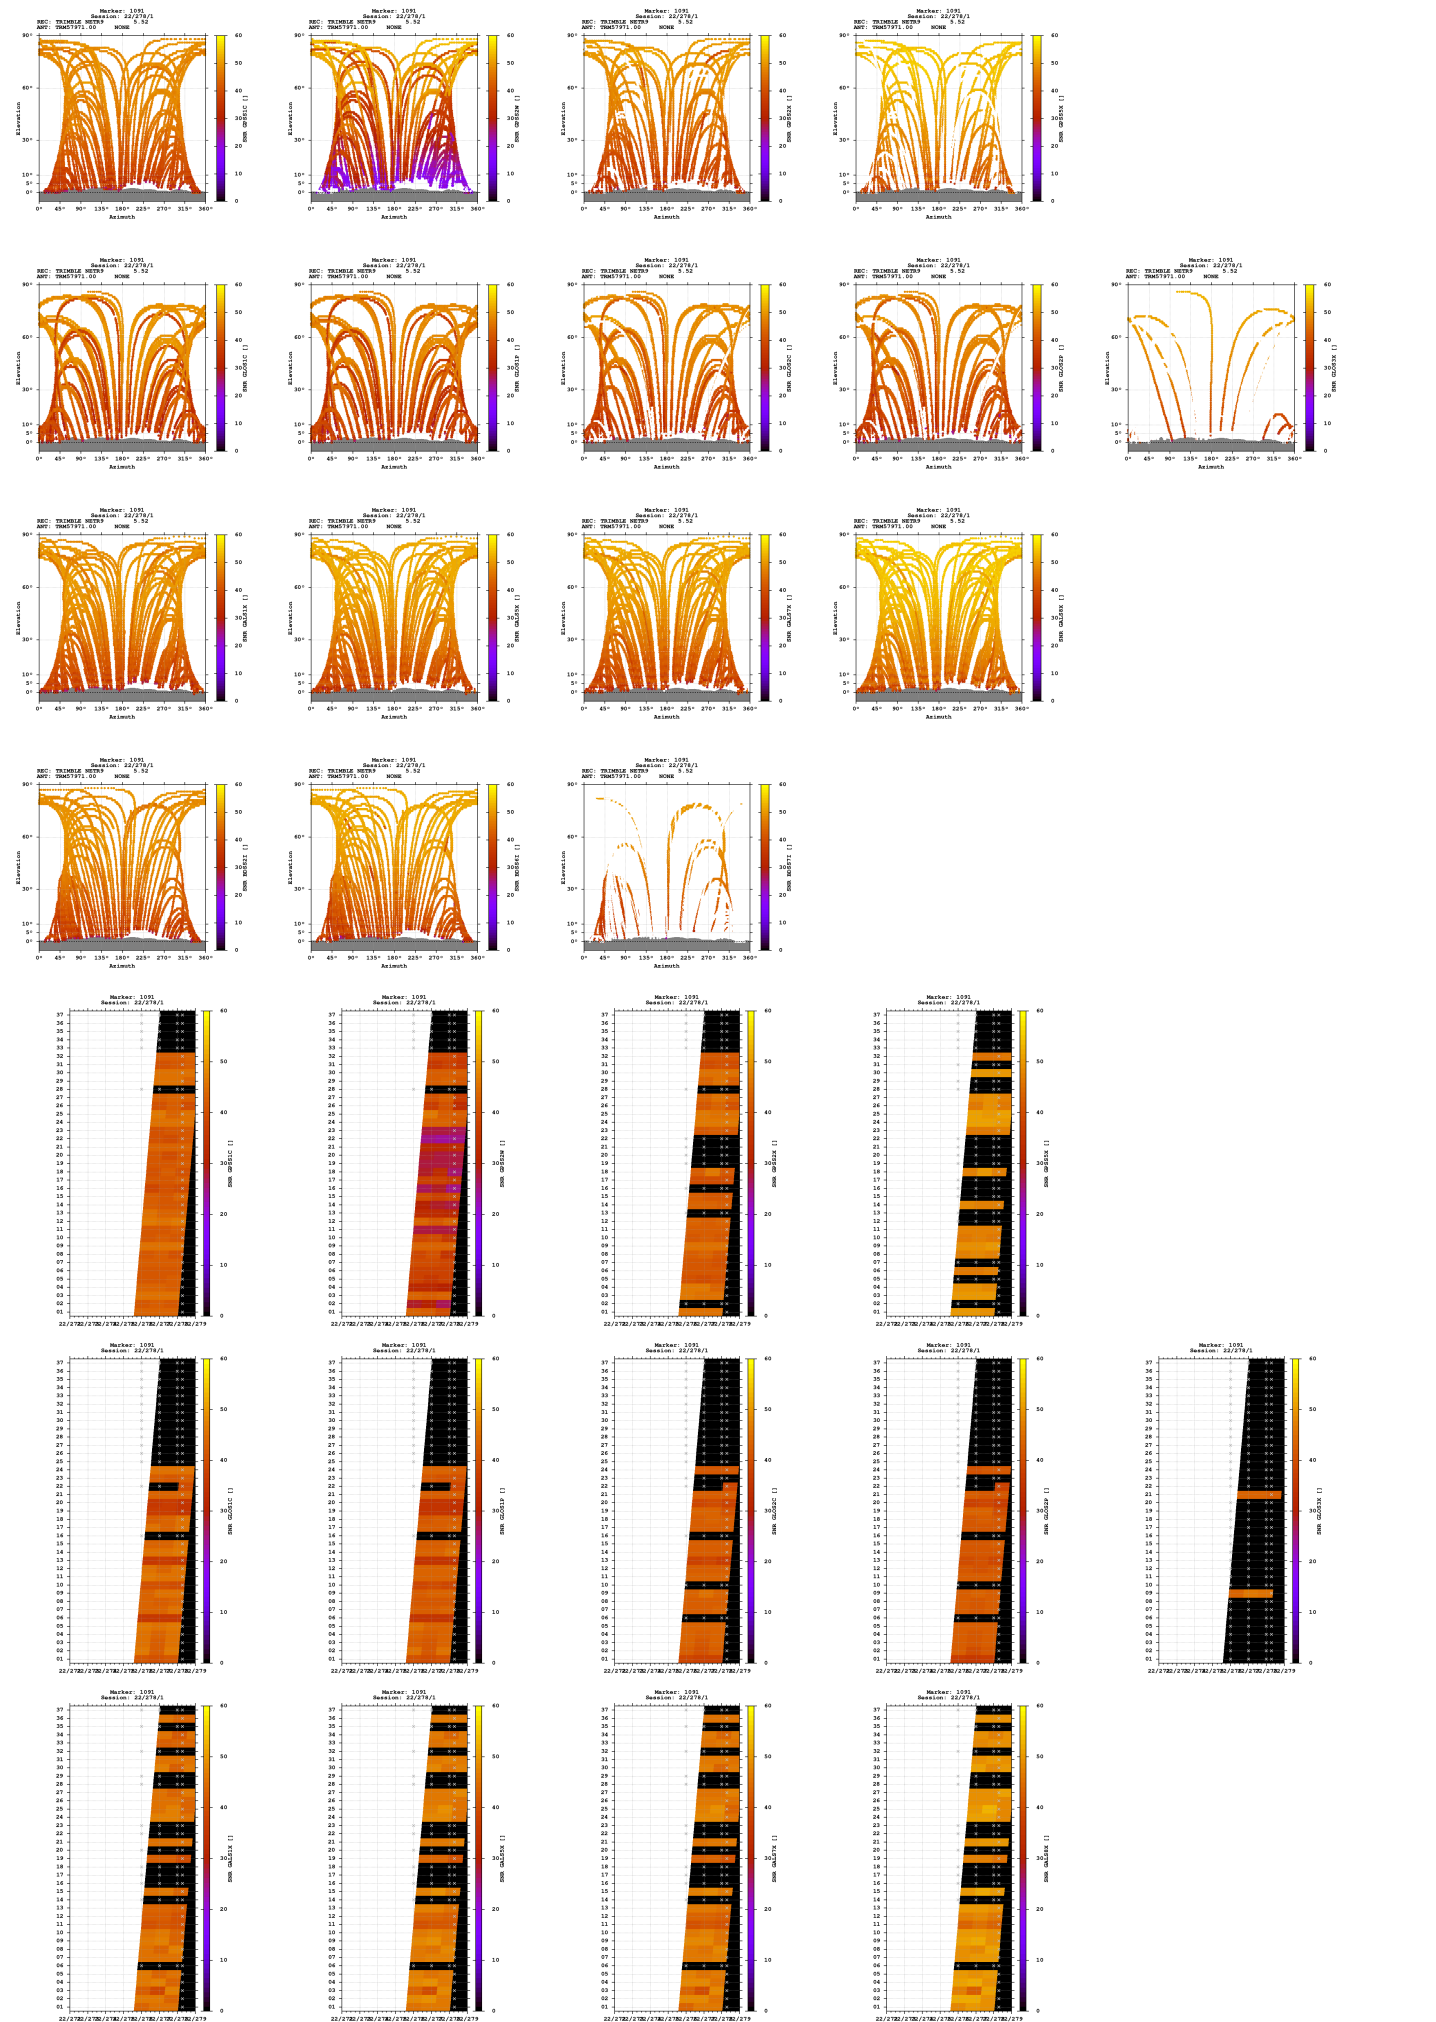

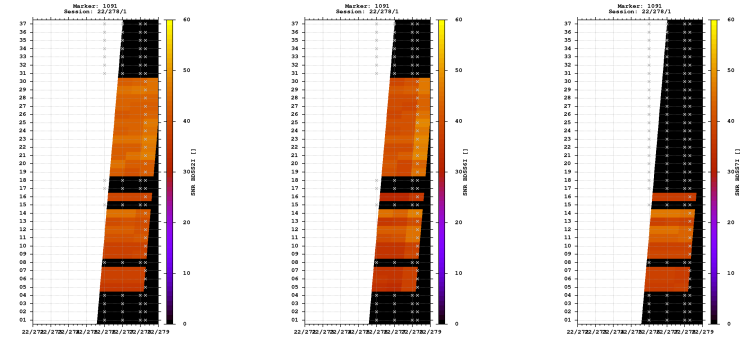



Estimates

2022-10-05 06:43:30	GPS	4283786.7694	634794.7800	4667778.2025	47.337972752	8.429059169	638.2161
2022-10-05 06:43:30	GLO	4283786.4196	634794.2165	4667777.7449	47.337972797	8.429052472	637.5891
2022-10-05 06:43:30	GAL	4283786.4443	634794.8742	4667777.6201	47.337971238	8.429061033	637.5792
2022-10-05 06:43:30	BDS	4283785.5669	634795.2483	4667778.8648	47.337984202	8.429067630	637.9436

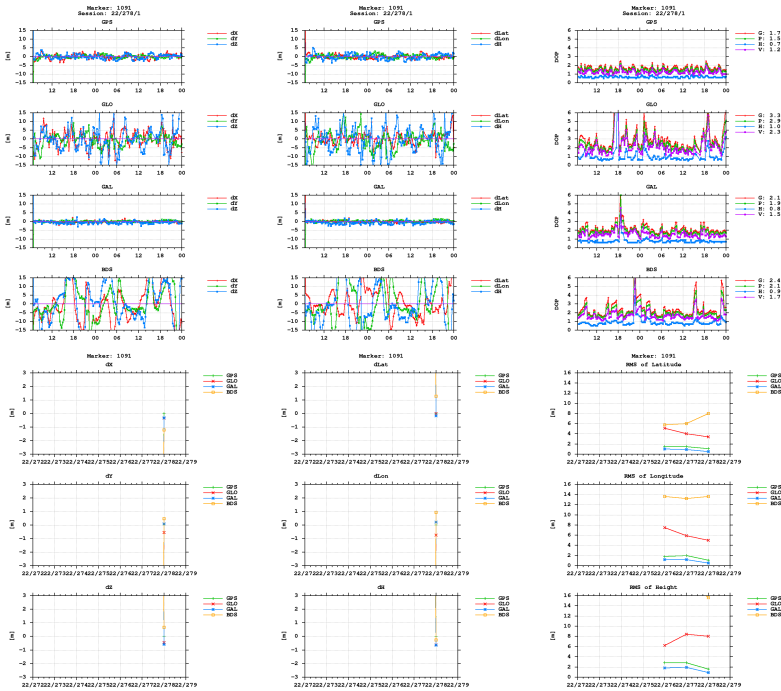

BNC

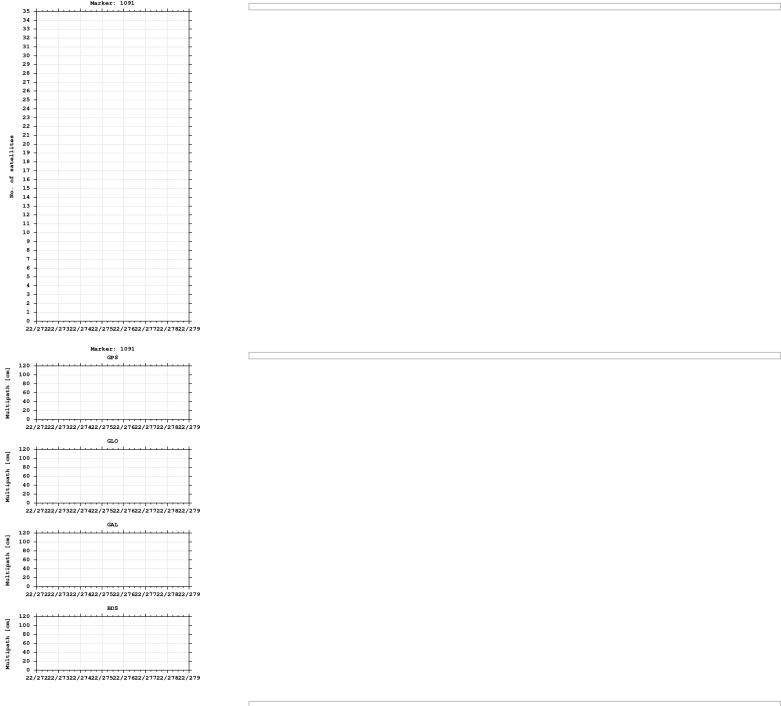

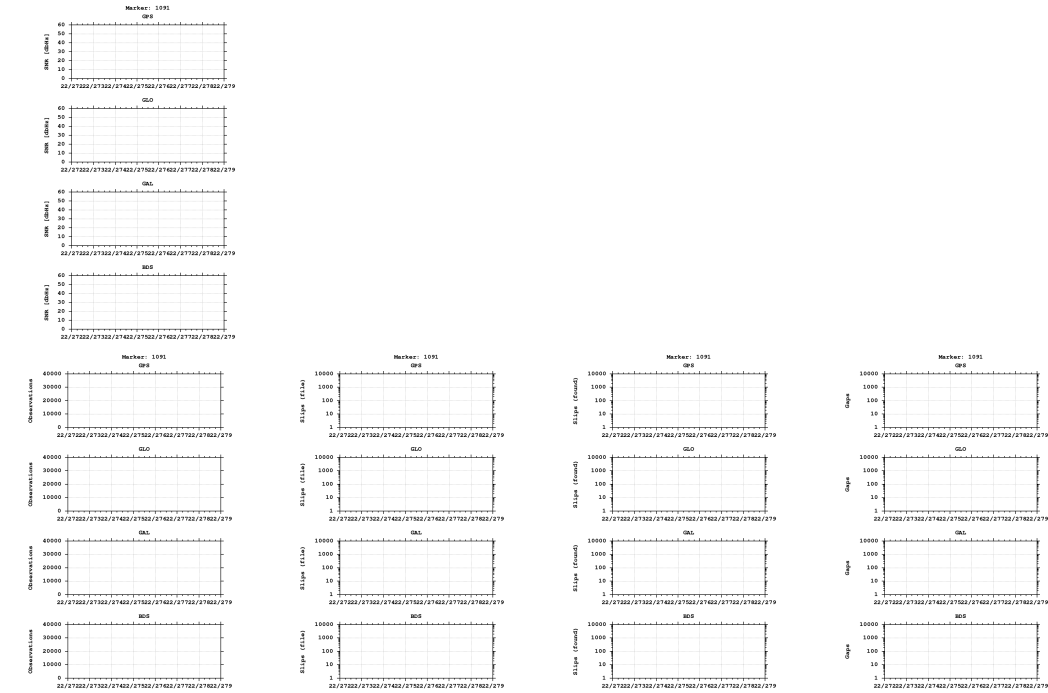

Equipment

2022-10-03 00:00:00 TRIMBLE NETR9 5.52 515 TRM57971.00 NONE 515

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)