

GNSS observation file monitoring for 0515

Last RINEX file: 05152791.220


RINEX version: 3.02

Marker: 1091

Receiver: 515 TRIMBLE NETR9 5.52

Antenna: 515 TRM57971.00 NONE


Epochs

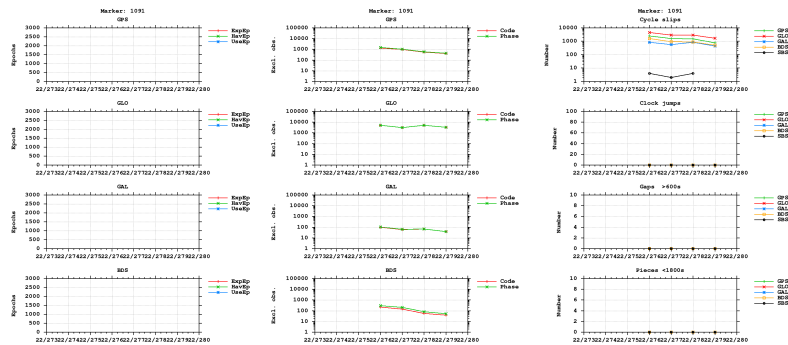


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.


- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

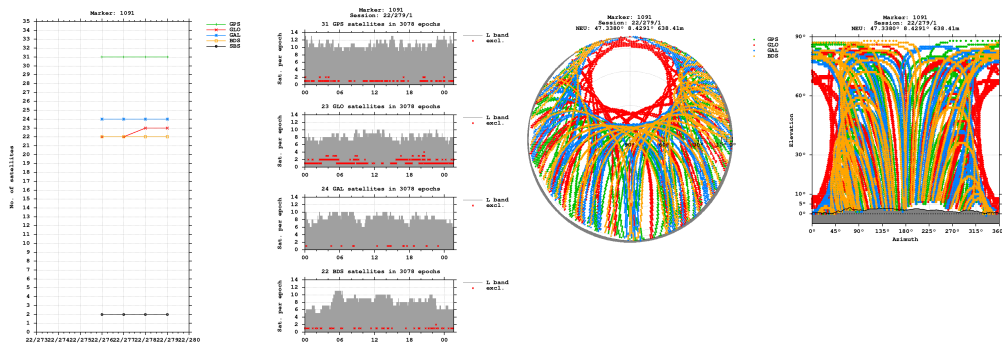


Bands

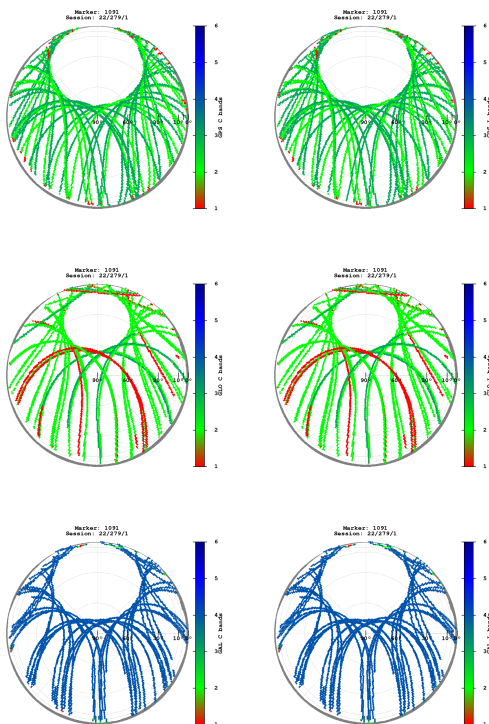


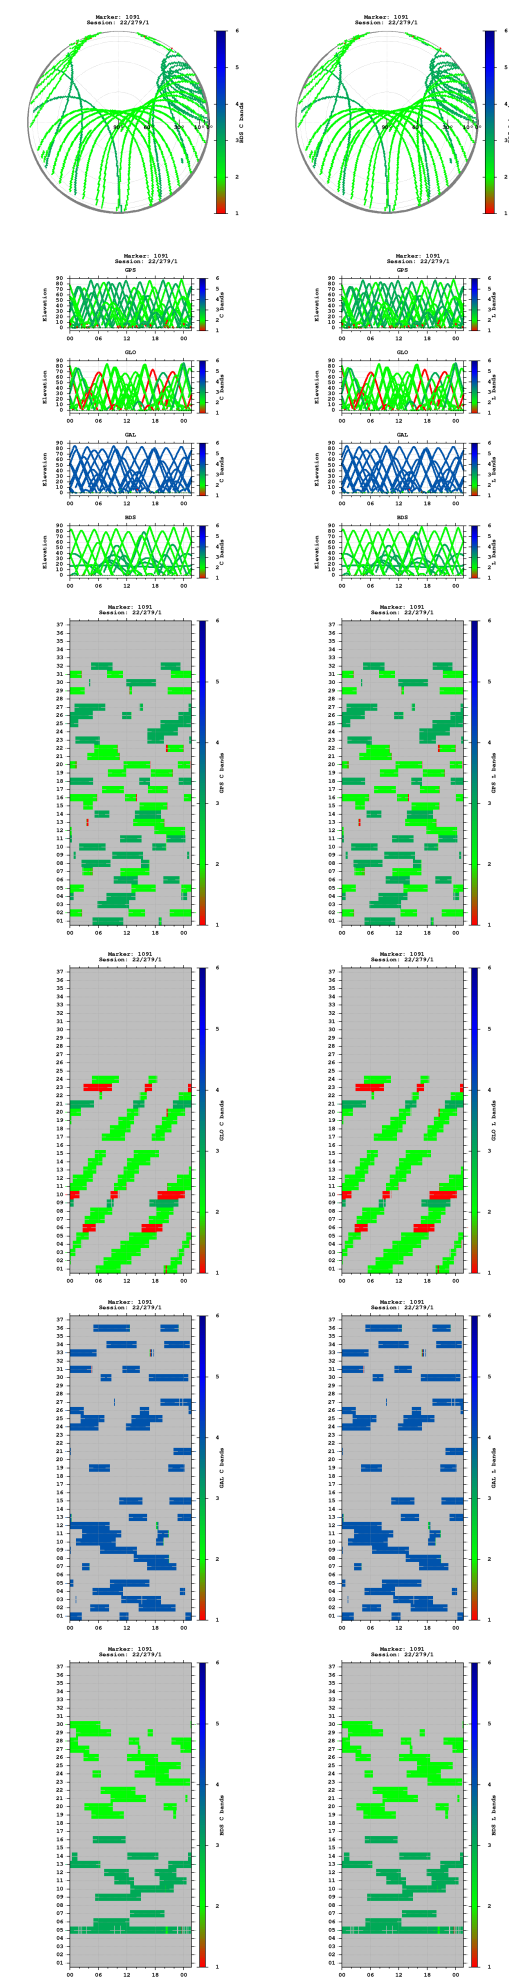


Observations

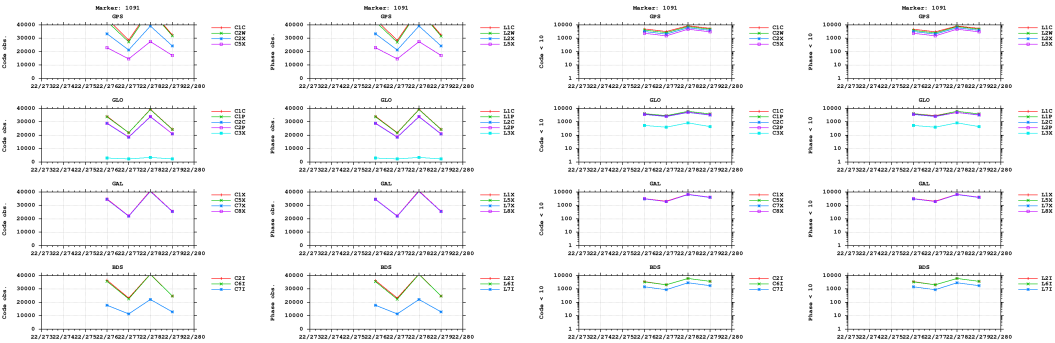


Multipath

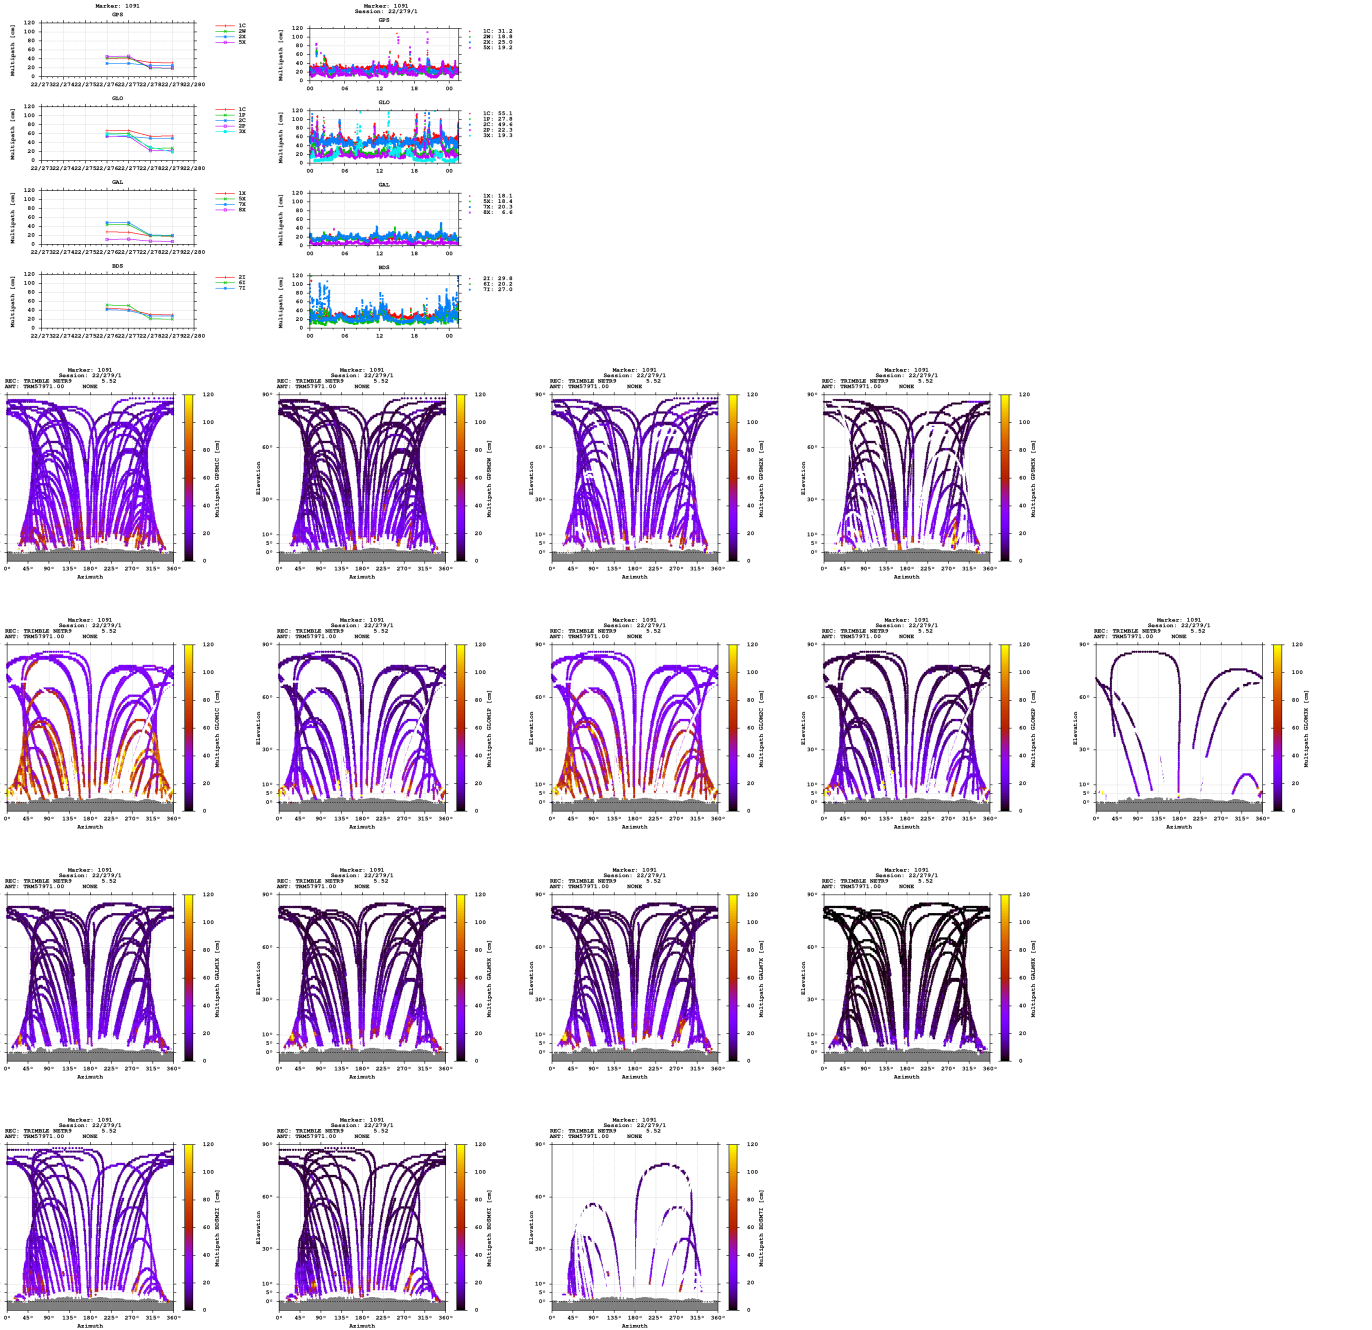


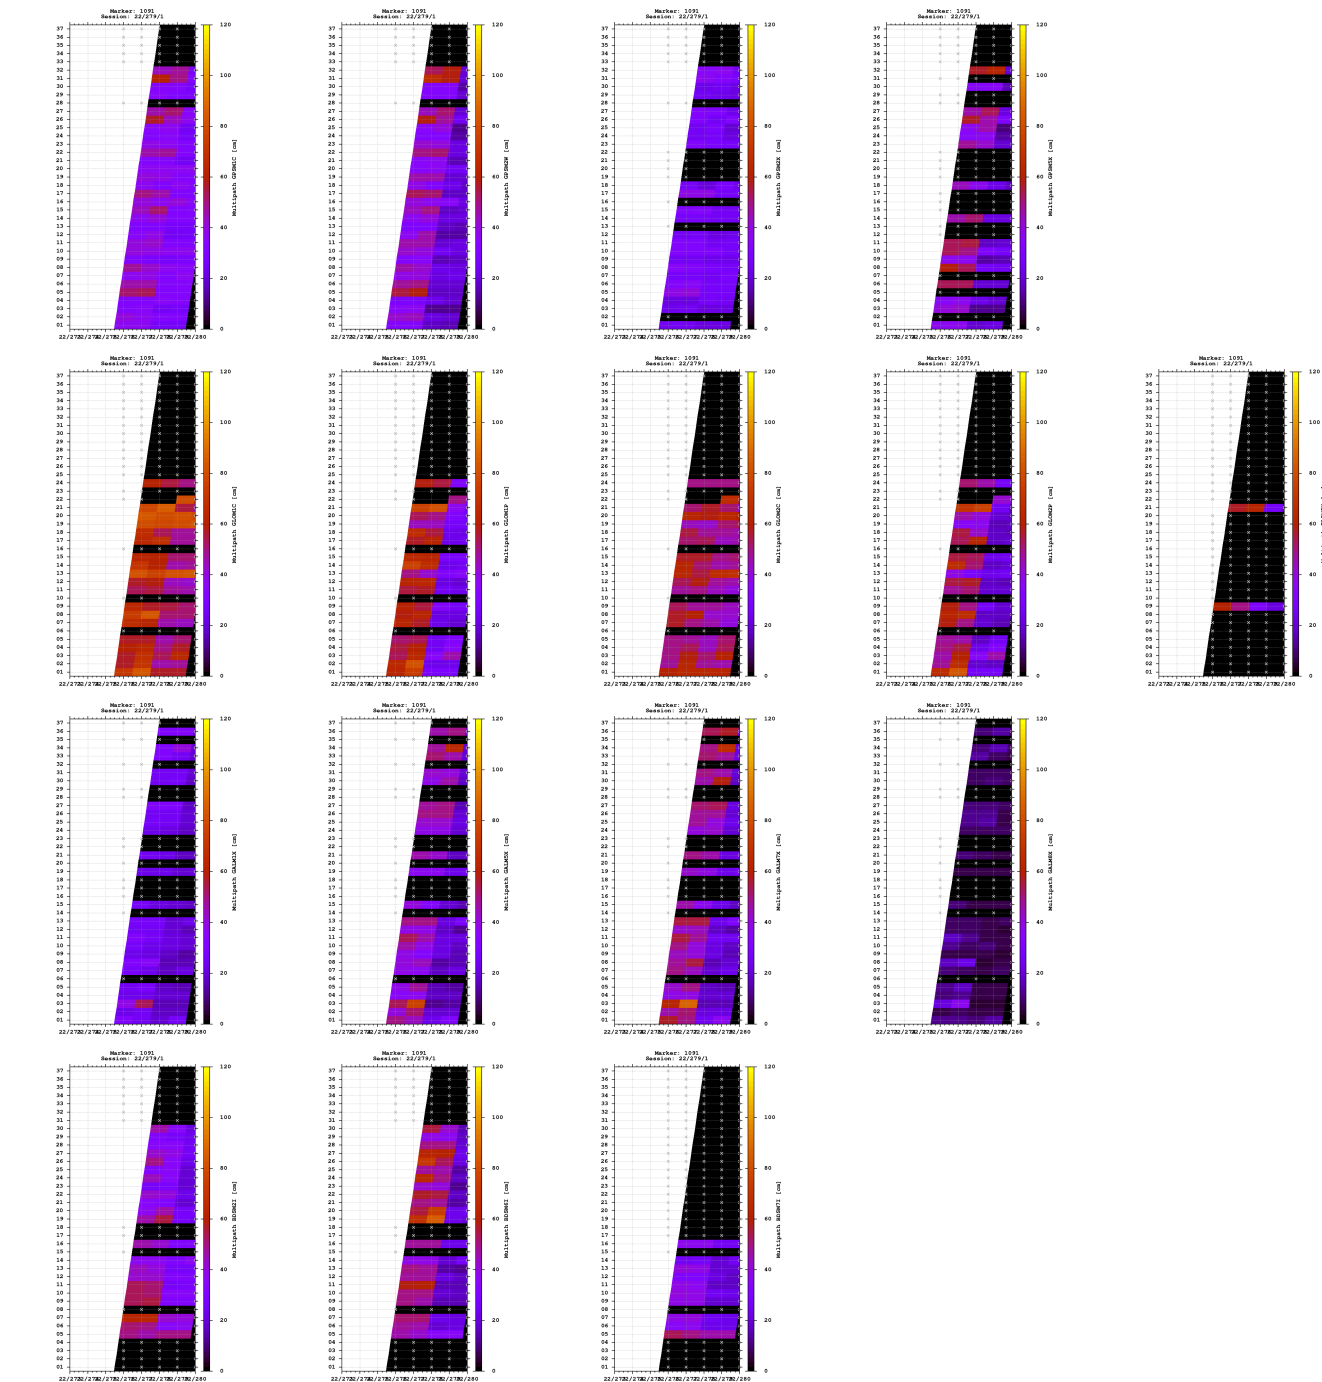


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

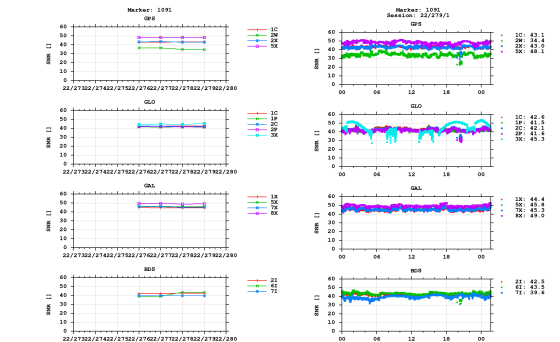


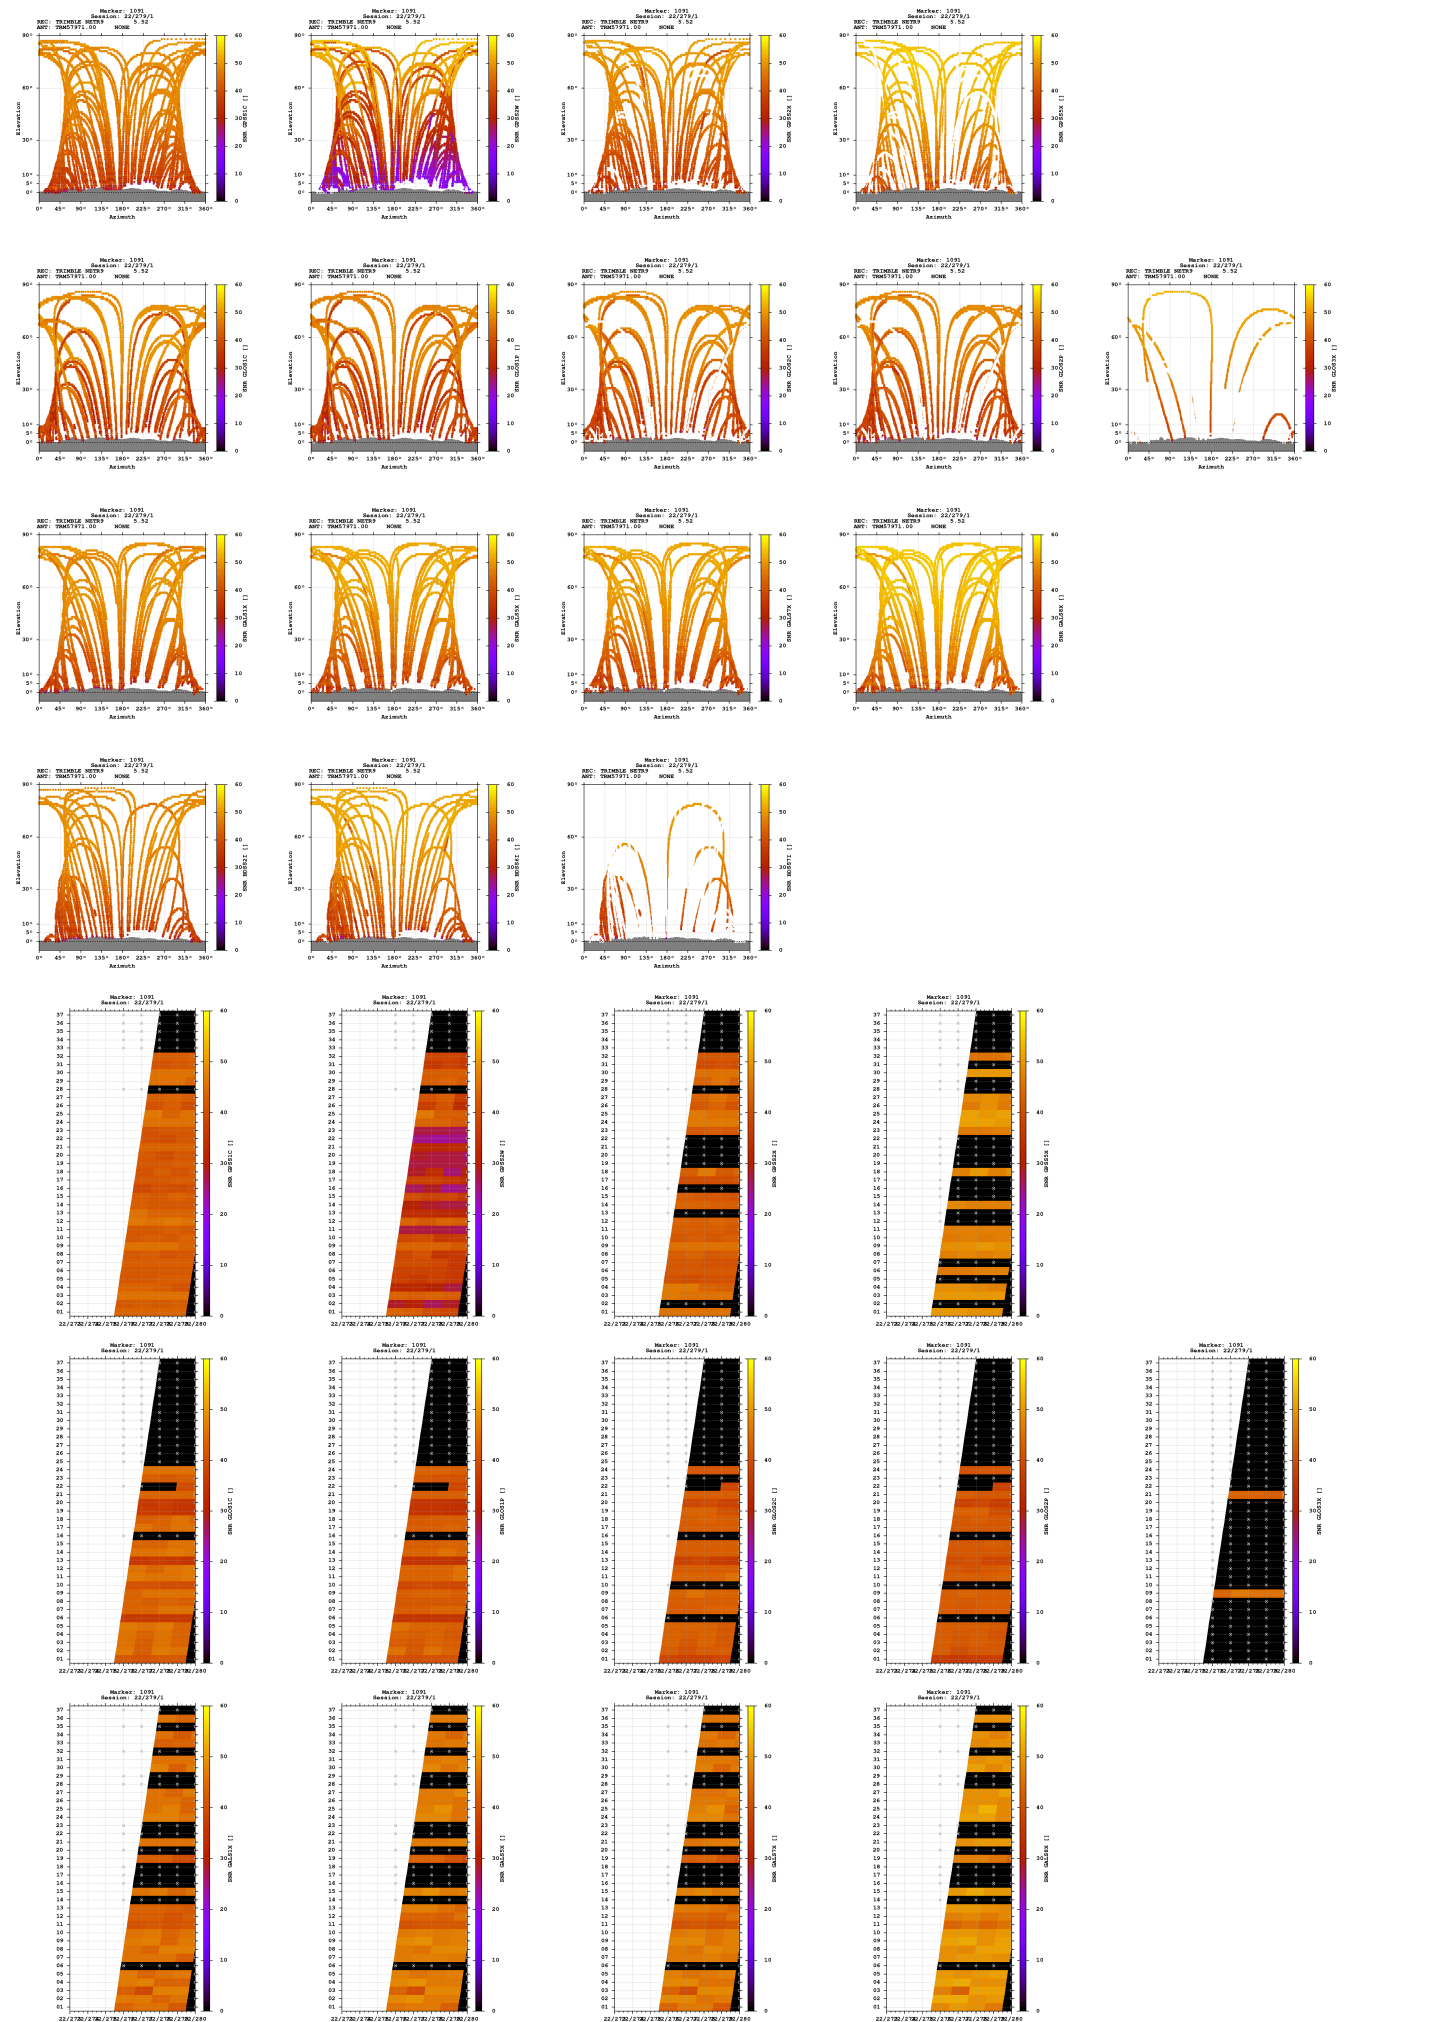

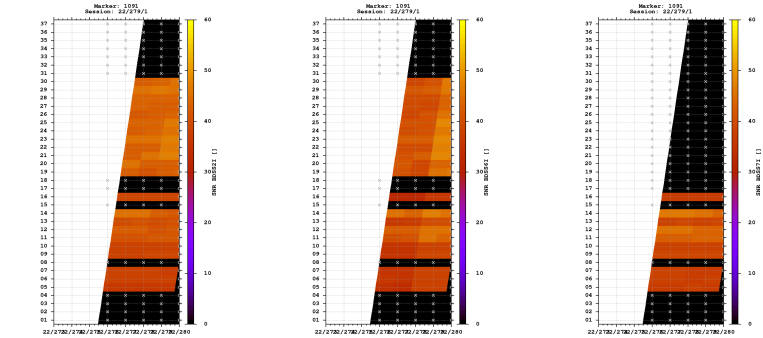


Estimates

2022-10-05 06:43:30	GPS	4283786.9063	634794.9976	4667778.3054	47.337972272	8.429061751	638.4051
2022-10-05 06:43:30	GLO	4283786.9055	634793.6654	4667778.2661	47.337973329	8.429044318	638.2434
2022-10-05 06:43:30	GAL	4283786.5299	634794.8395	4667777.5846	47.337970494	8.429060412	637.6071
2022-10-05 06:43:30	BDS	4283785.5469	634794.9662	4667780.1796	47.337992619	8.429063977	638.8689

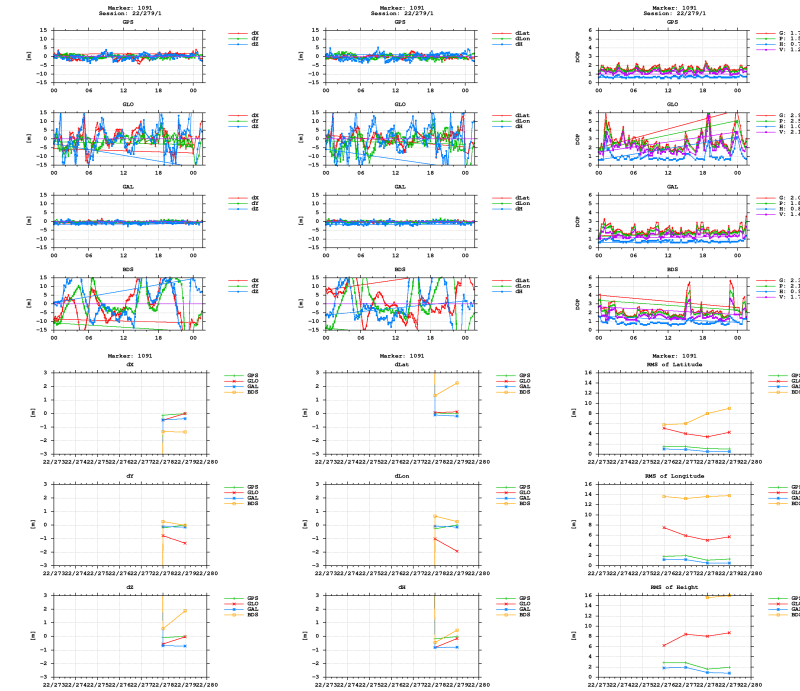

BNC



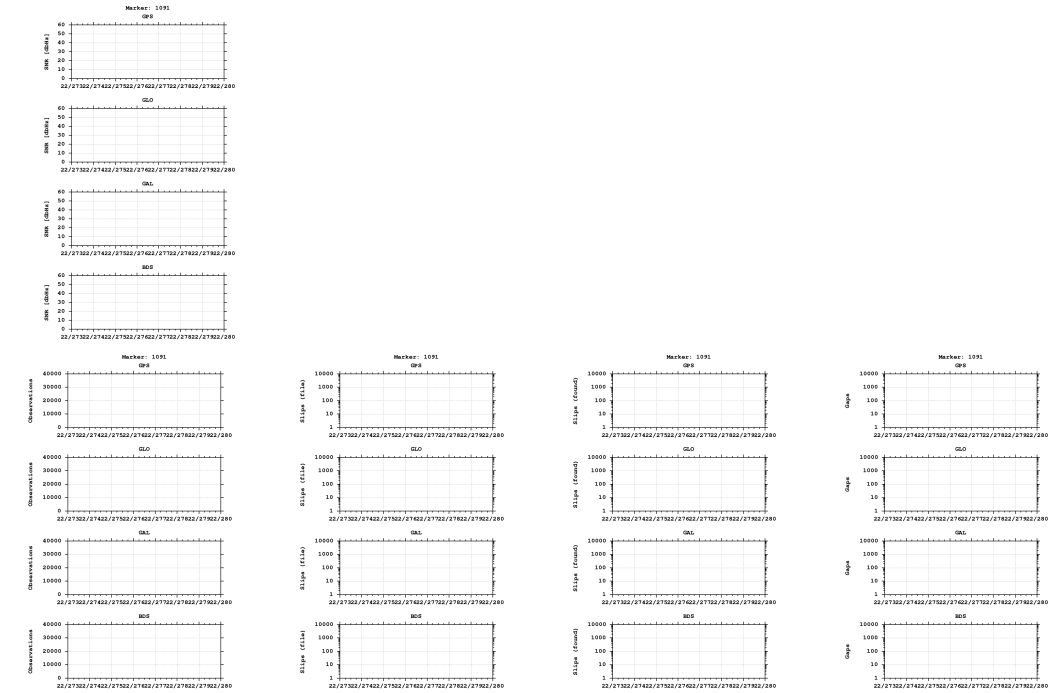

Equipment

2022-10-03 00:00:00 TRIMBLE NETR9 5.52 515 TRM57971.00 NONE 515

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)