


GNSS observation file monitoring for 0516


Last RINEX file: 05162761.22O
RINEX version: 3.02
Marker: 1091
Receiver: 516 TRIMBLE NETR9 5.52
Antenna: 516 TRM57971.00 NONE


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

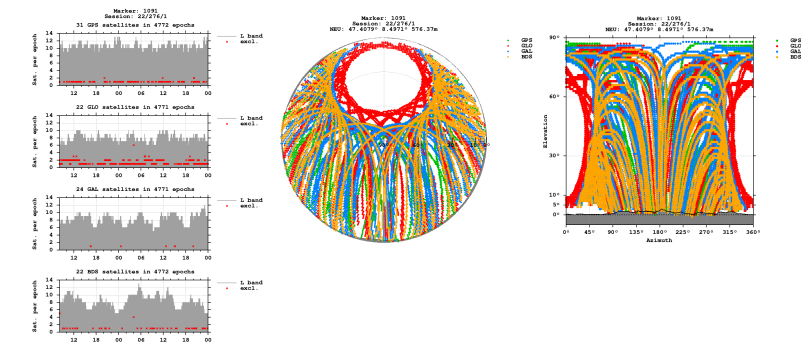


Bands

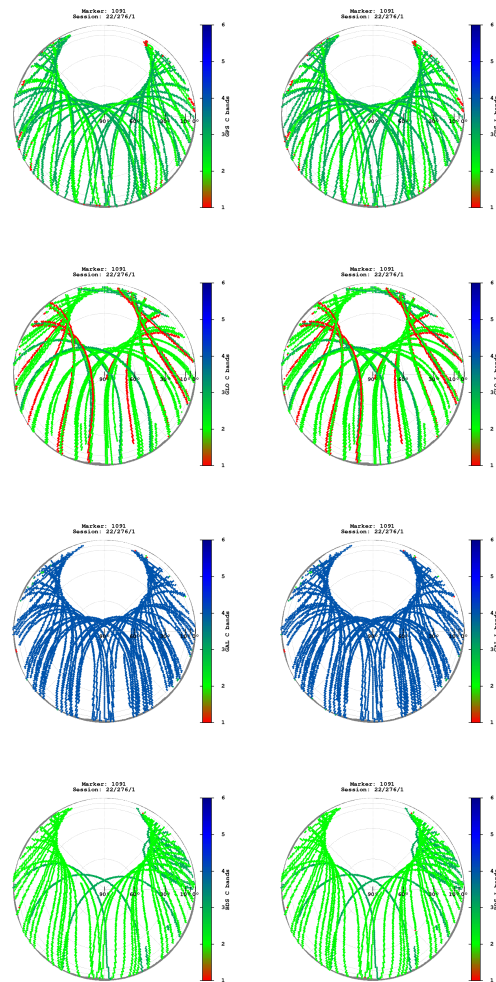


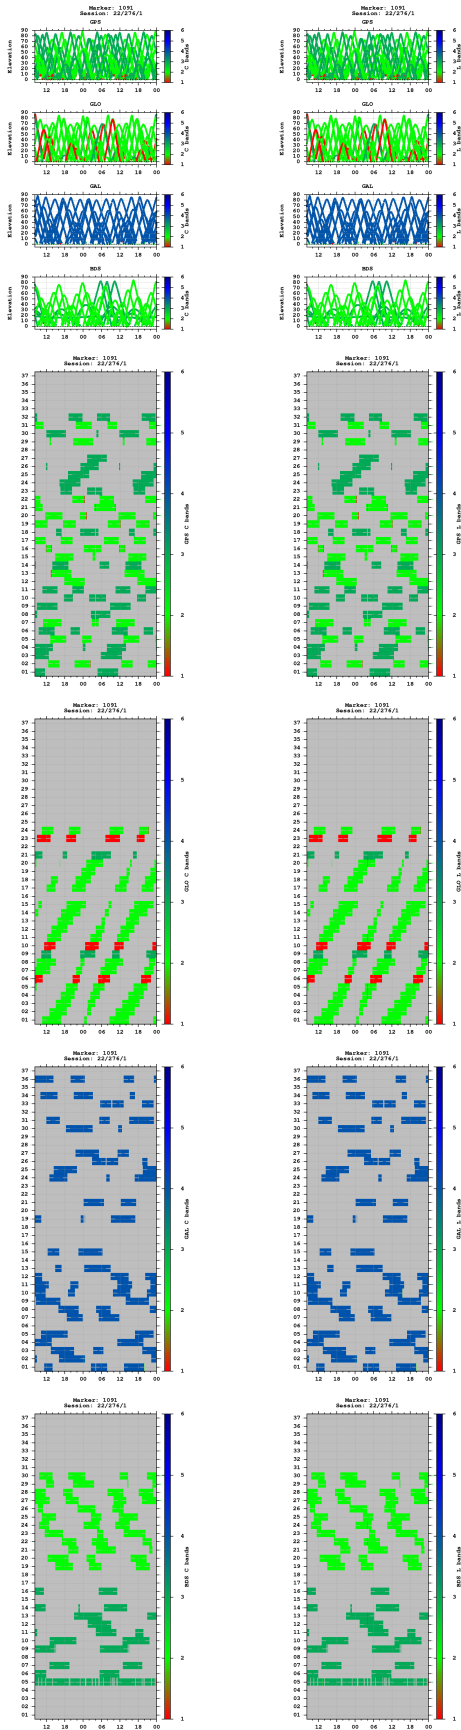


Multipath

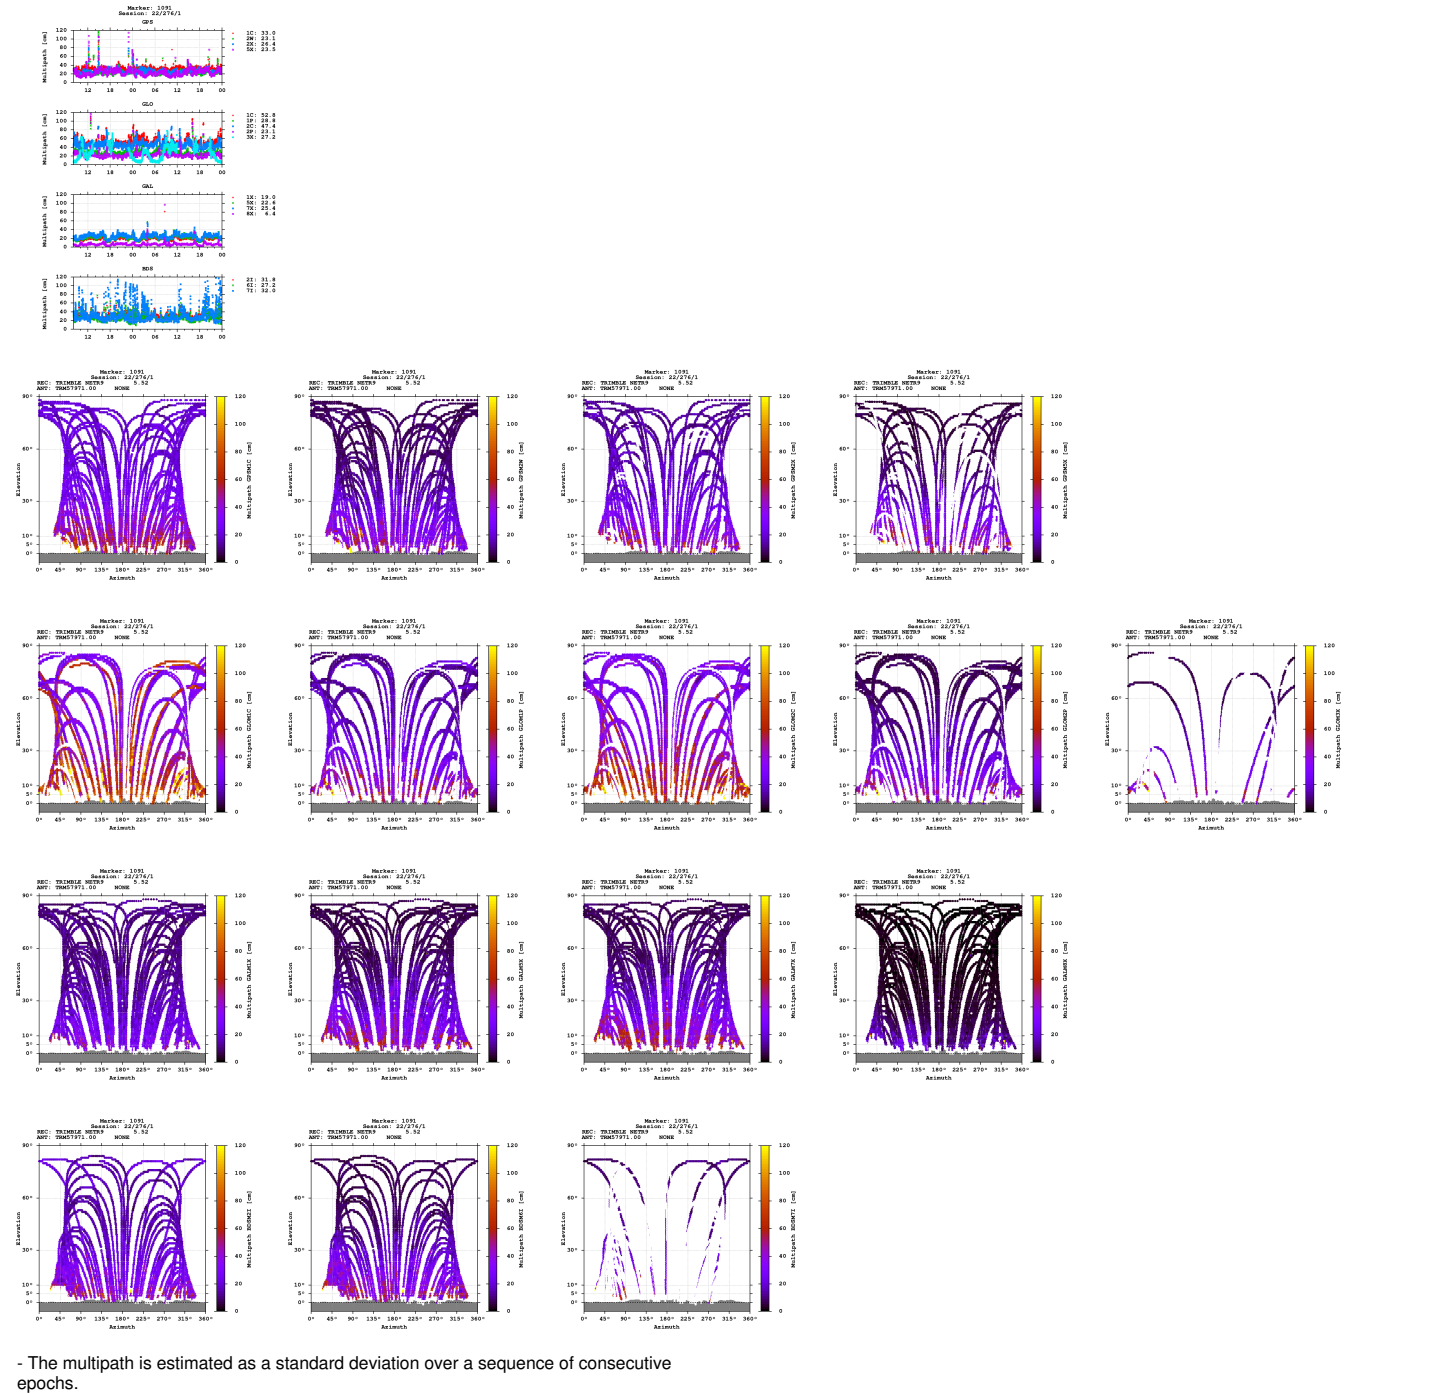


Signal-to-noise ratio

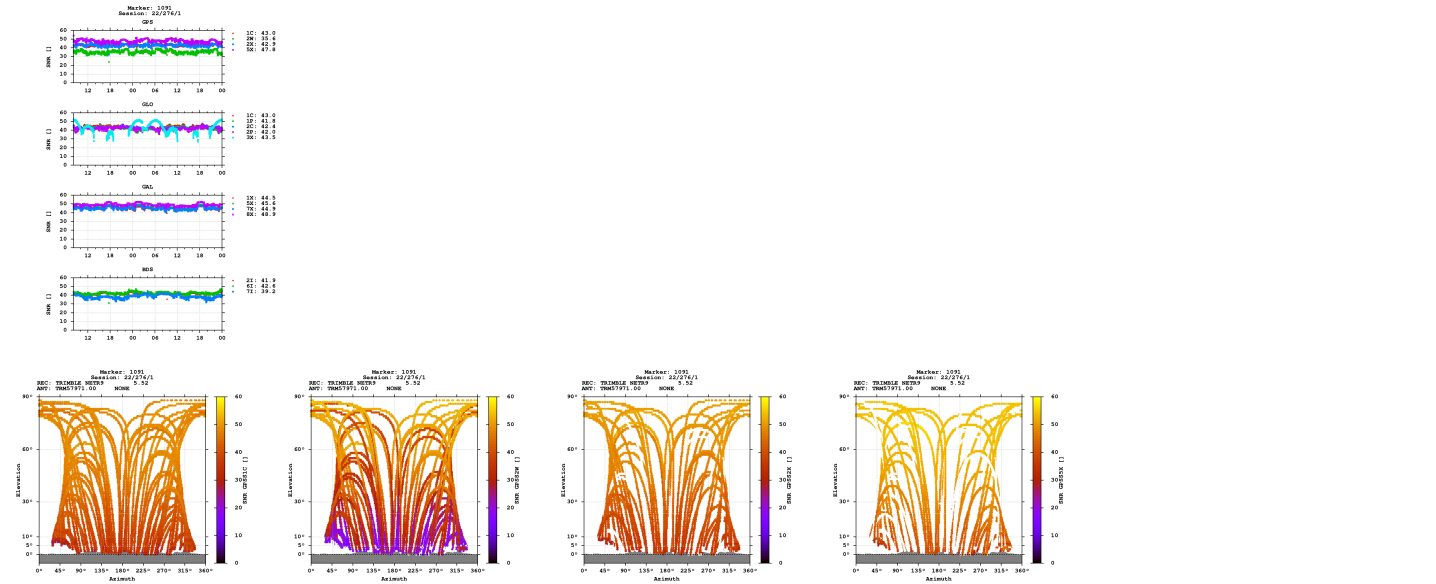

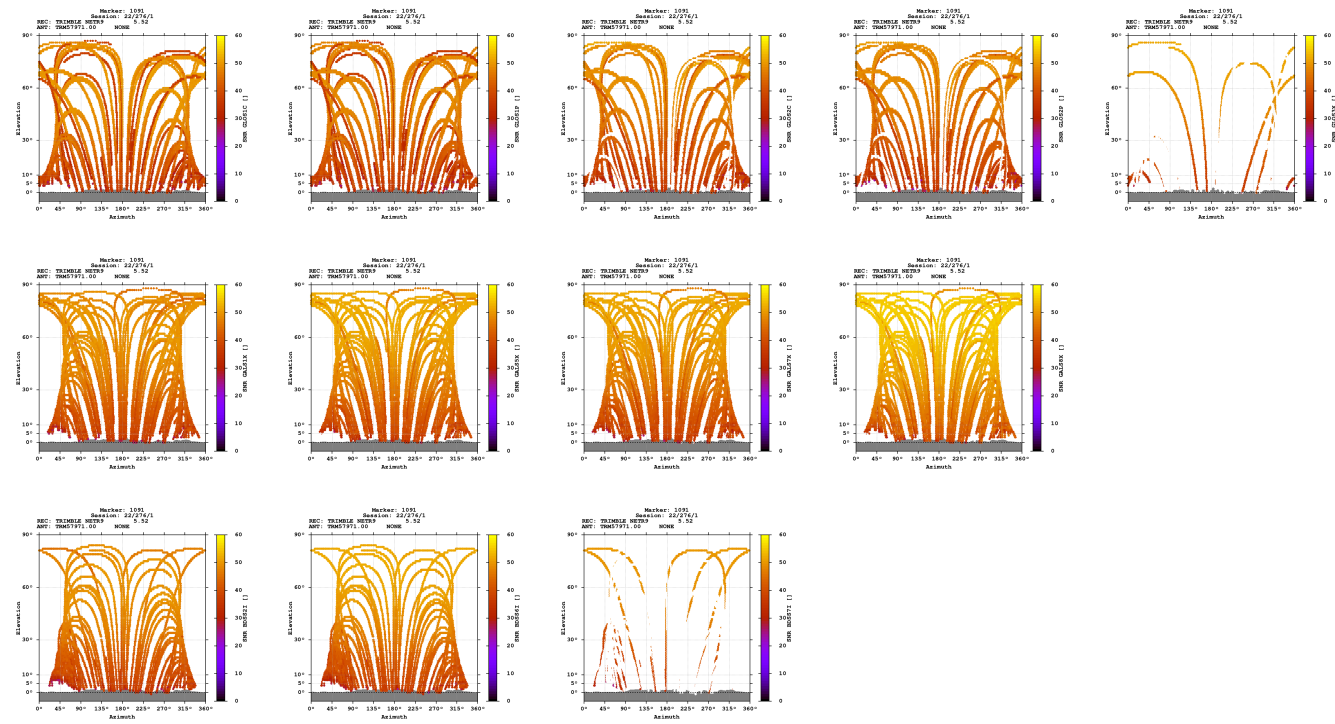

Estimates

2022-10-03 08:11:30	GPS	4277329.9016	639027.2103	4672999.1314	47.407912502	8.497064653	576.3676
2022-10-03 08:11:30	GLO	4277329.7876	639027.3606	4672998.6003	47.407909869	8.497066846	575.9153
2022-10-03 08:11:30	GAL	4277329.6435	639027.1970	4672998.7102	47.407911641	8.497064985	575.8835
2022-10-03 08:11:30	BDS	4277329.6672	639026.9630	4673000.2825	47.407921285	8.497061873	577.0334

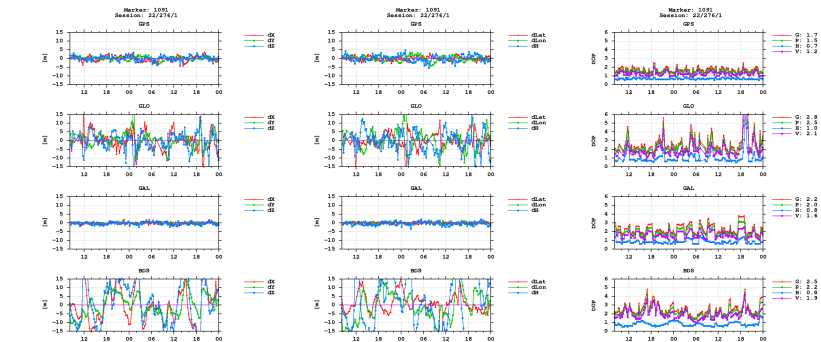

BNC

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)