


GNSS observation file monitoring for 0517


Last RINEX file: 05172761.22O
RINEX version: 3.02
Marker: 1050
Receiver: 517 TRIMBLE NETR9 5.52
Antenna: 519 TRM57971.00 NONE


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

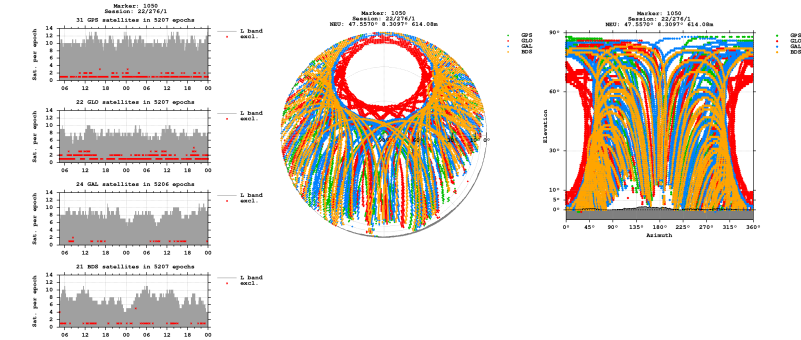


Bands

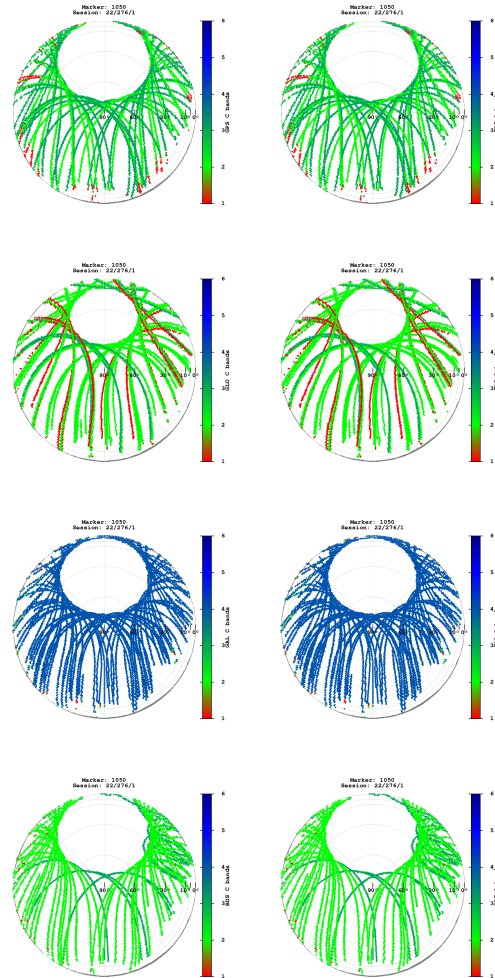

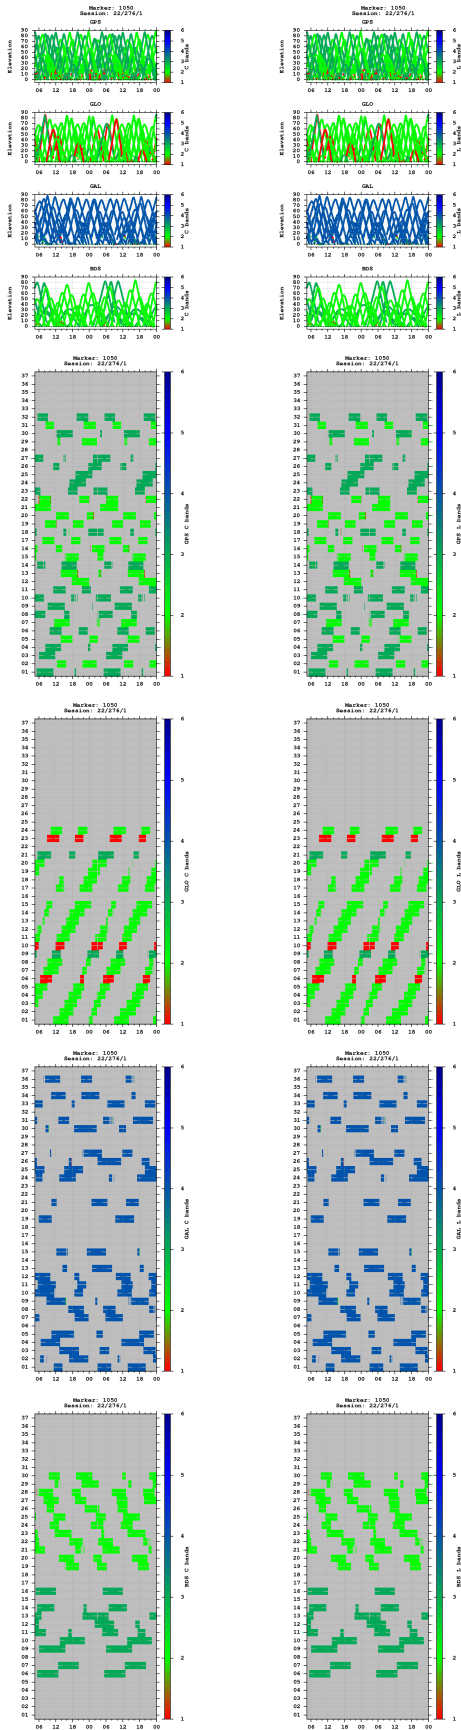



Multipath

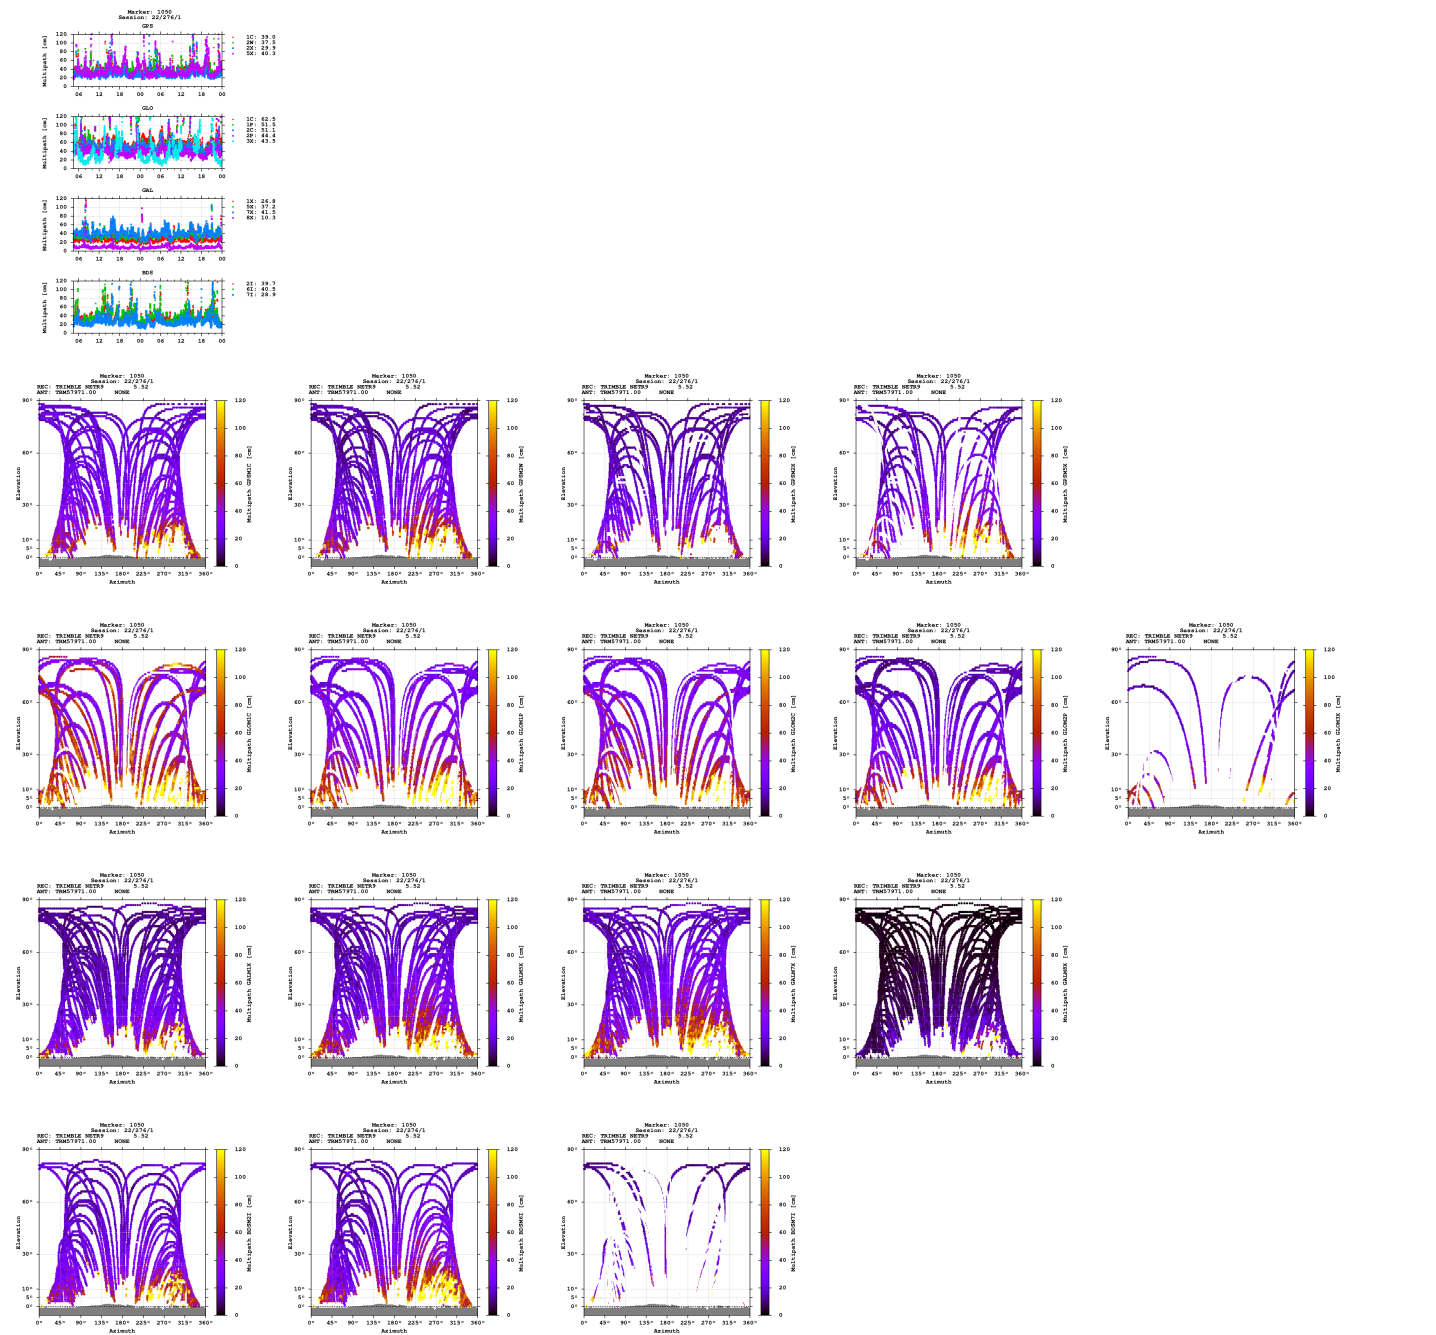

- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.


Signal-to-noise ratio

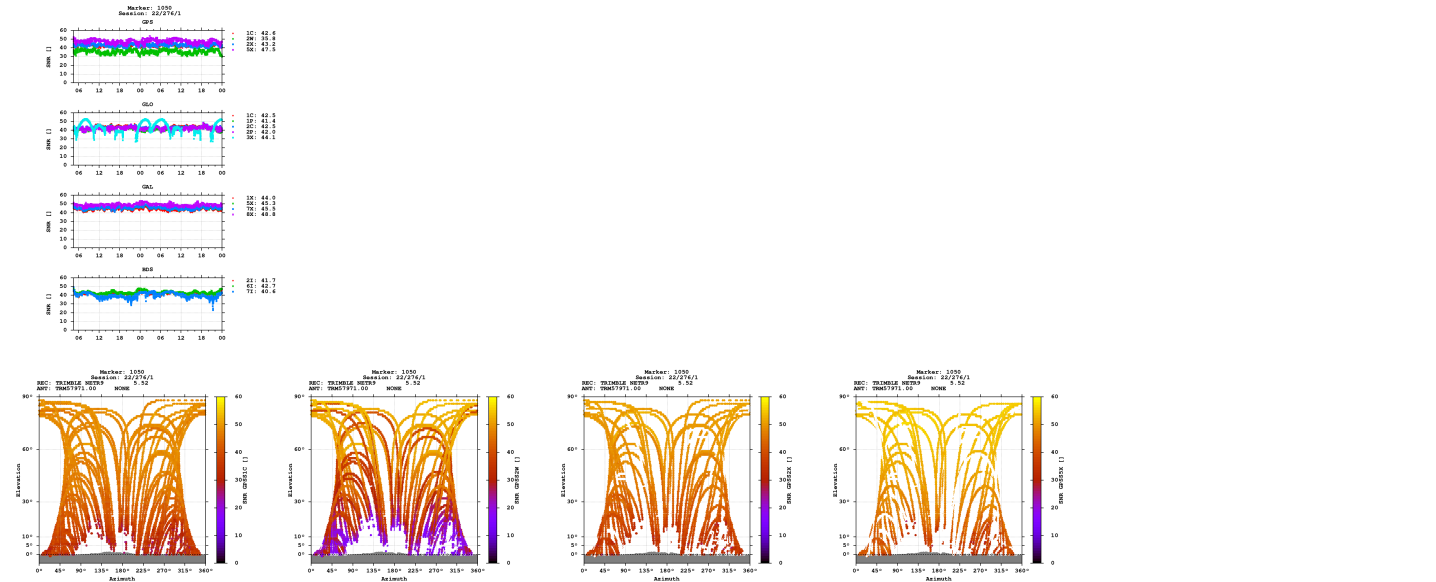

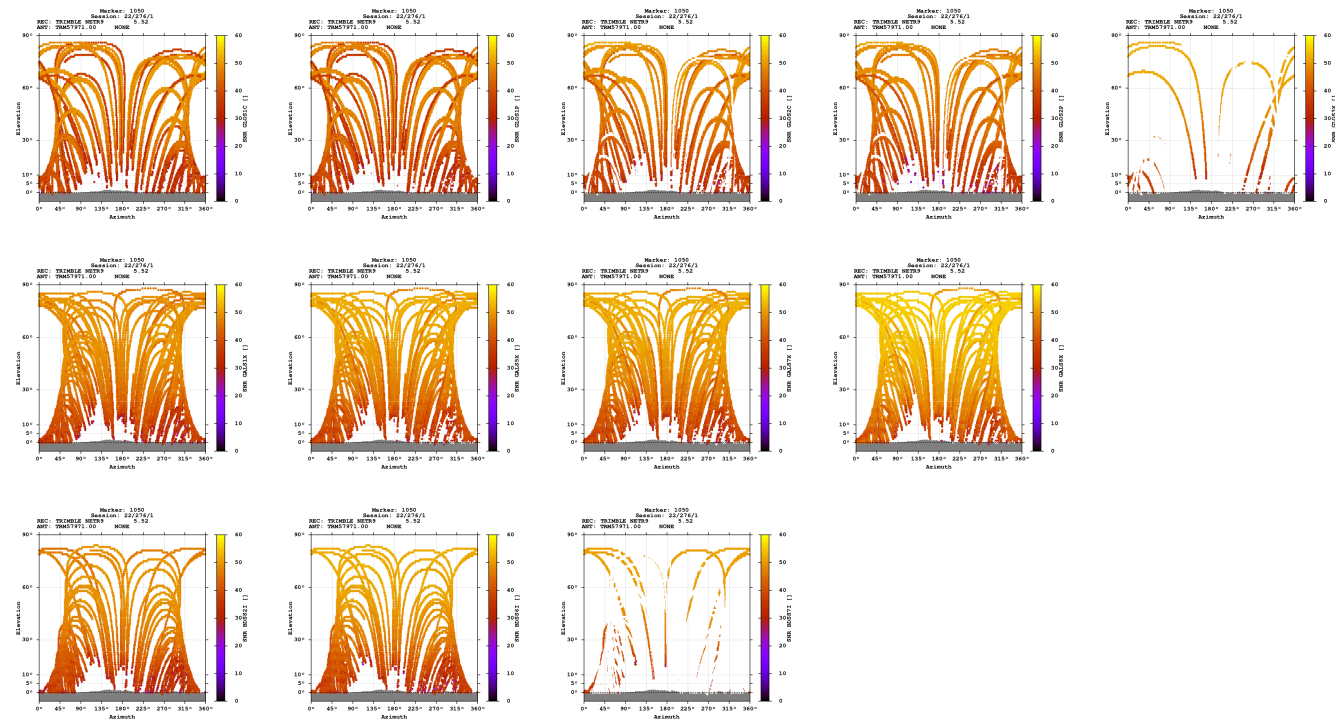

Estimates

2022-10-03 04:34:30	GPS	4267331.3496	623272.4659	4684230.5803	47.557007500	8.309677751	614.0823
2022-10-03 04:34:30	GLO	4267331.2895	623272.4722	4684229.8926	47.557003715	8.309677948	613.5353
2022-10-03 04:34:30	GAL	4267331.3497	623272.5572	4684230.3732	47.557006155	8.309678950	613.9385
2022-10-03 04:34:30	BDS	4267332.6348	623271.7910	4684232.9760	47.557014247	8.309666411	616.6426

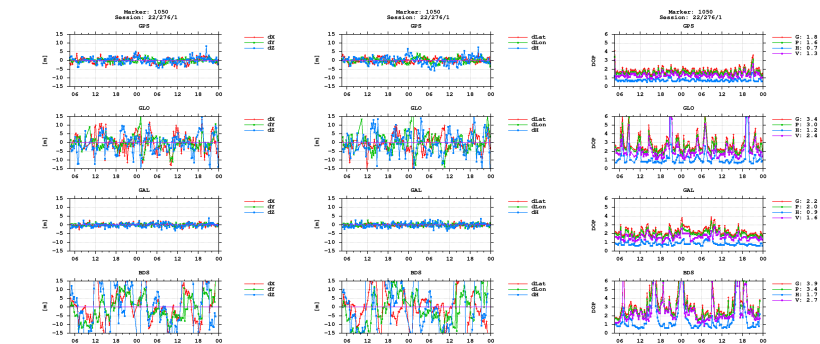

BNC

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)