


GNSS observation file monitoring for 0517


Last RINEX file: 05172791.220
RINEX version: 3.02
Marker: 1090
Receiver: 517 TRIMBLE NETR9 5.52
Antenna: 519 TRM57971.00 NONE

Epochs

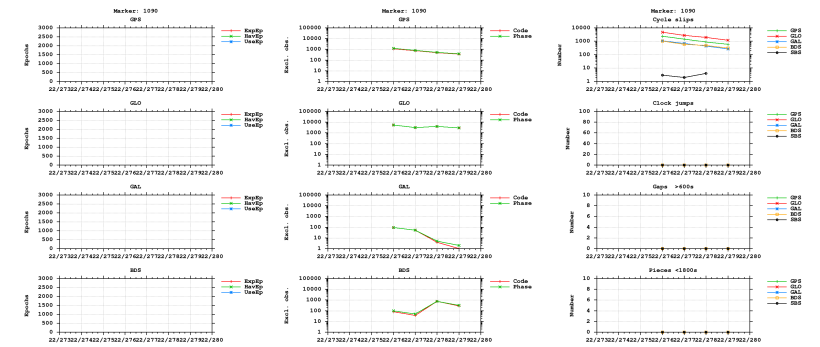



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

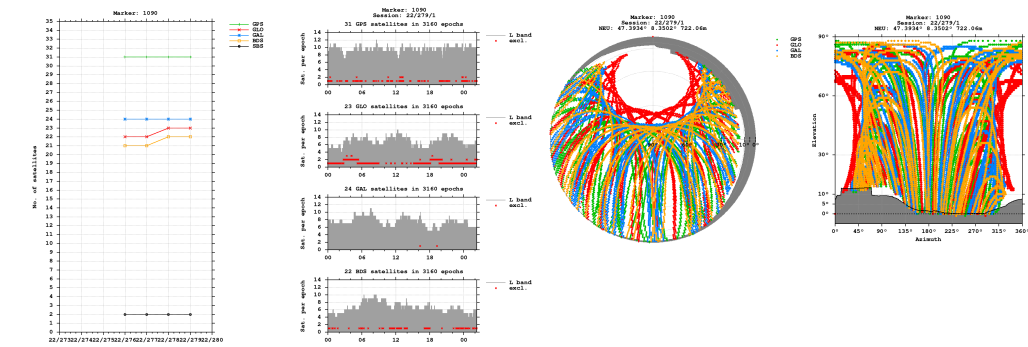


Bands

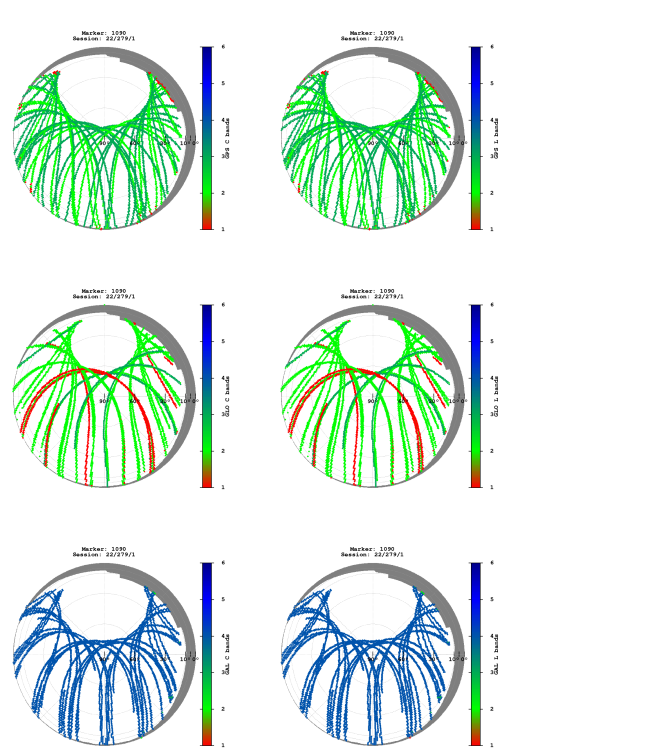


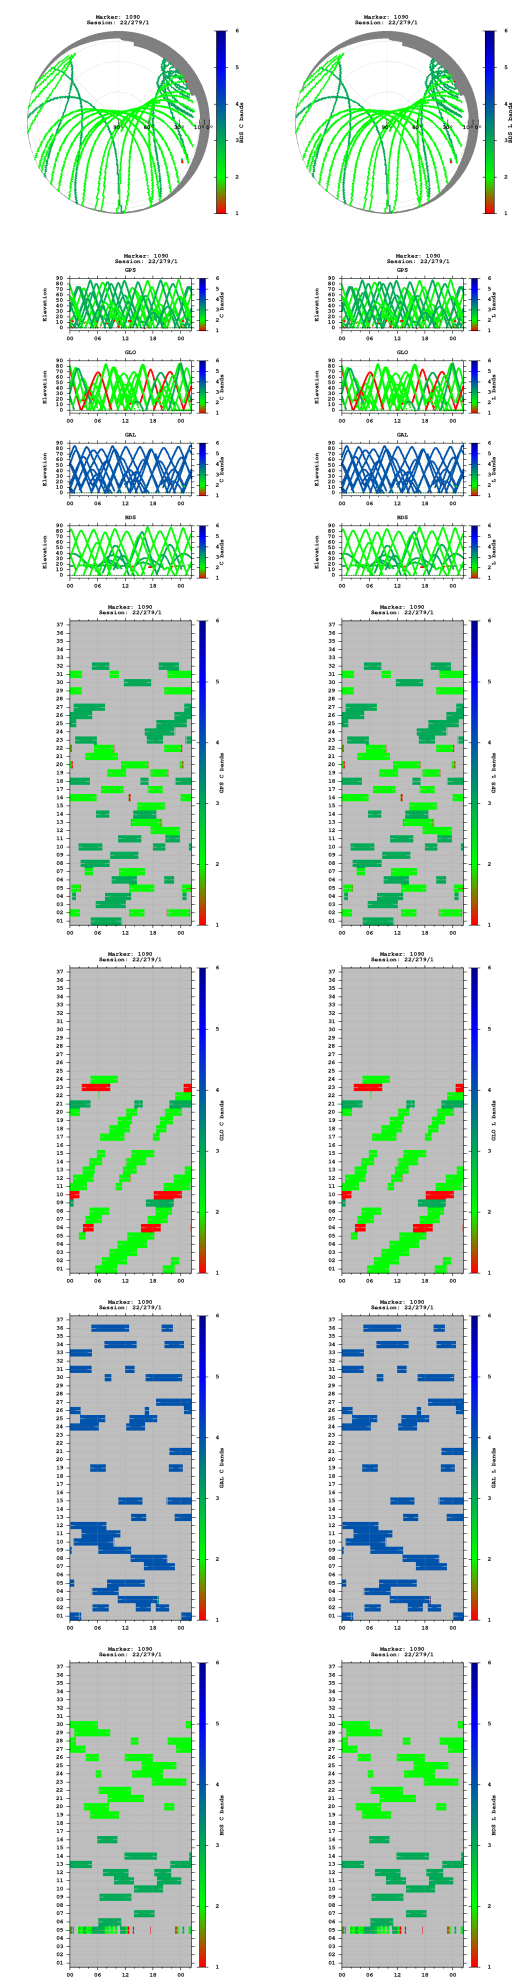


Observations

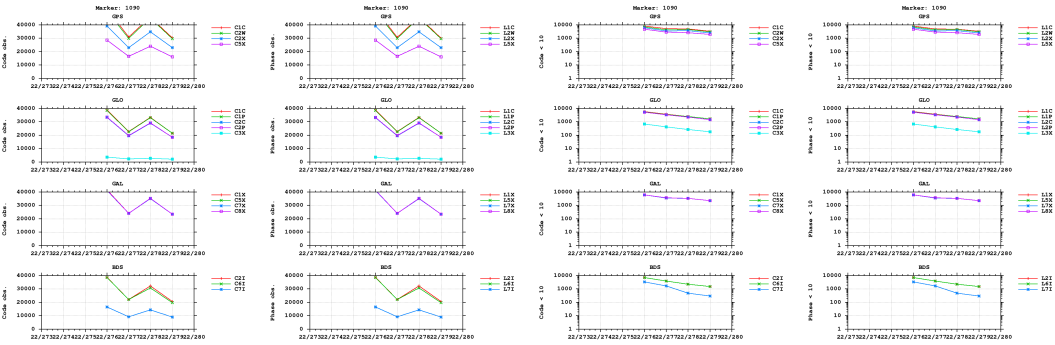


Multipath

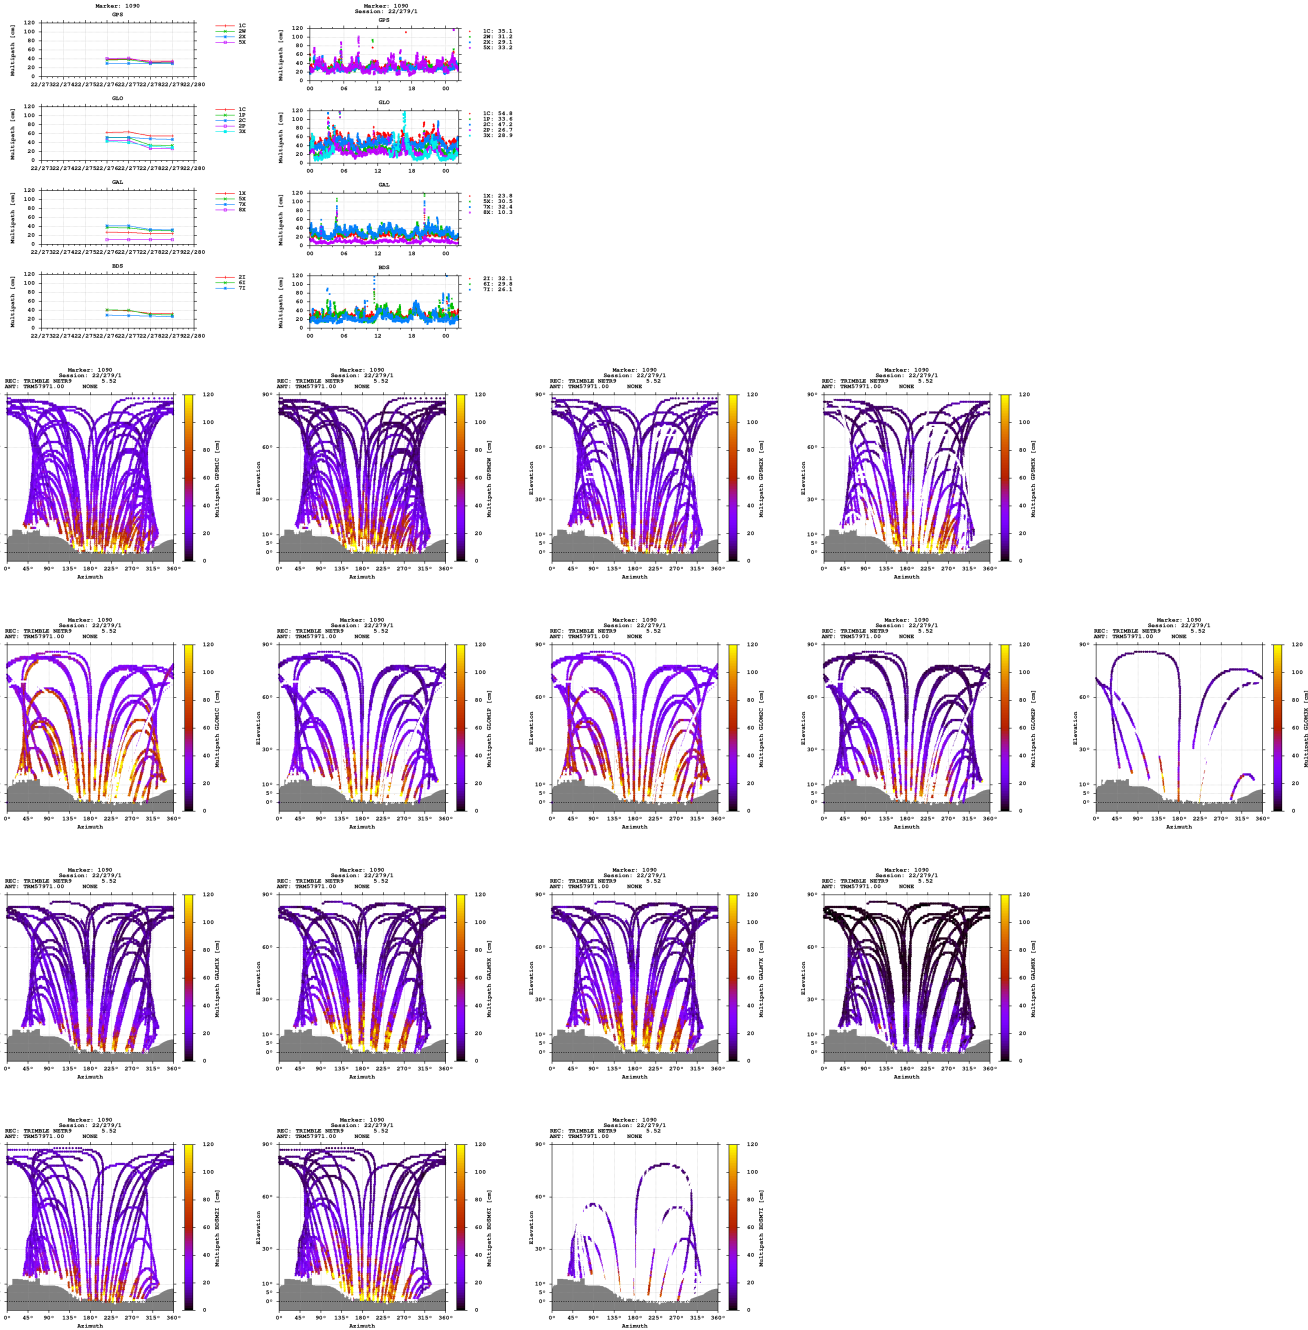


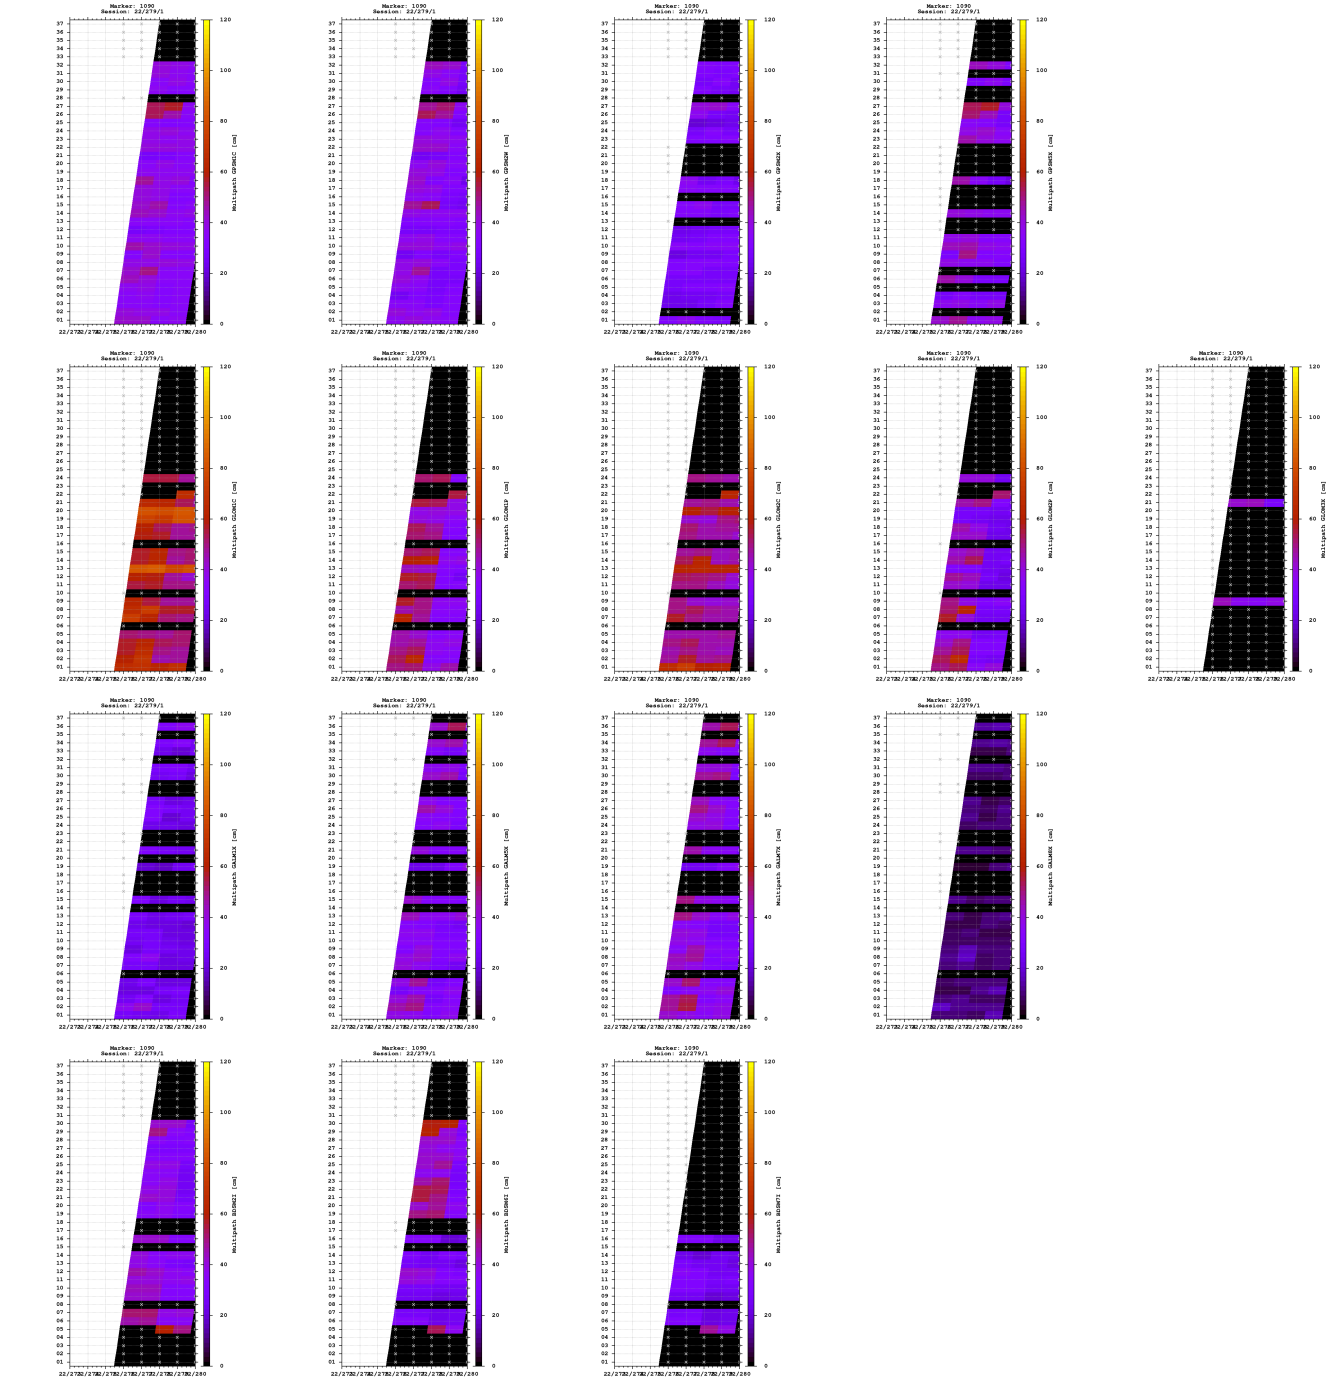


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

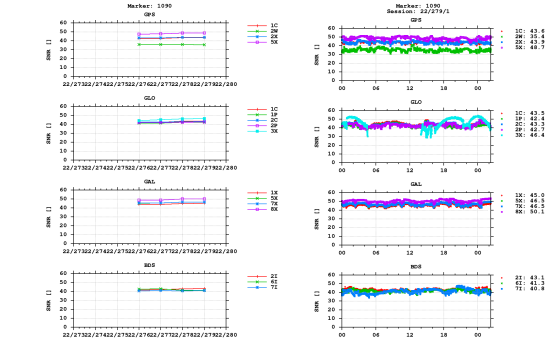


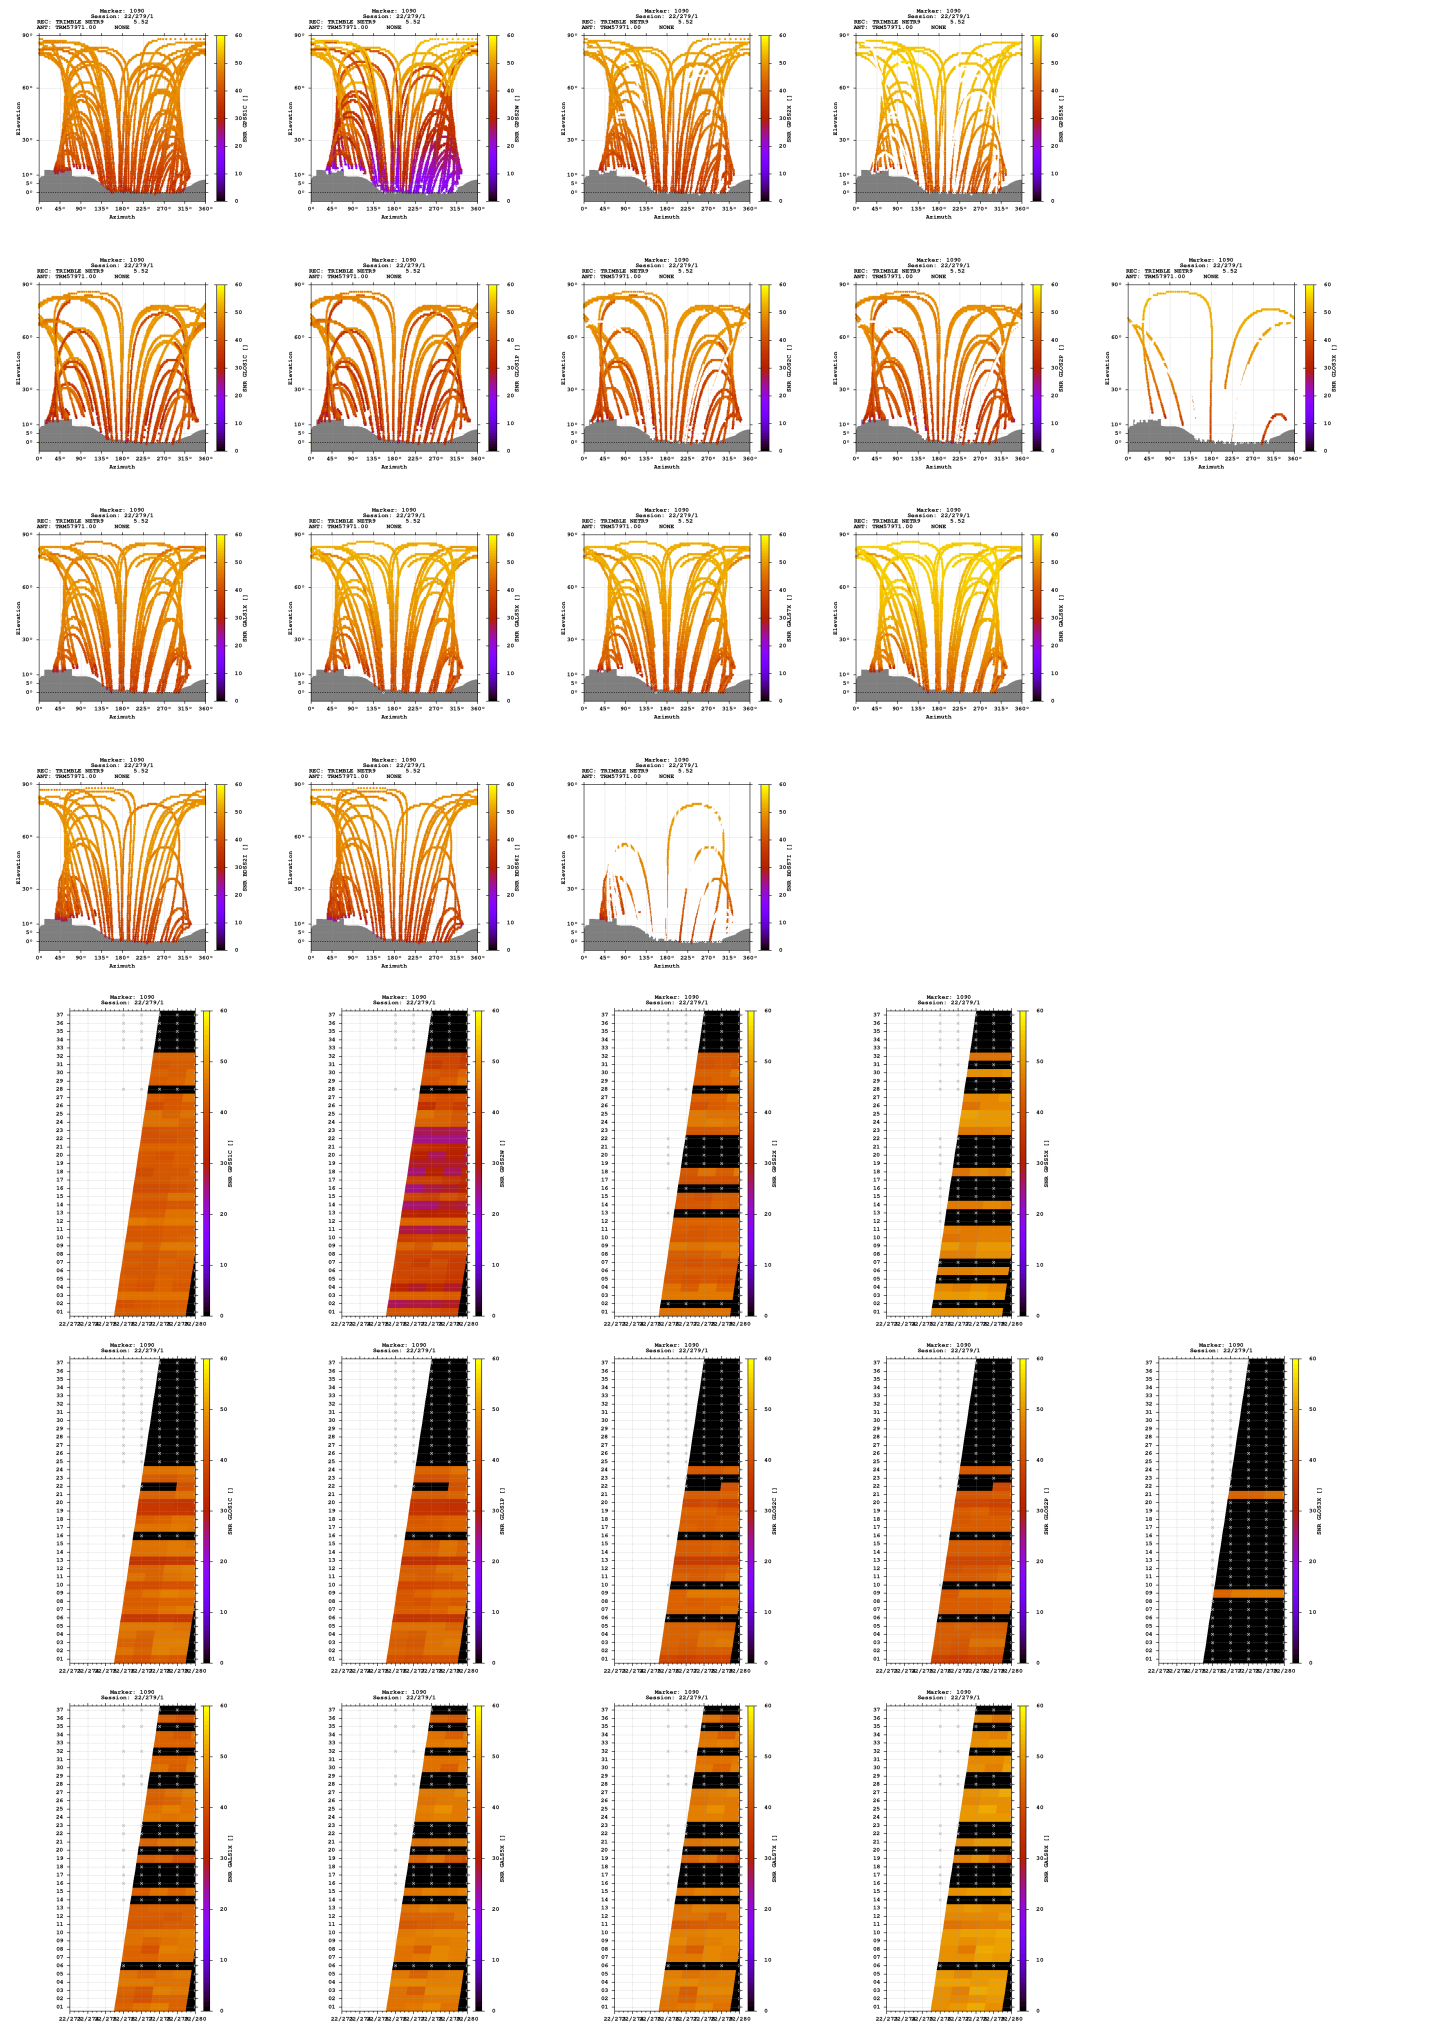

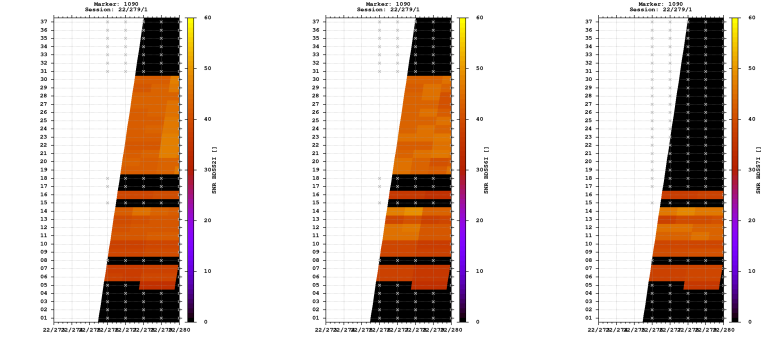


Estimates

2022-10-05 07:53:30	GPS	4280229.2076	628248.8357	4672011.7023	47.393367429	8.350206231	722.0622
2022-10-05 07:53:30	GLO	4280227.9385	628247.6997	4672011.4511	47.393375303	8.350193787	720.9156
2022-10-05 07:53:30	GAL	4280228.6963	628248.6343	4672011.2608	47.393368282	8.350204576	721.3749
2022-10-05 07:53:30	BDS	4280227.8271	628249.2096	4672013.3912	47.393386393	8.350213787	722.4174

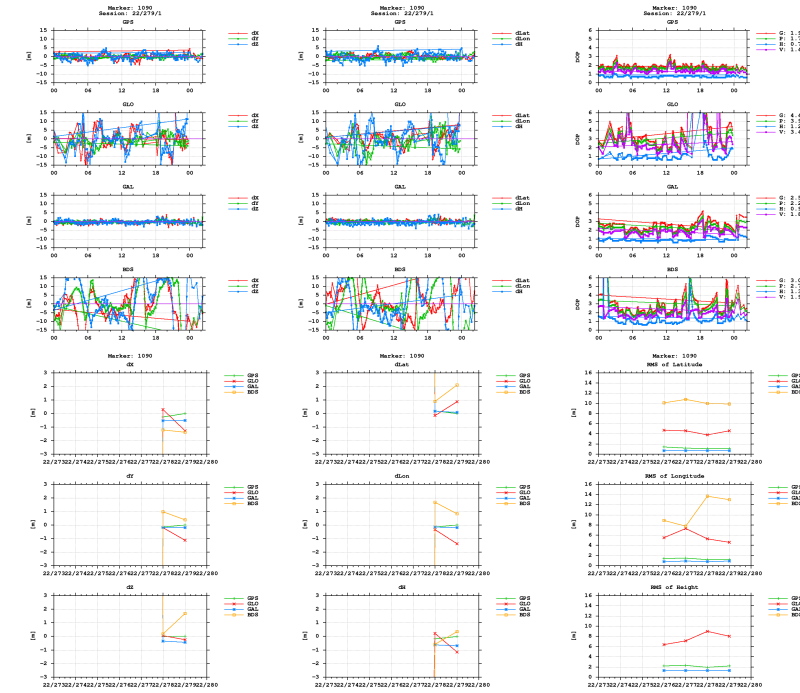

BNC



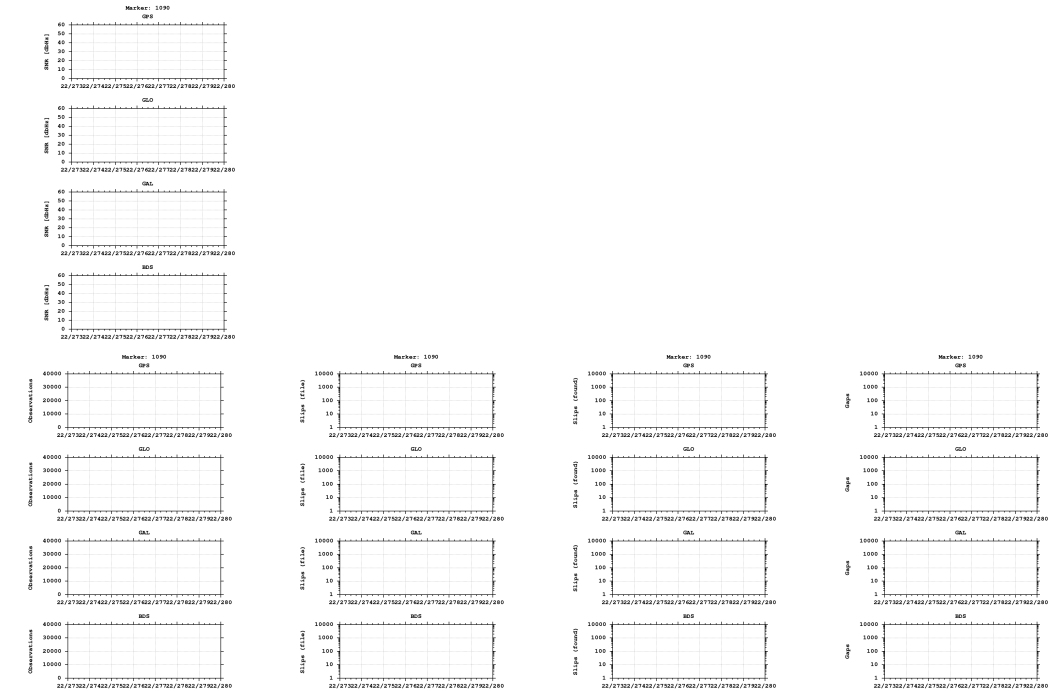

Equipment

2022-10-03 00:00:00 TRIMBLE NETR9 5.52 517 TRM57971.00 NONE 519

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)