


GNSS observation file monitoring for 0518


Last RINEX file: 05182771.220
RINEX version: 3.02
Marker: 1070
Receiver: 518 TRIMBLE NETR9 5.52
Antenna: 518 TRM57971.00 NONE

Epochs

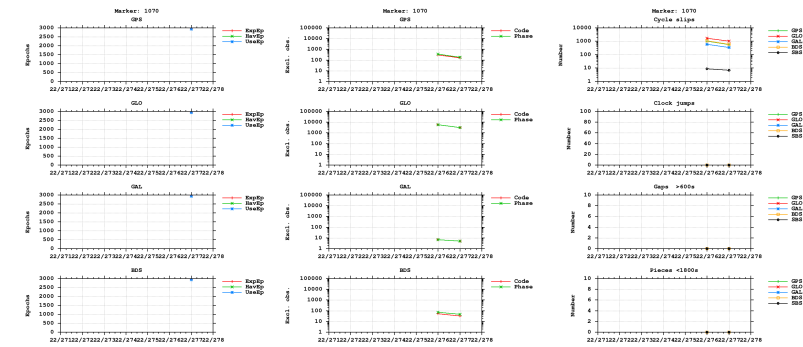



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.


Satellites

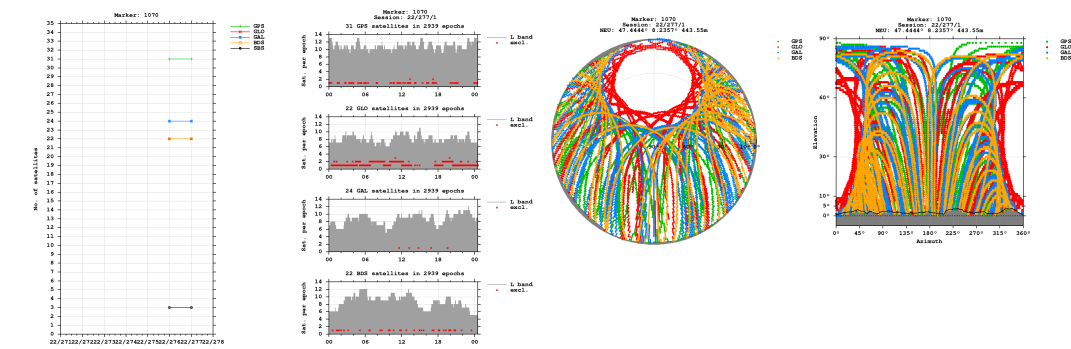


Bands

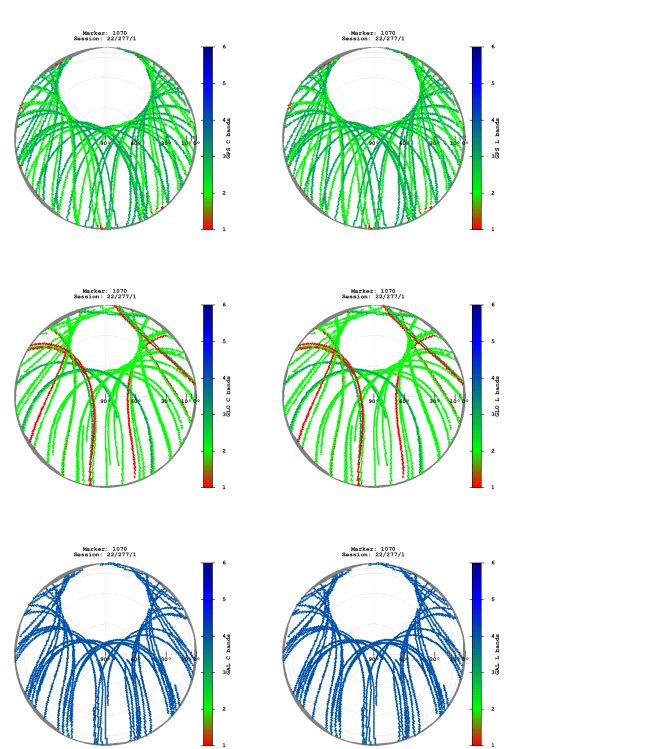


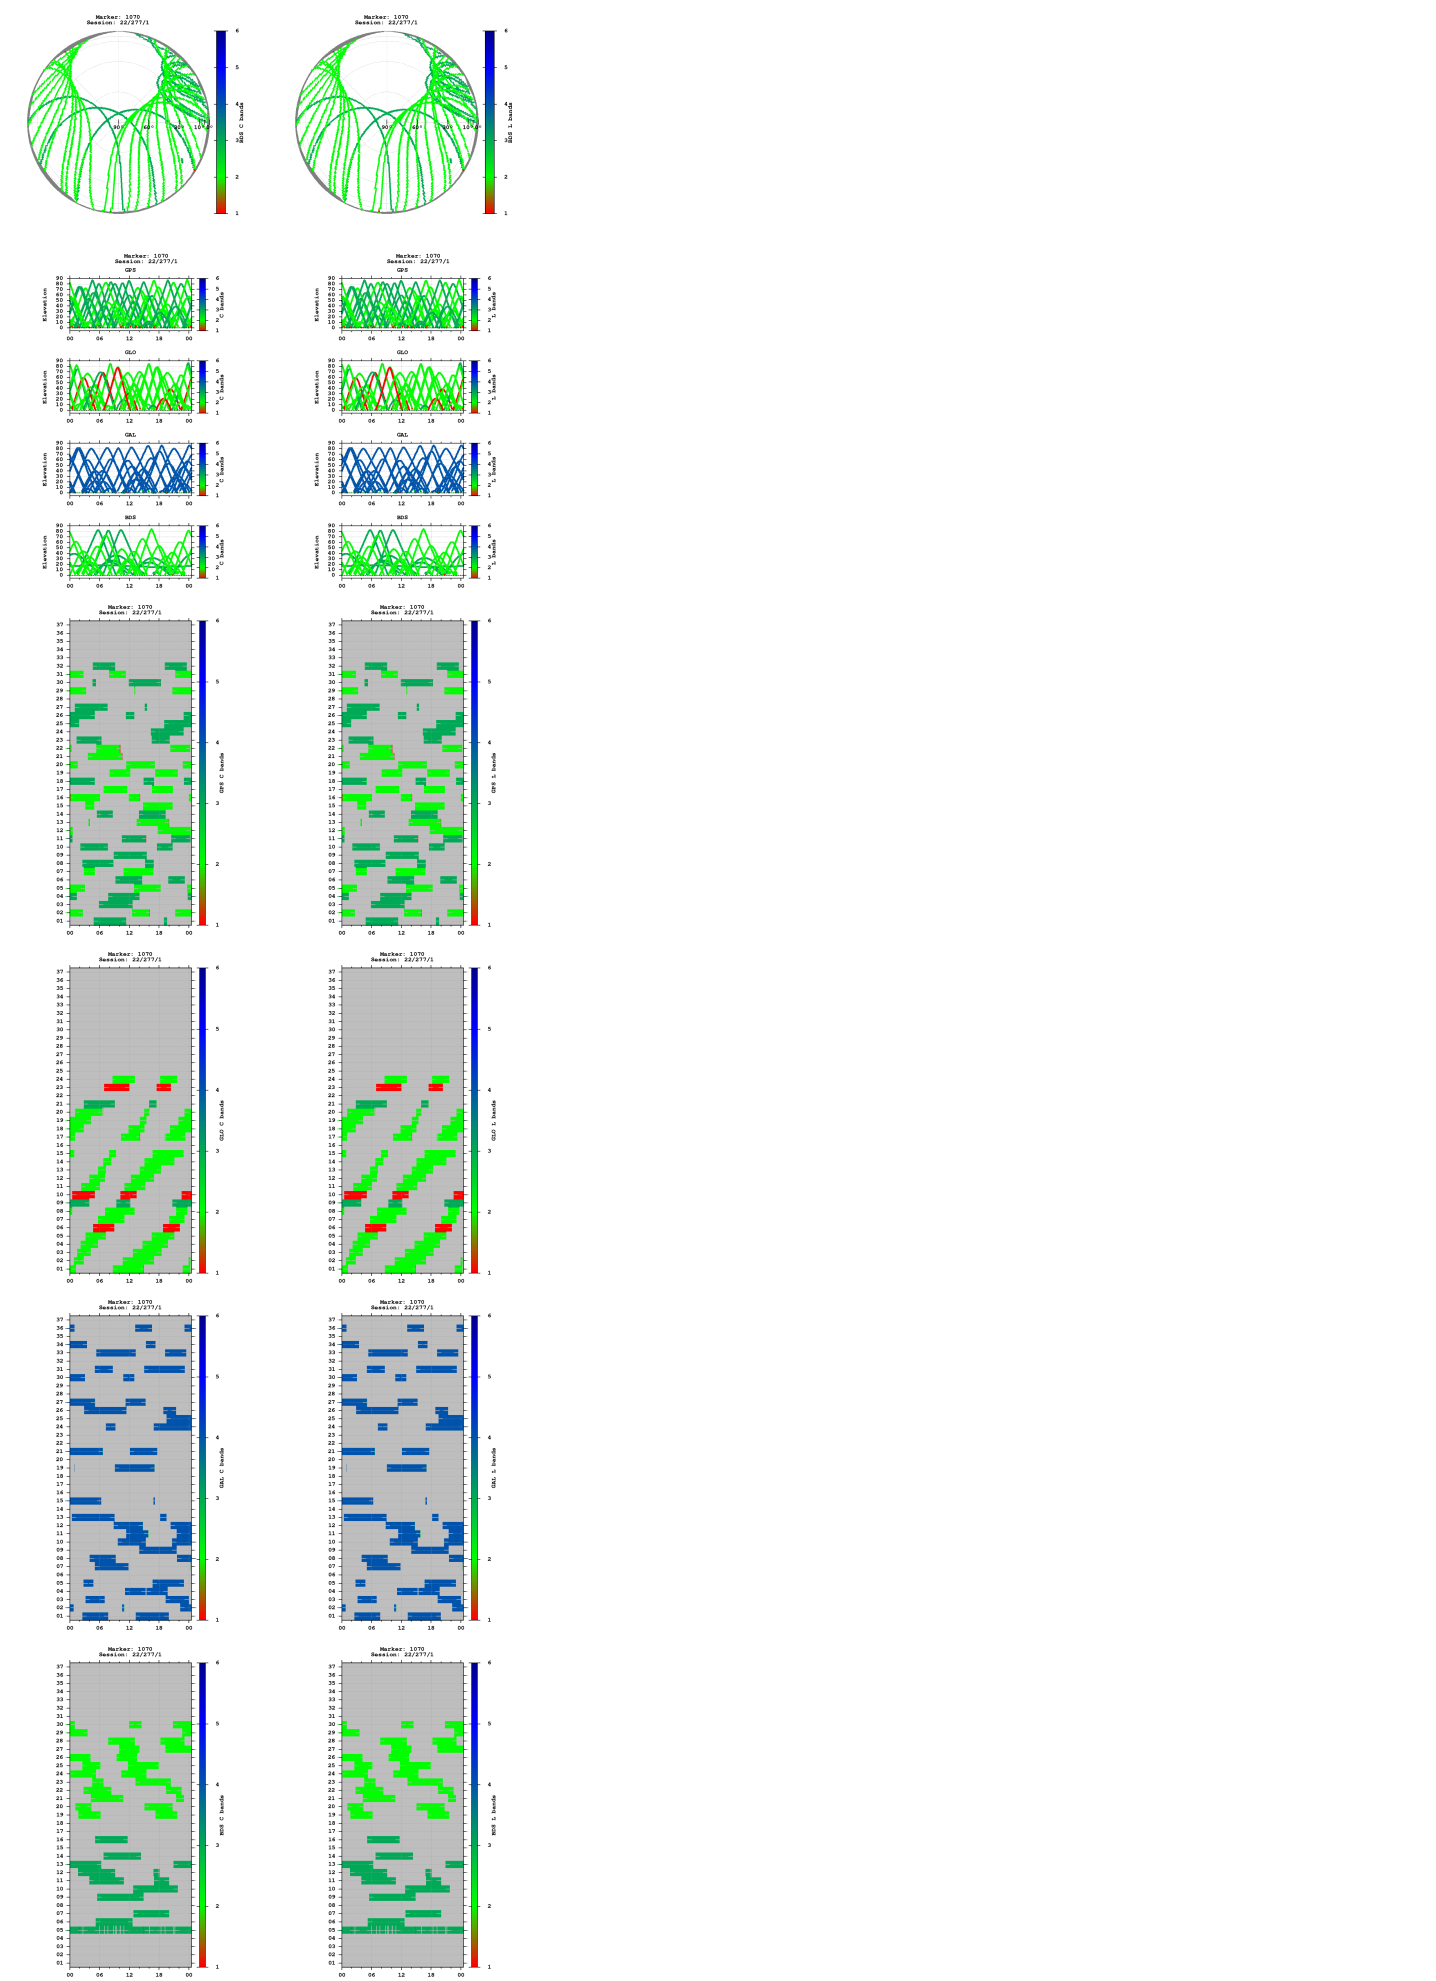

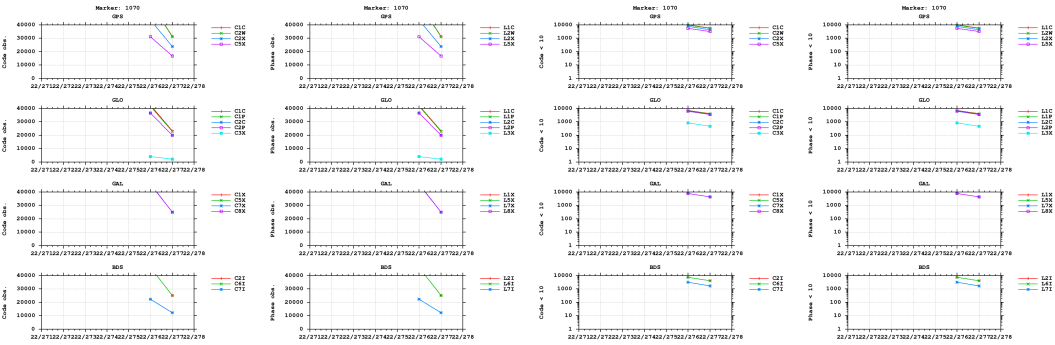


Multipath

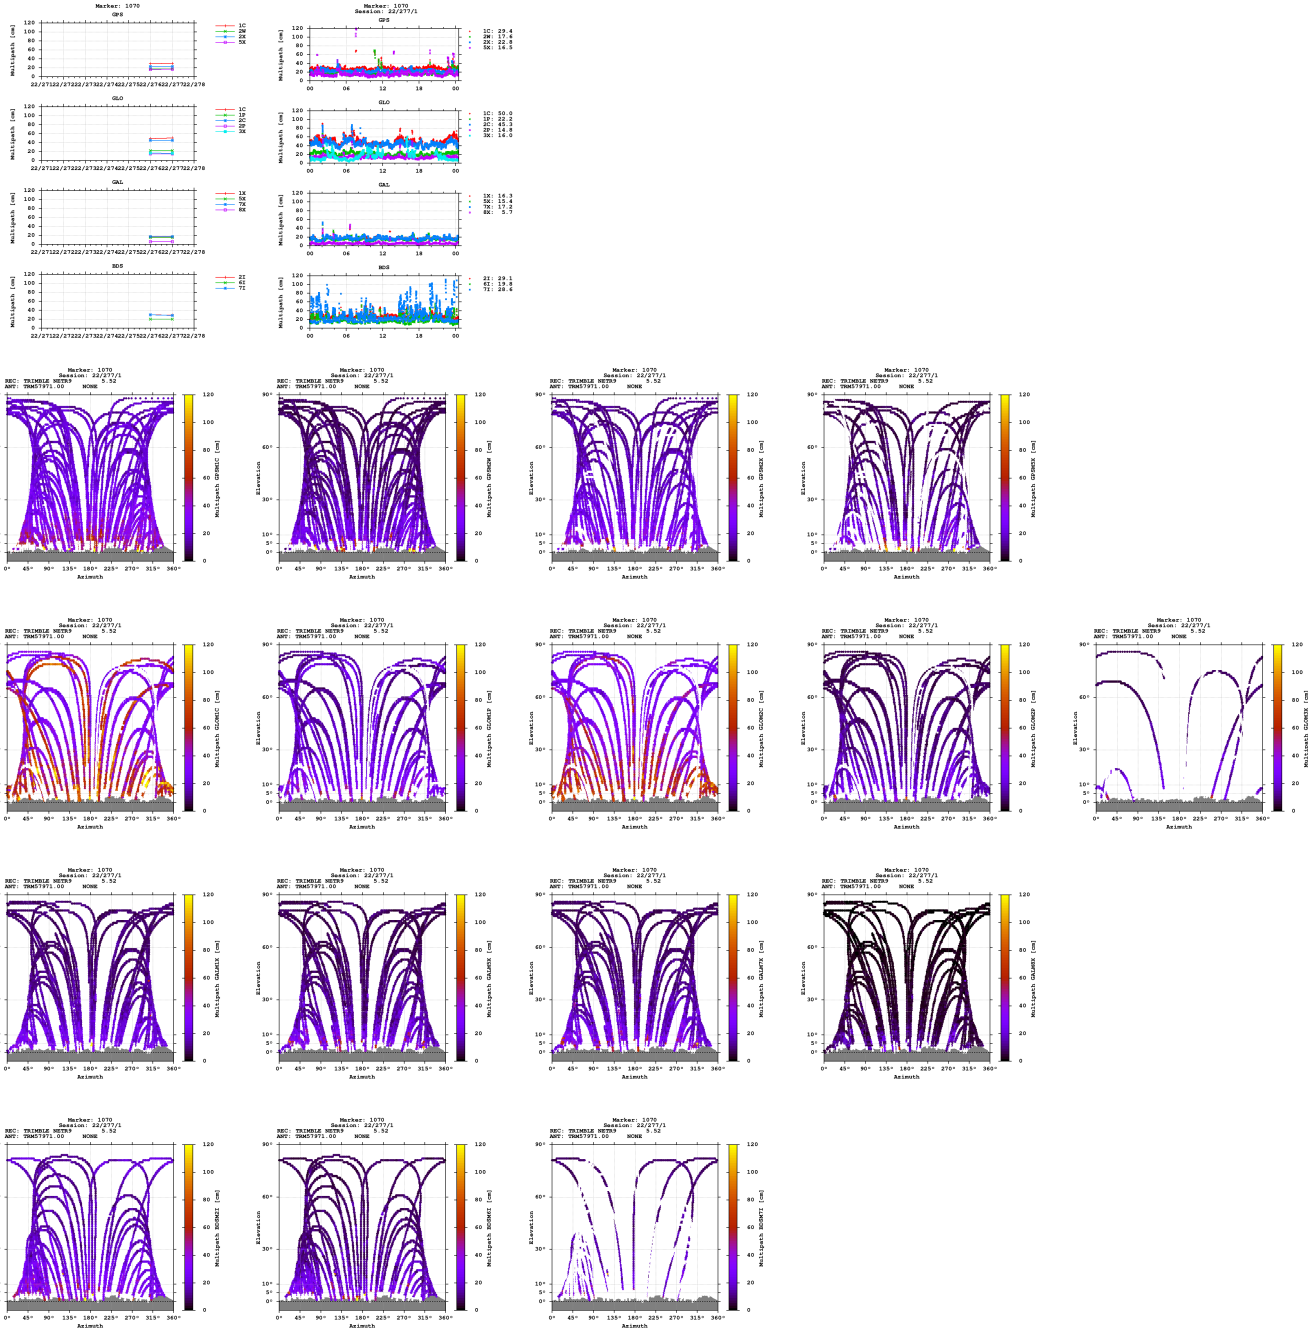


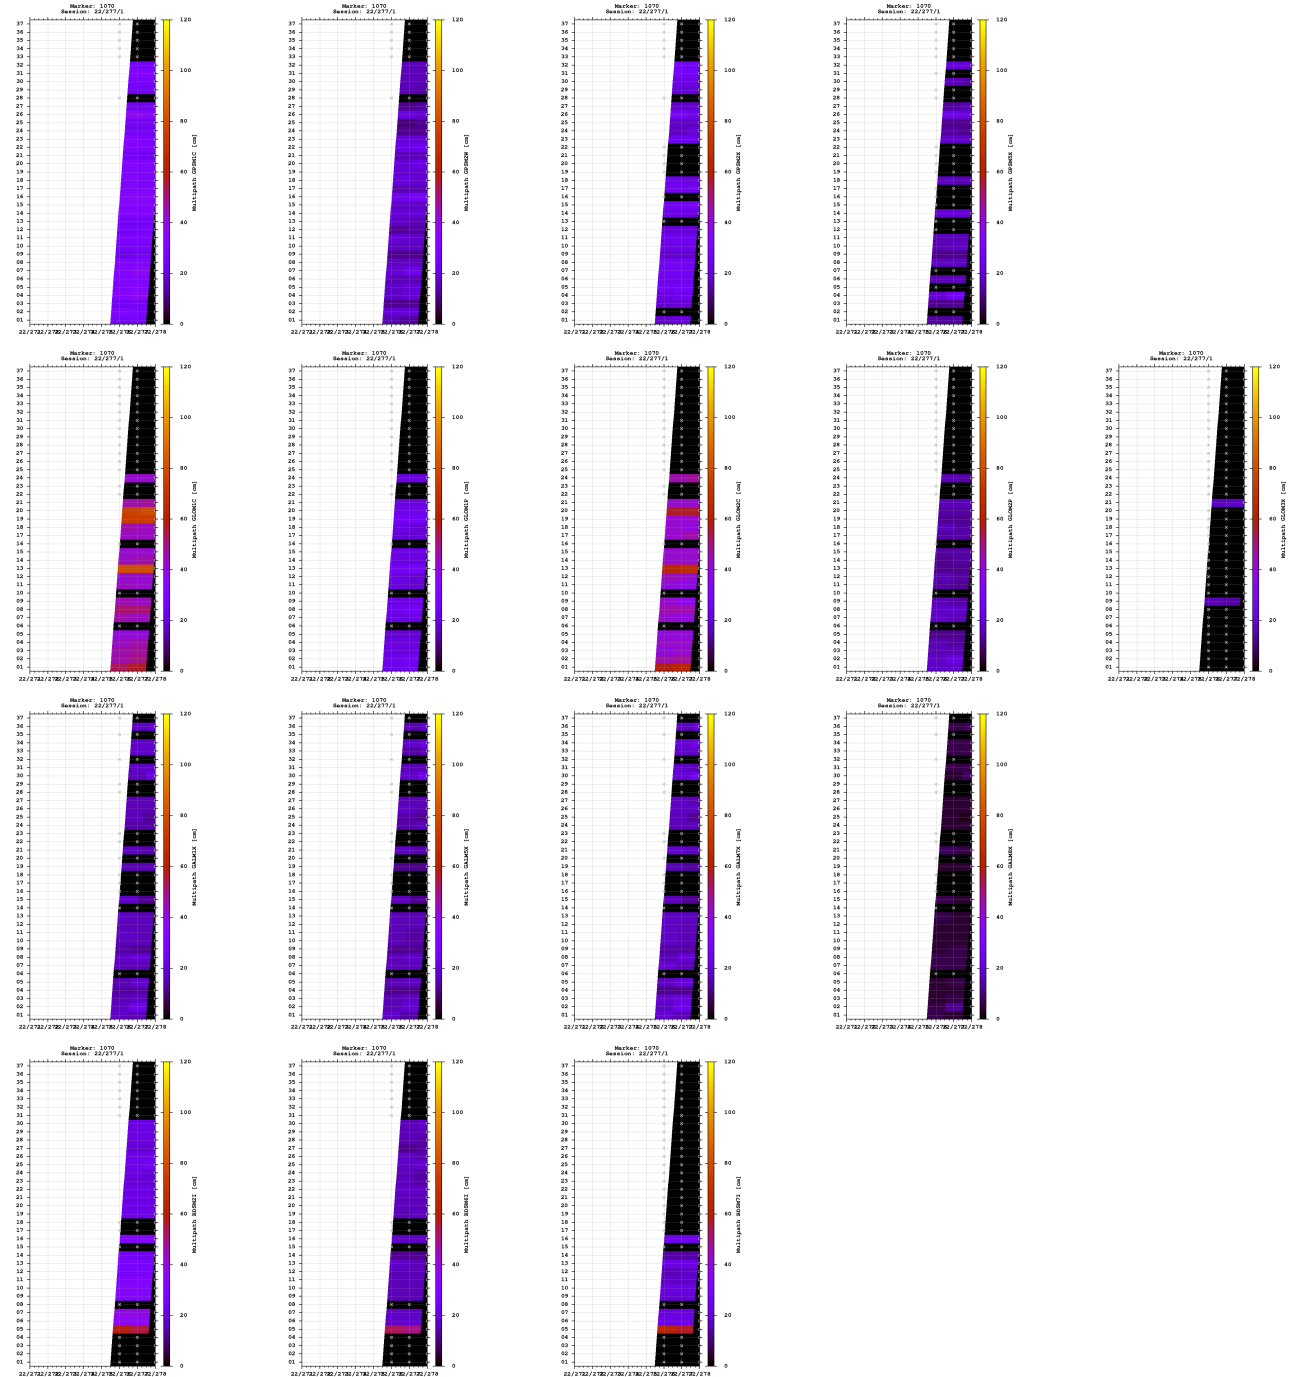


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

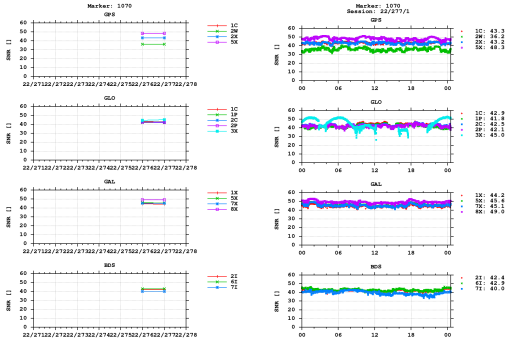


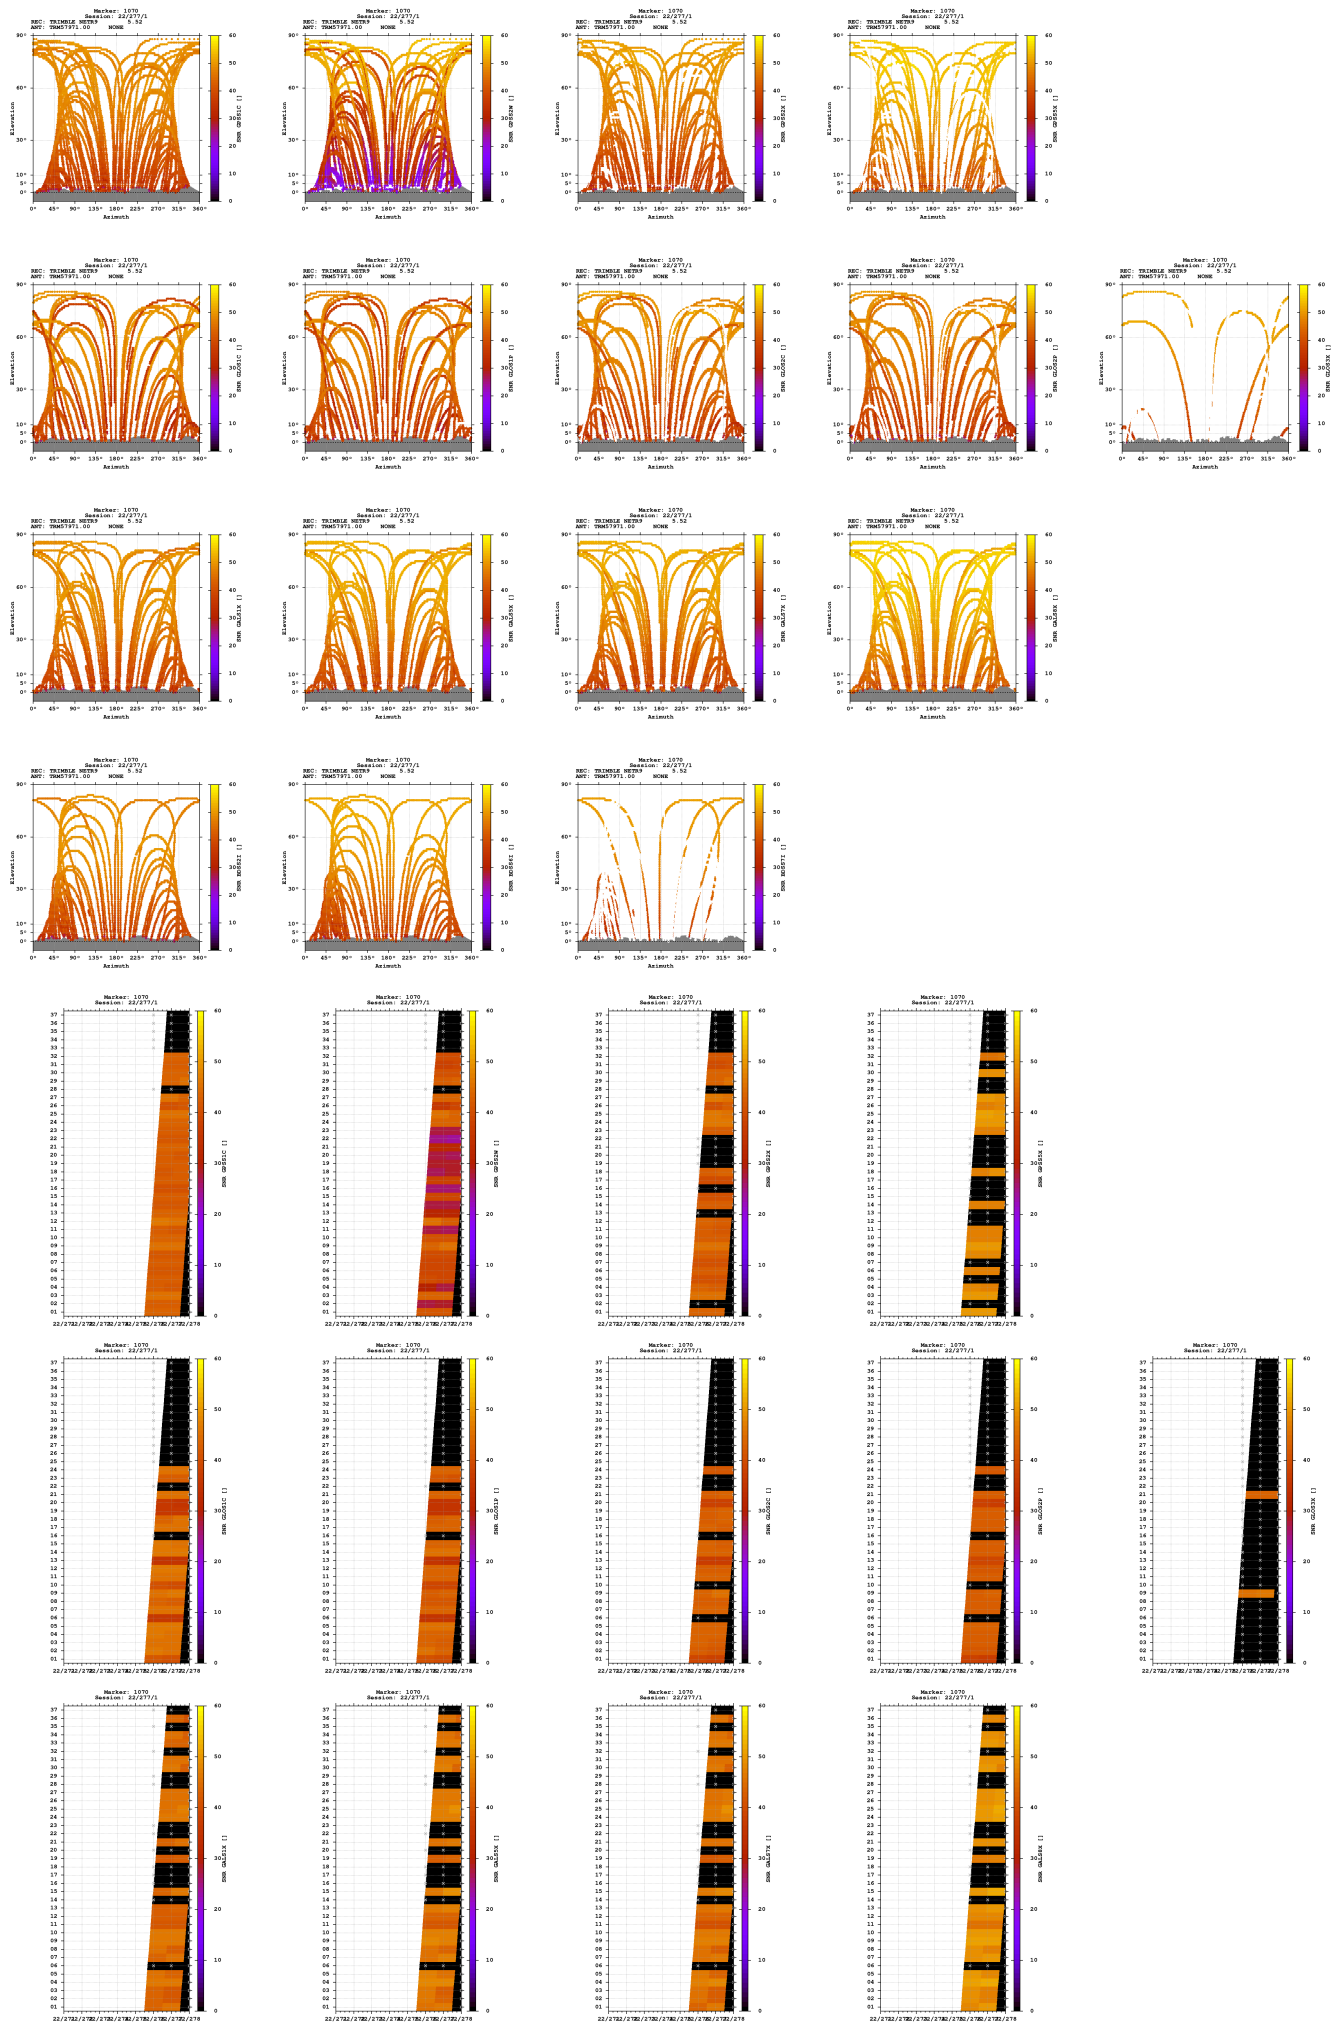

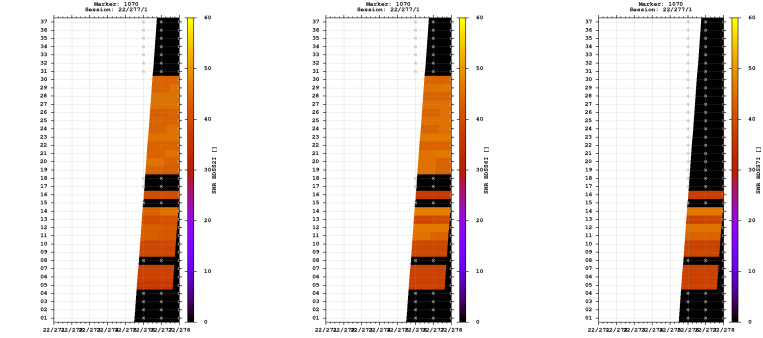


Estimates

2022-10-03 03:06:00	GPS	4277155.2634	619069.5324	4675645.3360	47.444390807	8.235718864	443.5489
2022-10-03 03:06:00	GLO	4277155.0627	619069.8131	4675644.7910	47.444388542	8.235722928	443.0402
2022-10-03 03:06:00	GAL	4277155.2966	619069.4455	4675645.2661	47.444390247	8.235717661	443.5112
2022-10-03 03:06:00	BDS	4277155.6338	619069.5289	4675646.2539	47.444393965	8.235718115	444.4725

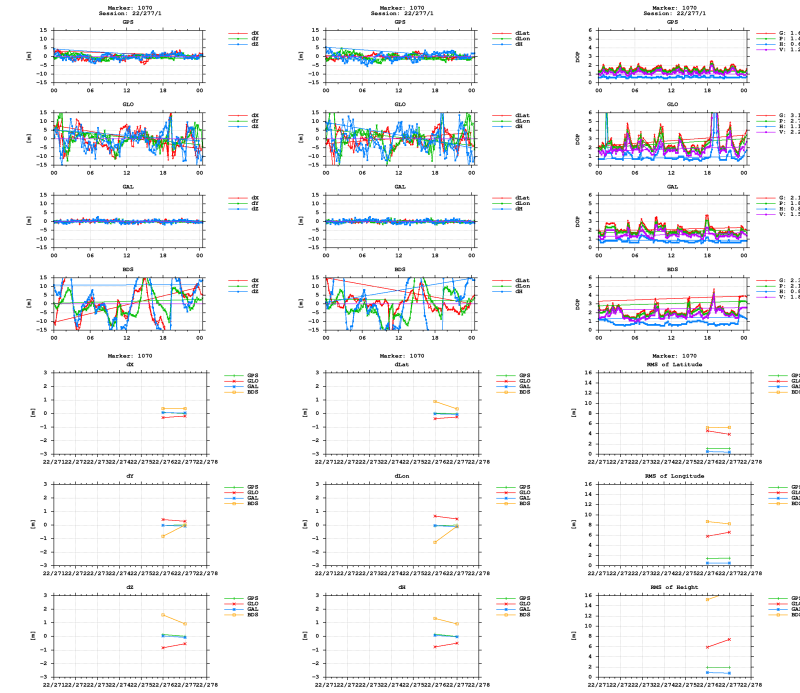

BNC



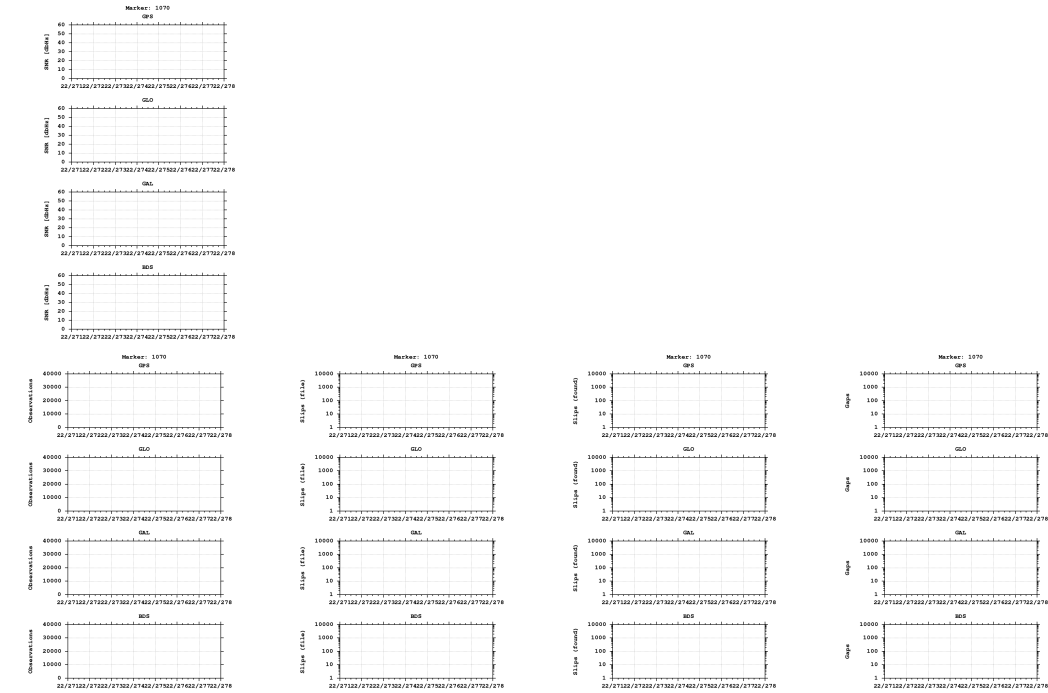

Equipment

2022-10-03 00:00:00 TRIMBLE NETR9 5.52 518 TRM57971.00 NONE 518

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)