

GNSS observation file monitoring for 0518

Last RINEX file: 05182781.220


RINEX version: 3.02

Marker: 1090

Receiver: 518 TRIMBLE NETR9 5.52


Antenna: 518 TRM57971.00 NONE

Epochs

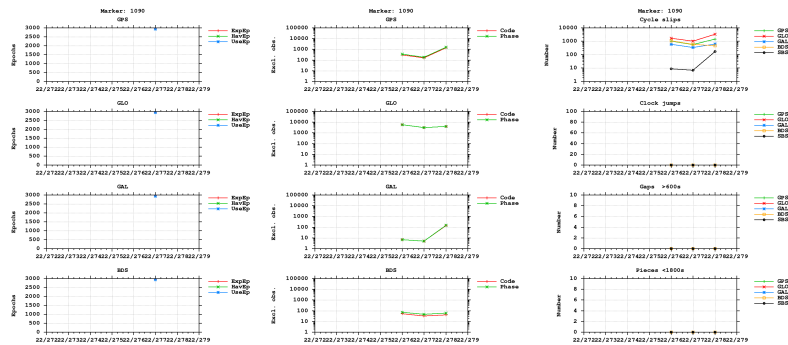



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

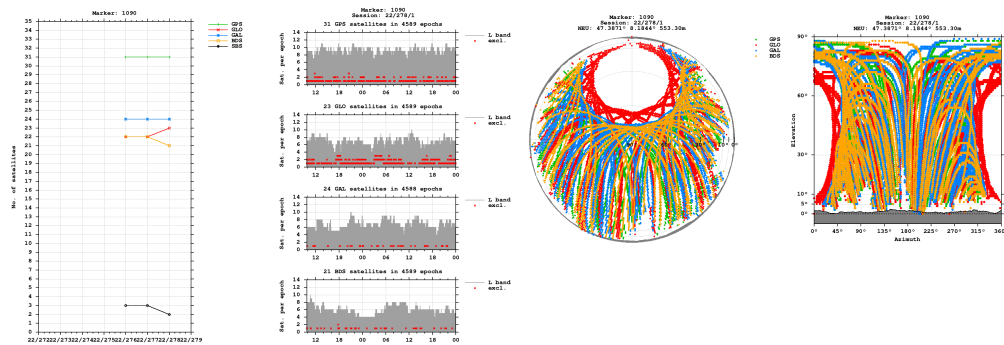


Bands

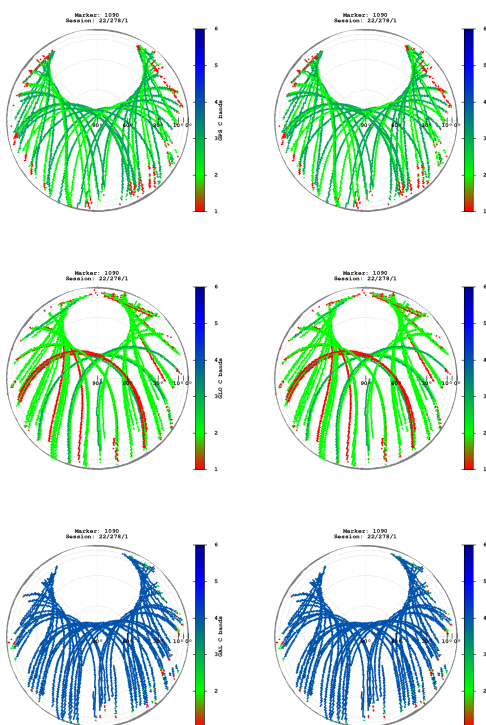


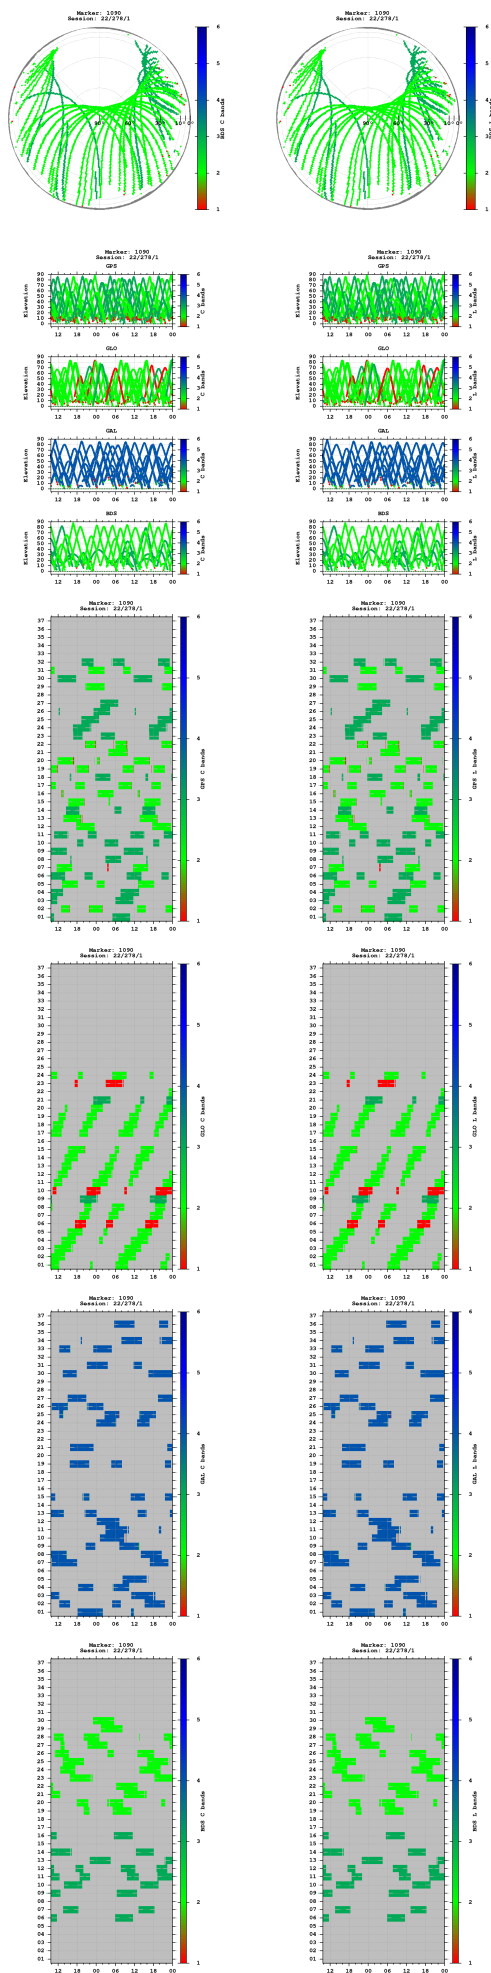


Observations

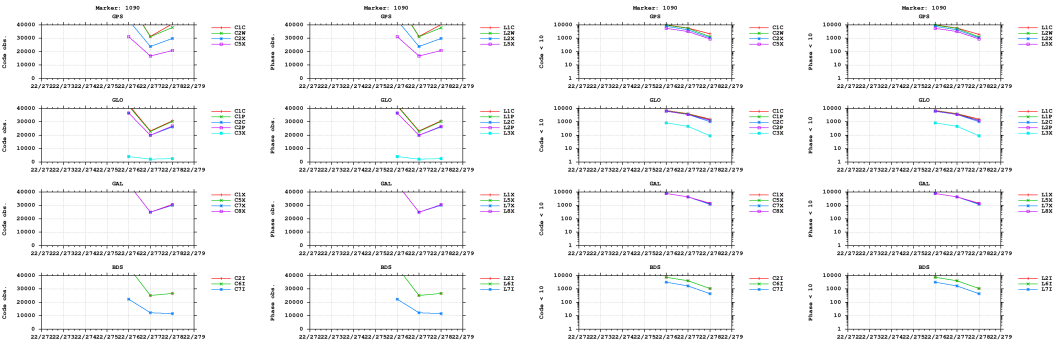


Multipath

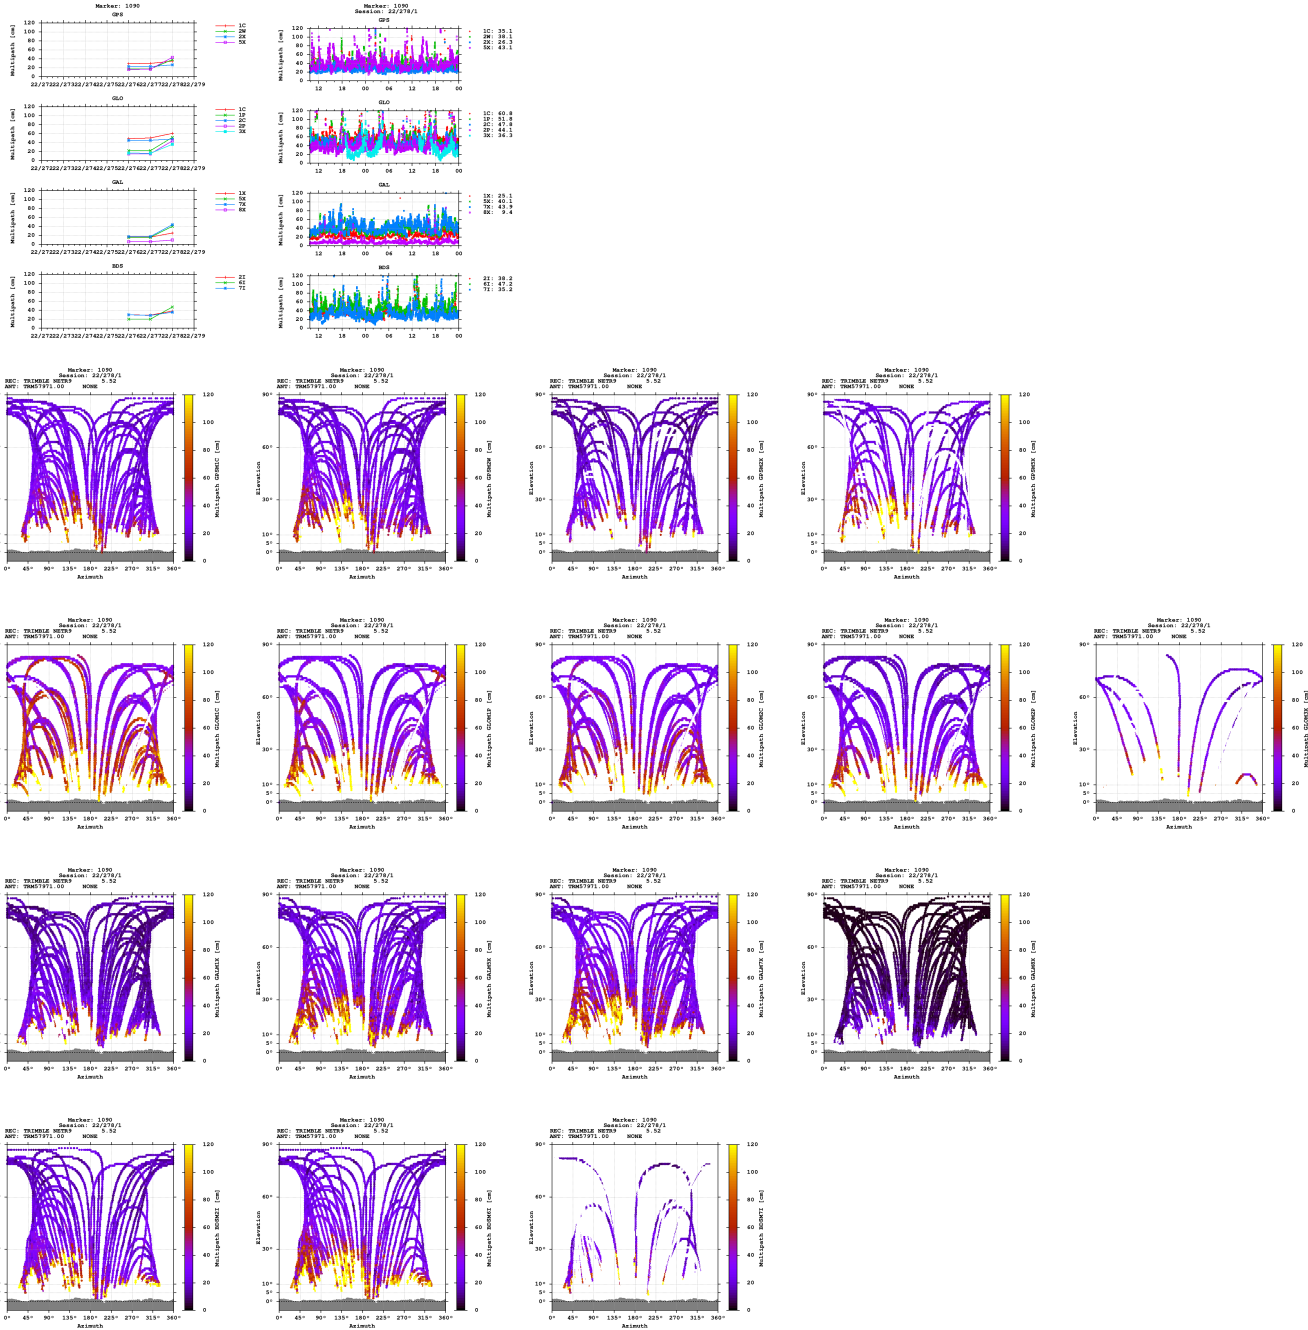


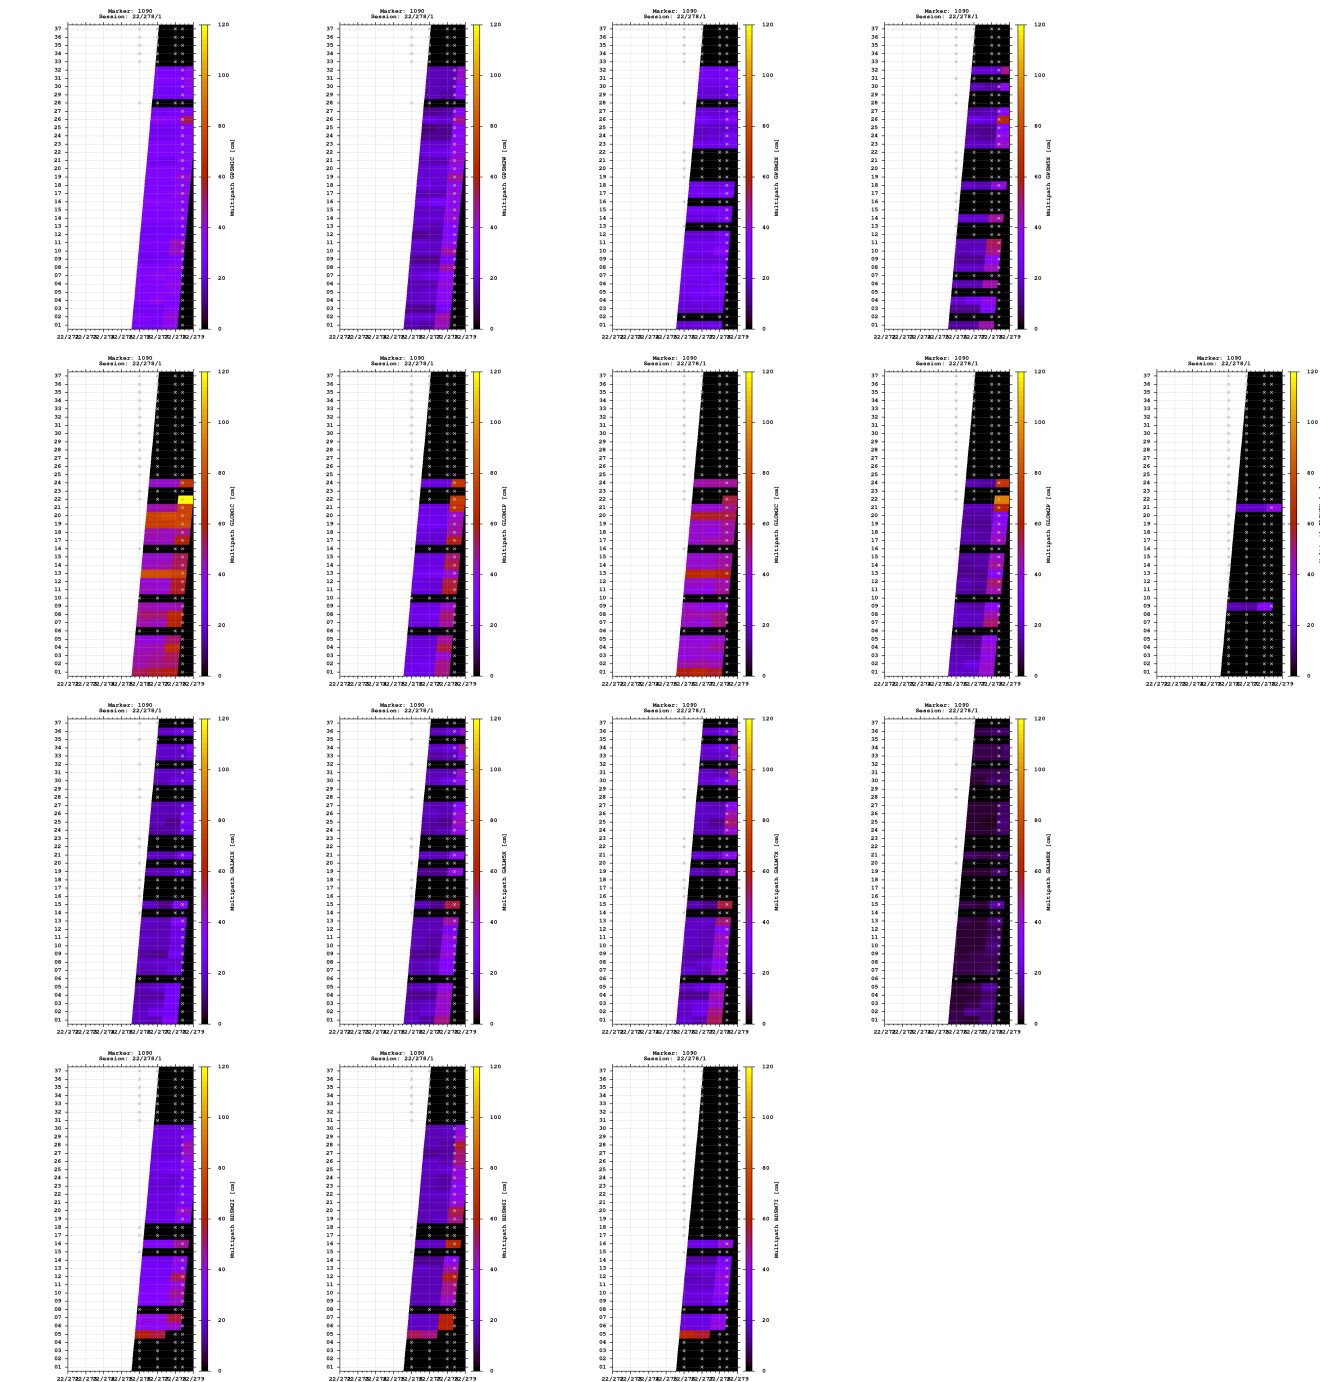


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

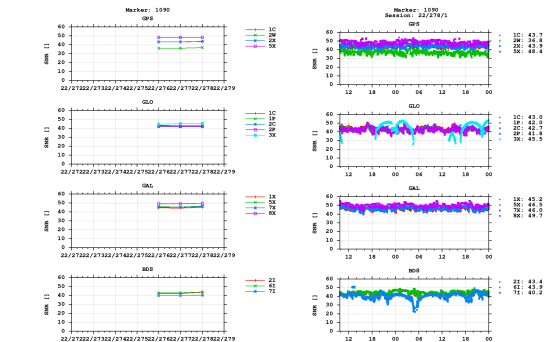


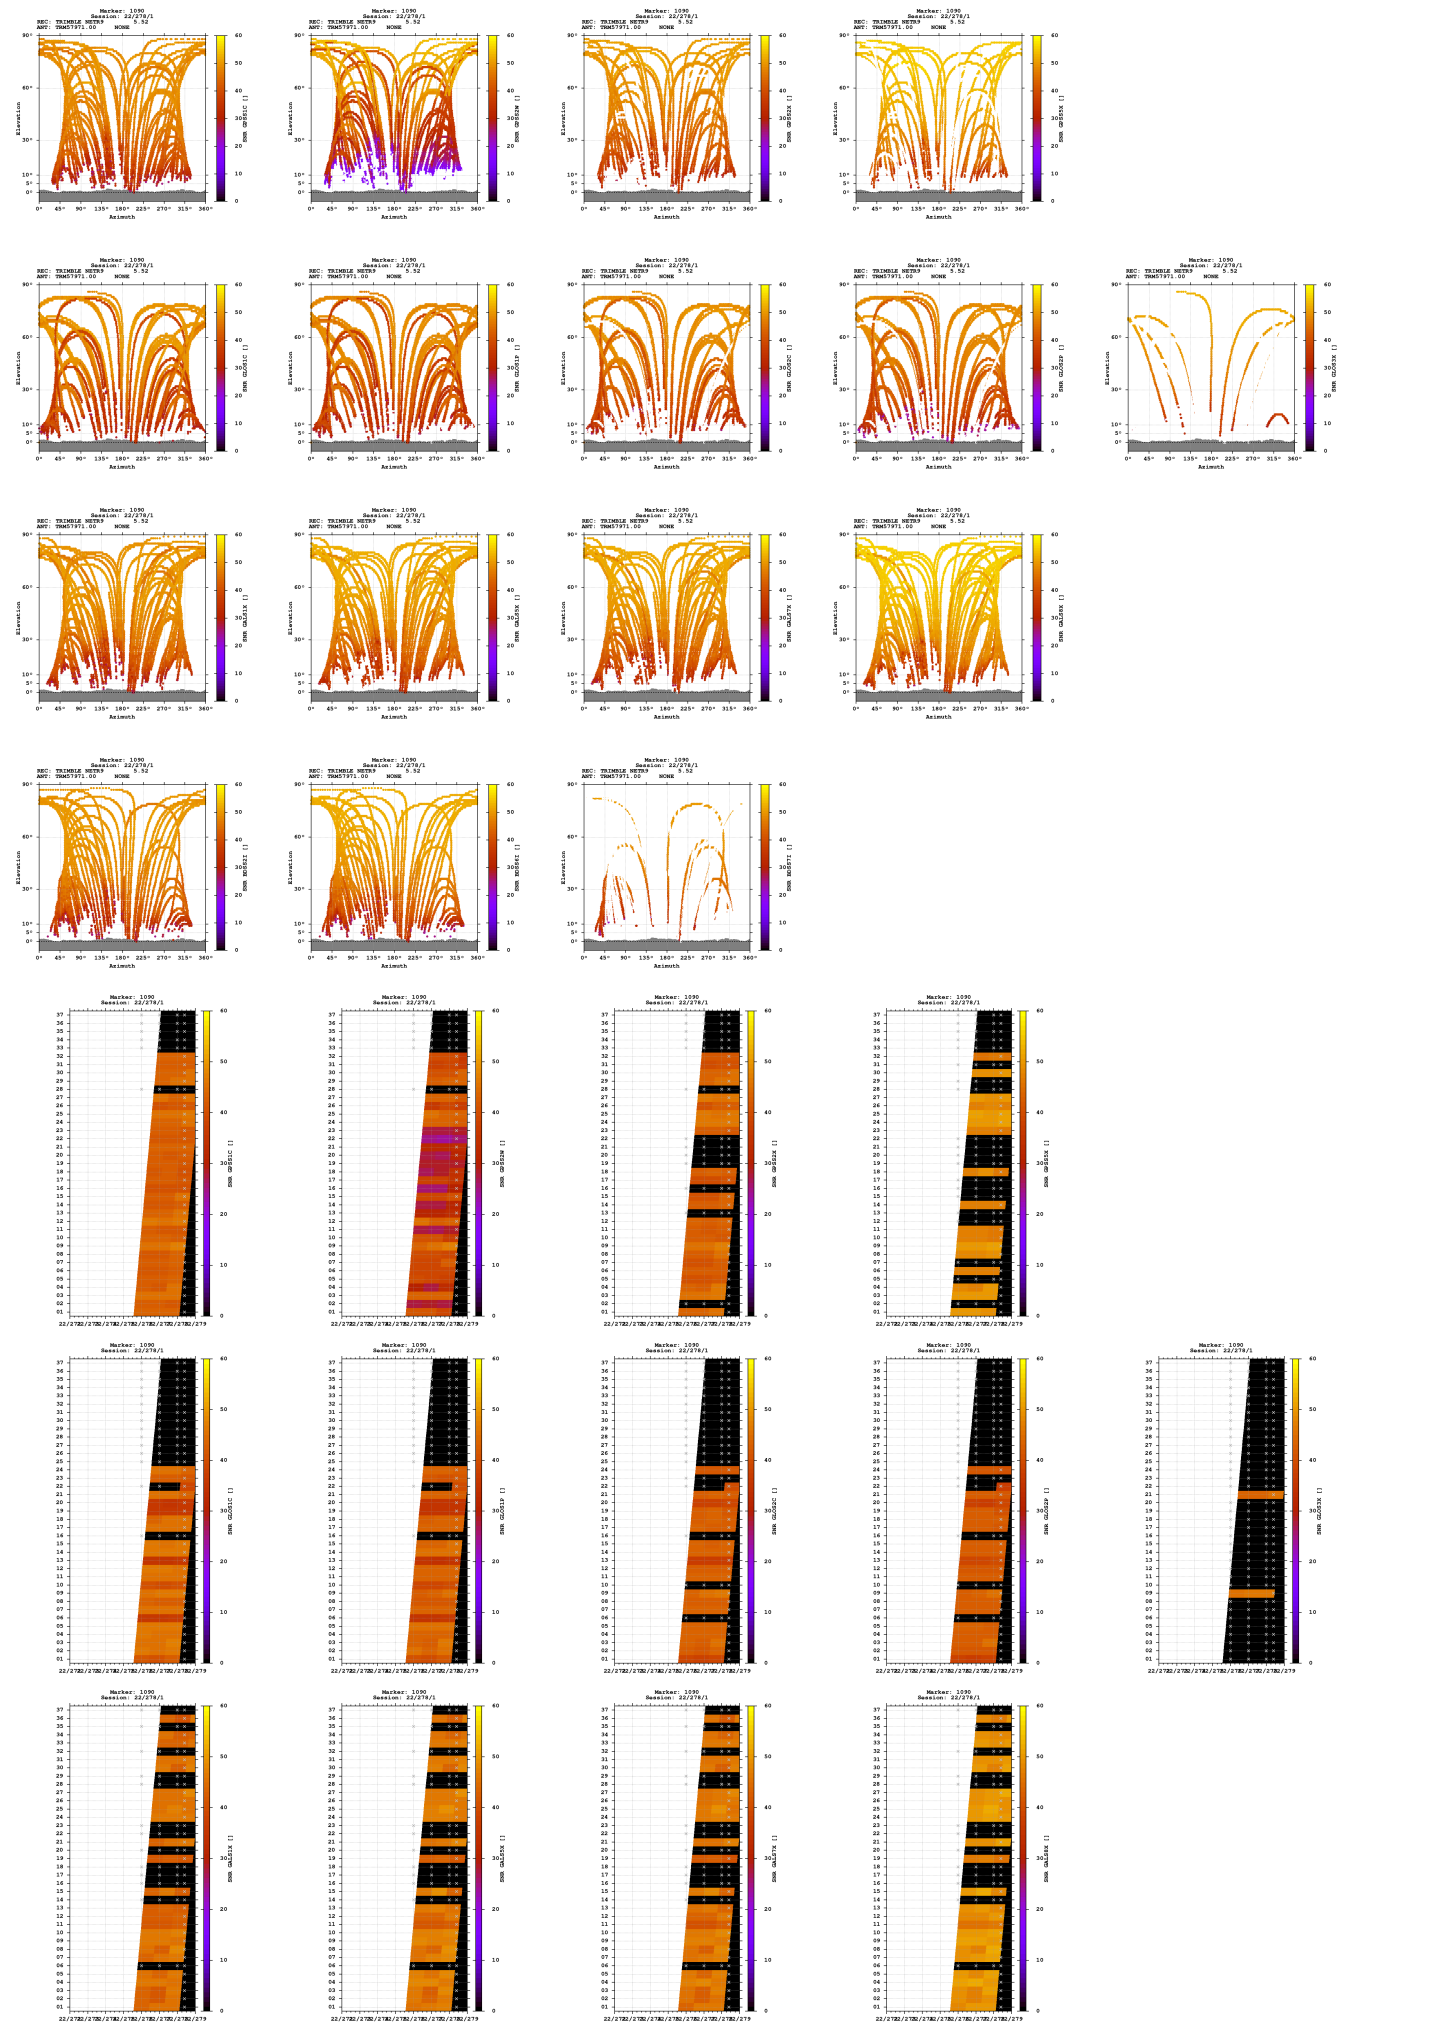

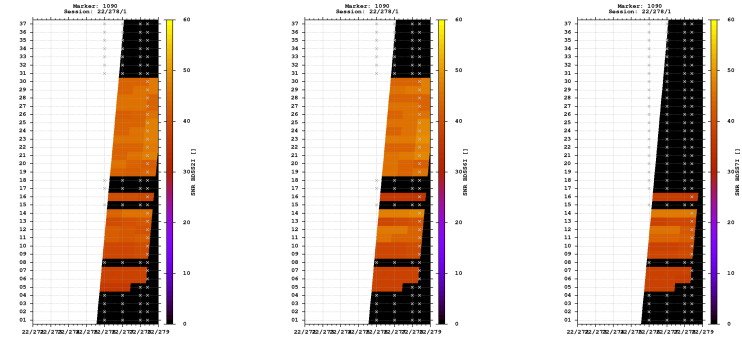



Estimates

2022-10-05 09:45:30	GPS	4282419.9277	615919.7156	4671418.9335	47.387142823	8.184448797	553.2963
2022-10-05 09:45:30	GLO	4282419.6737	615919.3471	4671418.3031	47.387140996	8.184444447	552.6266
2022-10-05 09:45:30	GAL	4282419.6496	615919.6401	4671418.5470	47.387142363	8.184448332	552.8181
2022-10-05 09:45:30	BDS	4282419.0892	615921.3176	4671419.2220	47.387148563	8.184471378	553.1011

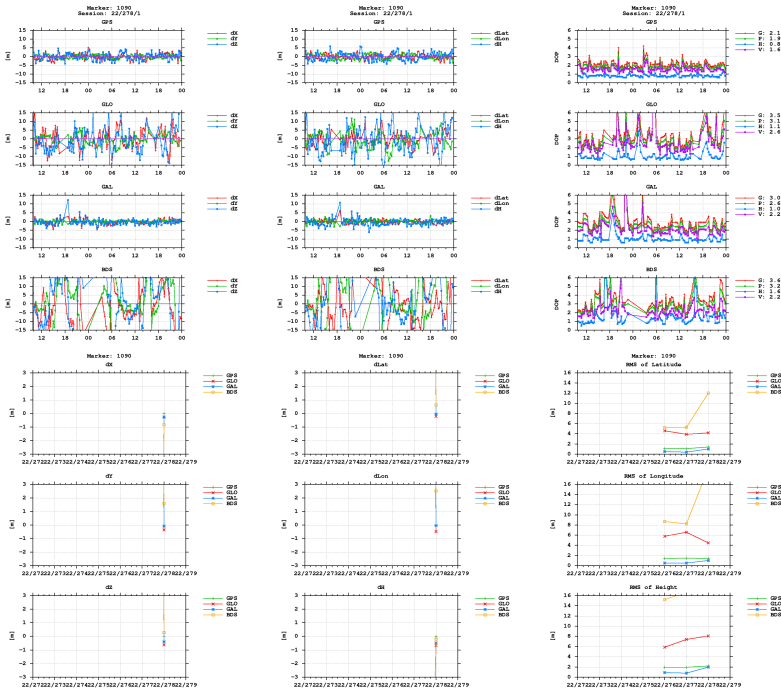

BNC

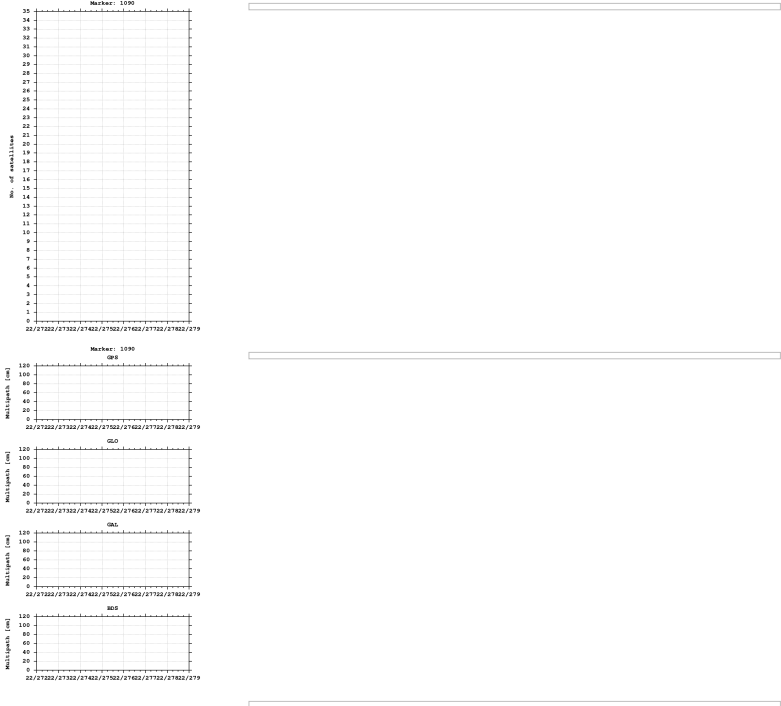

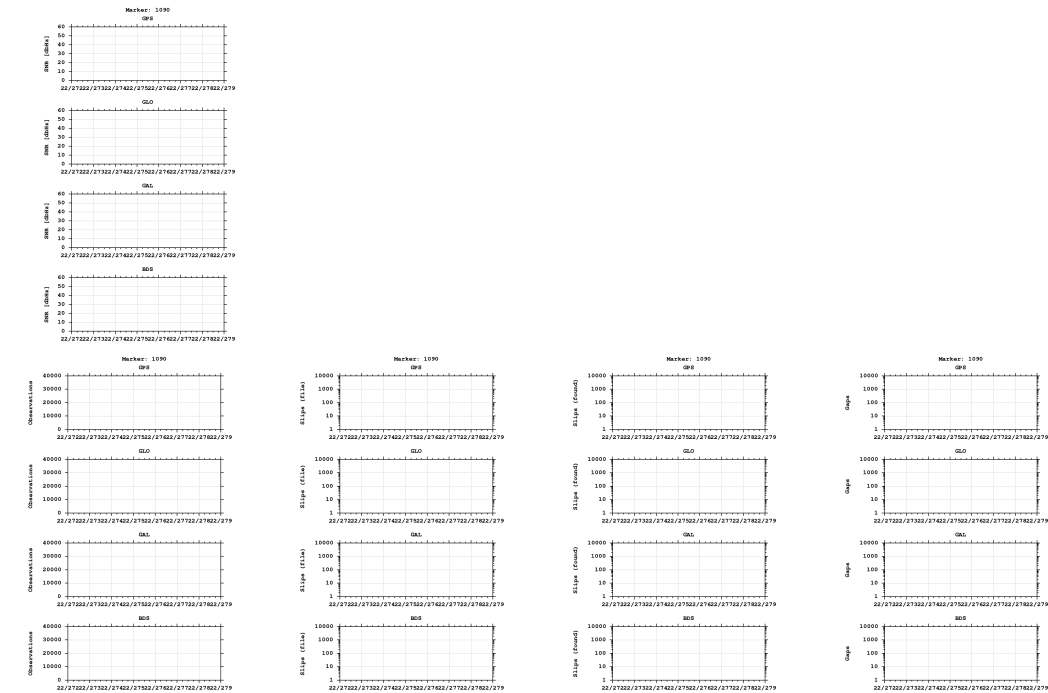

Equipment

2022-10-03 00:00:00 TRIMBLE NETR9 5.52 518 TRM57971.00 NONE 518

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)