

GNSS observation file monitoring for 0511

Last RINEX file: 05112901.22O

RINEX version: 3.02

Marker: 1088


Receiver: 511 TRIMBLE NETR9 5.52

Antenna: 511 TRM57971.00 NONE


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.


- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

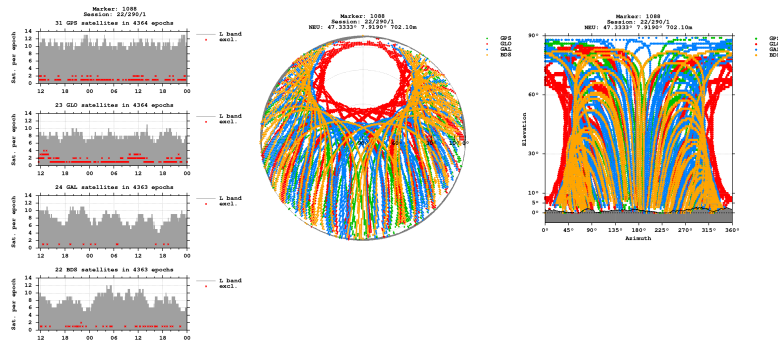


Bands

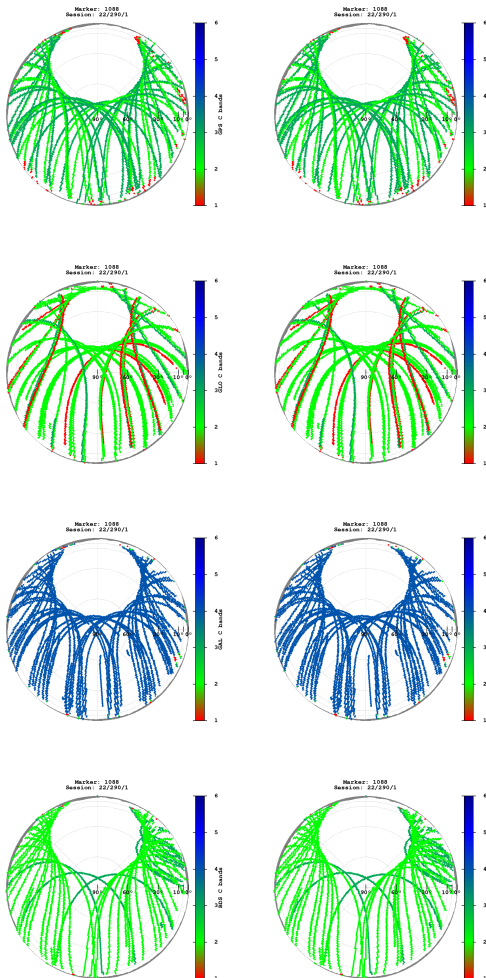

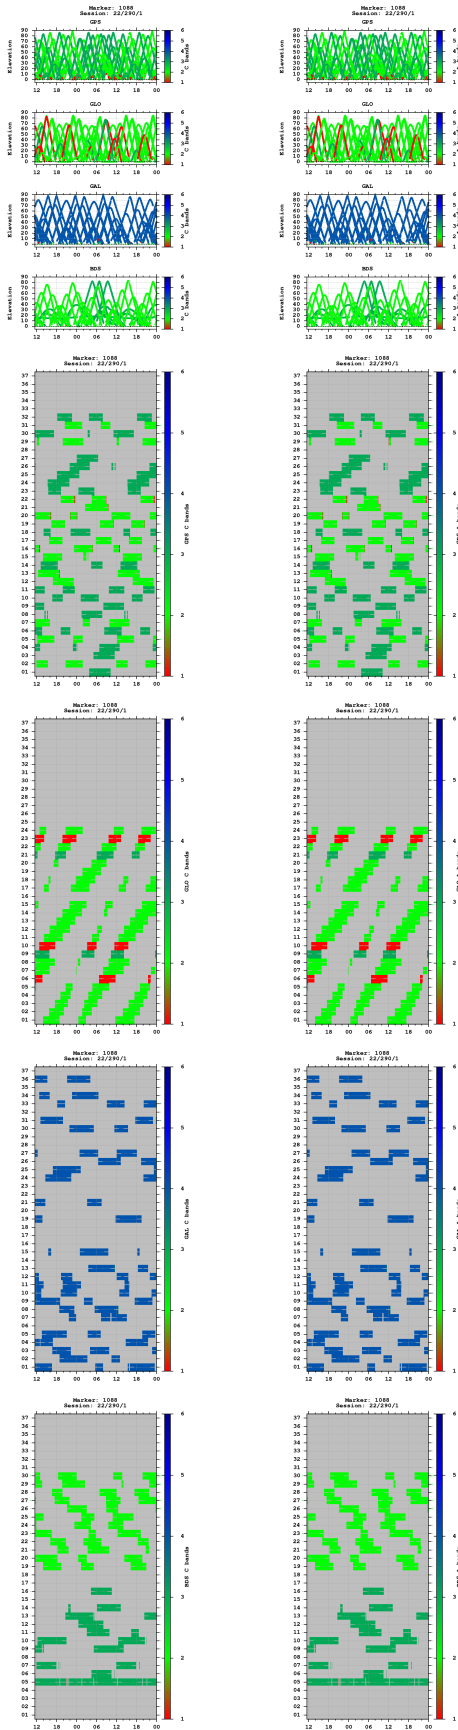



Multipath

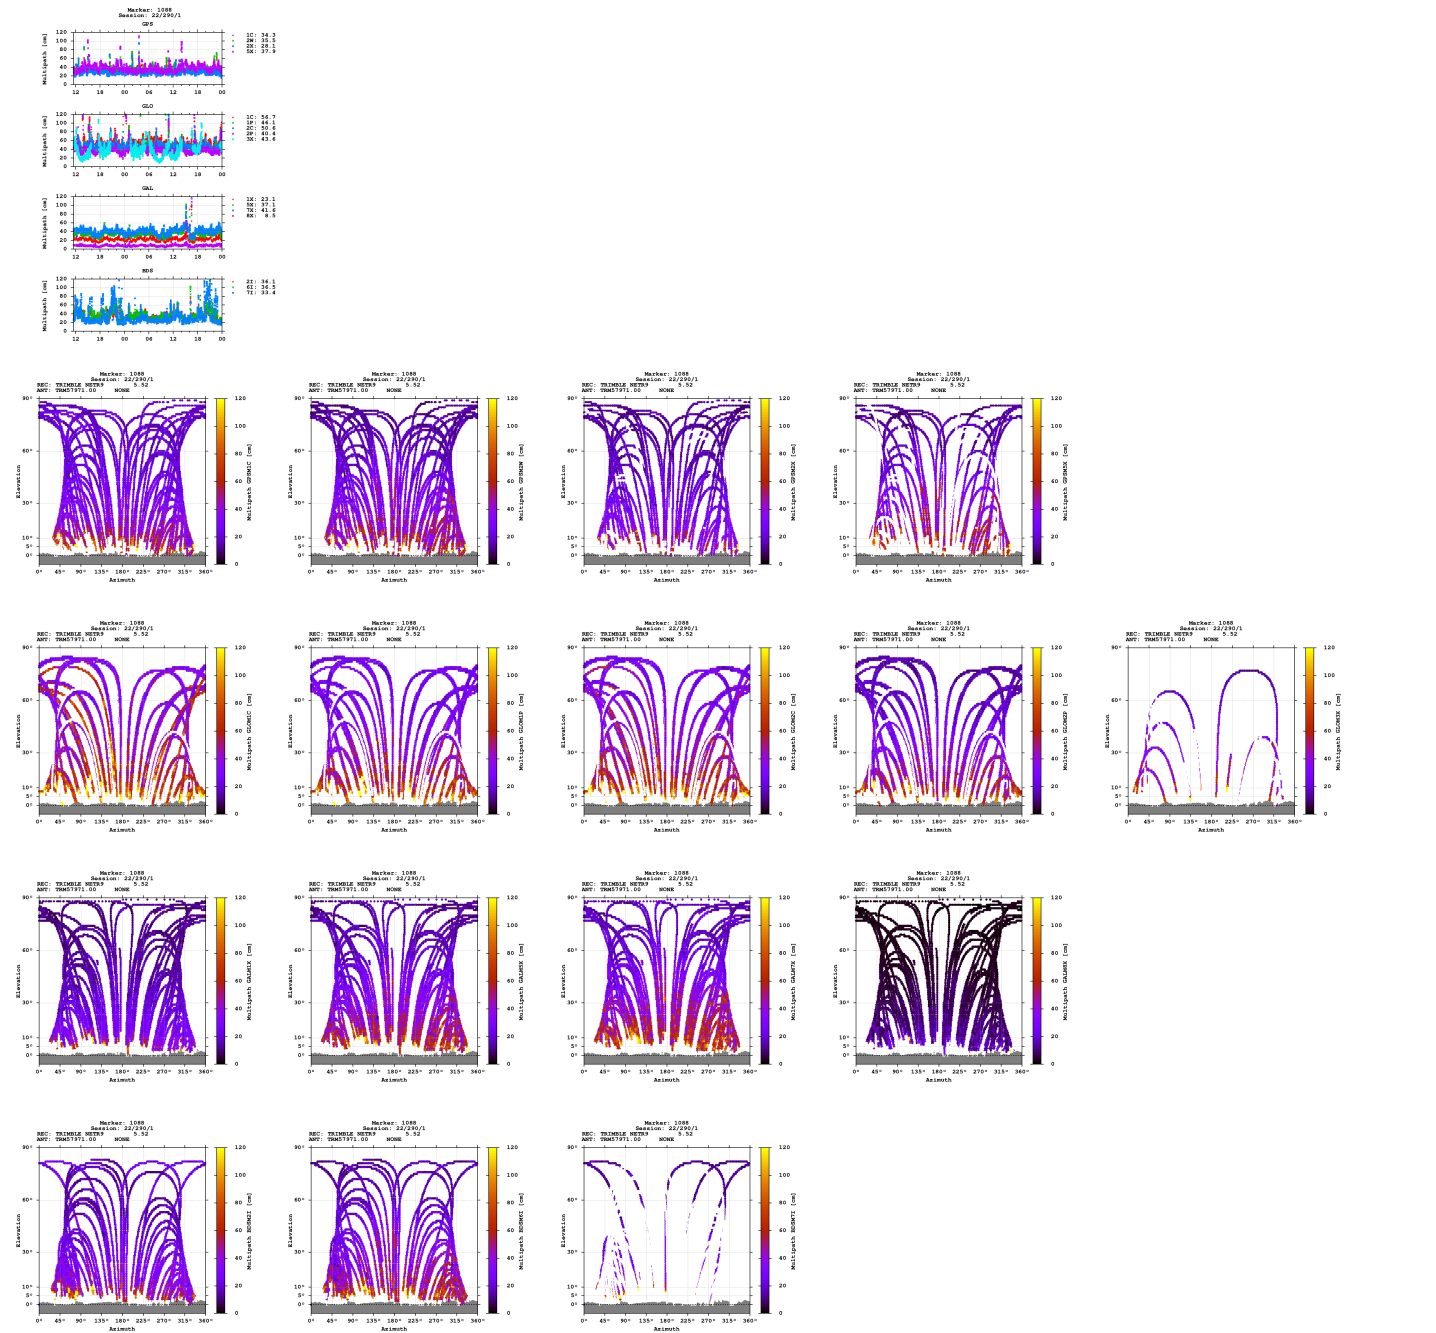

- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.


Signal-to-noise ratio

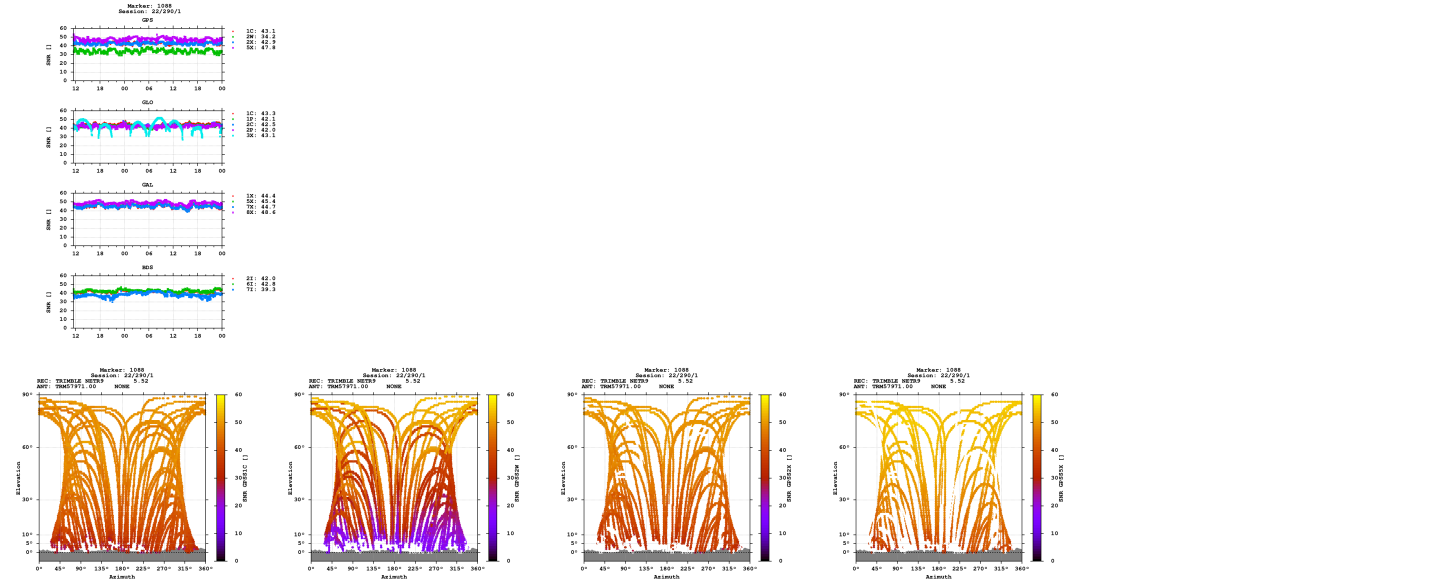

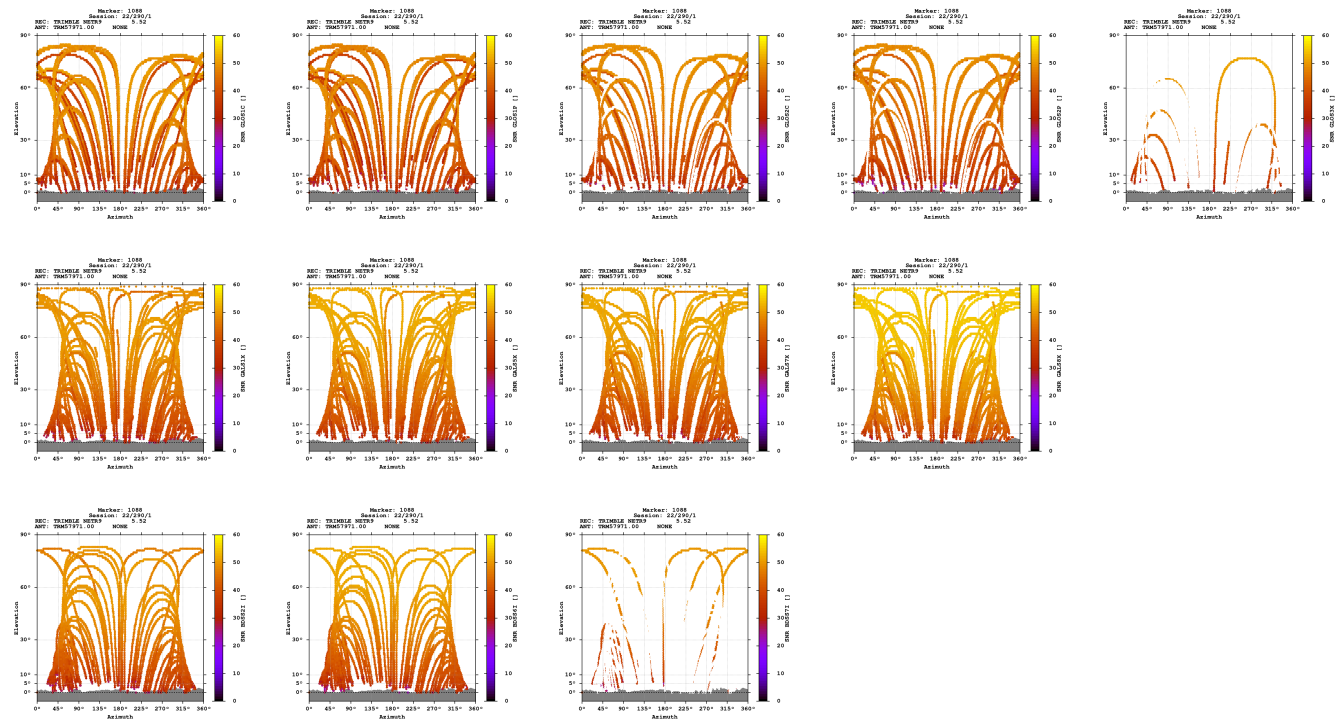

Estimates

2022-10-17 11:29:30	GPS	4289690.1583	596693.8208	4667472.2716	47.333289375	7.919001967	702.1000
2022-10-17 11:29:30	GLO	4289690.1525	596693.2927	4667472.3750	47.333290525	7.918995057	702.1227
2022-10-17 11:29:30	GAL	4289690.1828	596693.8903	4667472.1257	47.333288263	7.919002832	702.0156
2022-10-17 11:29:30	BDS	4289690.2922	596694.2875	4667474.9298	47.333304275	7.919007838	704.1880

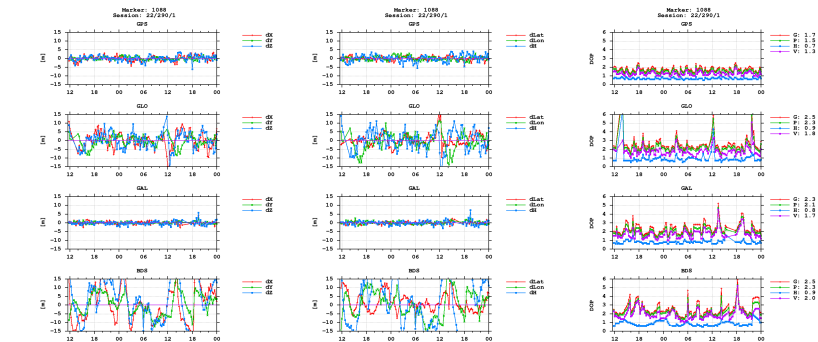

BNC

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)