

GNSS observation file monitoring for 0511

Last RINEX file: 05112911.220


RINEX version: 3.02

Marker: 1088

Receiver: 511 TRIMBLE NETR9 5.52


Antenna: 511 TRM57971.00 NONE

Epochs

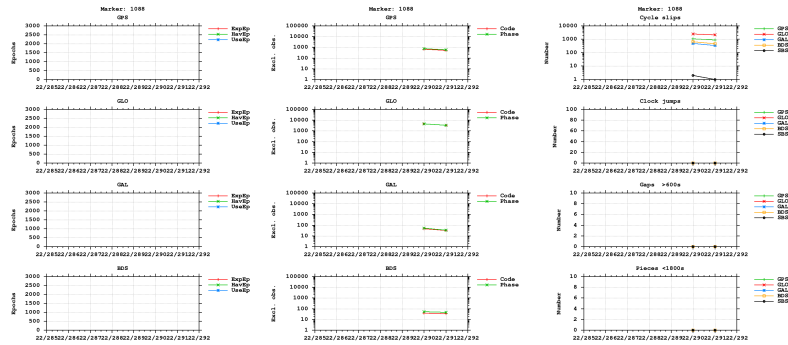



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

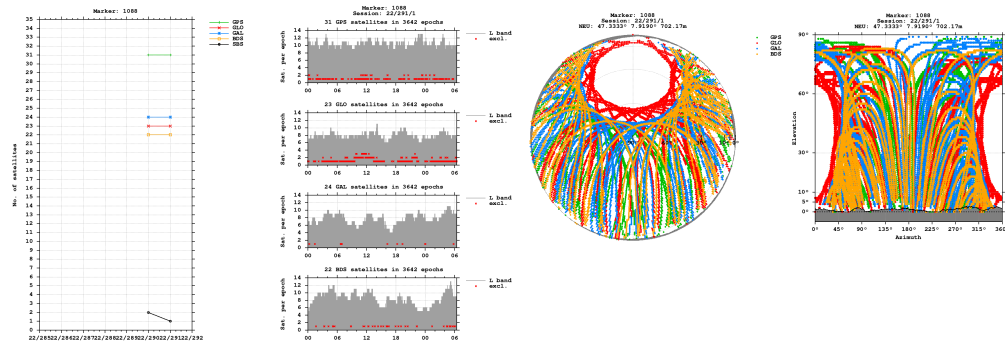


Bands

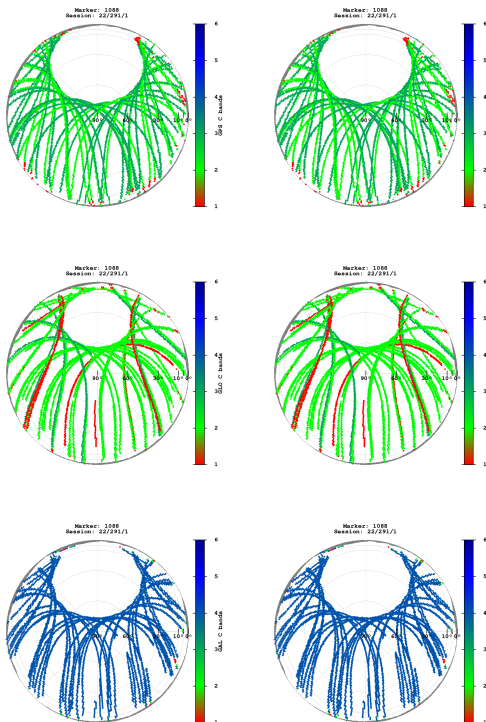


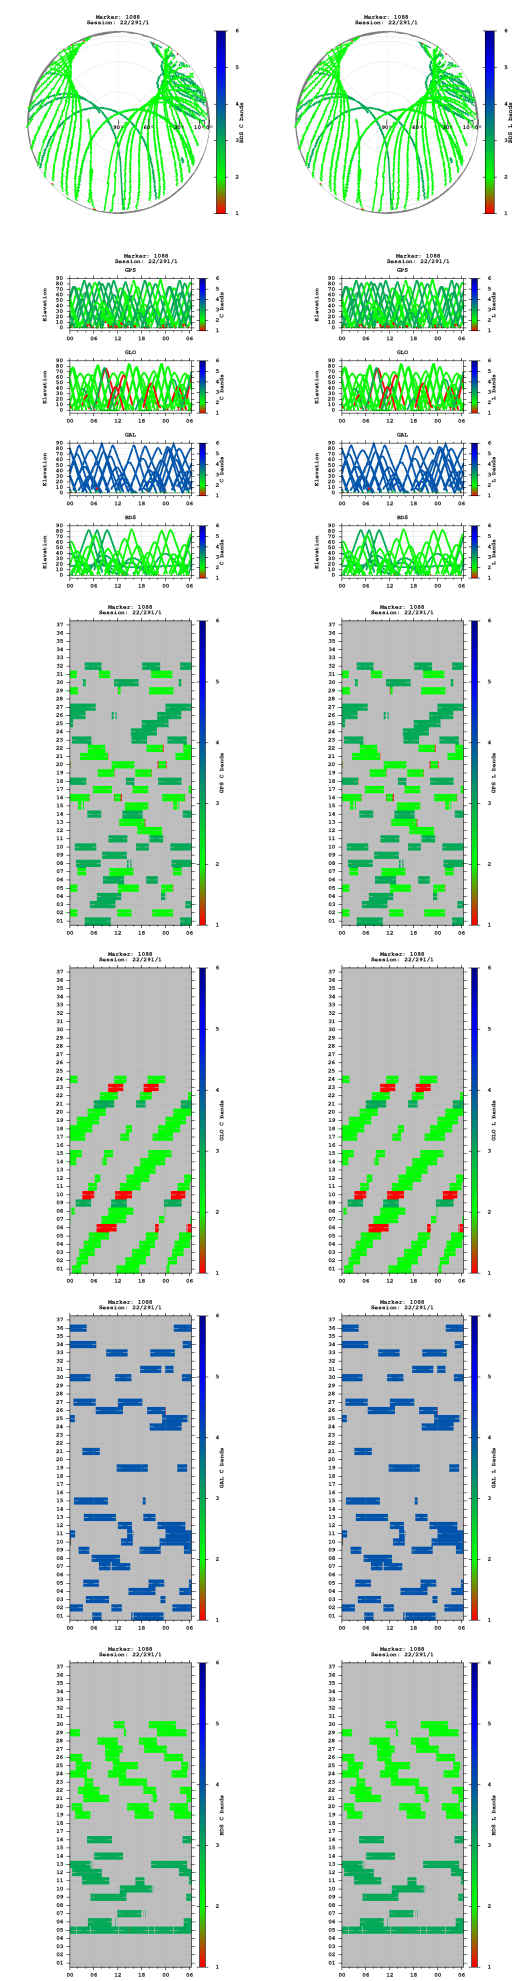


Observations

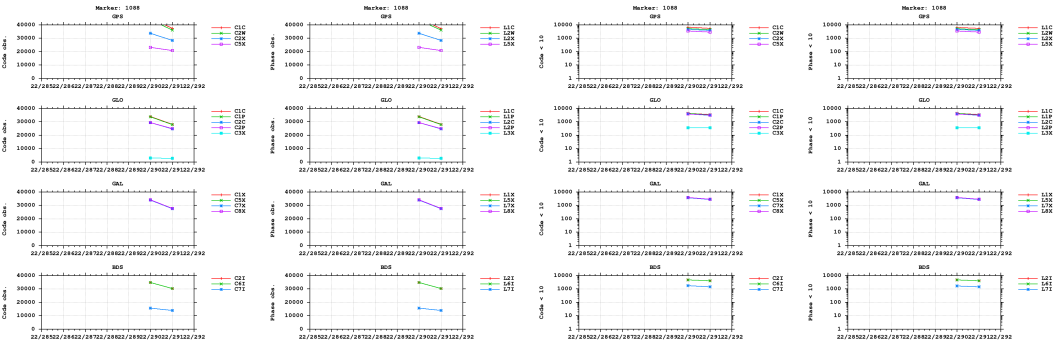


Multipath

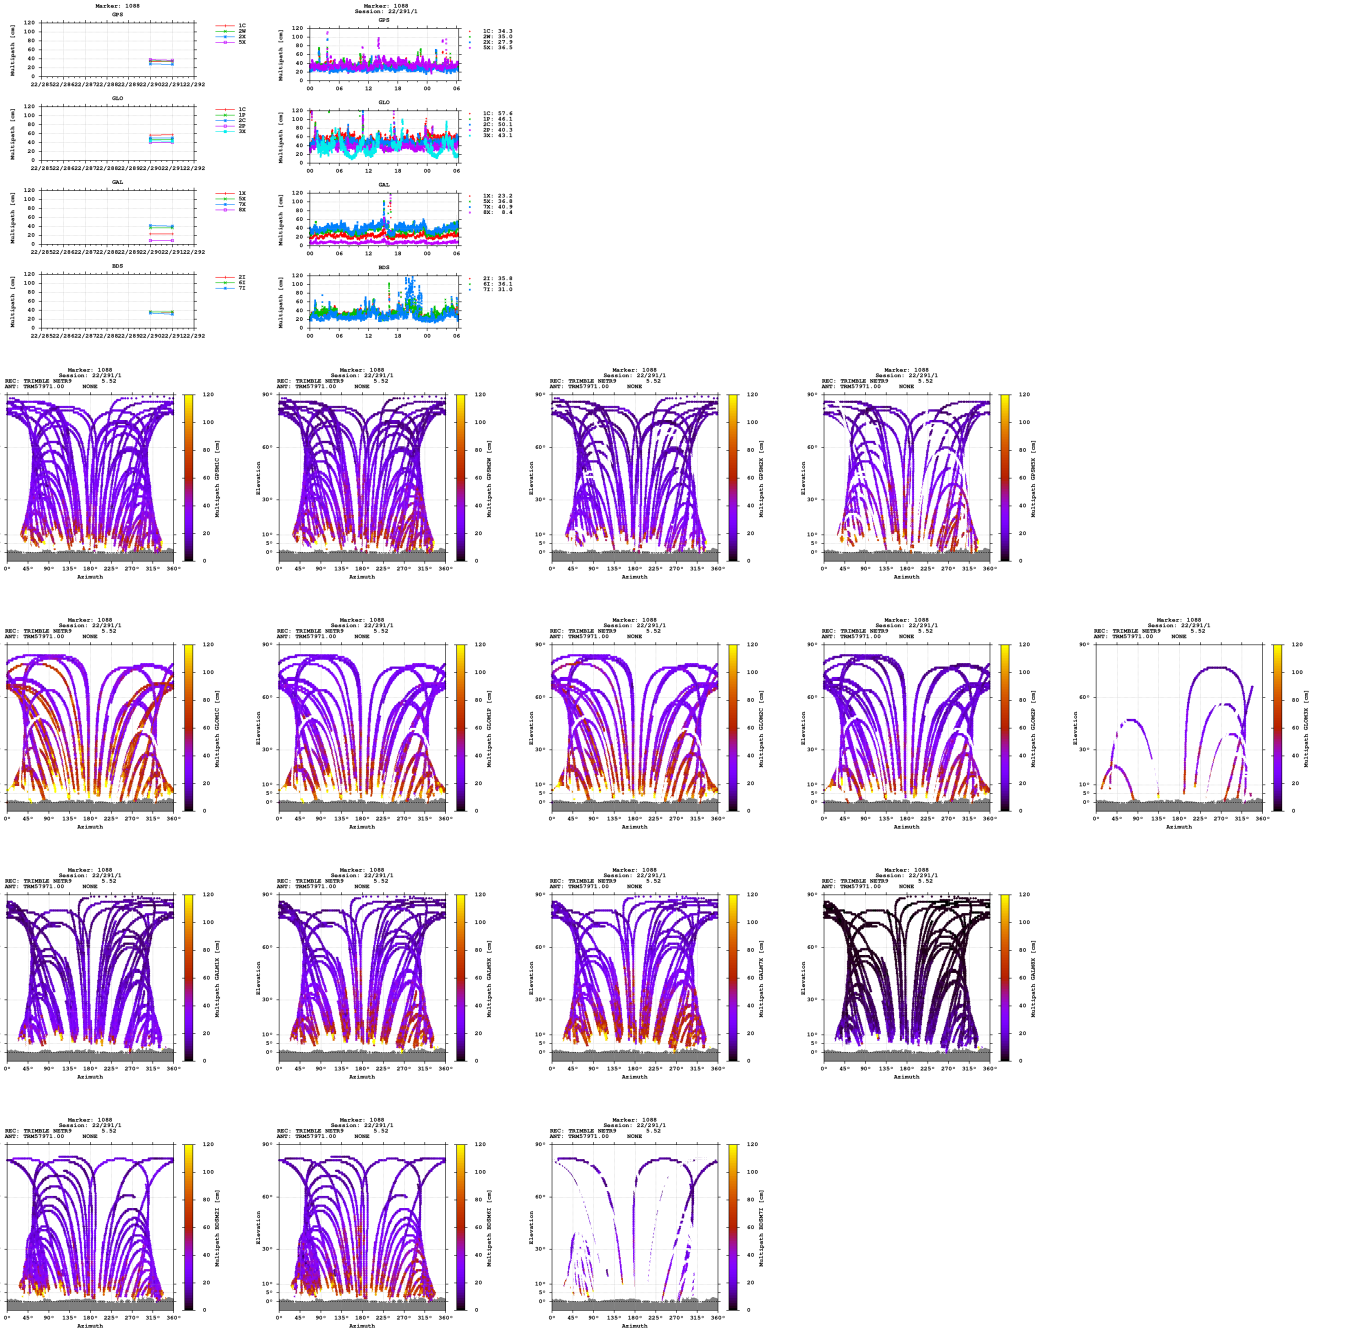


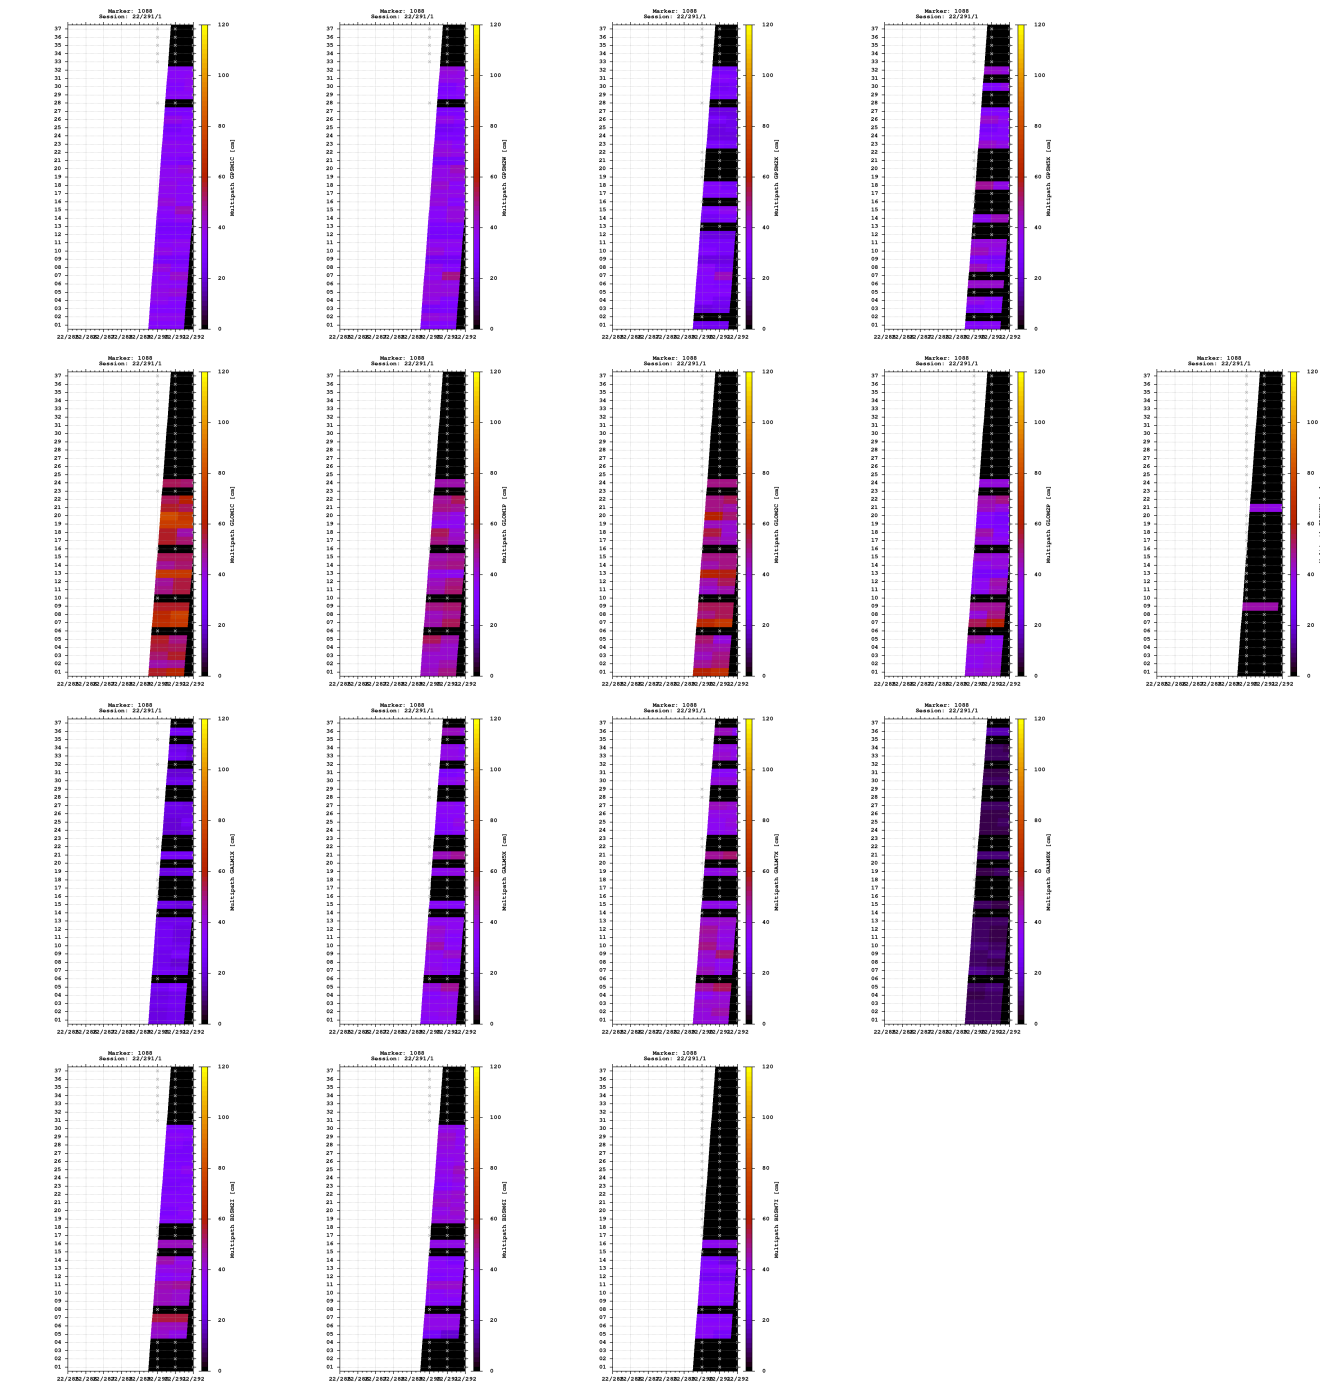


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

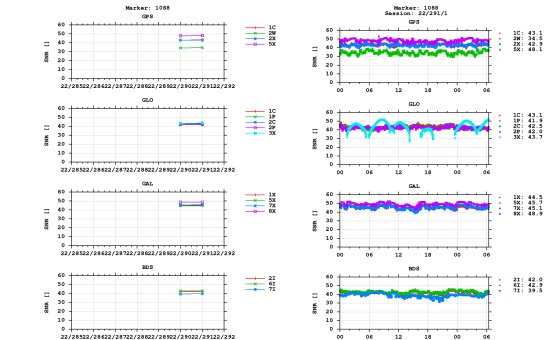


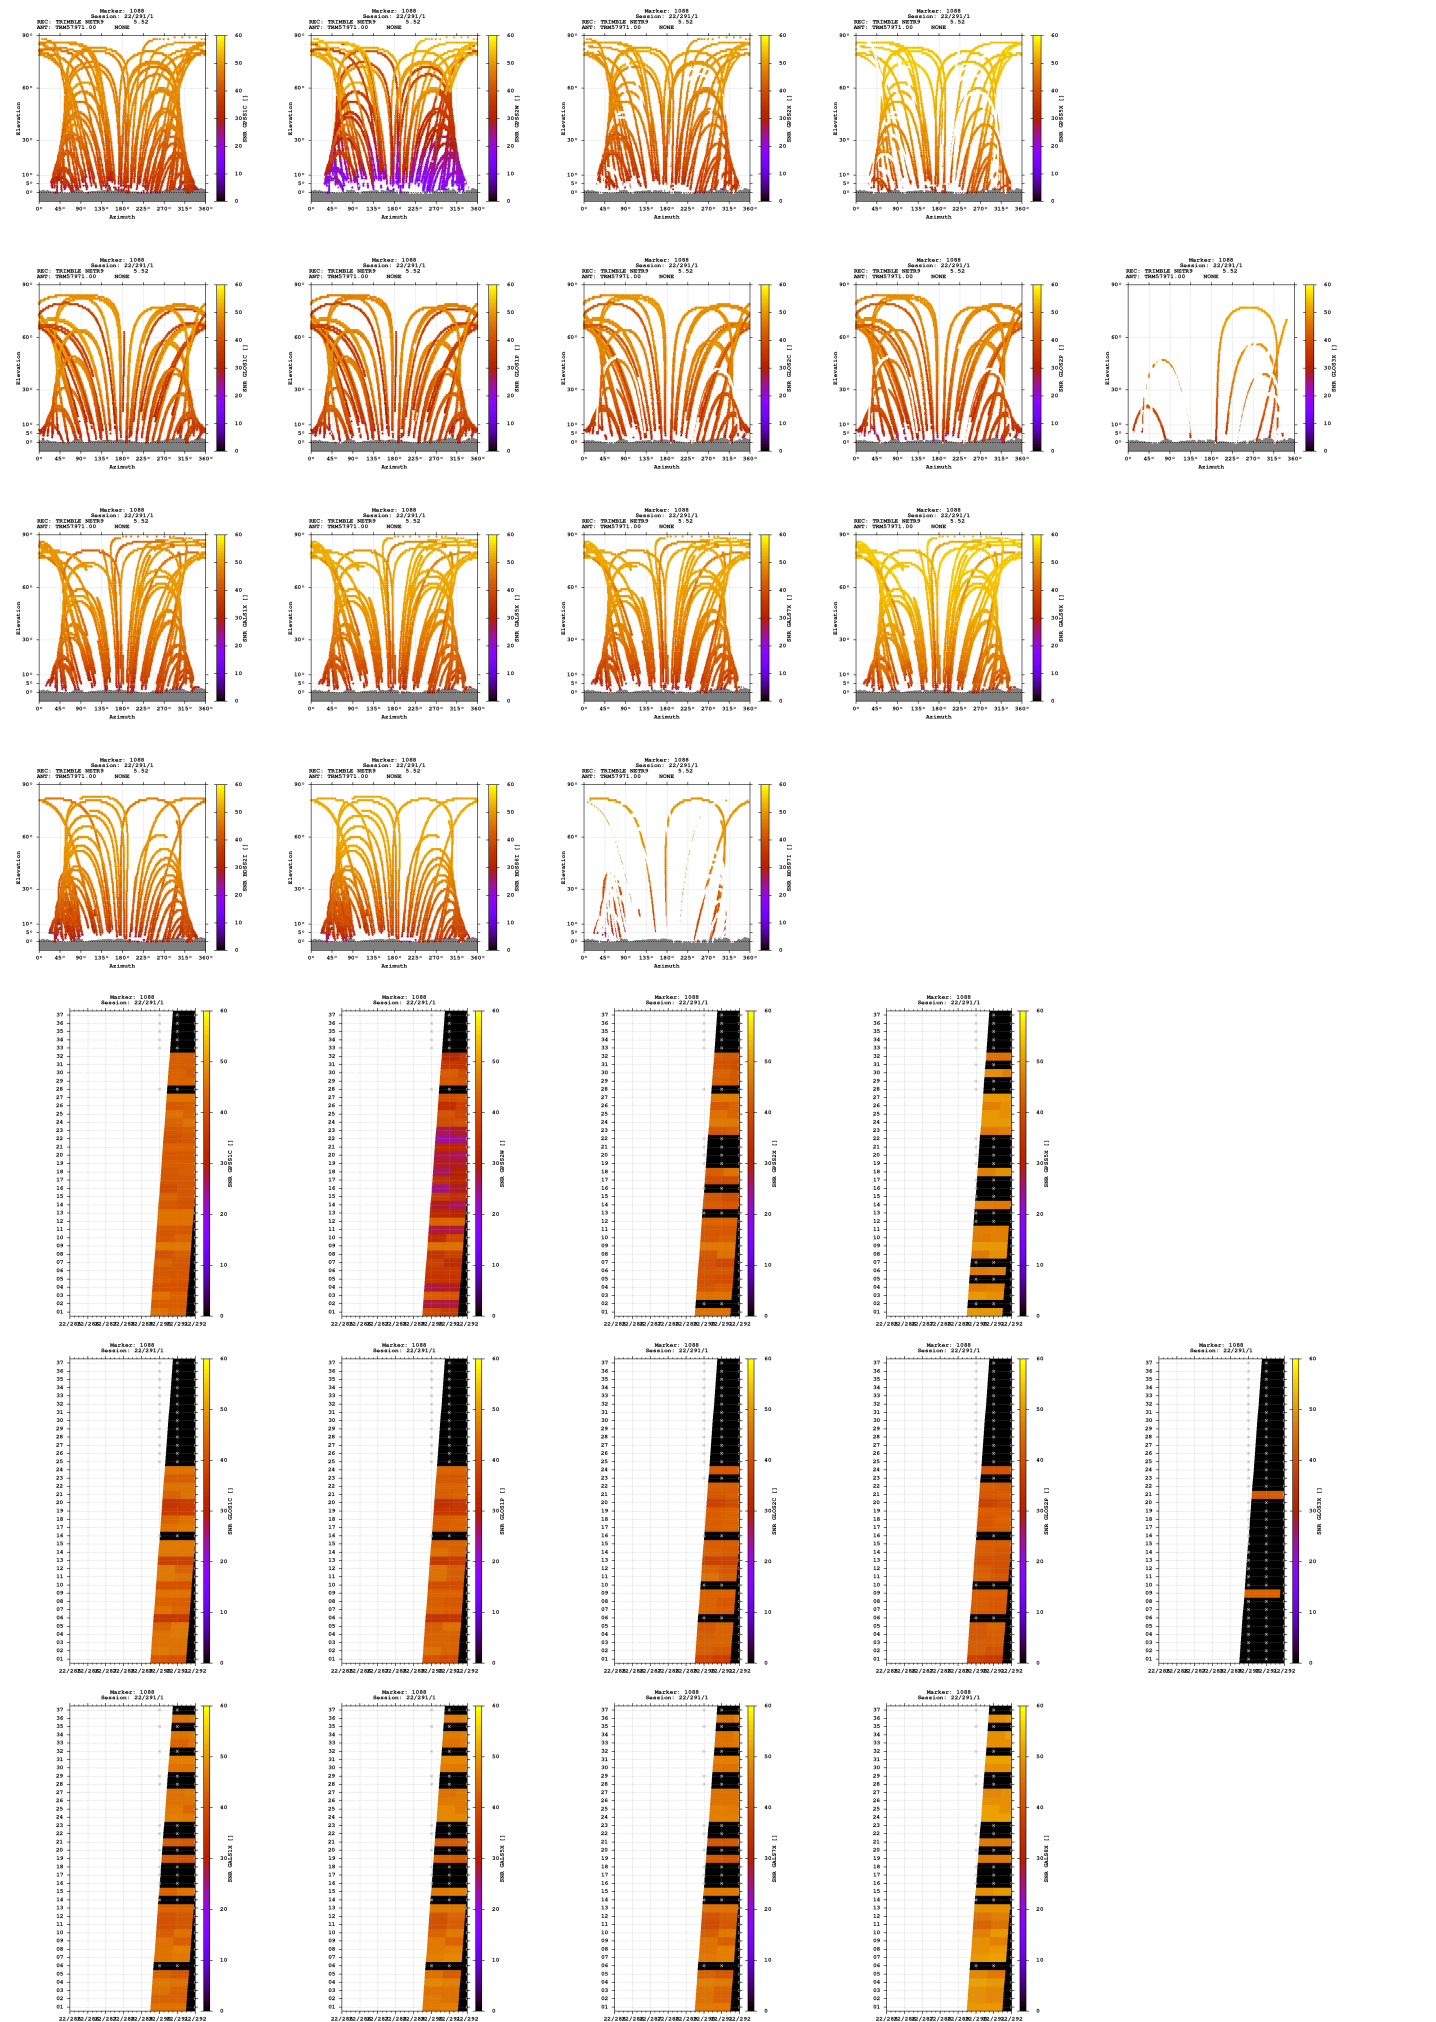

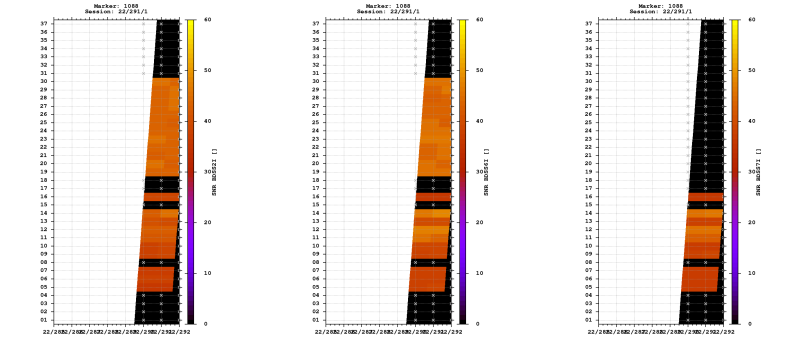


Estimates

2022-10-17 11:29:30	GPS	4289690.1839	596694.1155	4667472.3082	47.333289163	7.919005781	702.1715
2022-10-17 11:29:30	GLO	4289690.3972	596694.0362	4667472.8161	47.333290933	7.919004354	702.6807
2022-10-17 11:29:30	GAL	4289690.0779	596693.8191	4667472.1019	47.333288870	7.919002091	701.9210
2022-10-17 11:29:30	BDS	4289689.4387	596693.3573	4667474.0955	47.333305629	7.918997204	702.9147

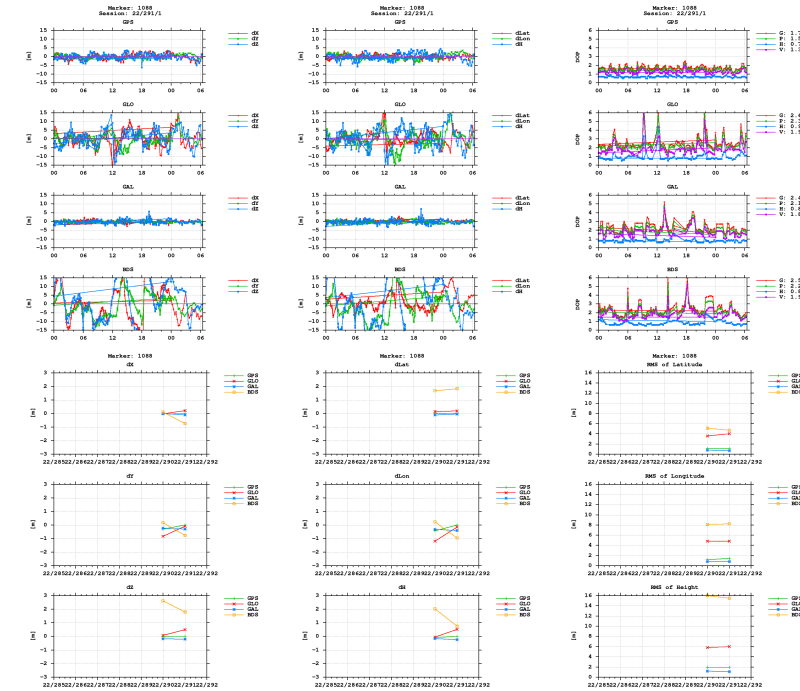

BNC



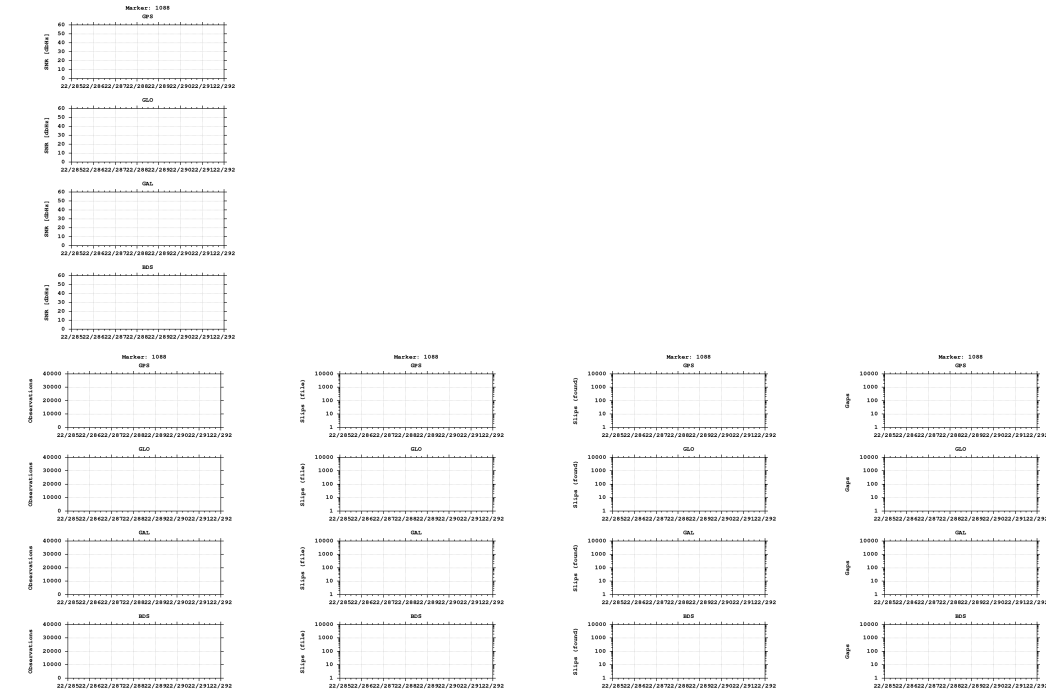

Equipment

2022-10-17 00:00:00 TRIMBLE NETR9 5.52 511 TRM57971.00 NONE 511

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)