


GNSS observation file monitoring for 0511


Last RINEX file: 05112931.220
RINEX version: 3.02
Marker: 1089
Receiver: 511 TRIMBLE NETR9 5.52
Antenna: 511 TRM57971.00 NONE

Epochs

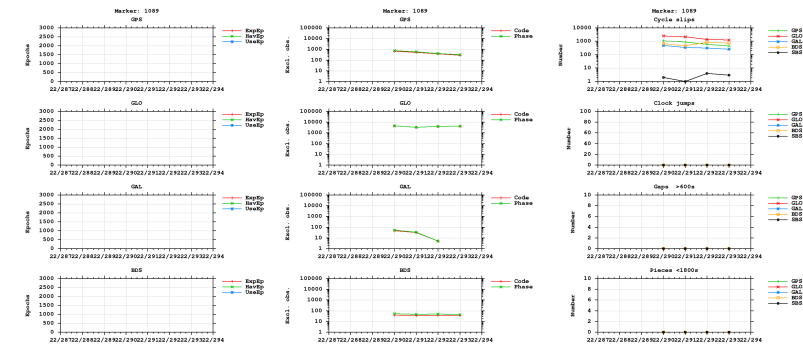



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

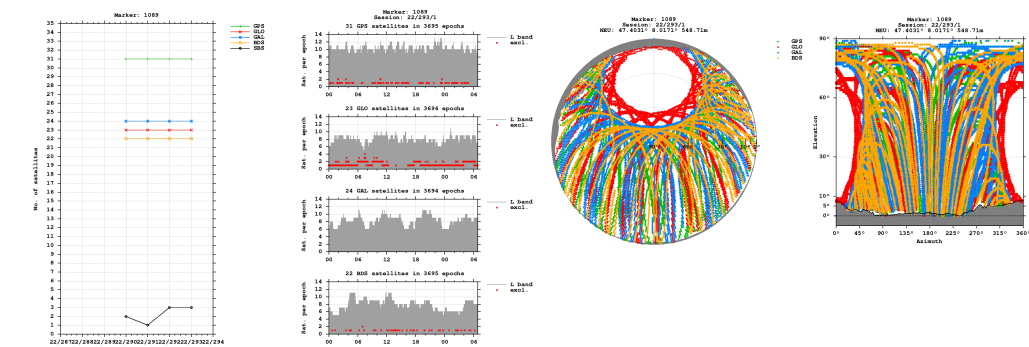


Bands


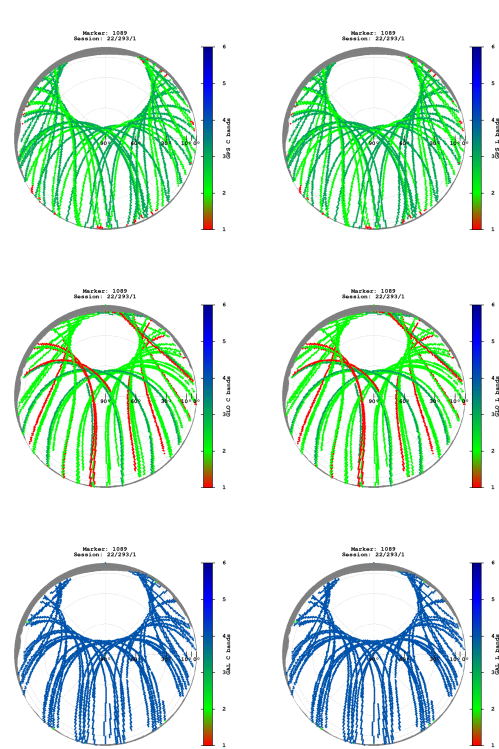


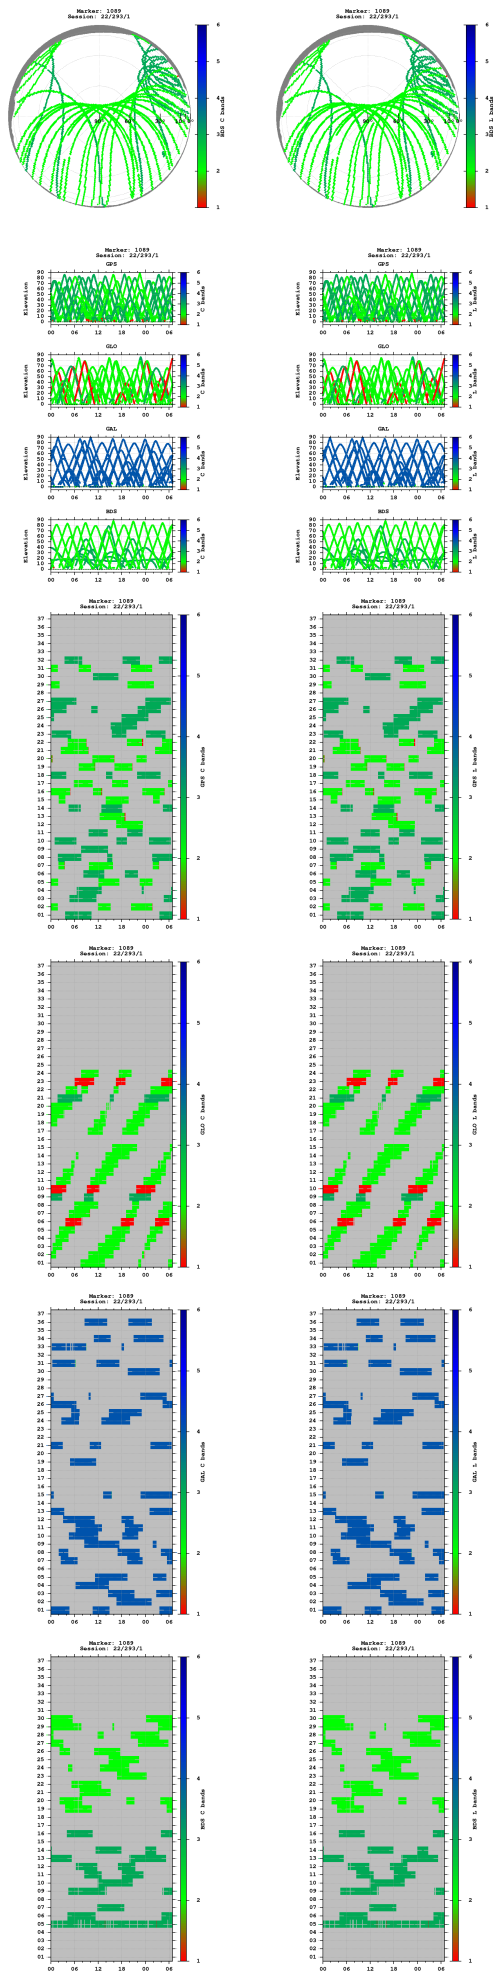


Observations

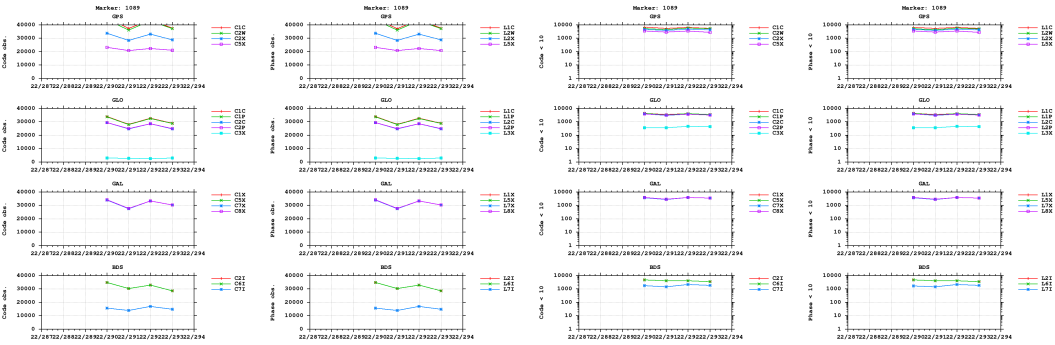


Multipath

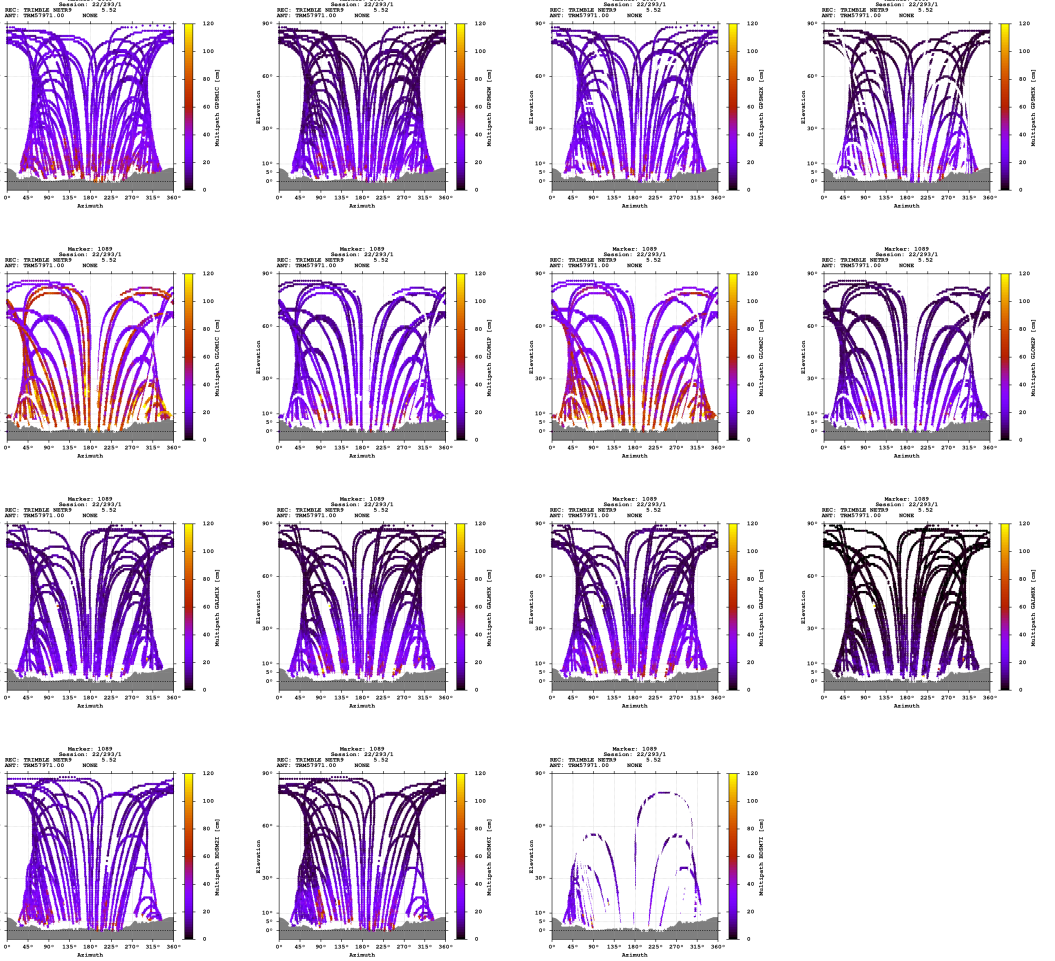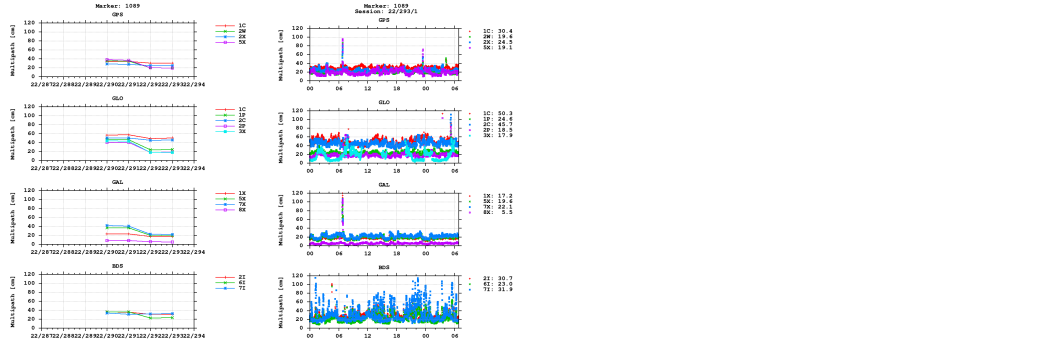


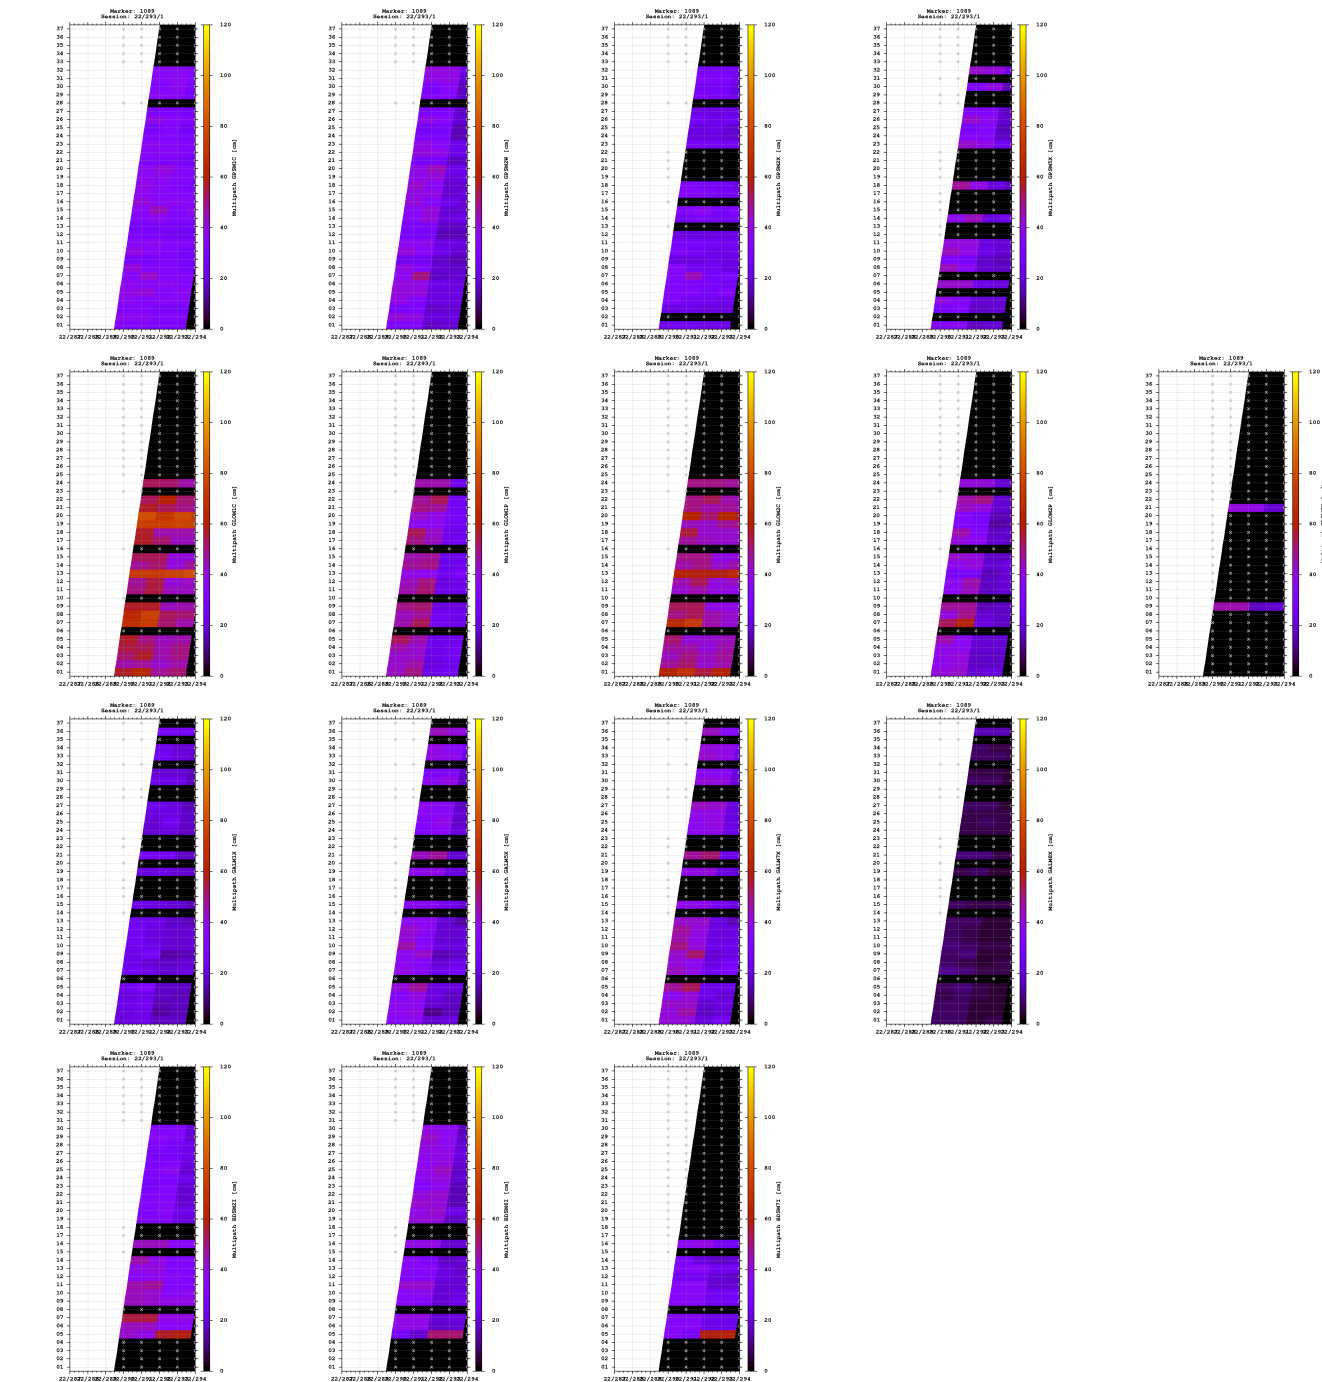


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

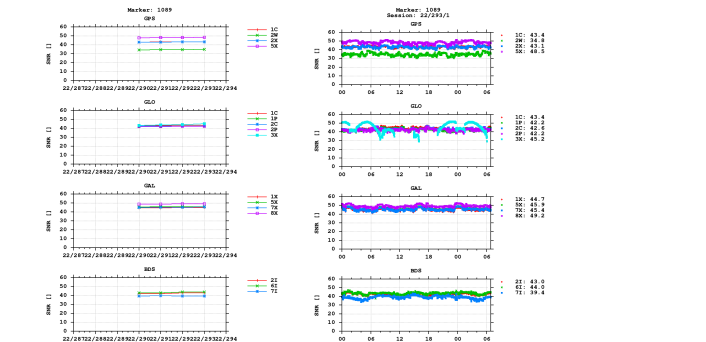


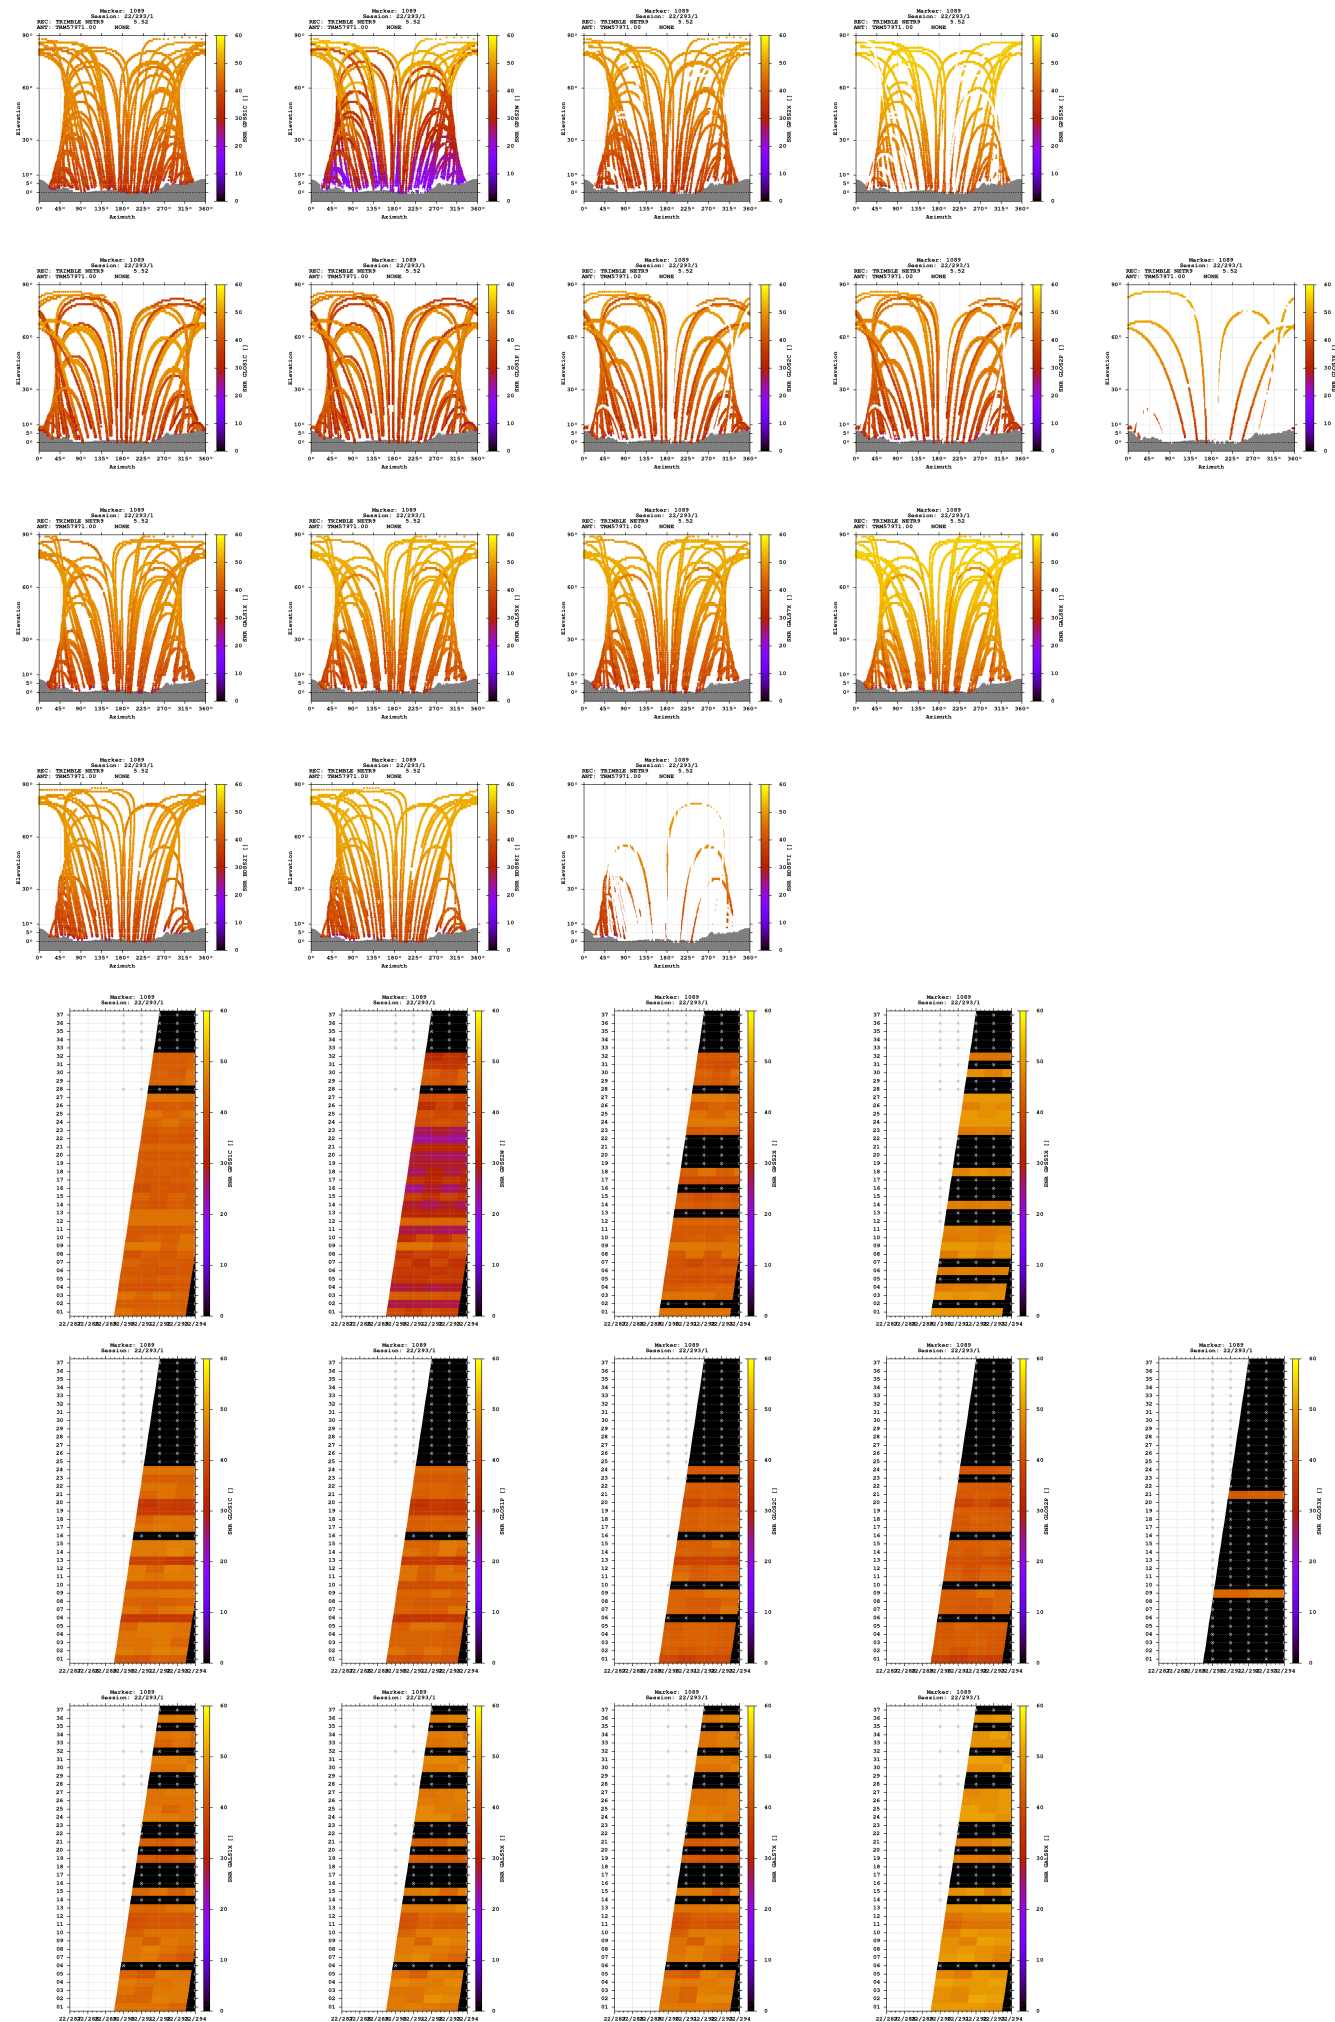

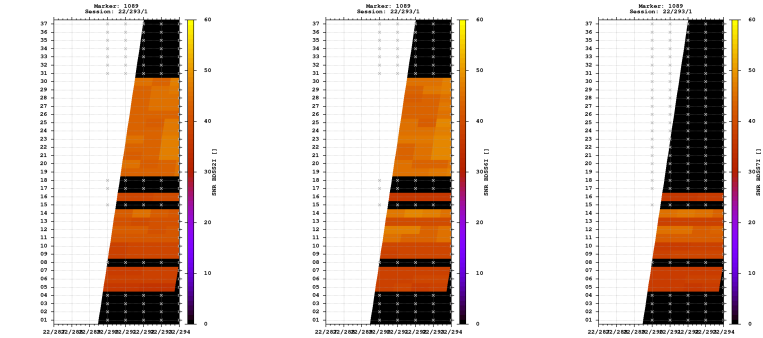


Estimates

2022-10-19 12:42:30	GPS	4282907.1975	603229.0376	4672613.7397	47.403061815	8.017128120	548.7069
2022-10-19 12:42:30	GLO	4282906.6924	603229.2459	4672613.1199	47.403061162	8.017131786	547.9317
2022-10-19 12:42:30	GAL	4282907.3120	603228.8528	4672613.7562	47.403061335	8.017125485	548.7782
2022-10-19 12:42:30	BDS	4282907.6680	603229.5391	4672618.0765	47.403084667	8.017133830	552.2620

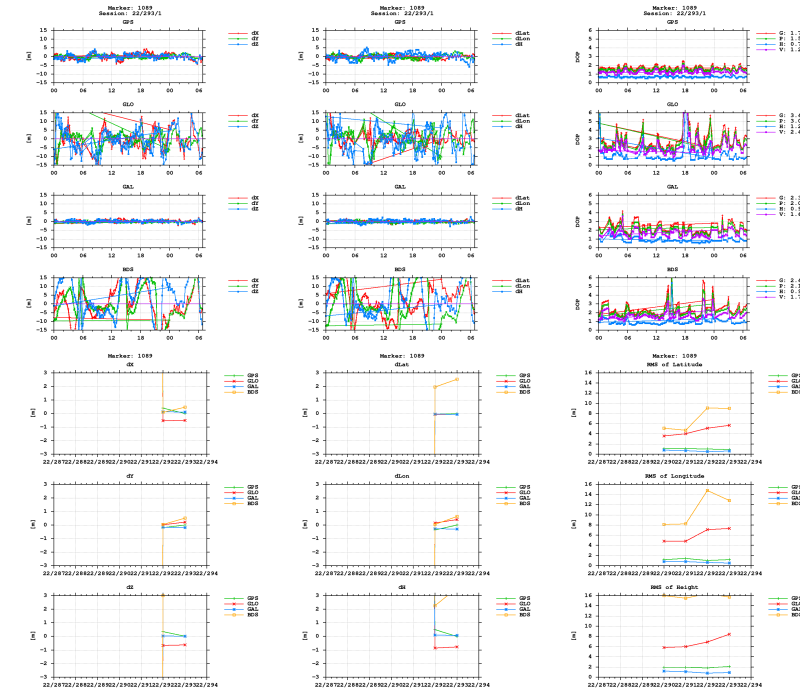

BNC



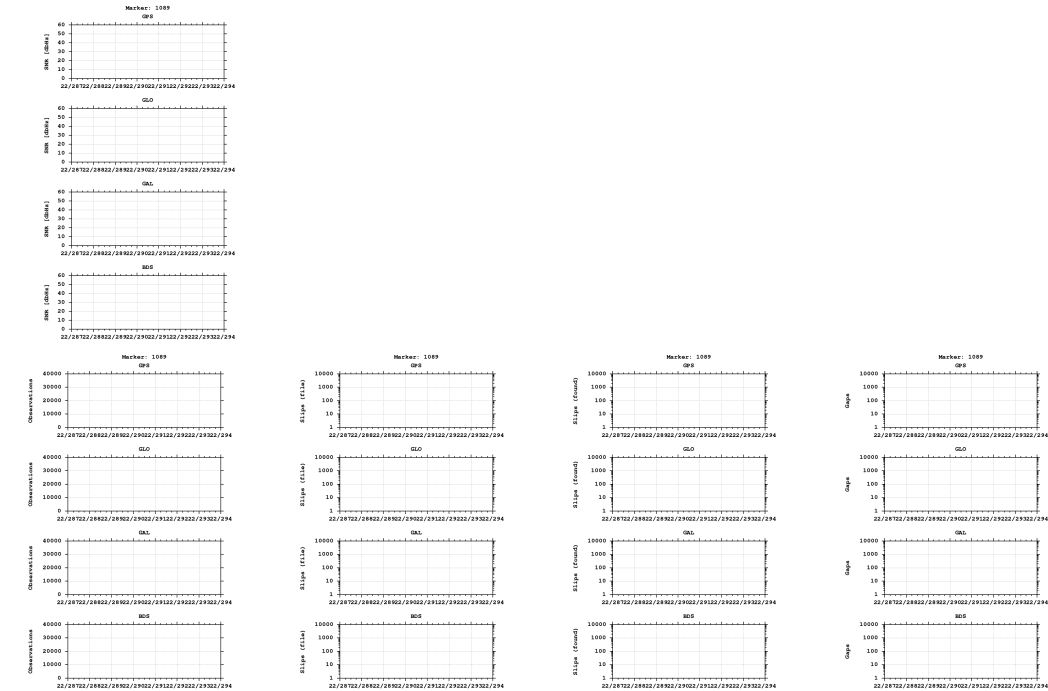

Equipment

2022-10-17 00:00:00 TRIMBLE NETR9 5.52 511 TRM57971.00 NONE 511

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)