


GNSS observation file monitoring for 0512


Last RINEX file: 05122901.22O
RINEX version: 3.02
Marker: 1088
Receiver: 512 TRIMBLE NETR9 5.52
Antenna: 512 TRM57971.00 NONE


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

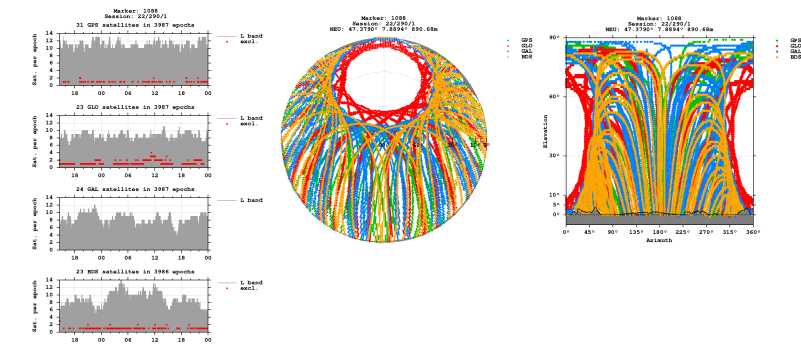


Bands

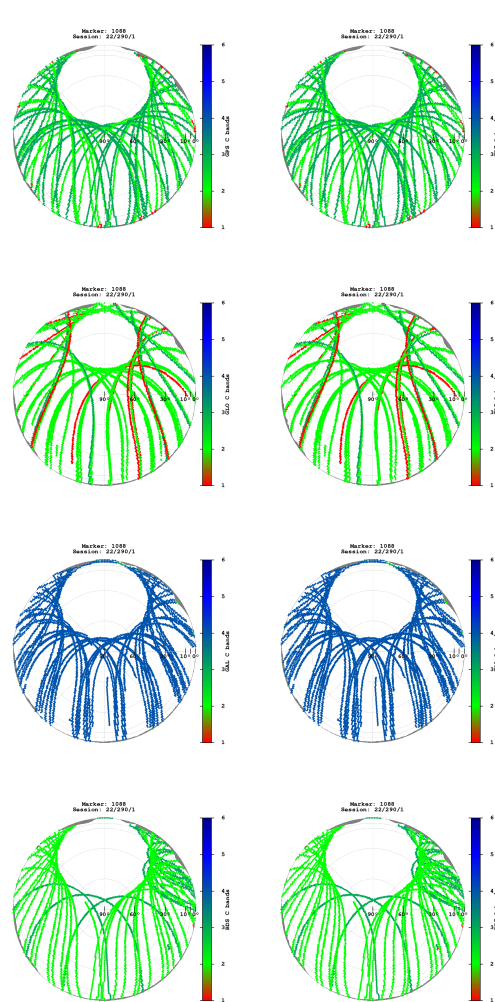

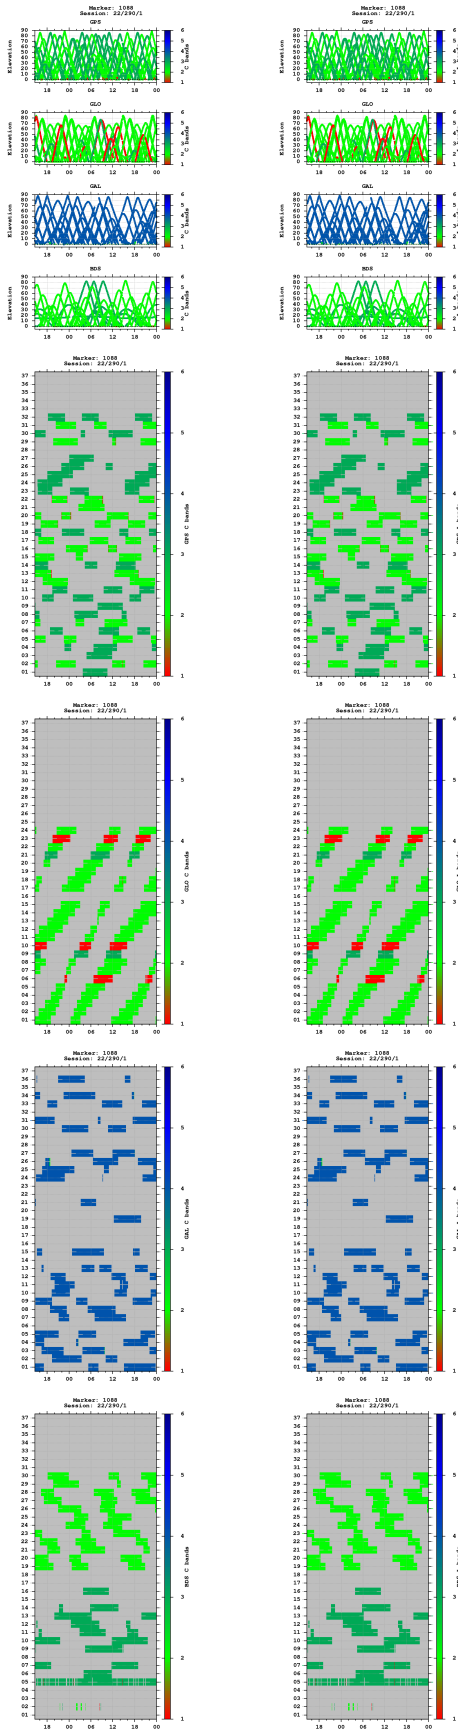



Multipath

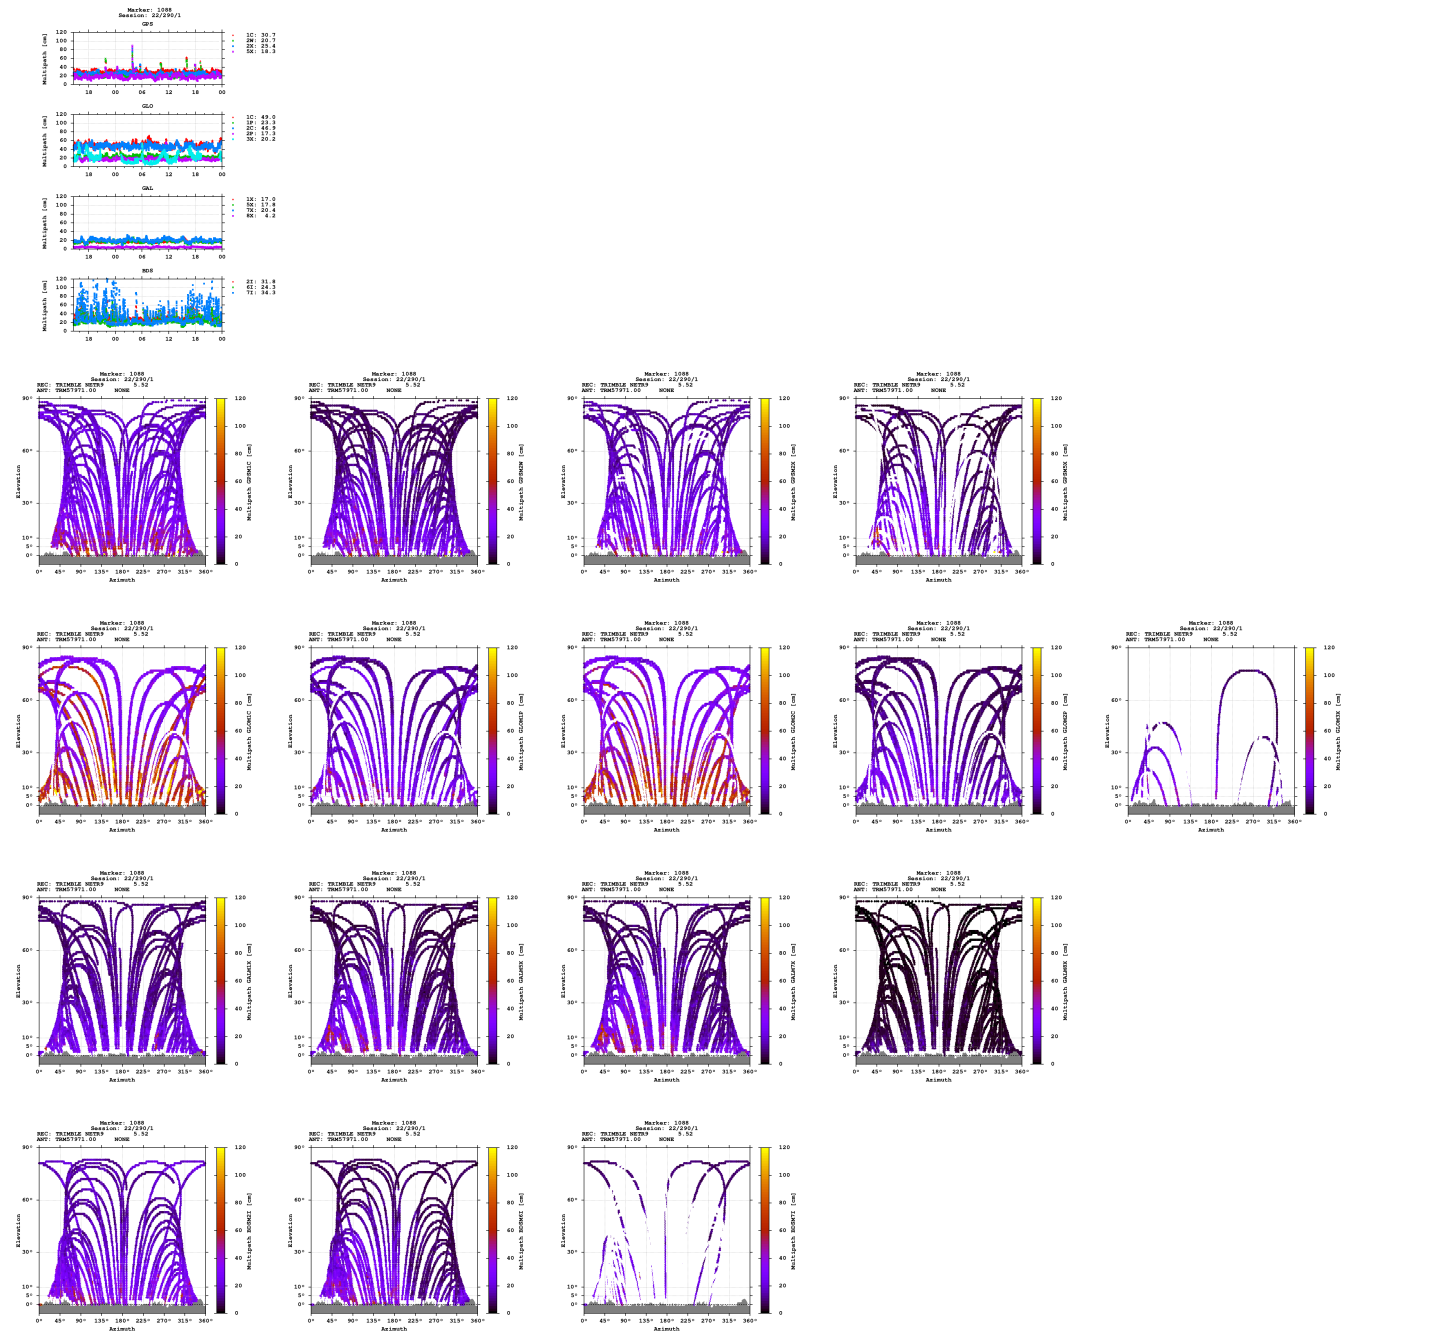

- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.


Signal-to-noise ratio

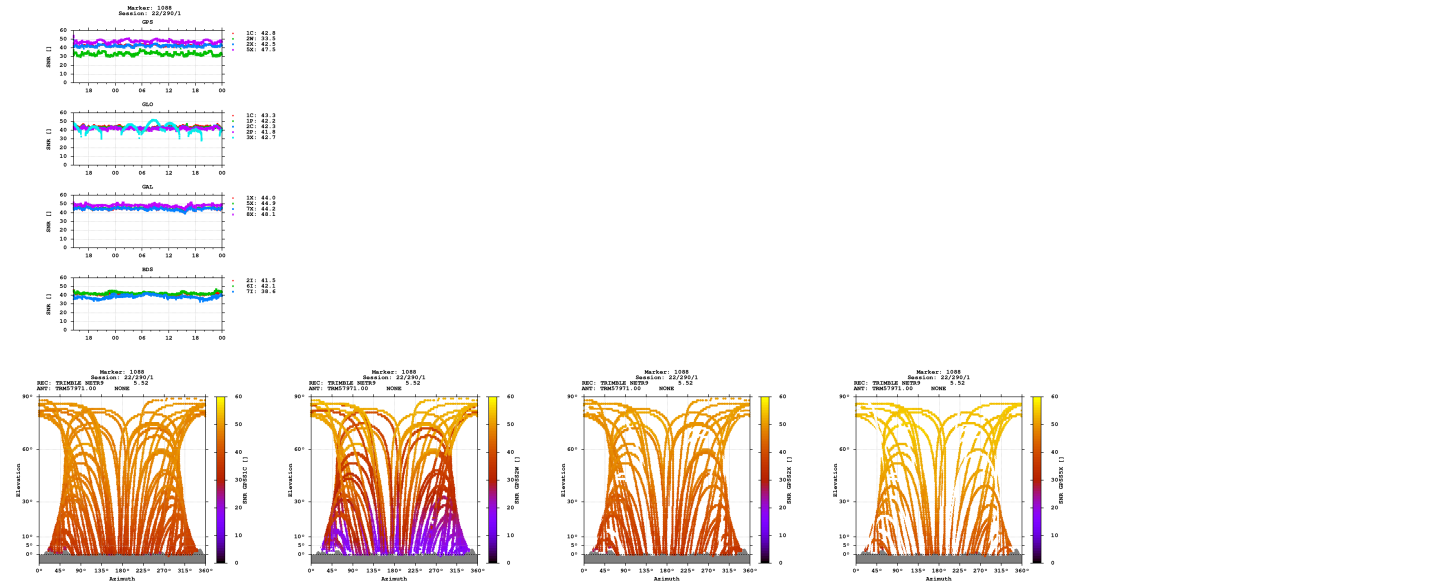

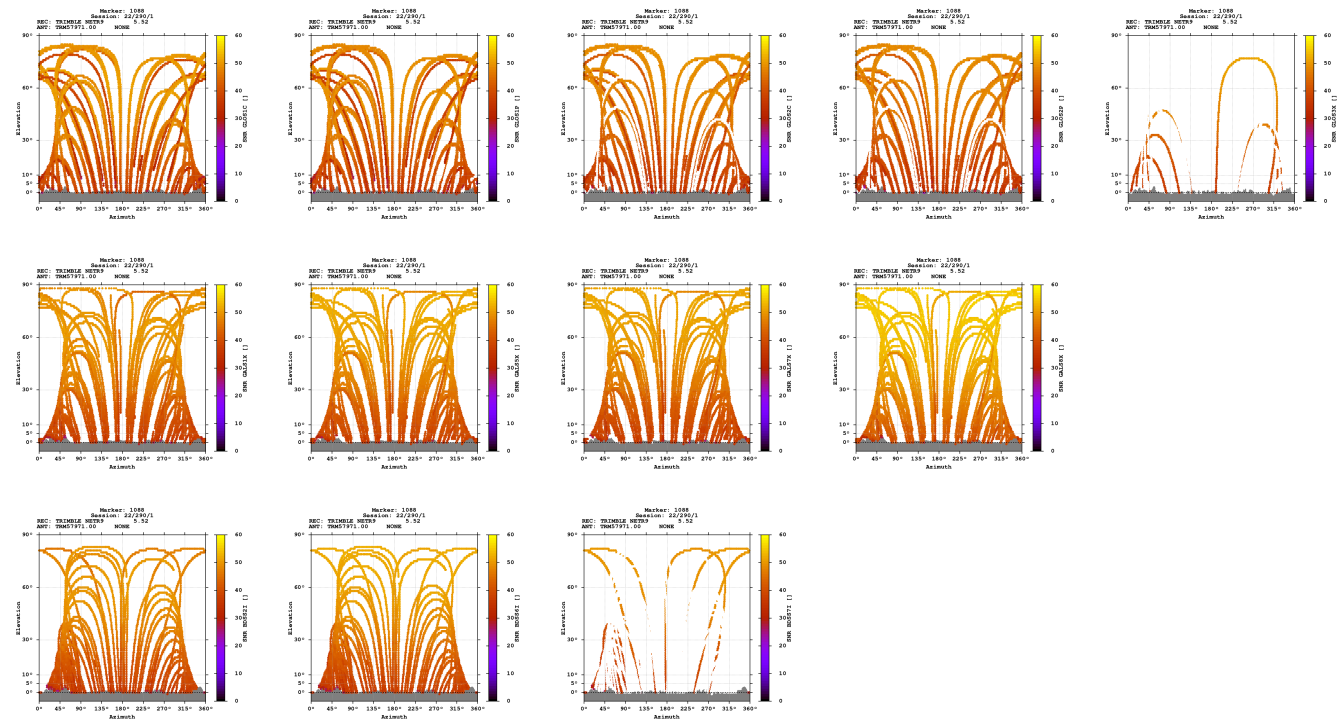

Estimates

2022-10-17 14:37:00	GPS	4286421.0511	593982.8699	4671054.0999	47.378999058	7.889413833	890.6845
2022-10-17 14:37:00	GLO	4286420.9837	593982.1394	4671054.0014	47.378999564	7.889404374	890.4990
2022-10-17 14:37:00	GAL	4286420.8474	593982.8640	4671054.0214	47.378999921	7.889414126	890.4896
2022-10-17 14:37:00	BDS	4286421.5741	593983.6455	4671056.3559	47.379008664	7.889423054	892.7675

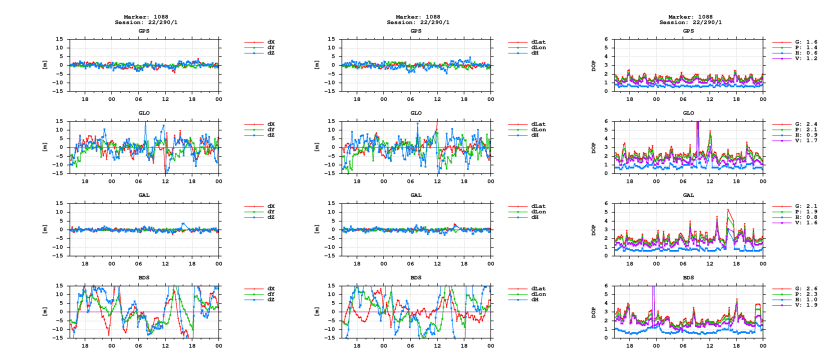

BNC

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)