

GNSS observation file monitoring for 0512

Last RINEX file: 05122931.220


RINEX version: 3.02

Marker: 1088

Receiver: 512 TRIMBLE NETR9 5.52


Antenna: 512 TRM57971.00 NONE

Epochs

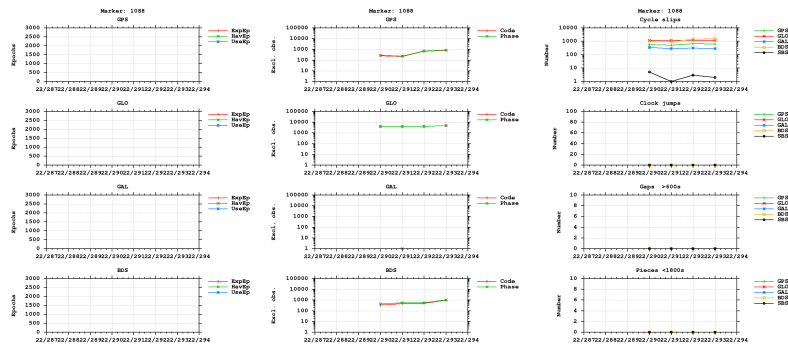



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

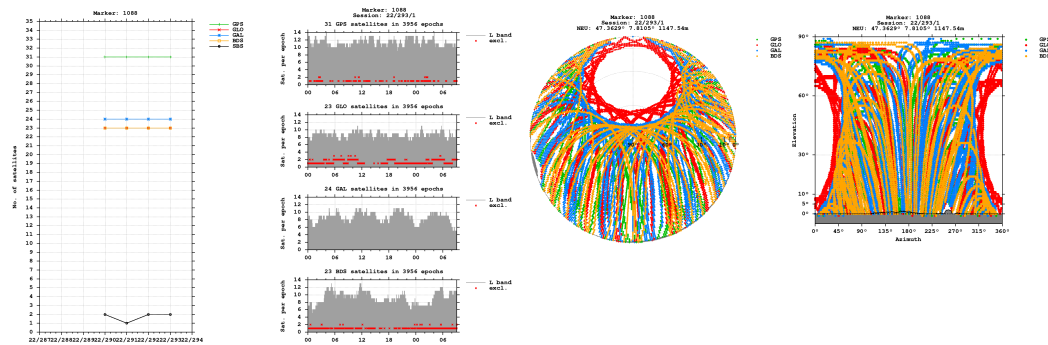


Bands

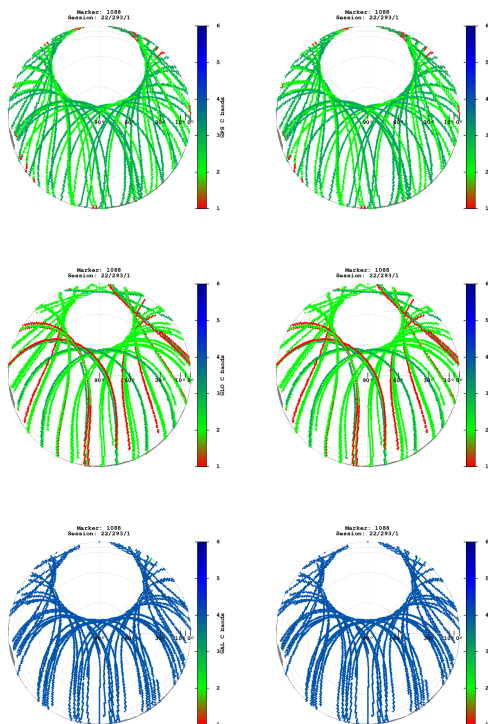


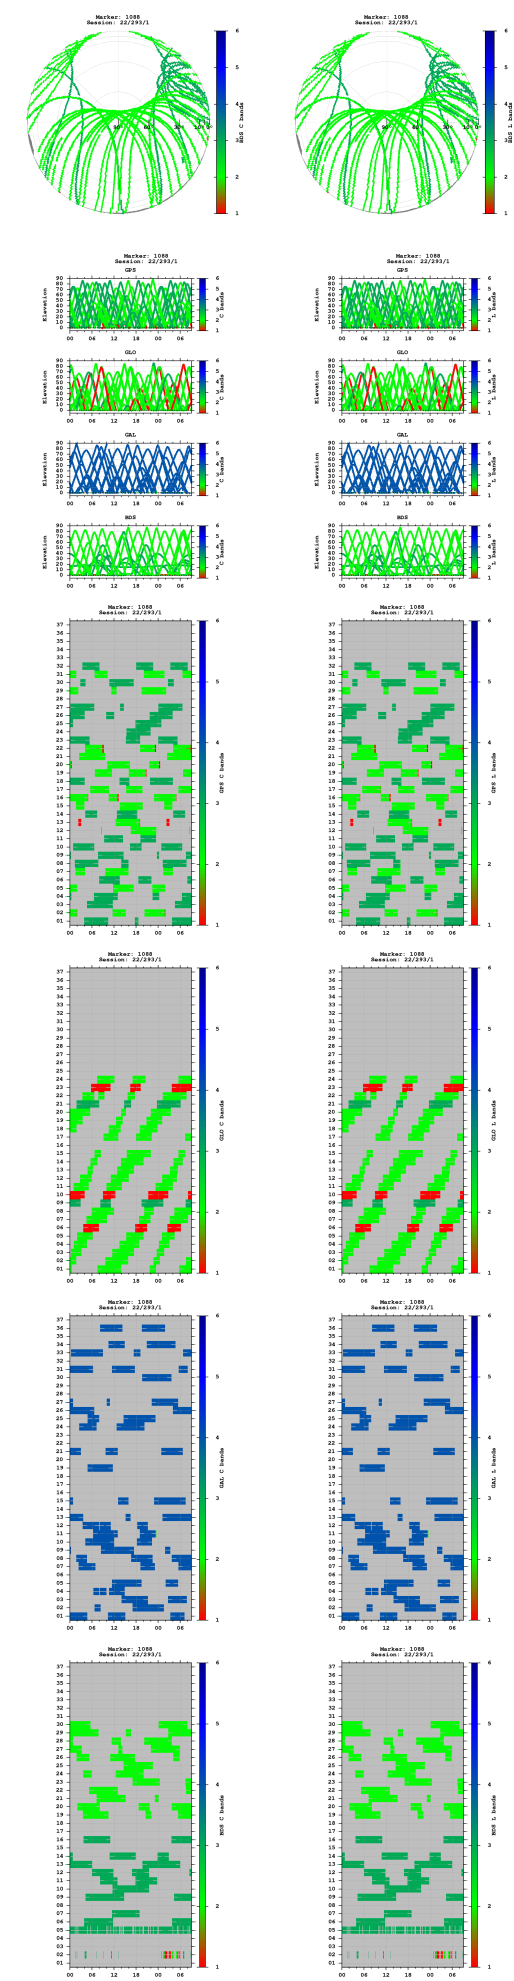


Observations

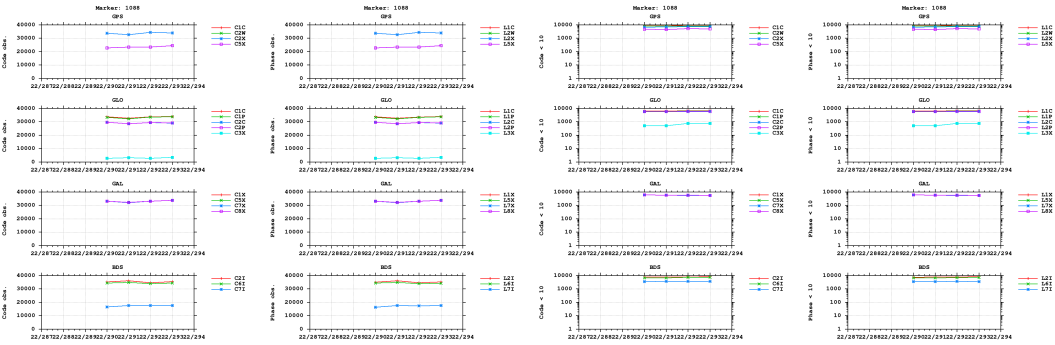


Multipath

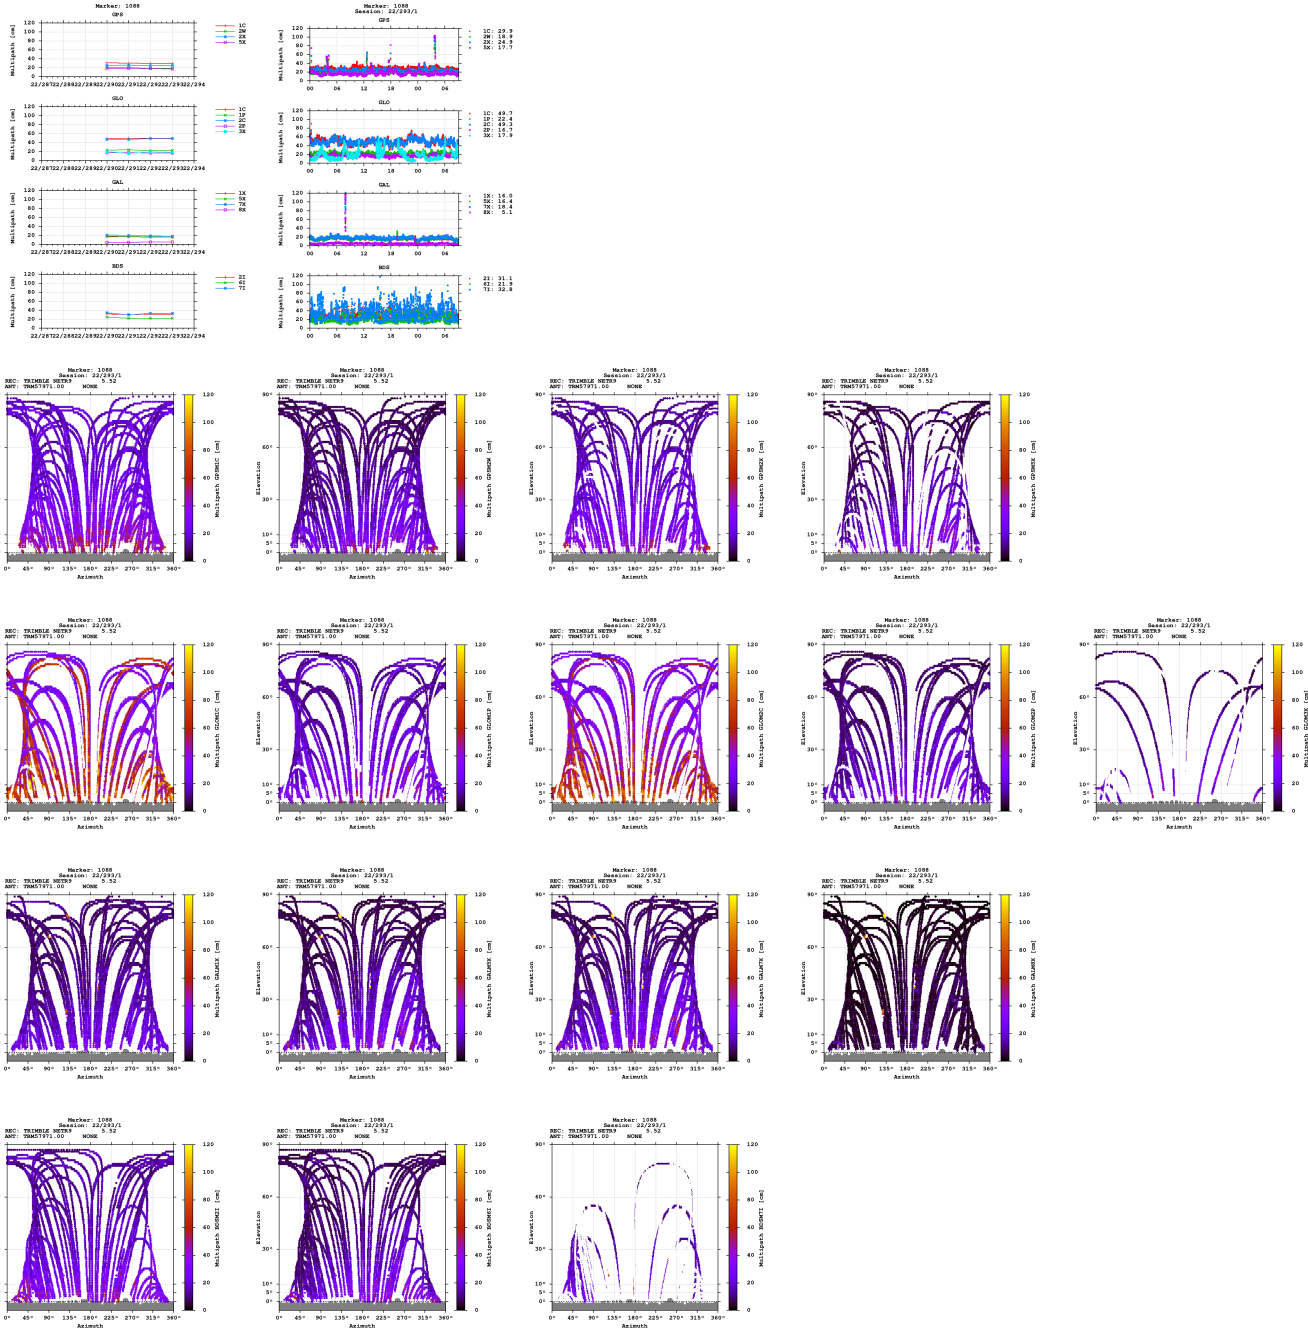


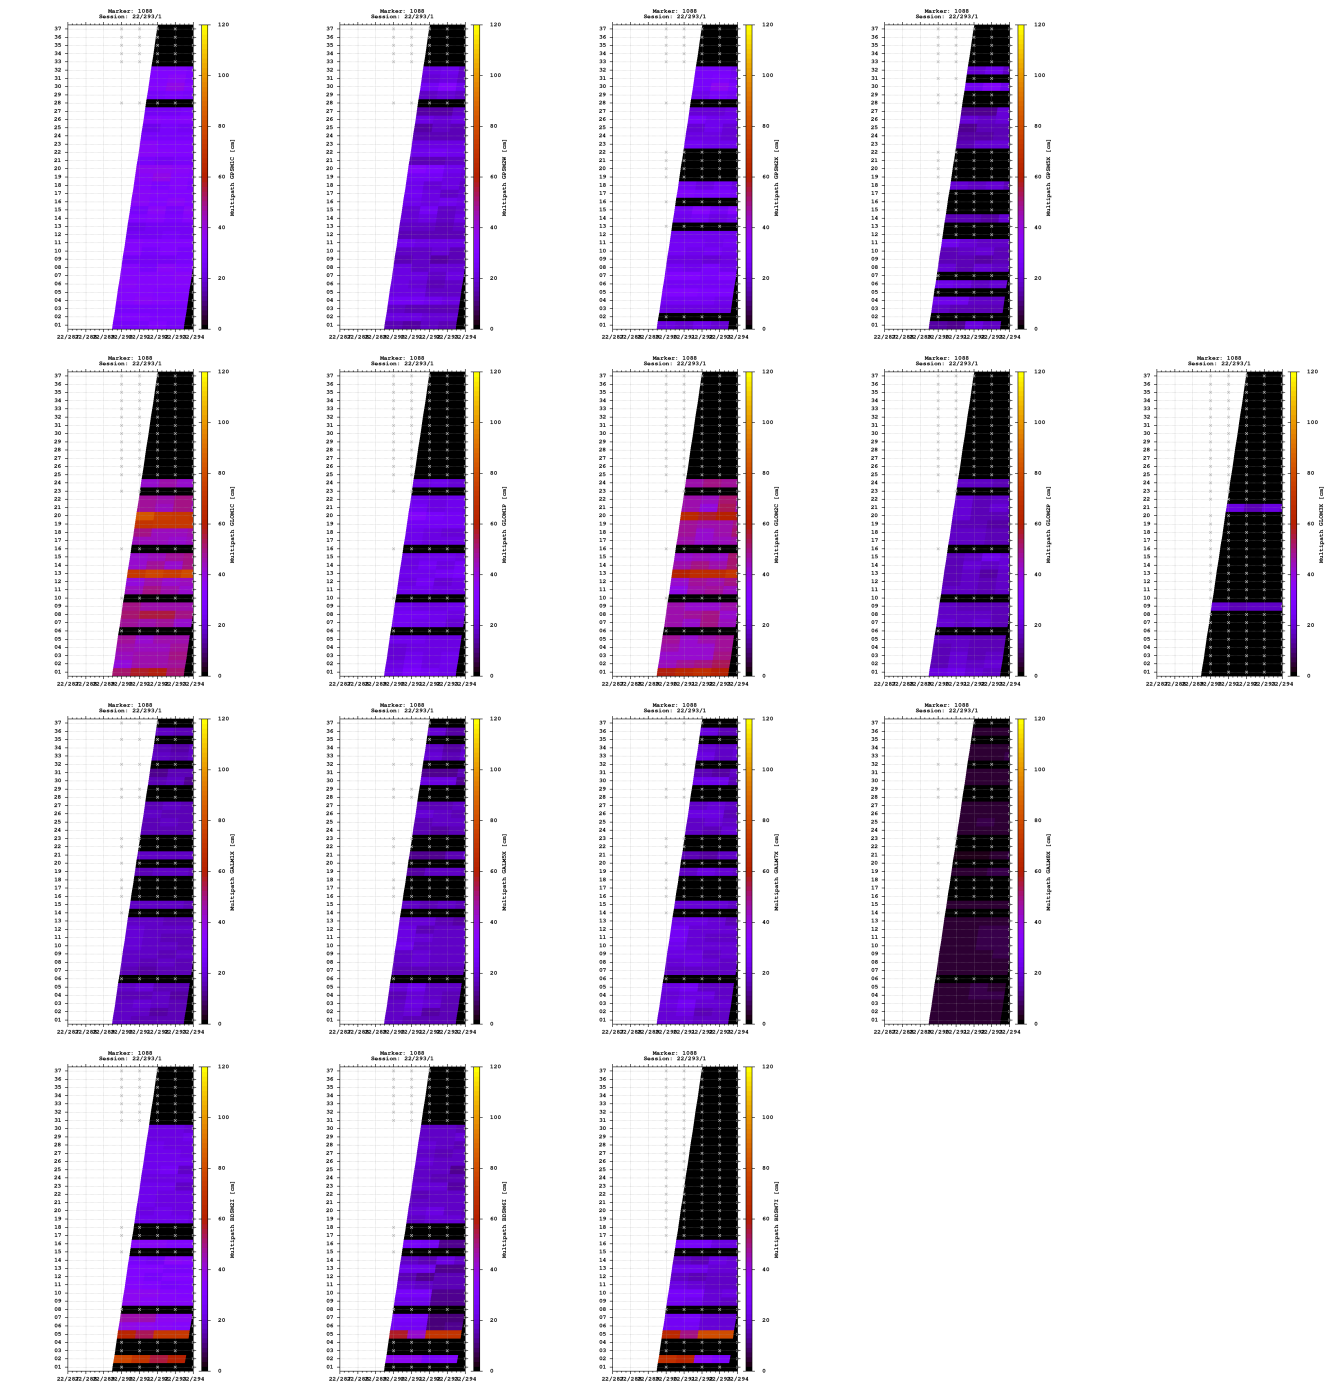


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

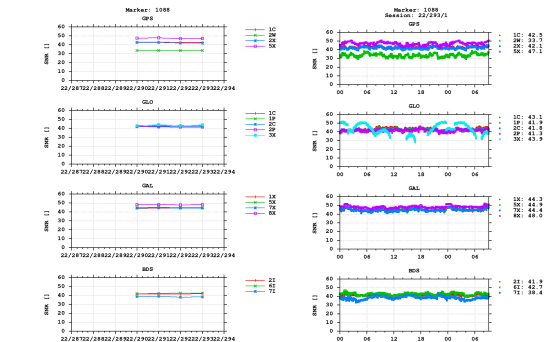


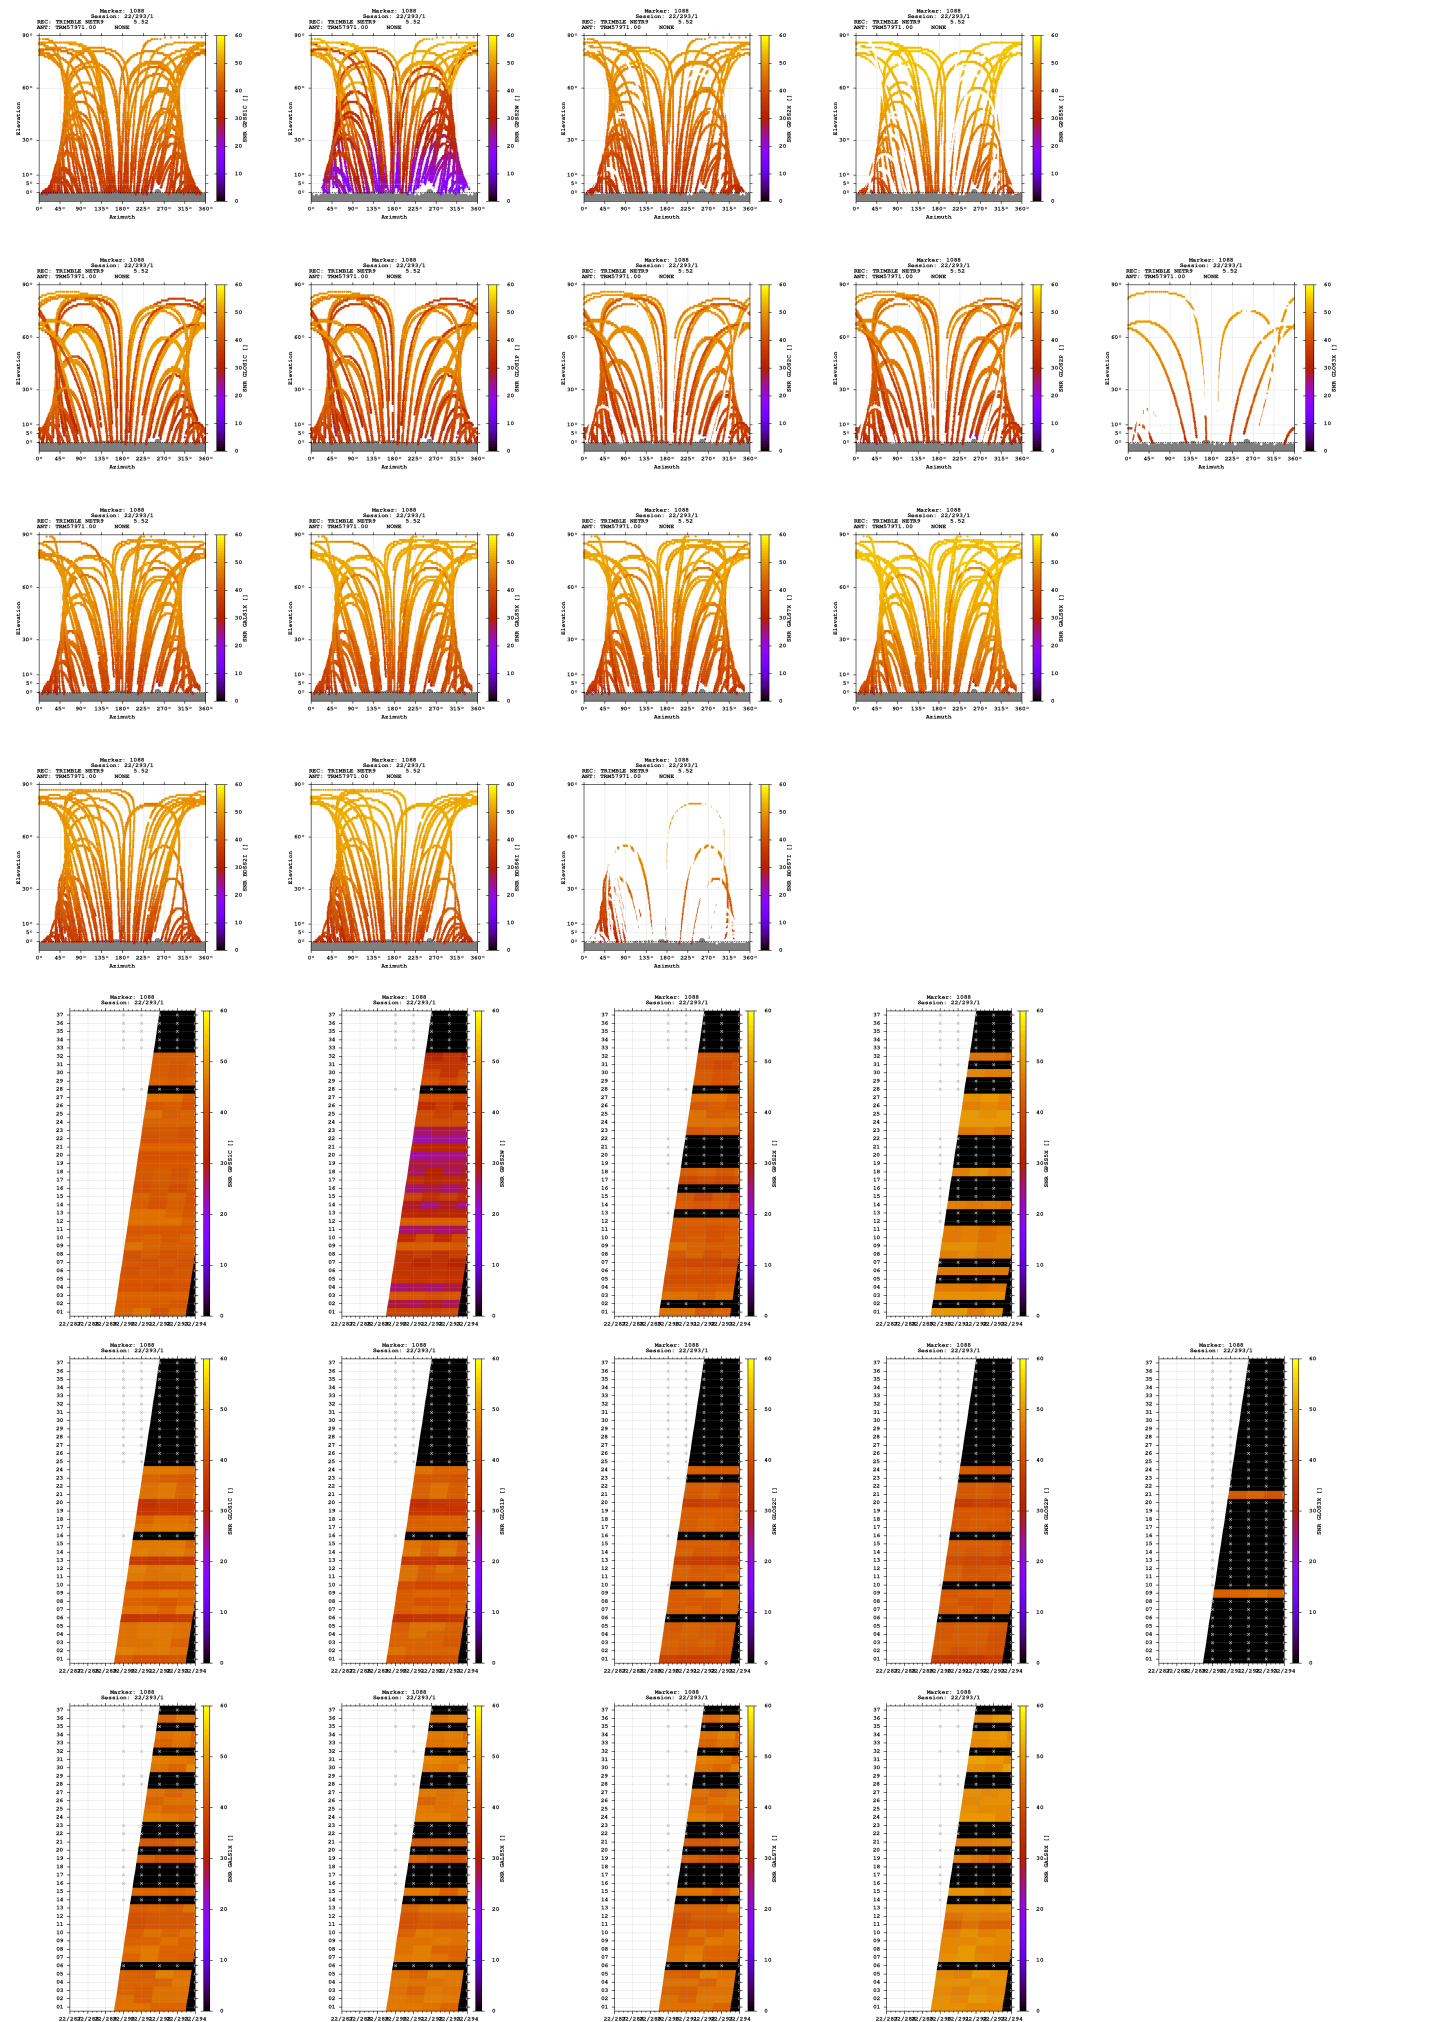

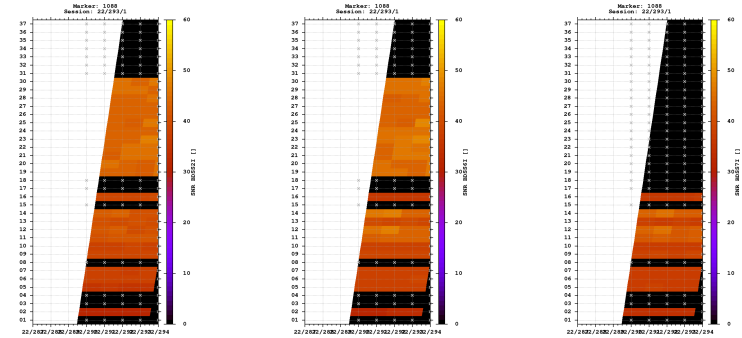



Estimates

2022-10-19 14:47:30	GPS	4288712.2183	588281.5926	4670030.7444	47.362900524	7.810504985	1147.5390
2022-10-19 14:47:30	GLO	4288711.7241	588281.4746	4670030.7549	47.362903933	7.810504327	1147.2042
2022-10-19 14:47:30	GAL	4288712.2273	588281.3745	4670030.8424	47.362901258	7.810502108	1147.5970
2022-10-19 14:47:30	BDS	4288711.8173	588282.2677	4670033.0192	47.362916402	7.810514559	1149.0055

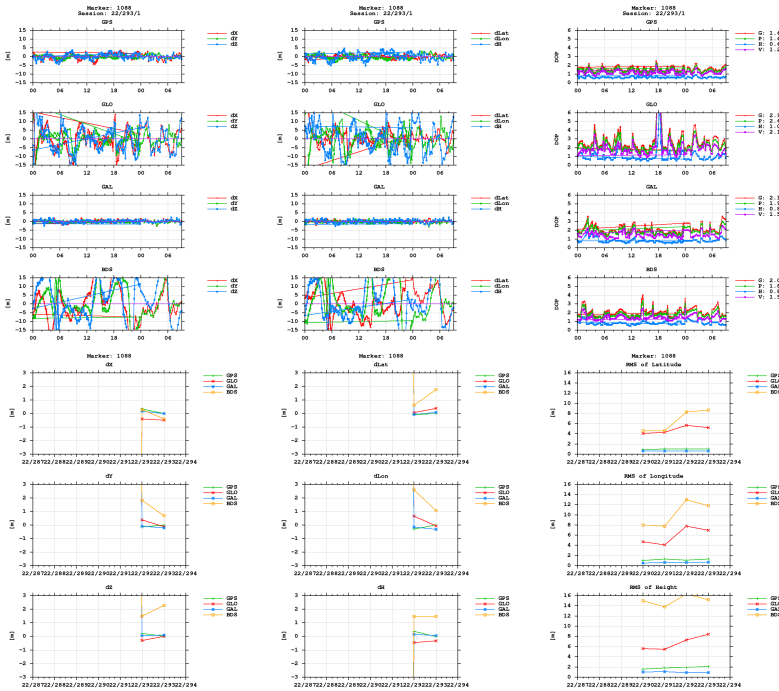

BNC

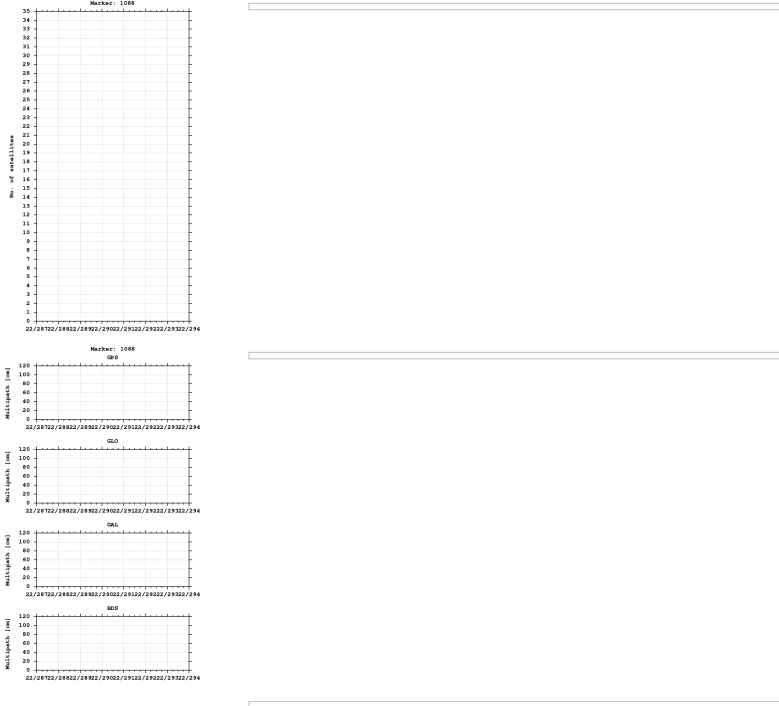

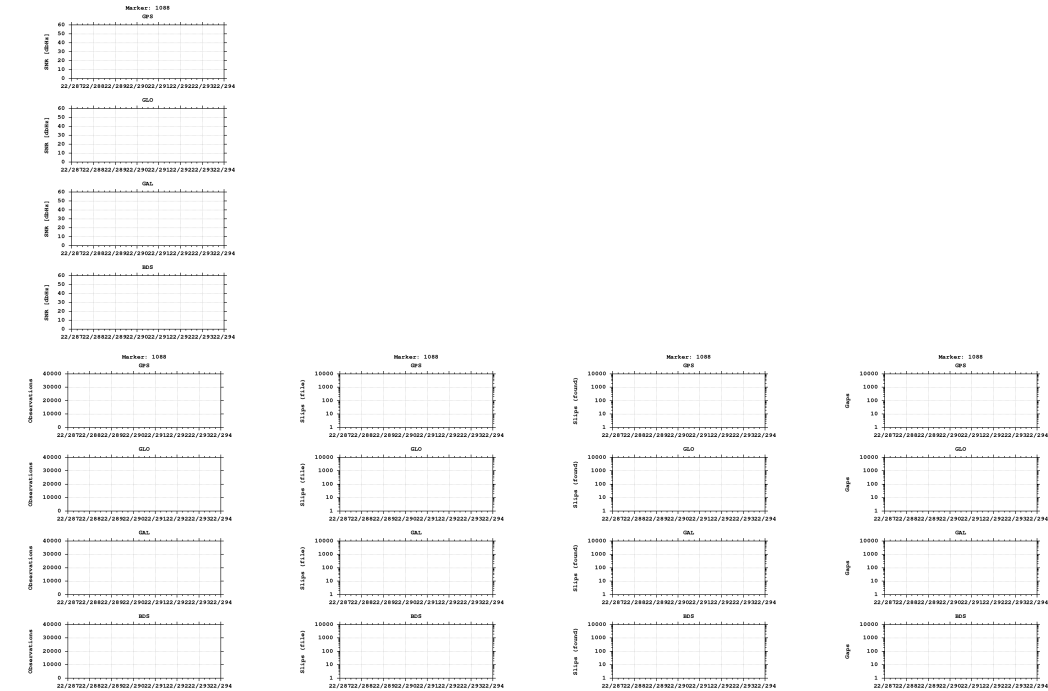

Equipment

2022-10-17 00:00:00 TRIMBLE NETR9 5.52 512 TRM57971.00 NONE 512

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)