


GNSS observation file monitoring for 0513


Last RINEX file: 05132911.22O
RINEX version: 3.02
Marker: 1087
Receiver: 513 TRIMBLE NETR9 5.52
Antenna: 513 TRM57971.00 NONE


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites


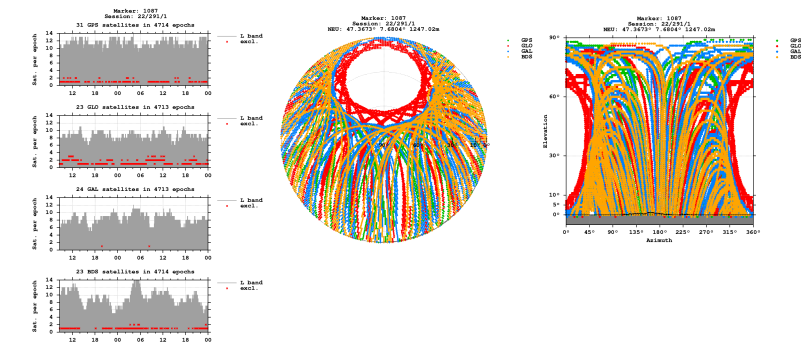


Bands

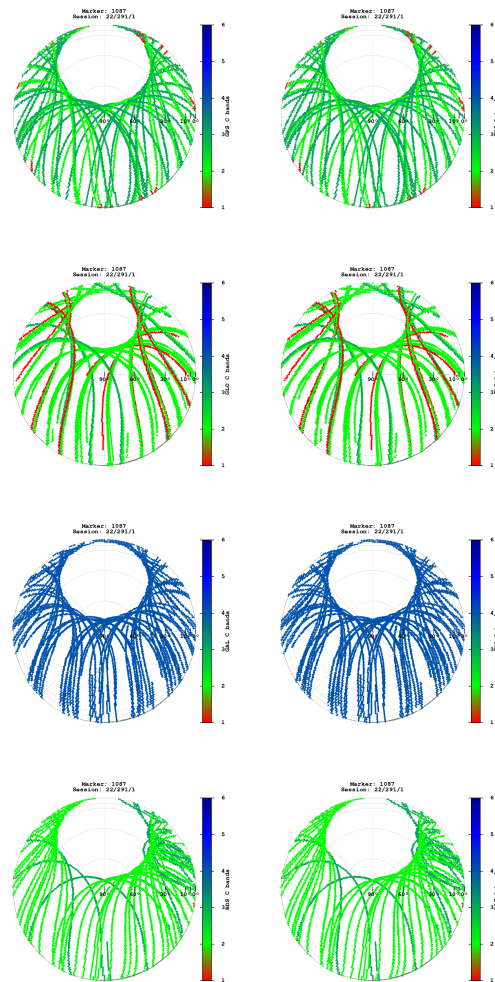

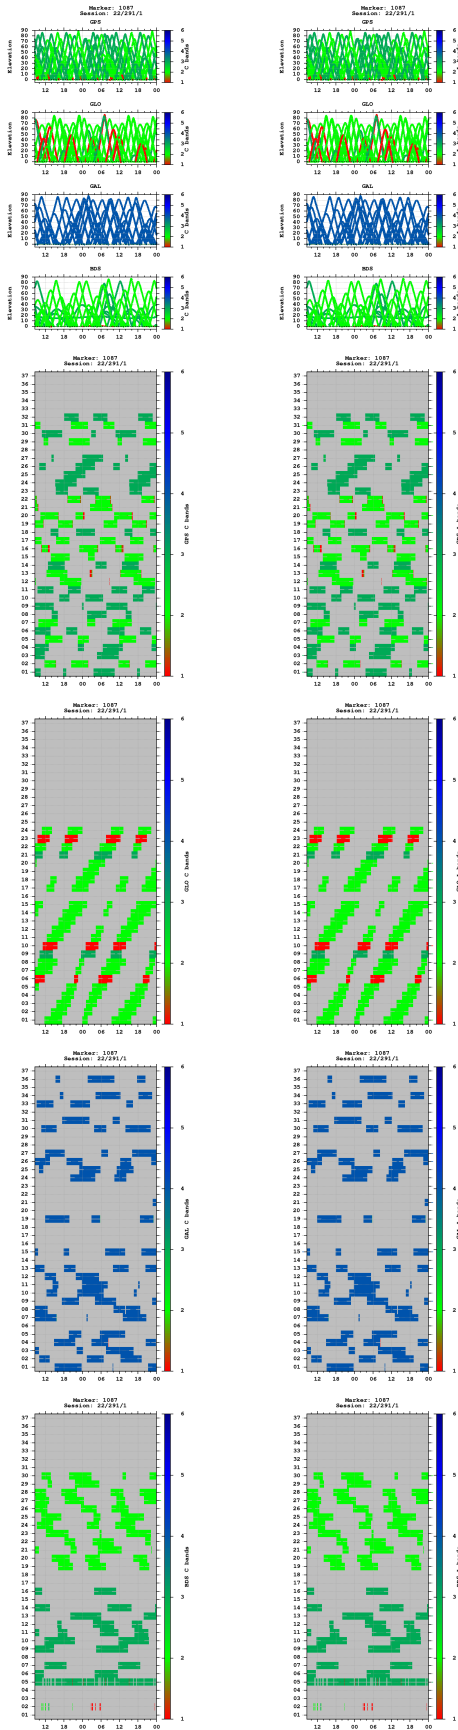



Multipath

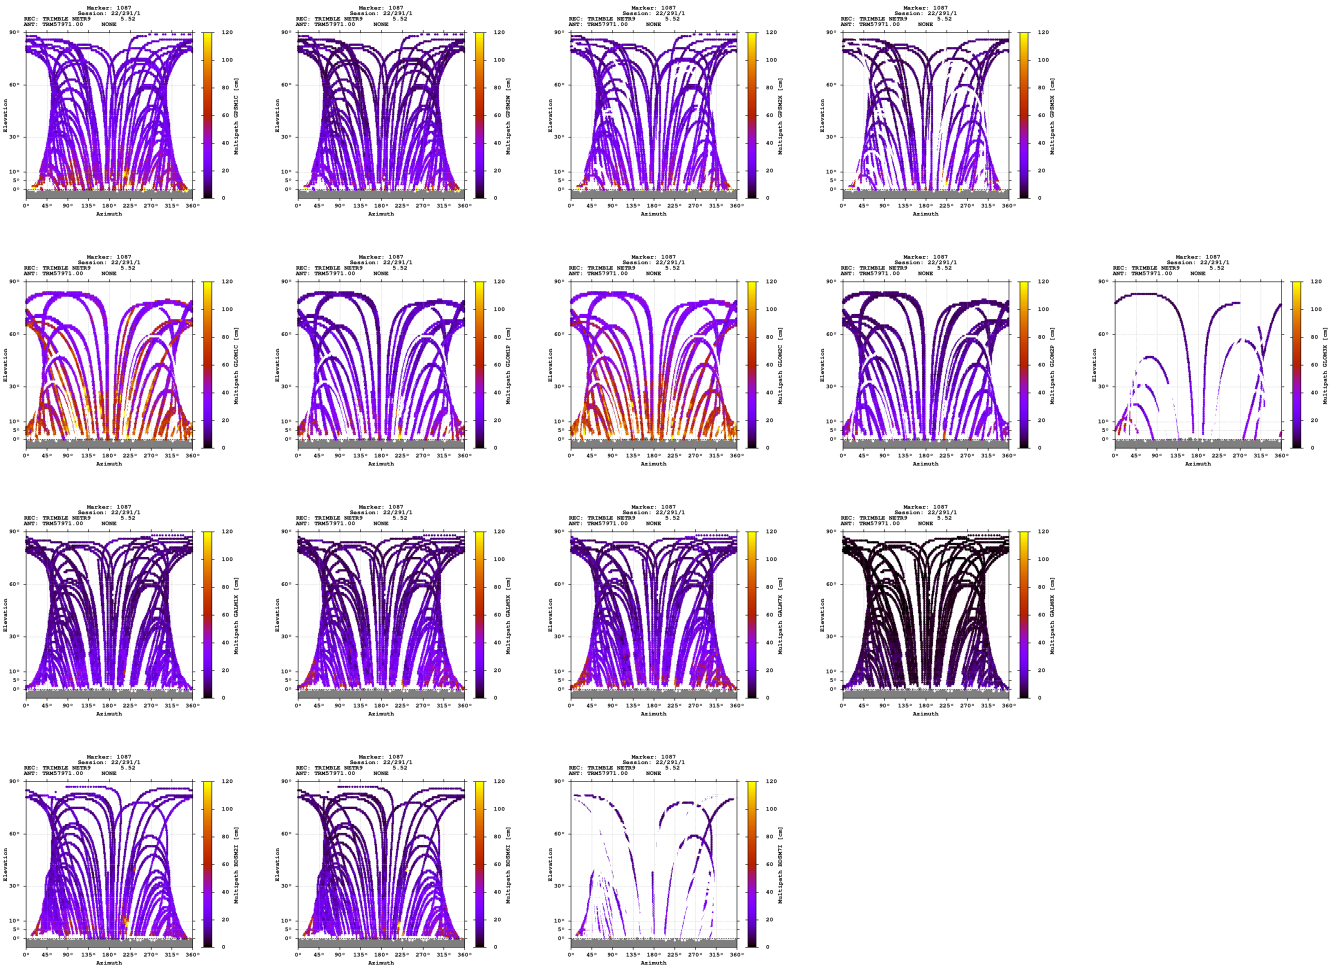

- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.


Signal-to-noise ratio

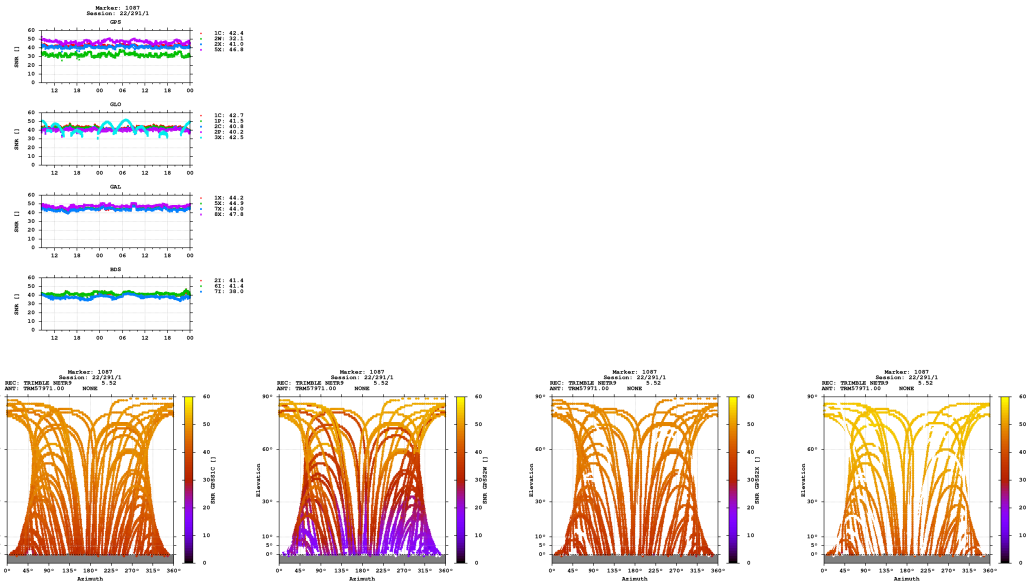

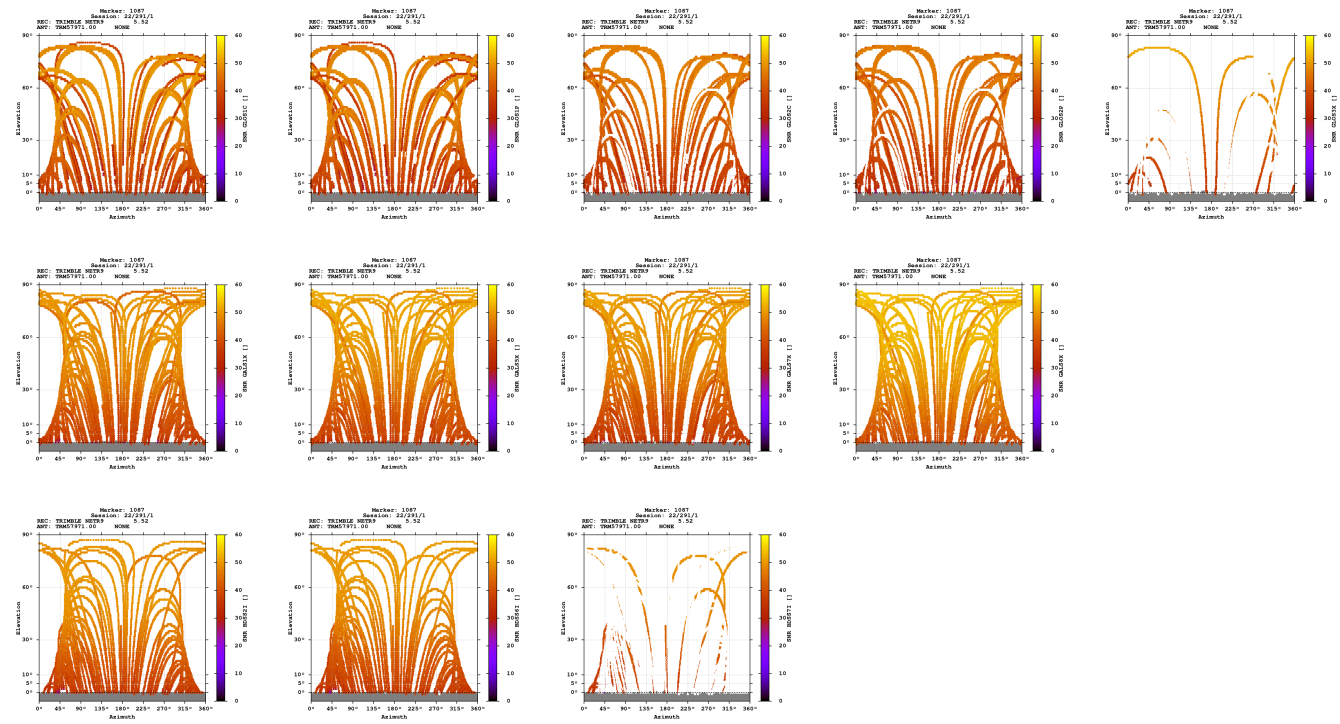

Estimates

2022-10-18 08:36:30	GPS	4289747.1302	578502.0899	4670435.2936	47.367300075	7.680396526	1247.0180
2022-10-18 08:36:30	GLO	4289747.2608	578502.0126	4670435.7450	47.367302037	7.680395281	1247.4308
2022-10-18 08:36:30	GAL	4289746.9196	578502.1324	4670435.0370	47.367299856	7.680397456	1246.6917
2022-10-18 08:36:30	BDS	4289746.0418	578501.6407	4670436.2685	47.367313547	7.680392559	1246.9640

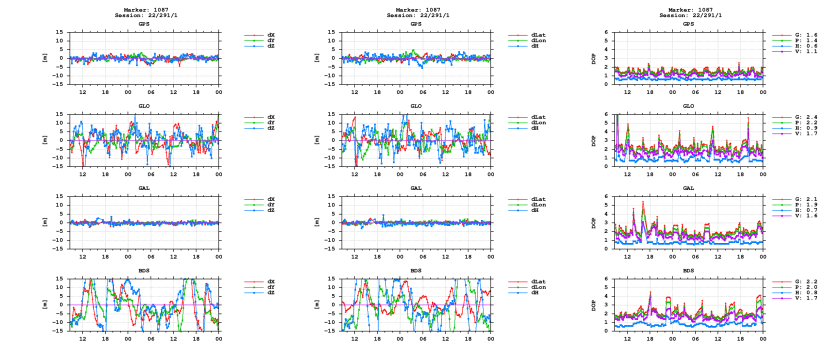

BNC

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)