

GNSS observation file monitoring for 0513

Last RINEX file: 05132921.220


RINEX version: 3.02

Marker: 1087

Receiver: 513 TRIMBLE NETR9 5.52


Antenna: 513 TRM57971.00 NONE

Epochs

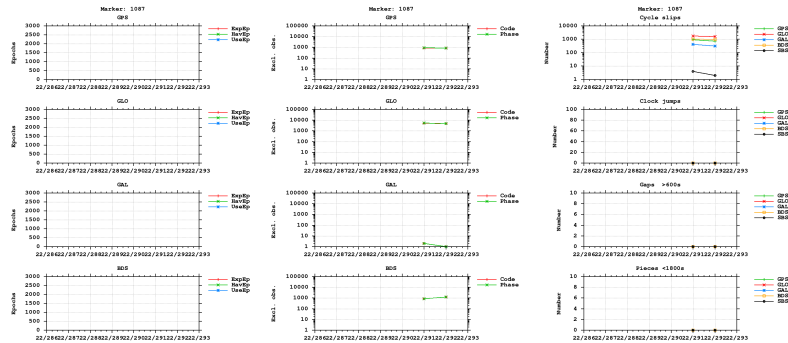



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

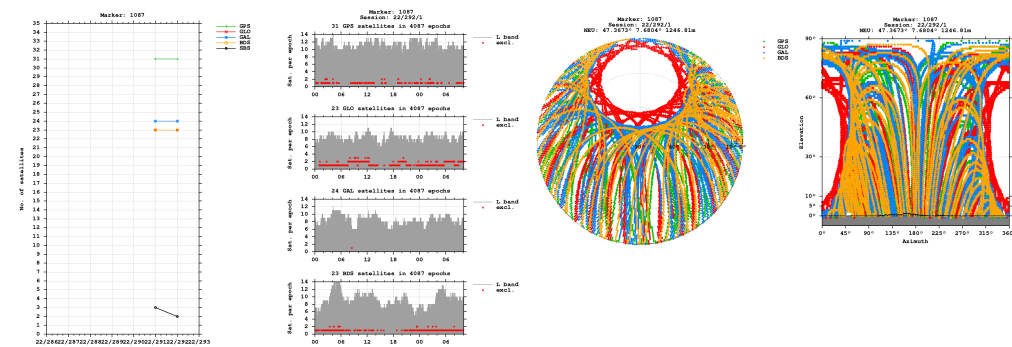


Bands

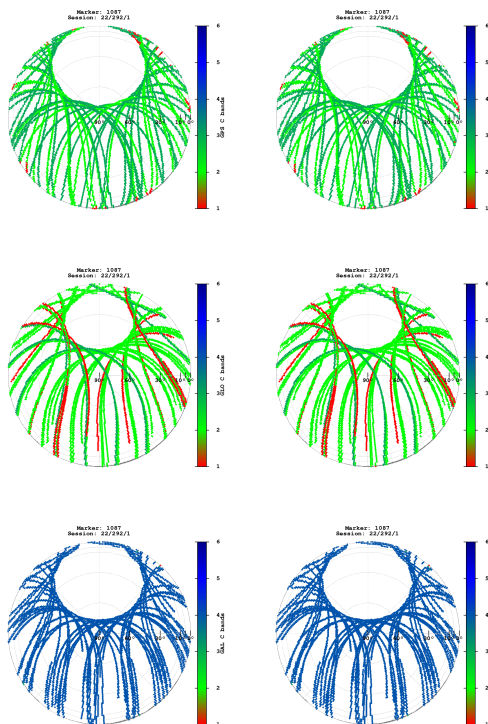


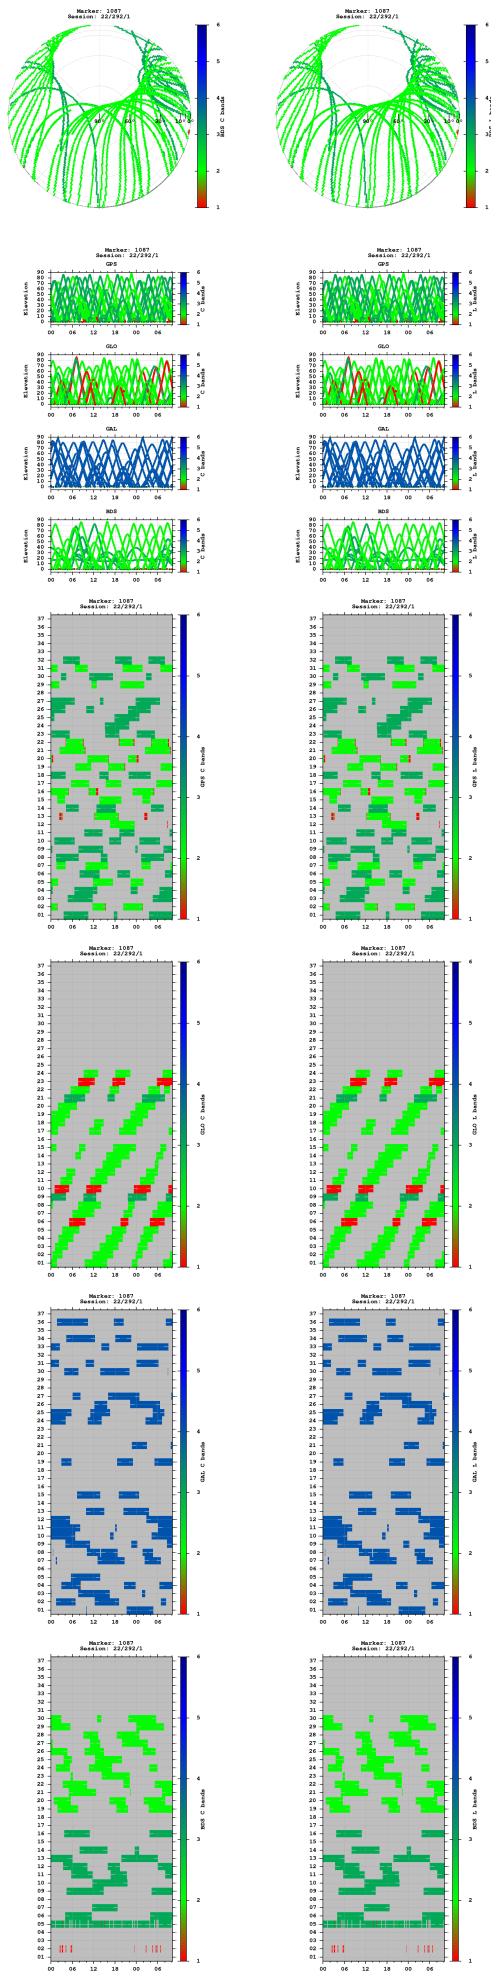


Observations

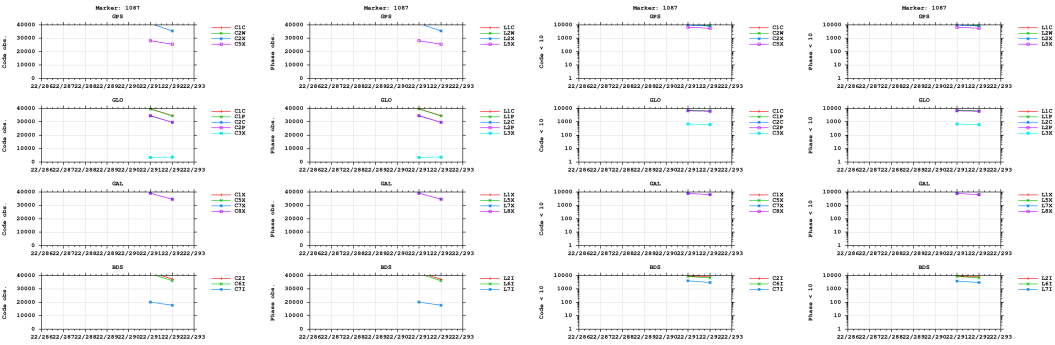


Multipath

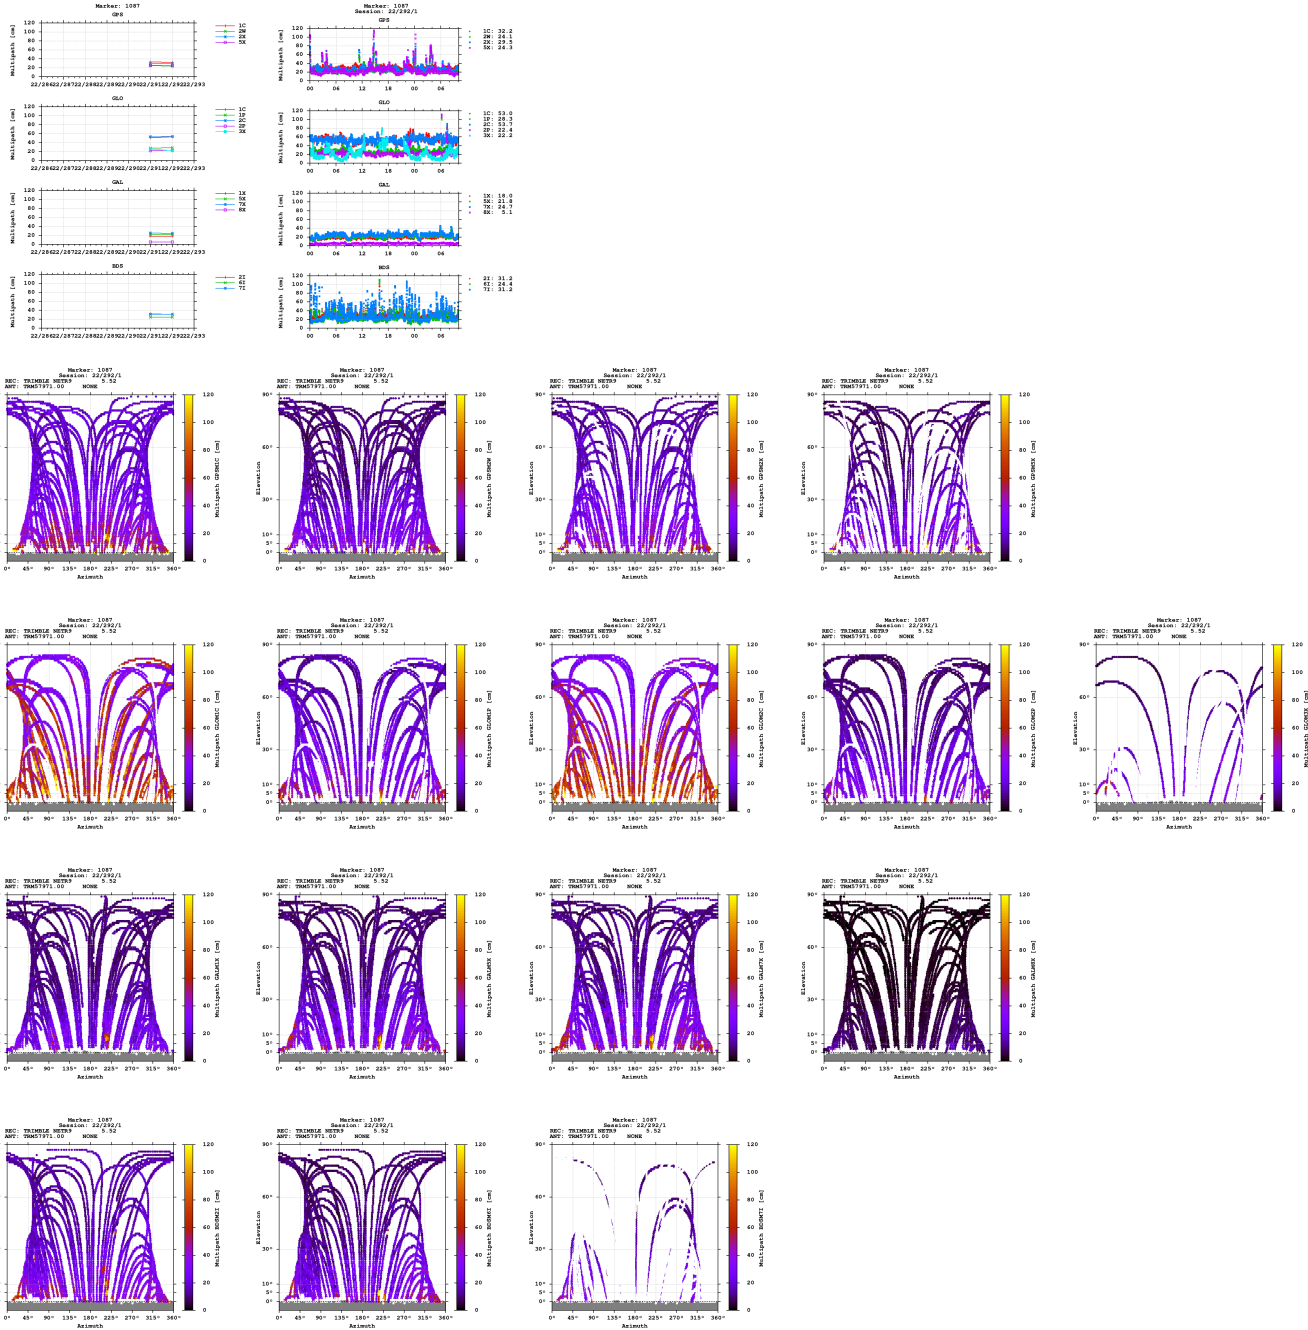


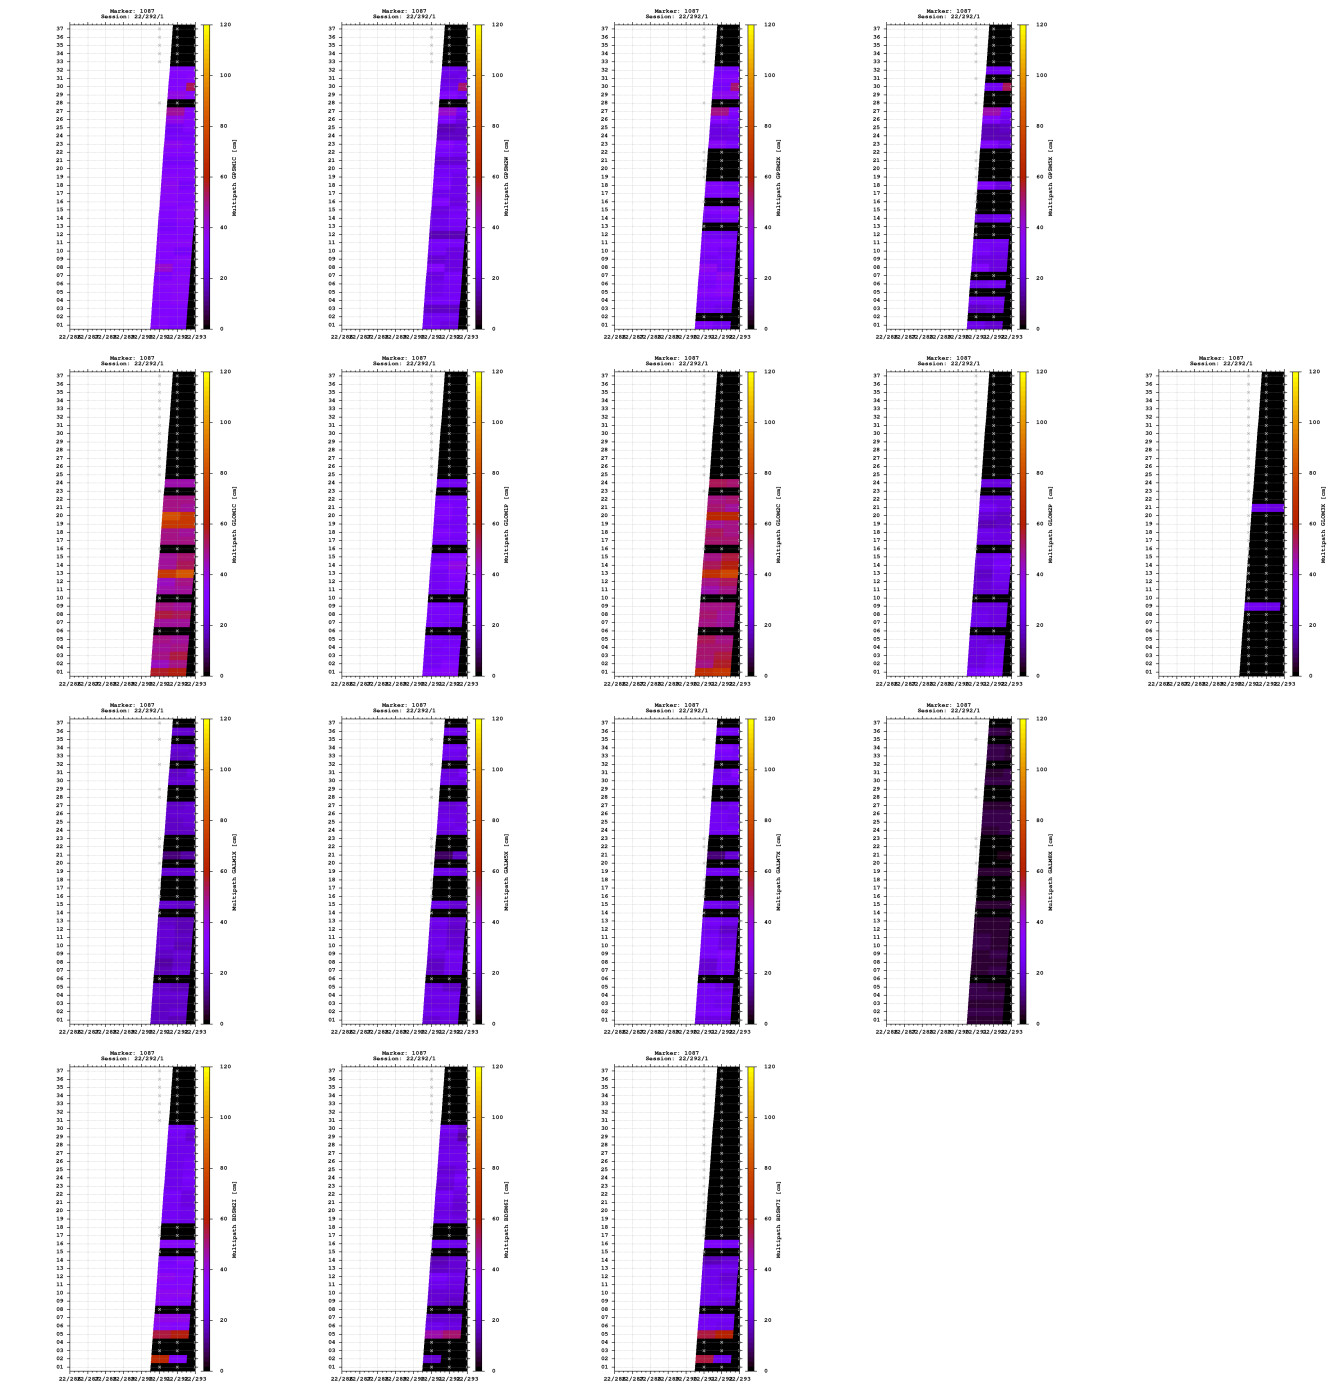


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

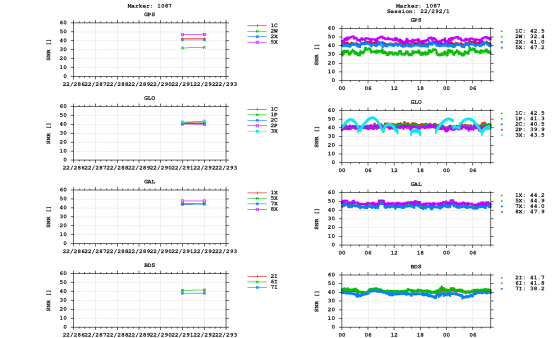


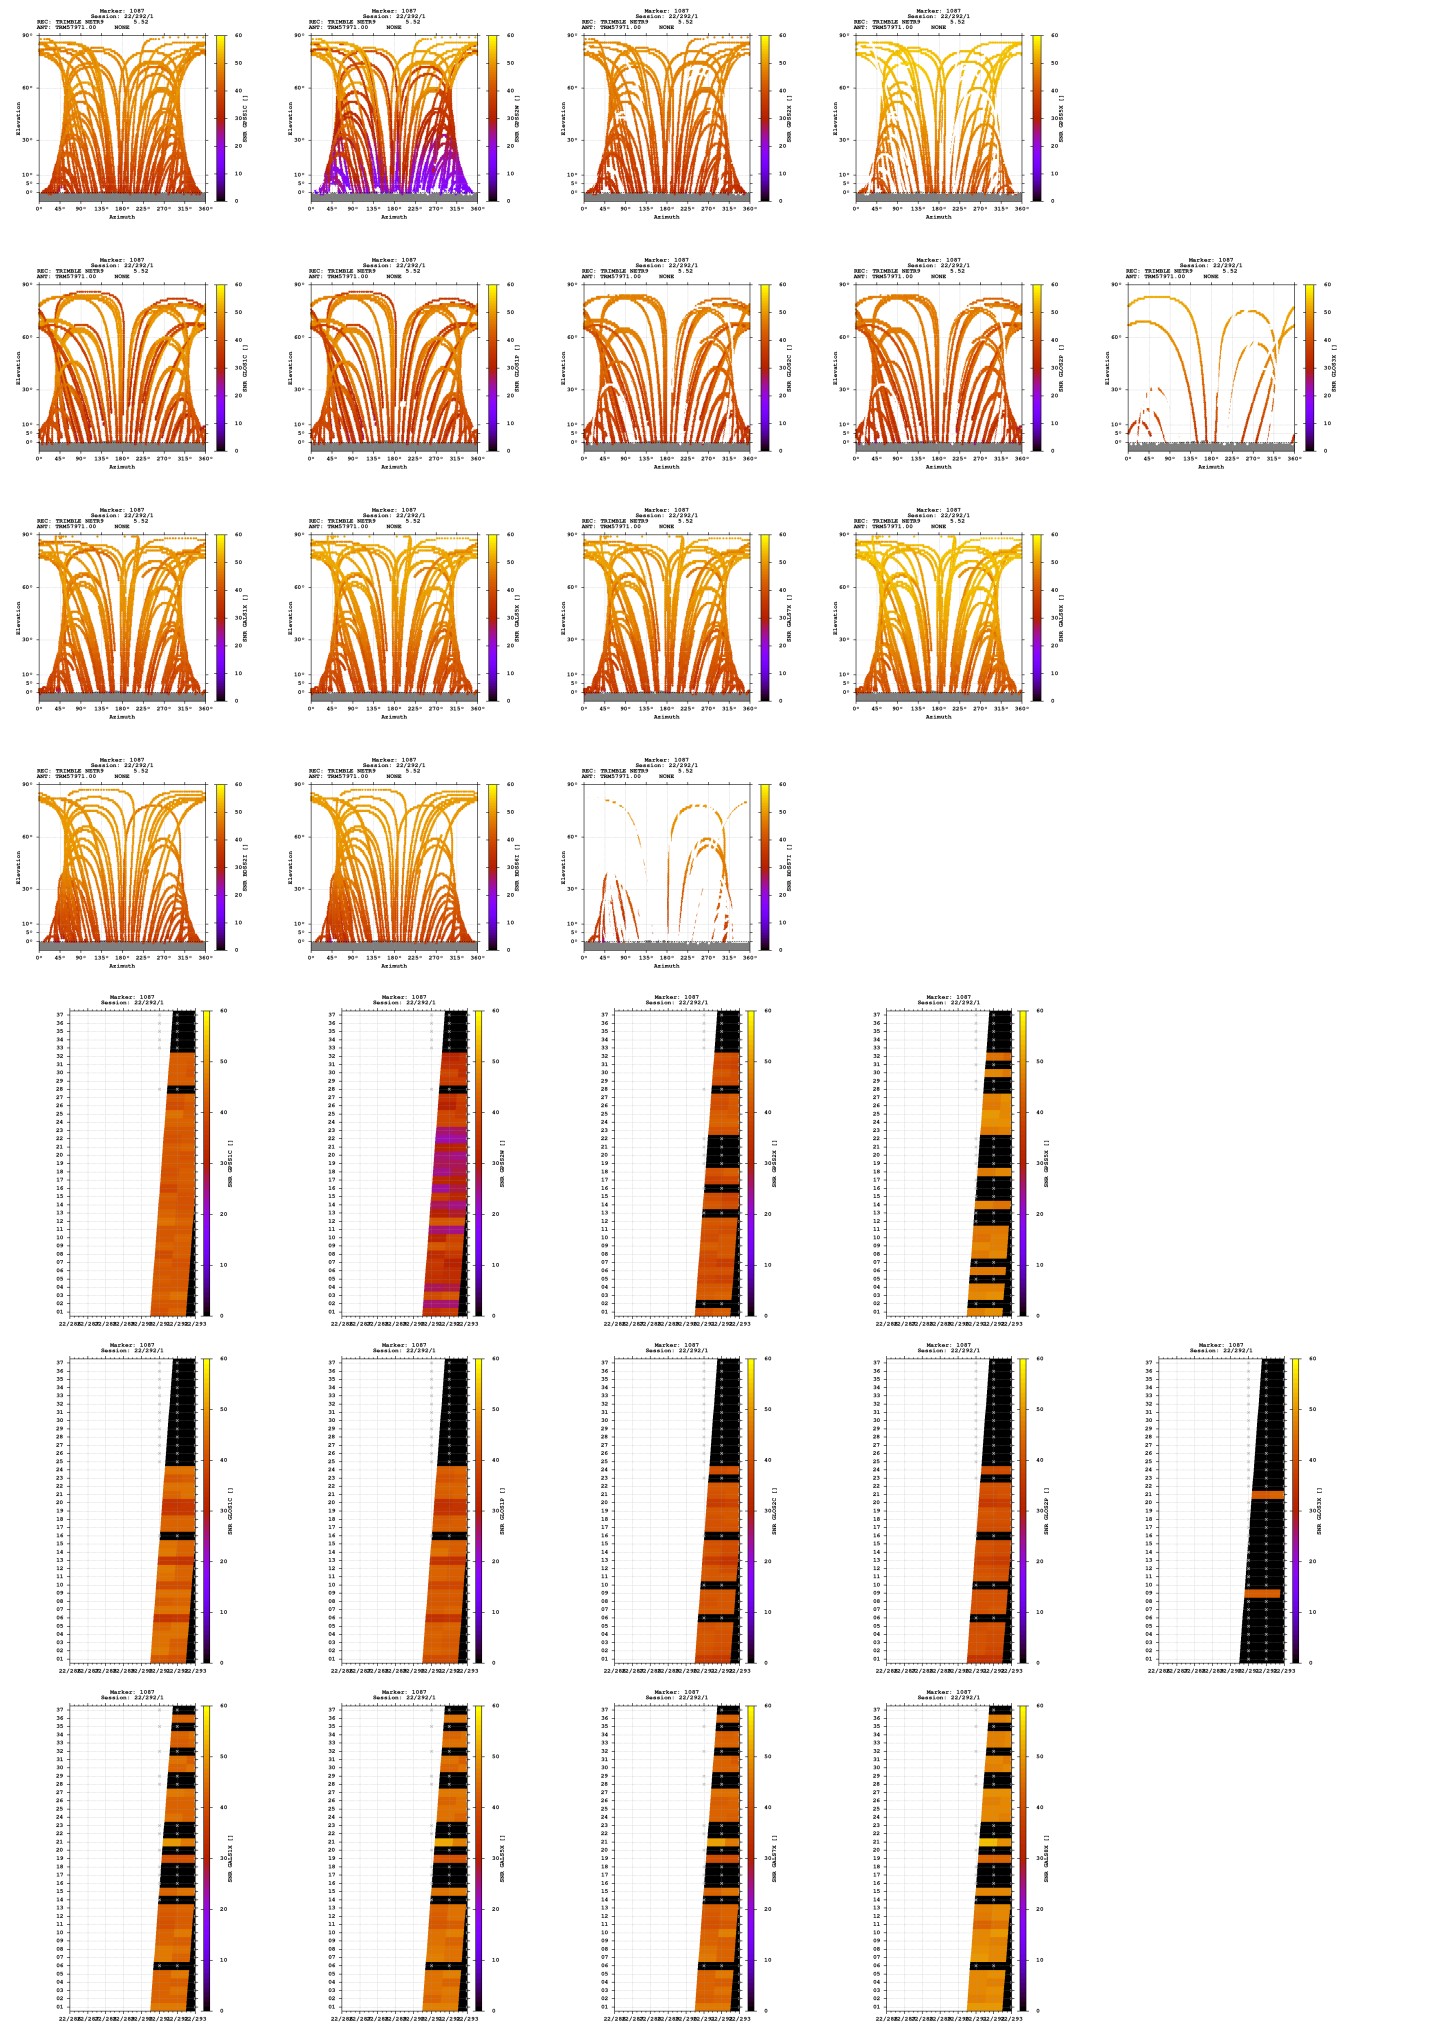

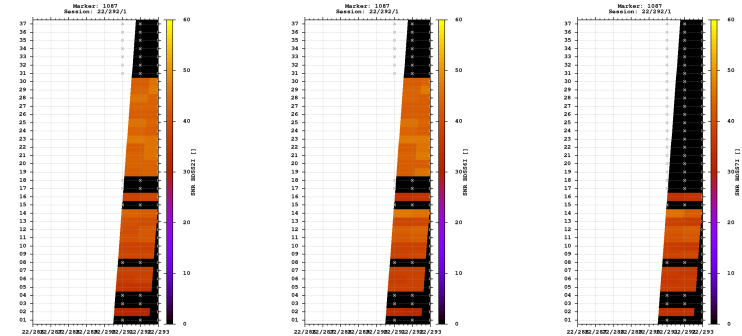



Estimates

2022-10-18 08:36:30	GPS	4289746.8597	578502.2611	4670435.2337	47.367301333	7.680399250	1246.8078
2022-10-18 08:36:30	GLO	4289746.9347	578502.1346	4670435.3865	47.367301884	7.680397458	1246.9592
2022-10-18 08:36:30	GAL	4289746.8834	578502.1093	4670434.9427	47.367299539	7.680397217	1246.5959
2022-10-18 08:36:30	BDS	4289744.7688	578501.7438	4670436.2330	47.367321586	7.680396163	1246.0927

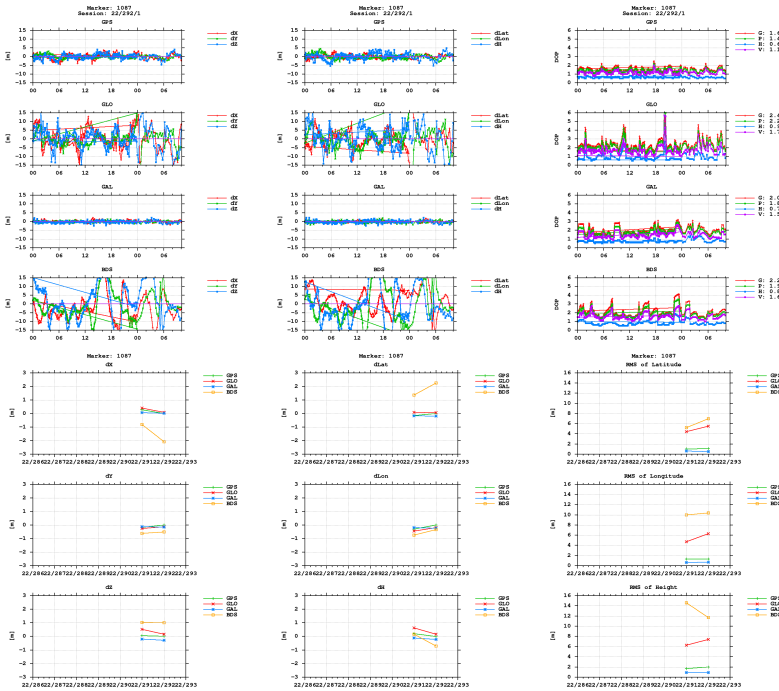

BNC

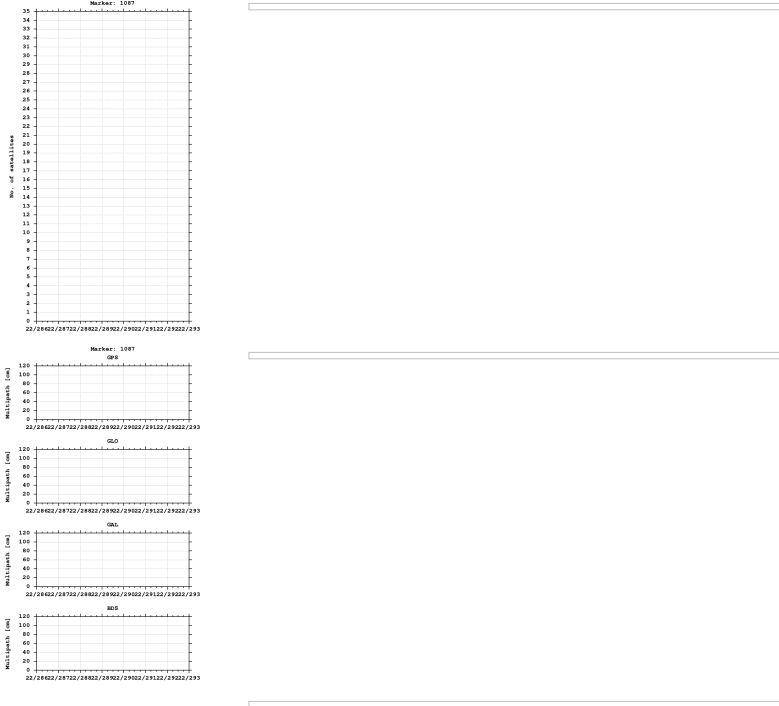

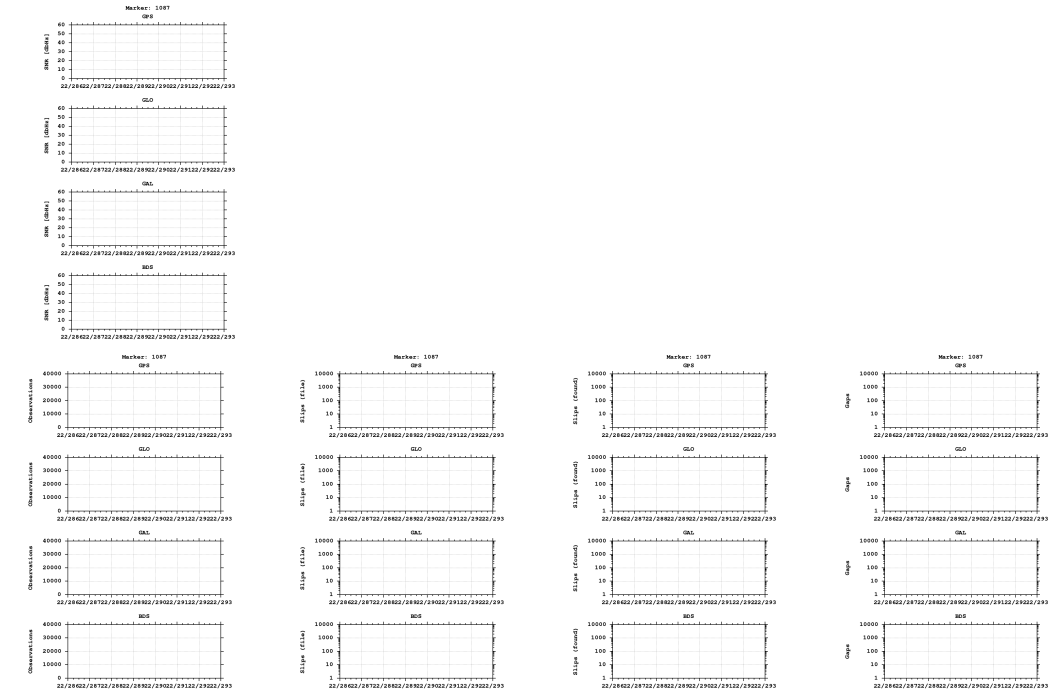

Equipment

2022-10-18 00:00:00 TRIMBLE NETR9 5.52 513 TRM57971.00 NONE 513

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)