


GNSS observation file monitoring for 0514


Last RINEX file: 05142911.22O
RINEX version: 3.02
Marker: 1089
Receiver: 514 TRIMBLE NETR9 5.52
Antenna: 514 TRM57971.00 NONE


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

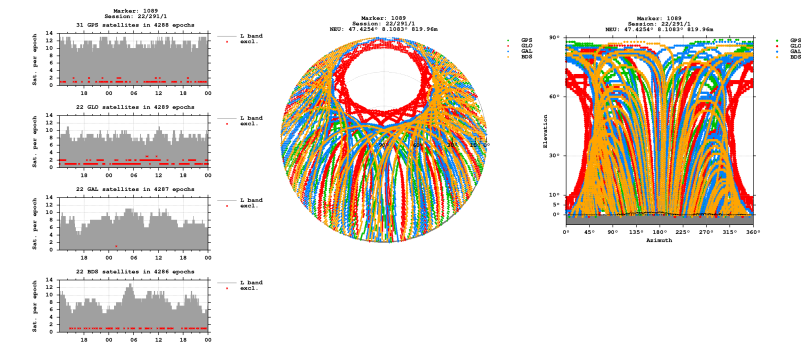


Bands

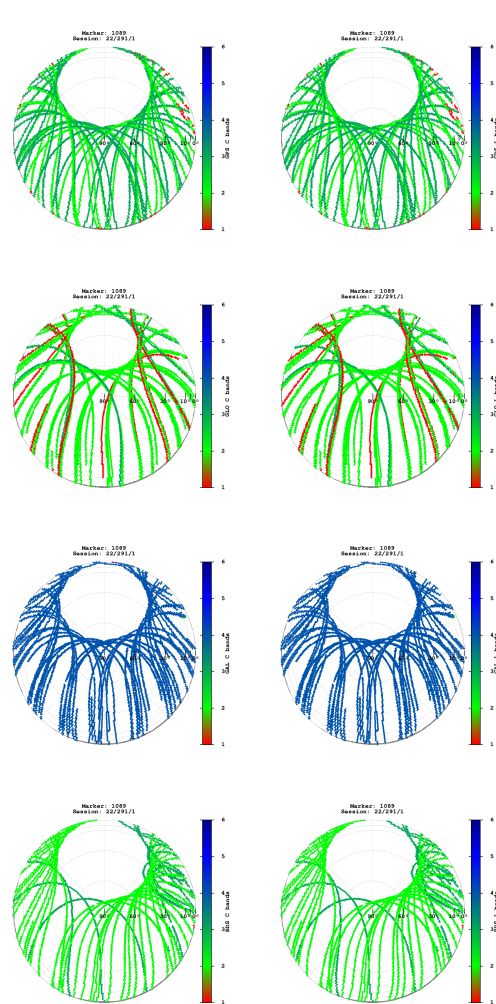

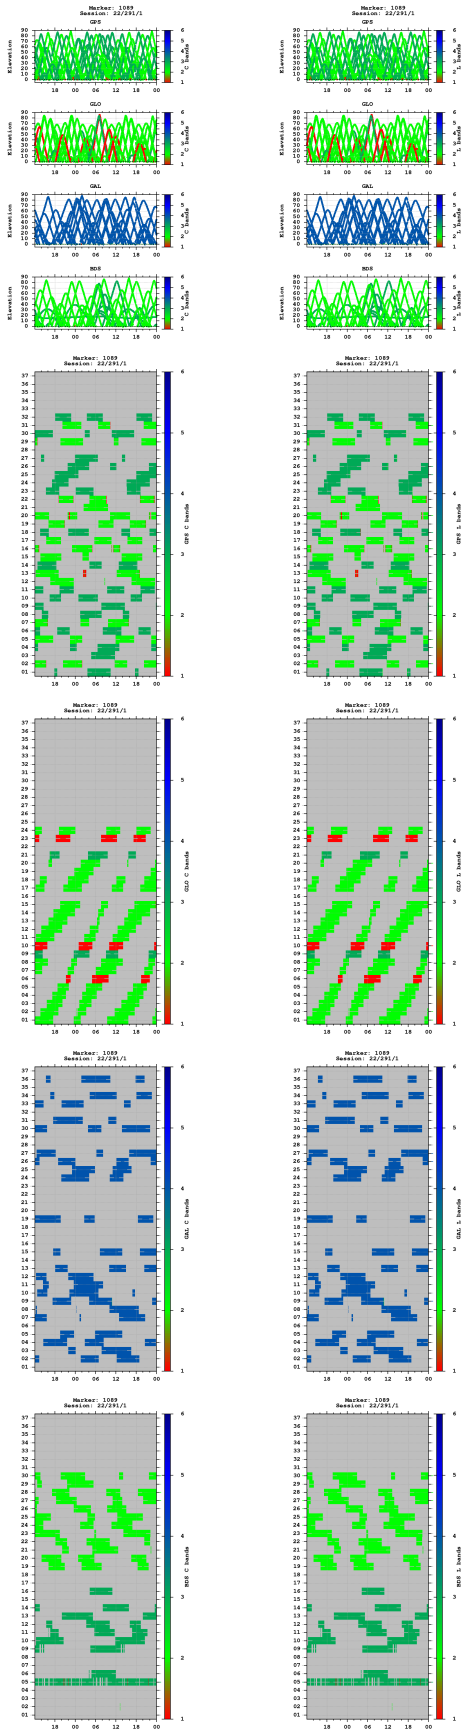



Multipath

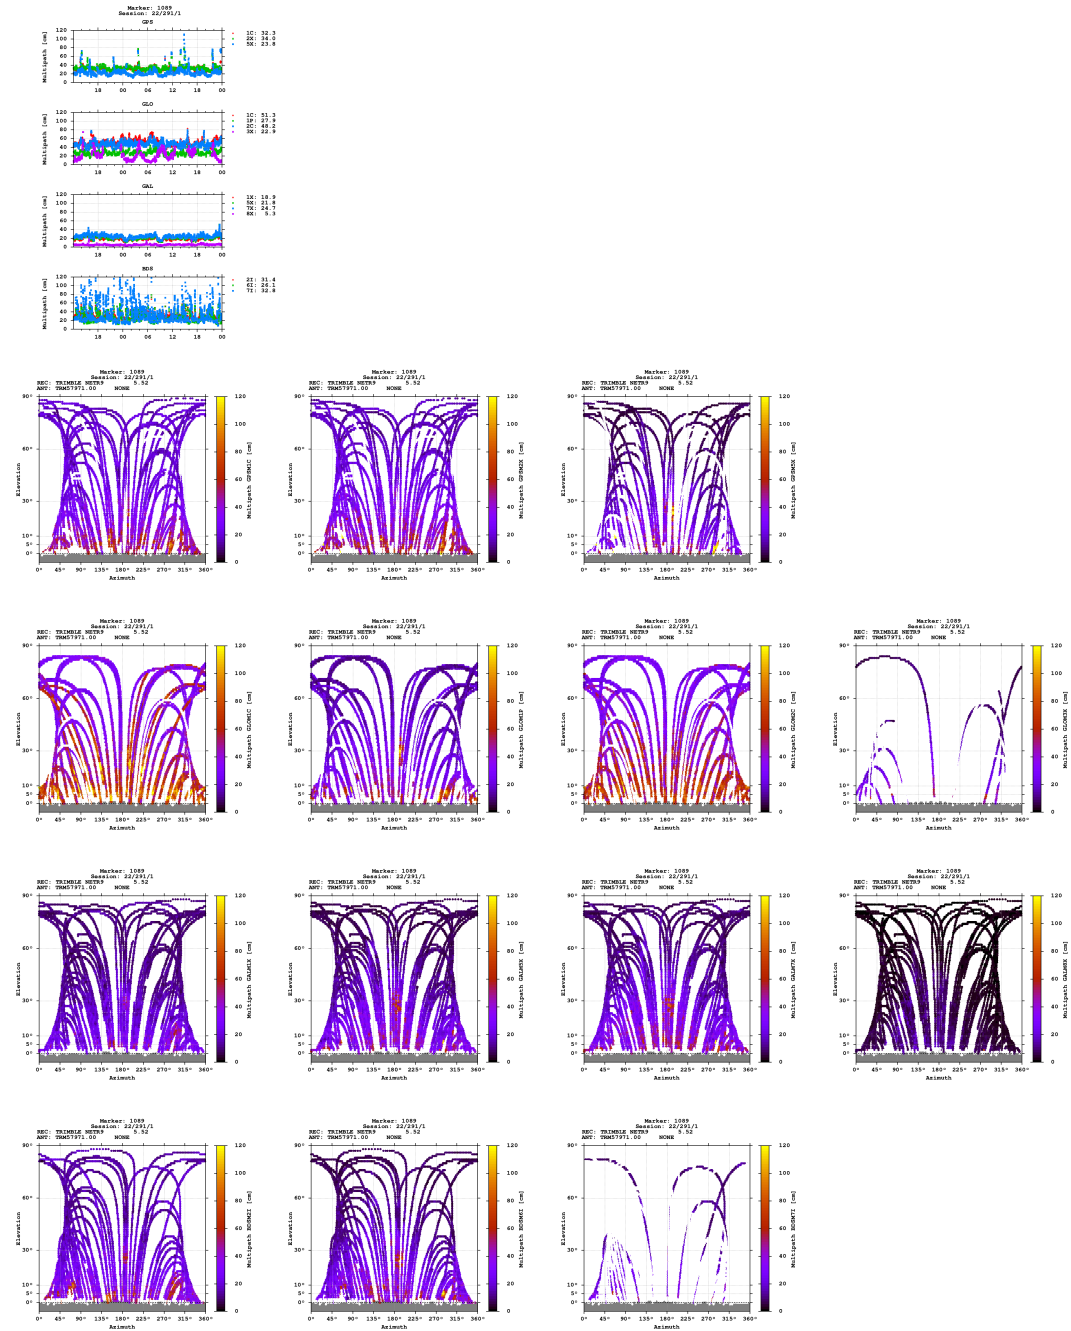

- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.


Signal-to-noise ratio

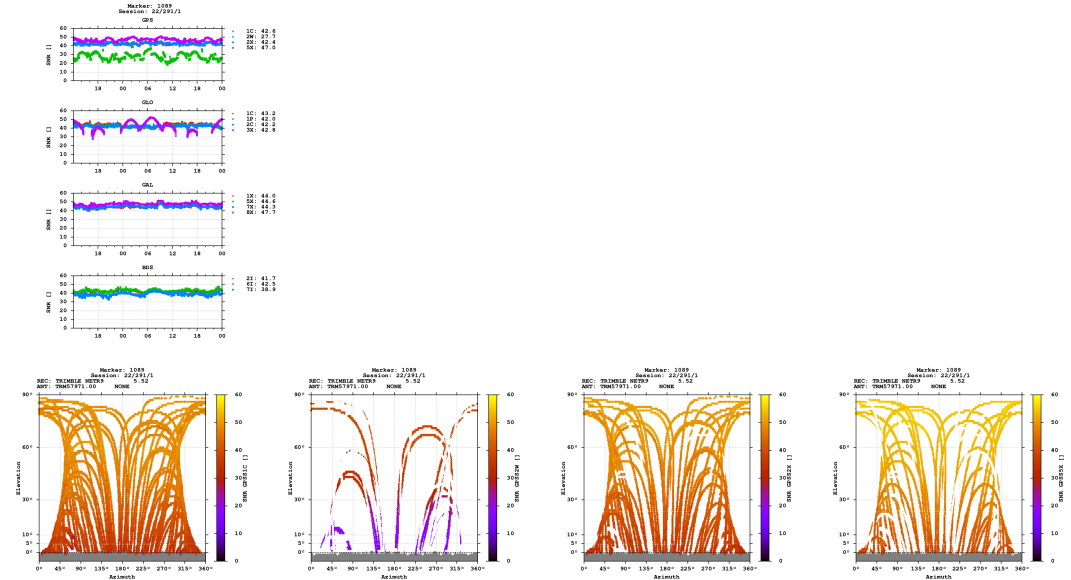

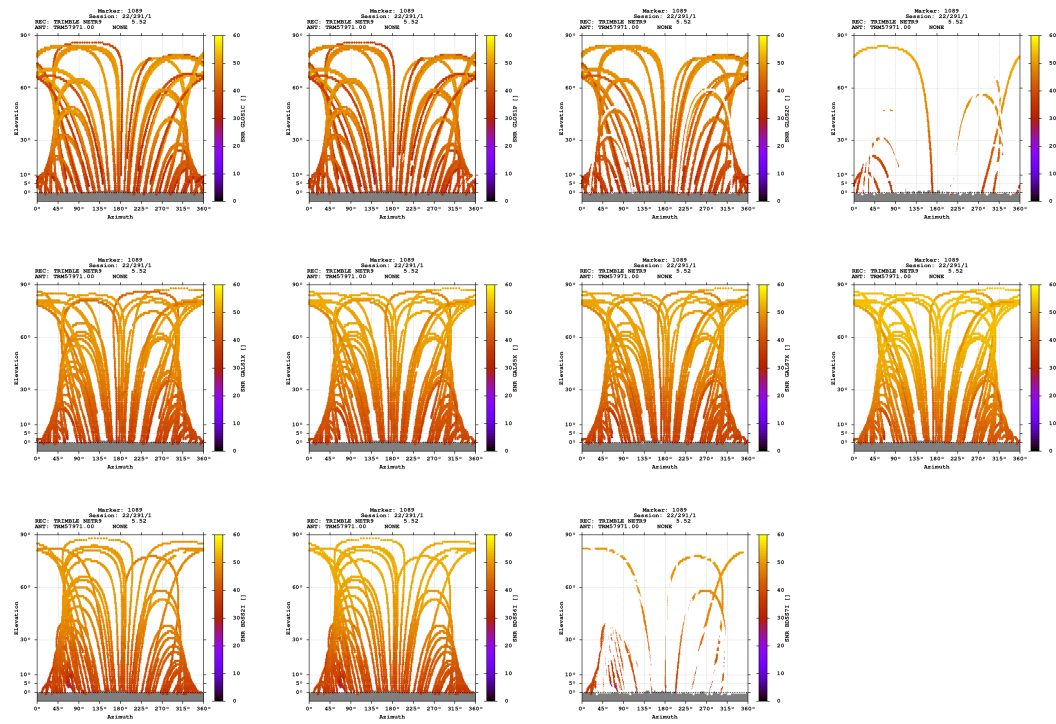

Estimates

2022-10-18 12:07:00	GPS	4280314.2587	609813.3013	4674492.9705	47.425383334	8.108322867	819.9580
2022-10-18 12:07:00	GLO	4280314.7286	609813.0425	4674493.1736	47.425381731	8.108318592	820.3976
2022-10-18 12:07:00	GAL	4280313.8456	609813.3061	4674492.8696	47.425385424	8.108323701	819.6074
2022-10-18 12:07:00	BDS	4280312.0241	609813.4148	4674493.6640	47.425402098	8.108328532	818.9828

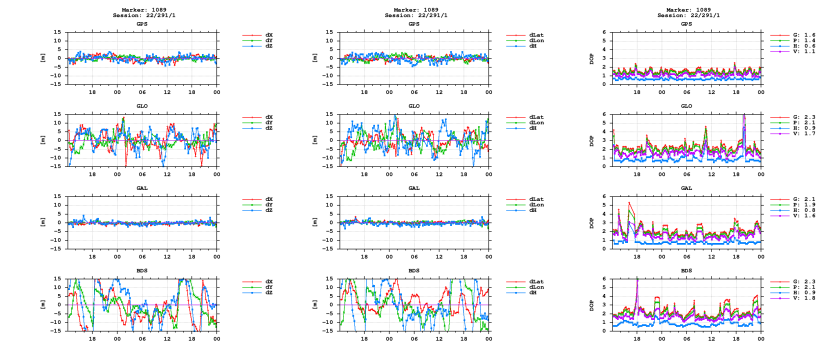

BNC

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)