


GNSS observation file monitoring for 0514


Last RINEX file: 05142921.220
RINEX version: 3.02
Marker: 1089
Receiver: 514 TRIMBLE NETR9 5.52
Antenna: 514 TRM57971.00 NONE

Epochs

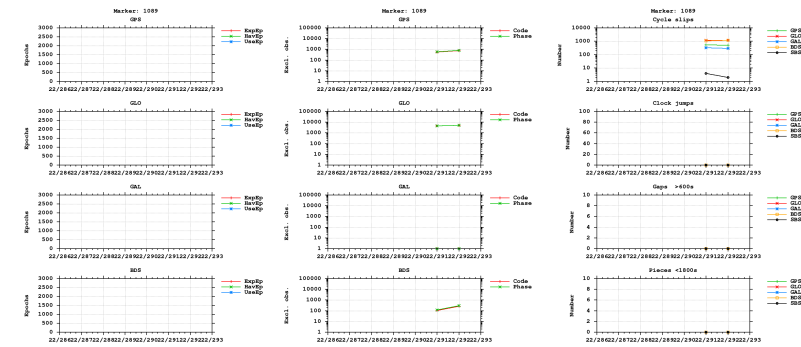



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

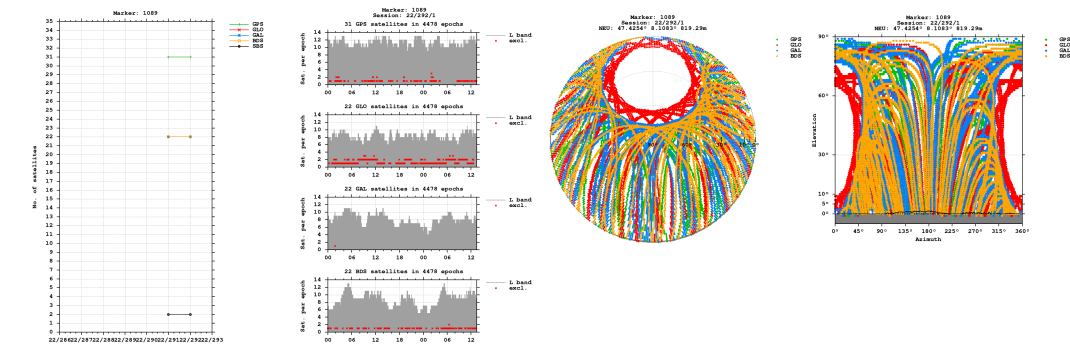


Bands

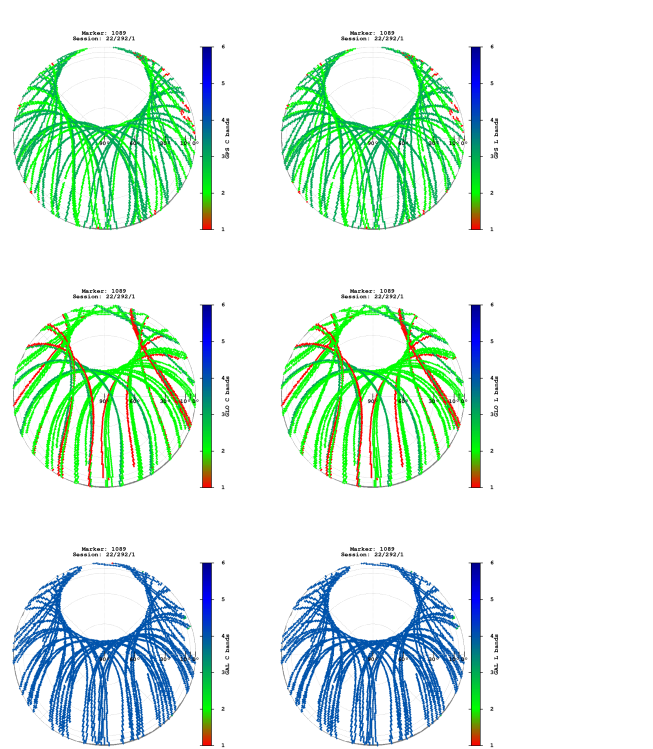


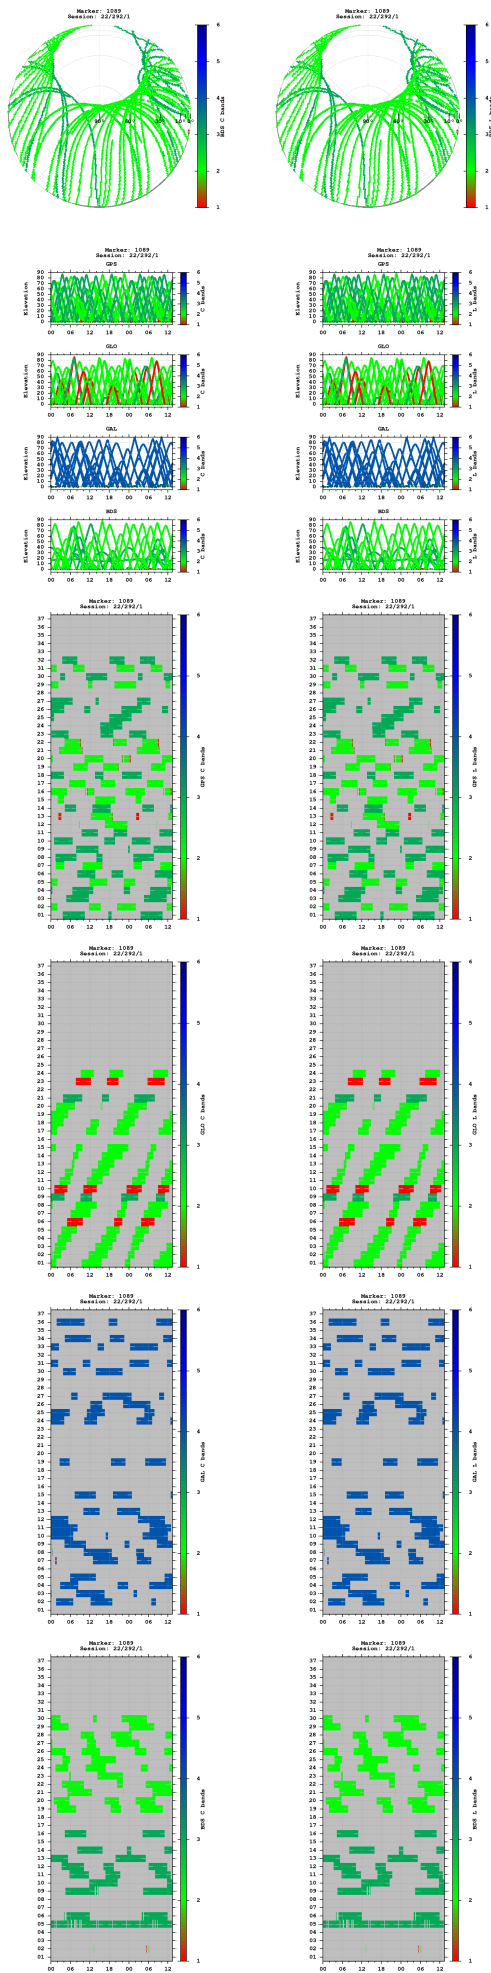


Observations

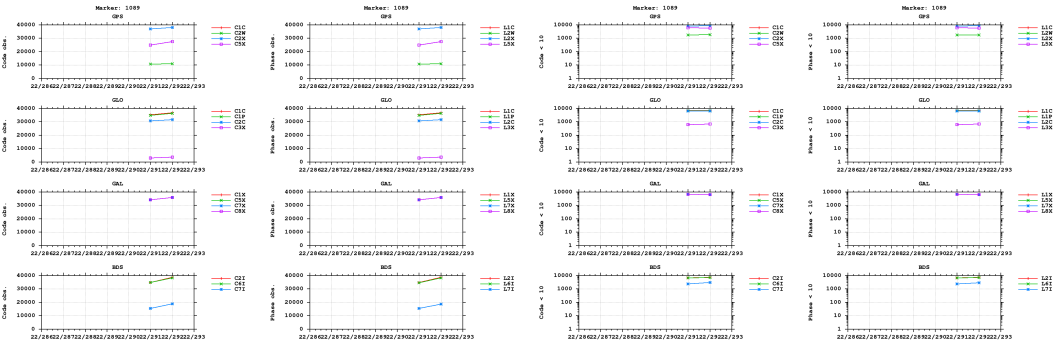



Multipath

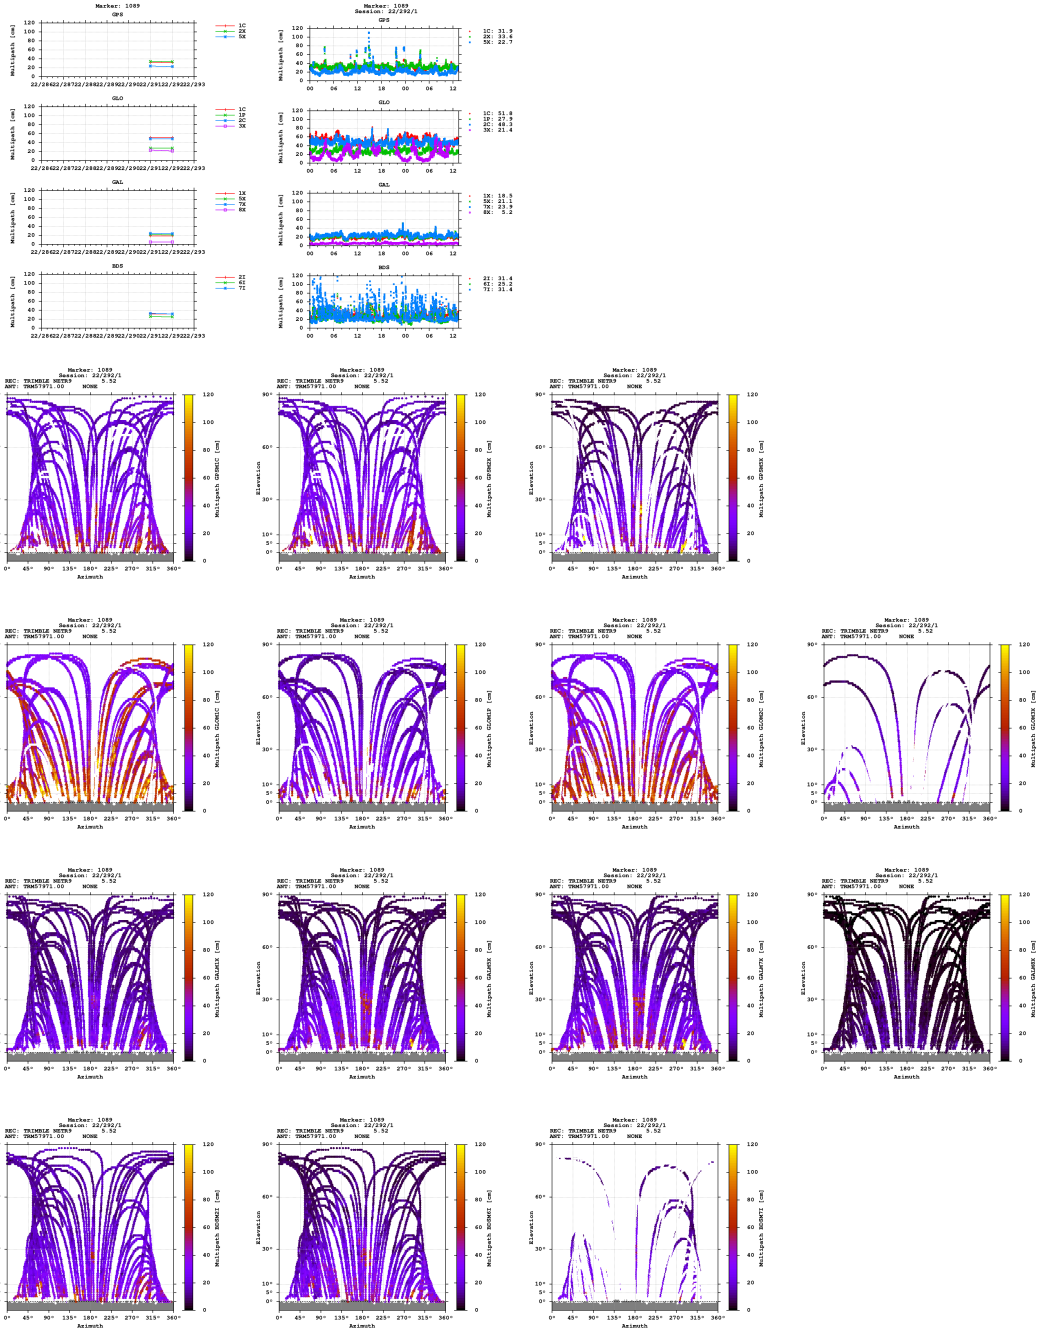


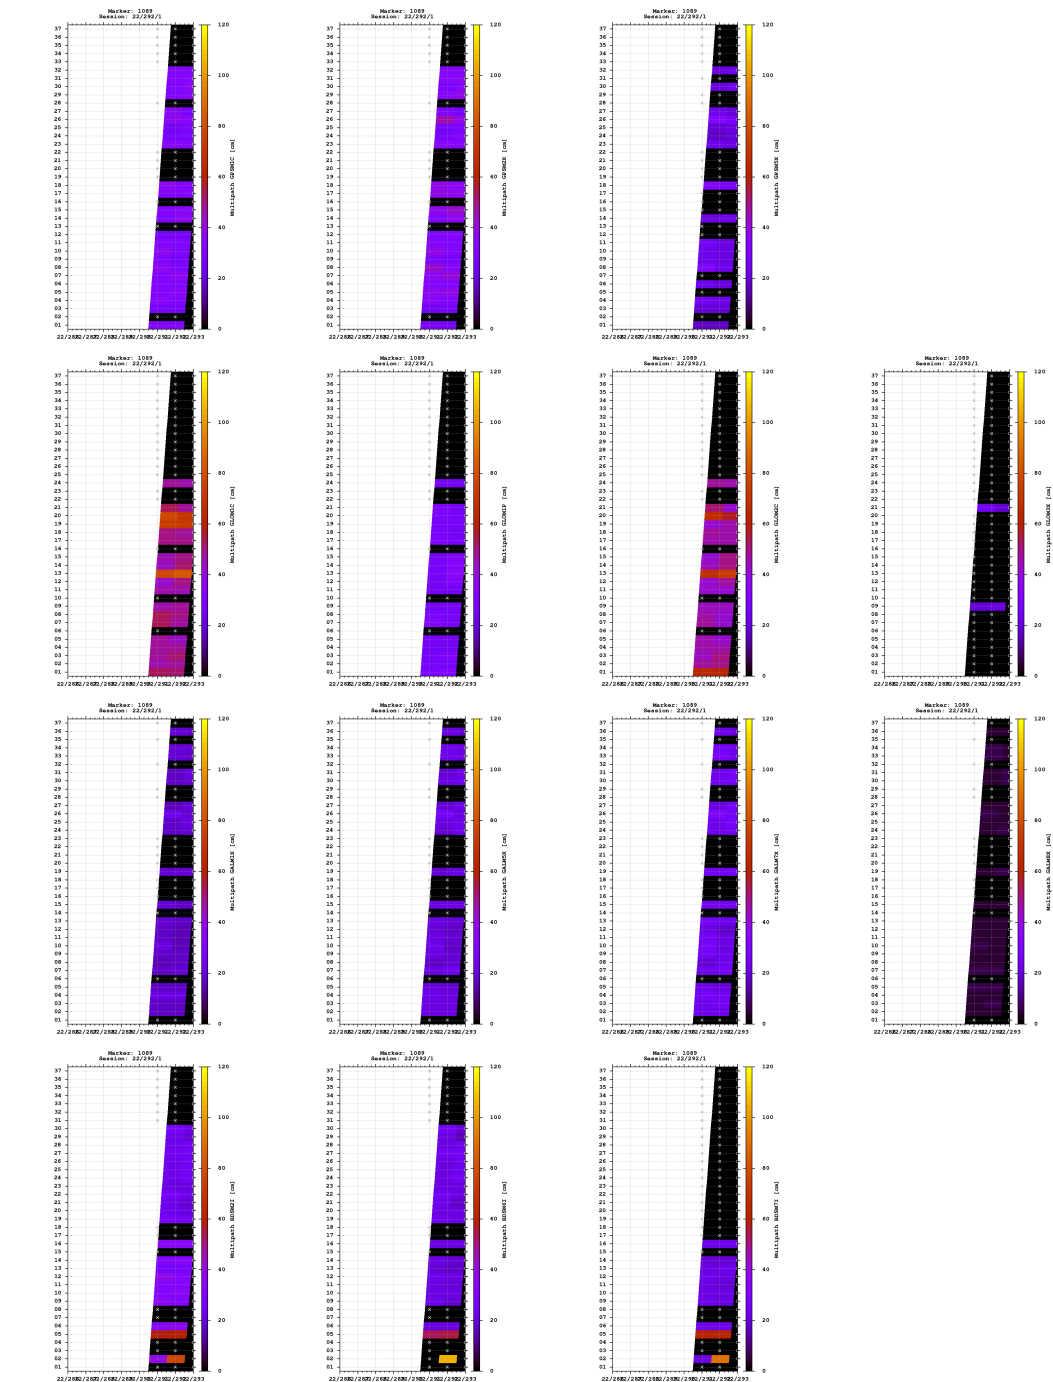

Signal-to-noise ratio

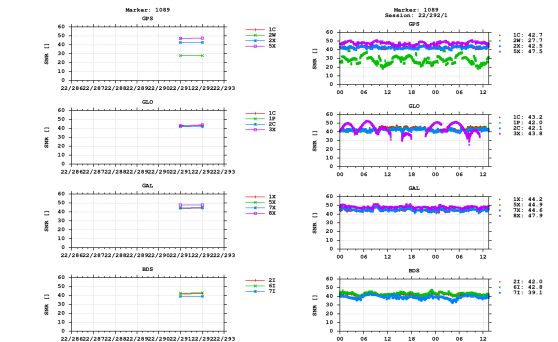


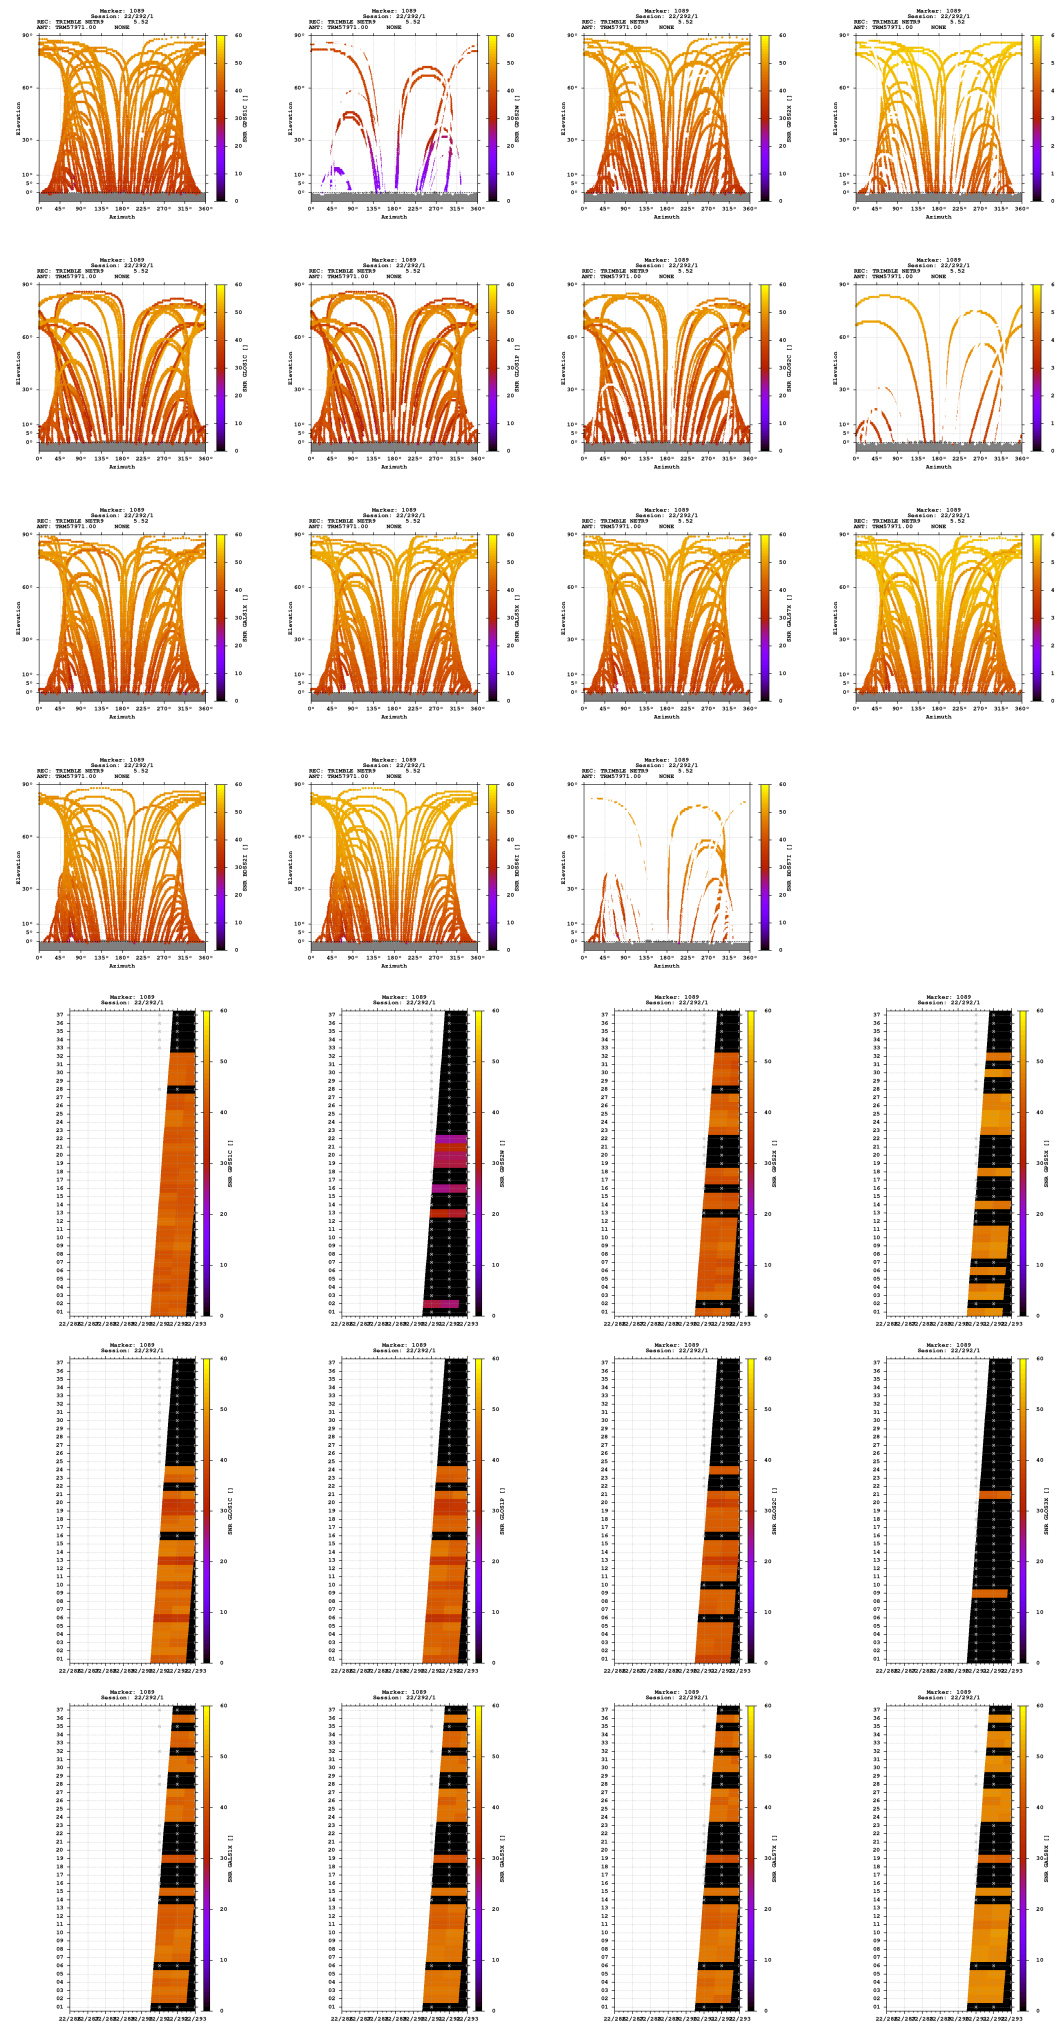

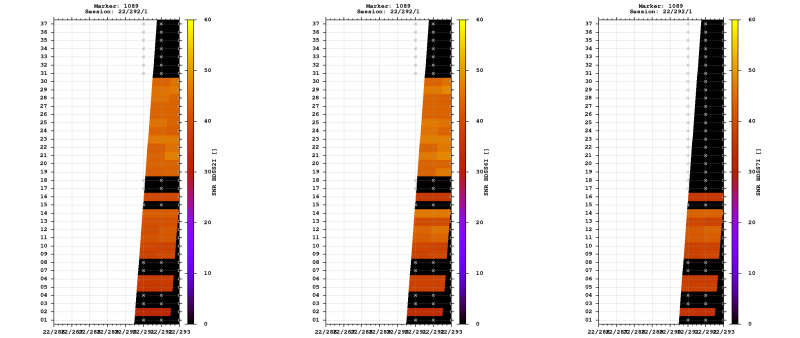


Estimates

2022-10-18 12:07:00	GPS	4280313.6797	609813.3225	4674492.5893	47.425384791	8.108324227	819.2916
2022-10-18 12:07:00	GLO	4280313.8361	609813.4973	4674492.8170	47.425384988	8.108326228	819.5806
2022-10-18 12:07:00	GAL	4280313.8746	609813.3121	4674492.6233	47.425383730	8.108323725	819.4461
2022-10-18 12:07:00	BDS	4280311.3224	609812.5415	4674492.7917	47.425402208	8.108318387	817.7871

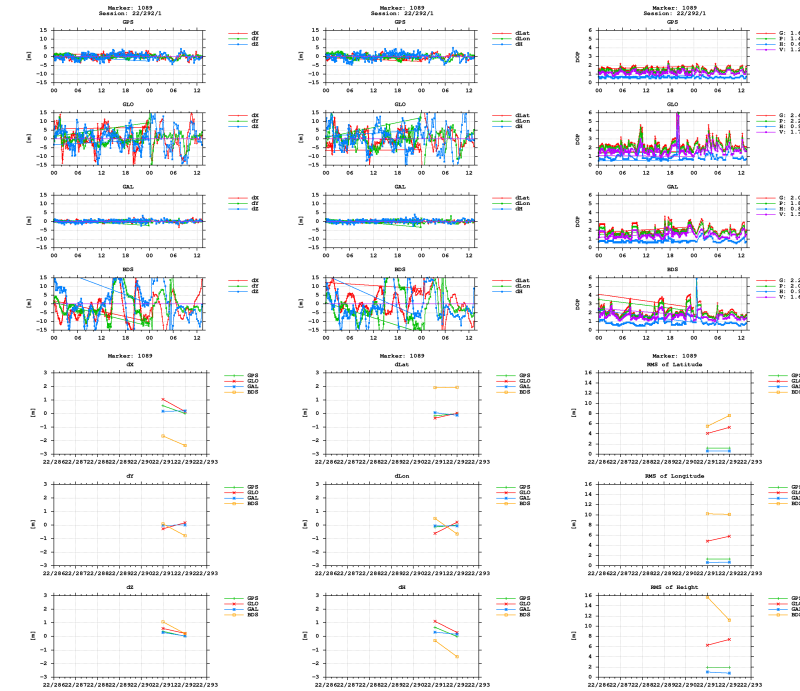

BNC



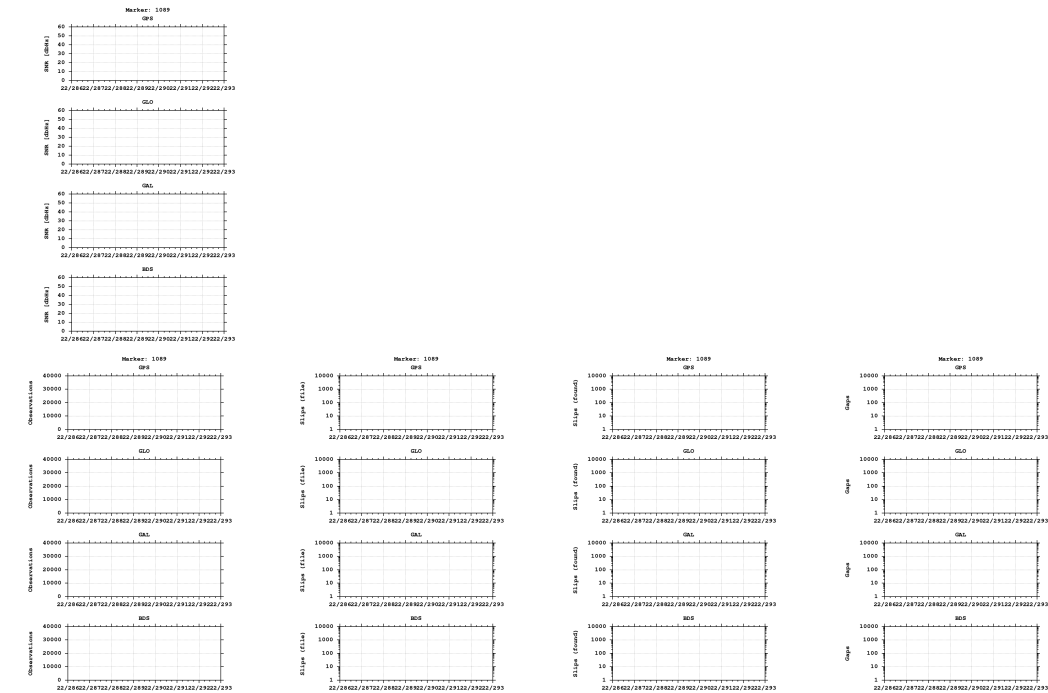

Equipment

2022-10-18 00:00:00 TRIMBLE NETR9 5.52 514 TRM57971.00 NONE 514

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)