


GNSS observation file monitoring for 0515


Last RINEX file: 05152901.22O
RINEX version: 3.02
Marker: 1069
Receiver: 515 TRIMBLE NETR9 5.52
Antenna: 515 TRM57971.00 NONE


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

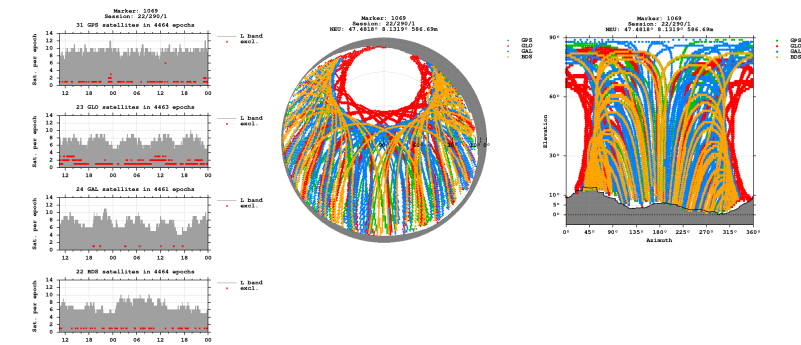


Bands

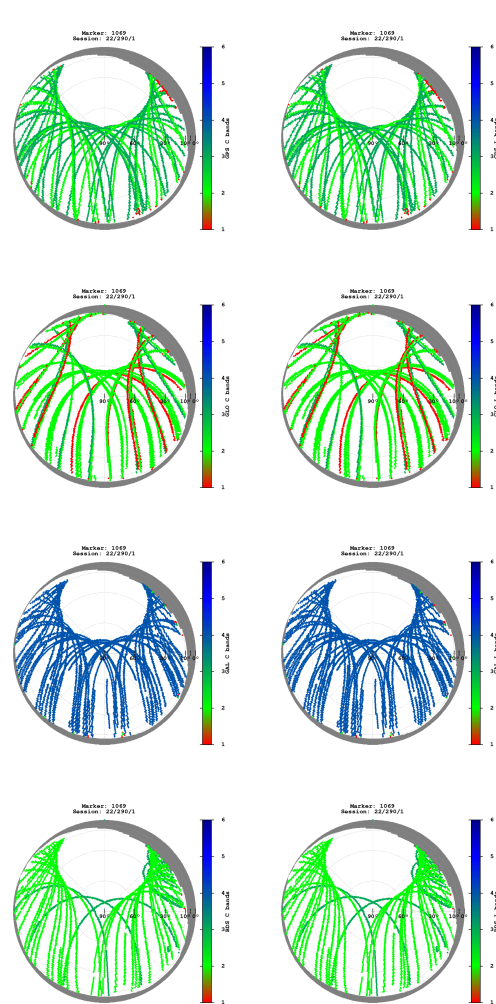

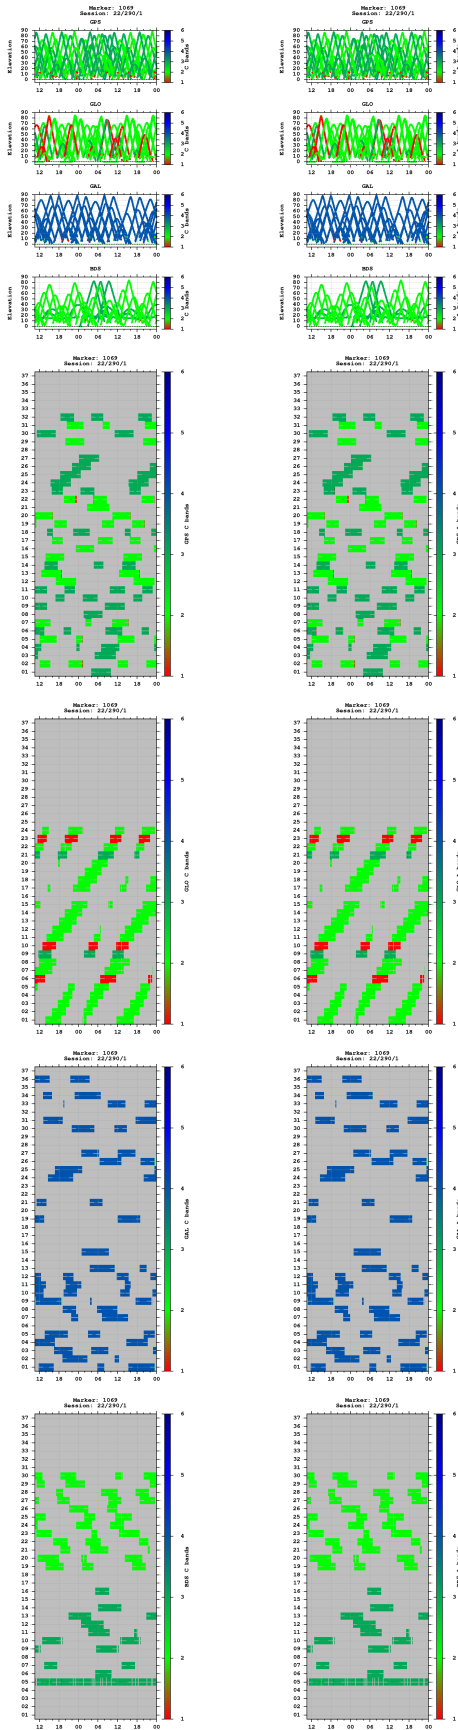


Multipath

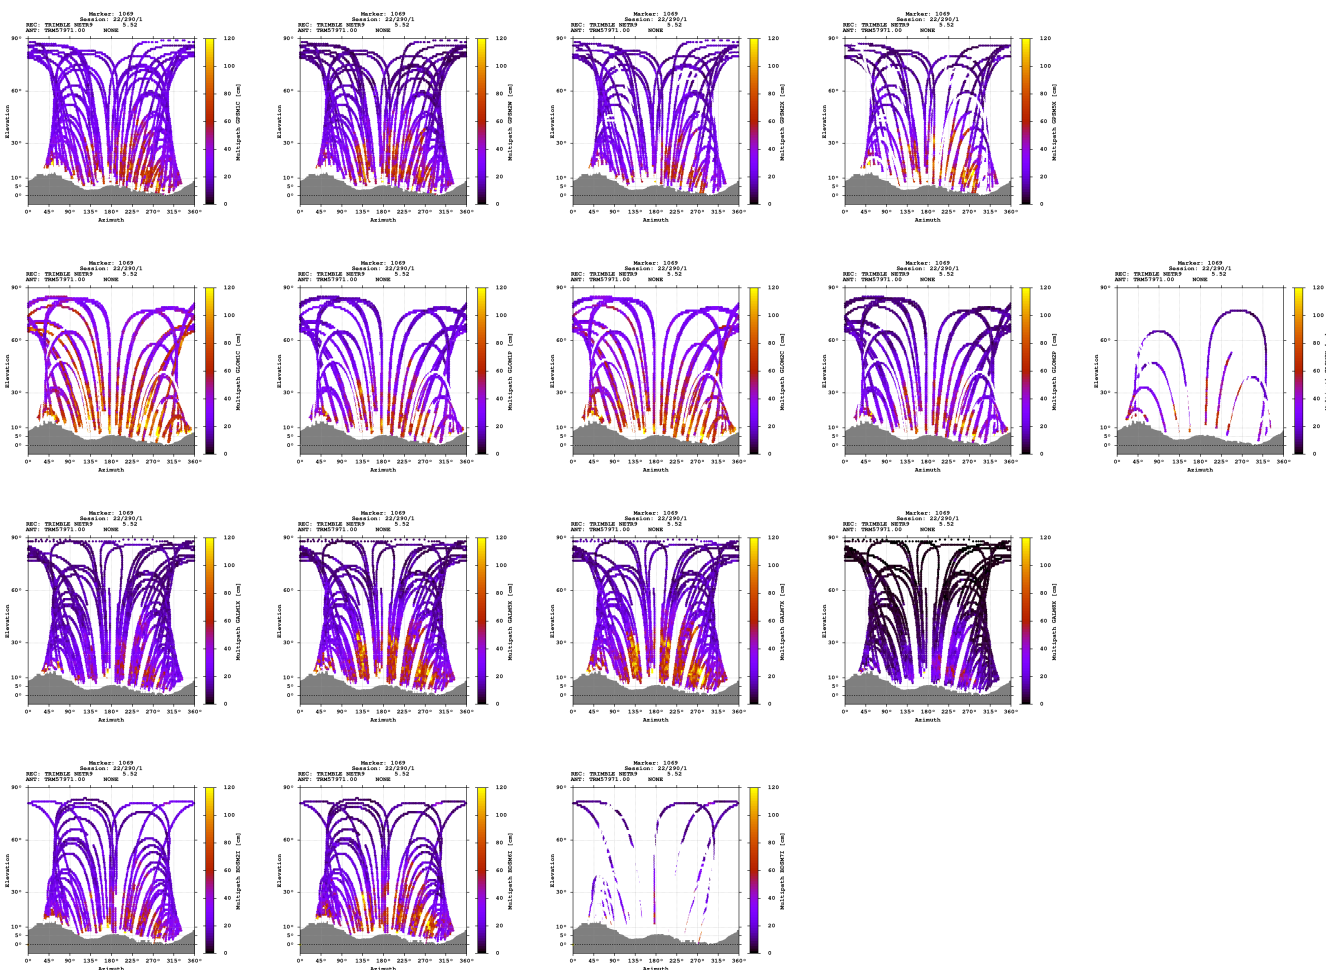


Signal-to-noise ratio



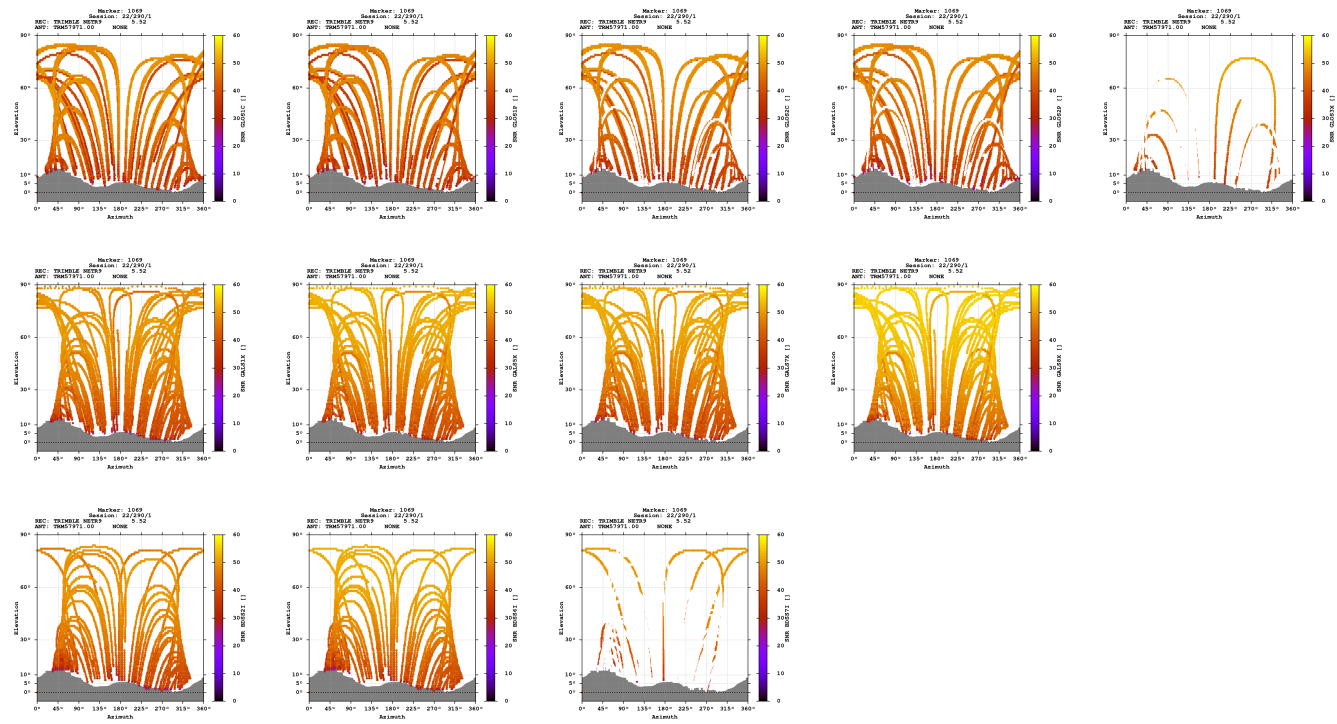

Estimates

2022-10-17 10:37:00	GPS	4275334.1730	610899.2994	4678560.5651	47.481769043	8.131905236	586.6908
2022-10-17 10:37:00	GLO	4275334.9291	610898.6795	4678560.6894	47.481765418	8.131895675	587.2290
2022-10-17 10:37:00	GAL	4275334.1969	610899.3289	4678560.6157	47.481769166	8.131905579	586.7470
2022-10-17 10:37:00	BDS	4275334.4581	610899.8471	4678563.6314	47.481785296	8.131911893	589.1940

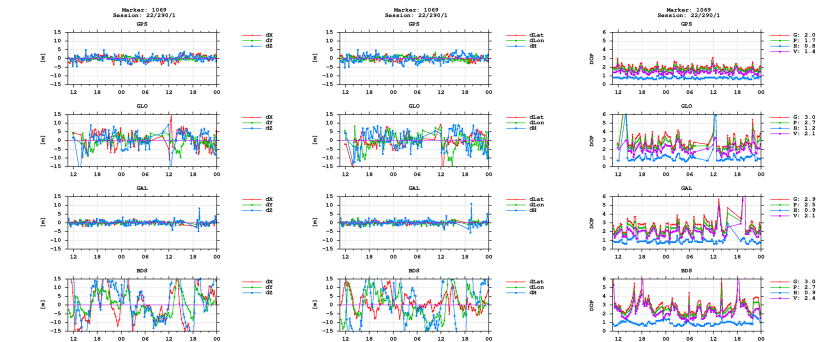

BNC

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)