


GNSS observation file monitoring for 0515


Last RINEX file: 05152921.220
RINEX version: 3.02
Marker: 1109
Receiver: 515 TRIMBLE NETR9 5.52
Antenna: 515 TRM57971.00 NONE

Epochs

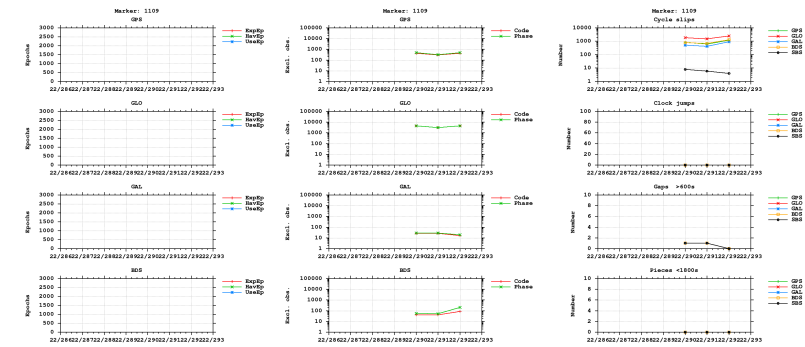



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

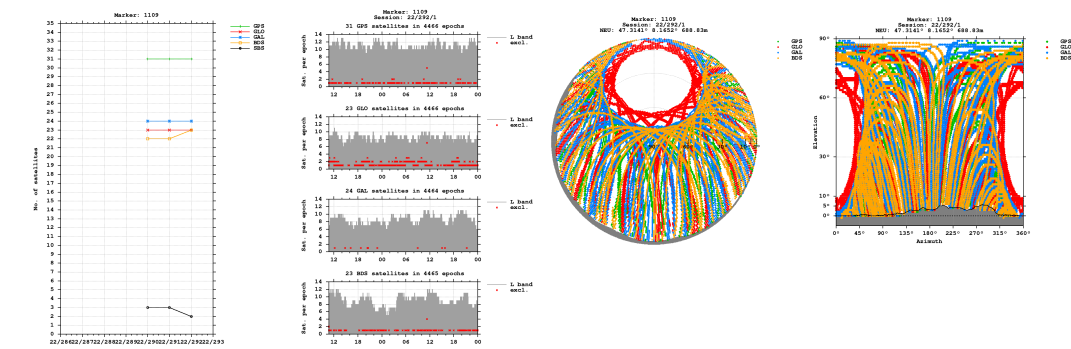


Bands

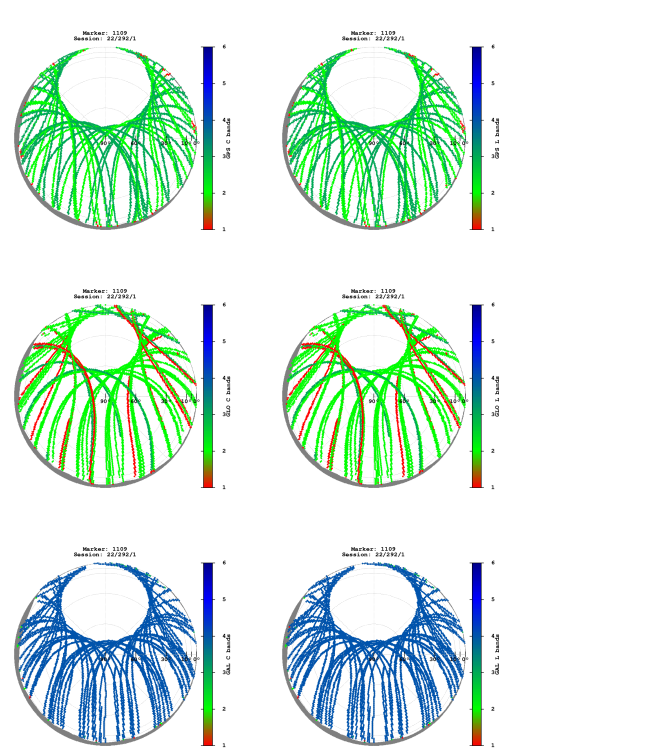


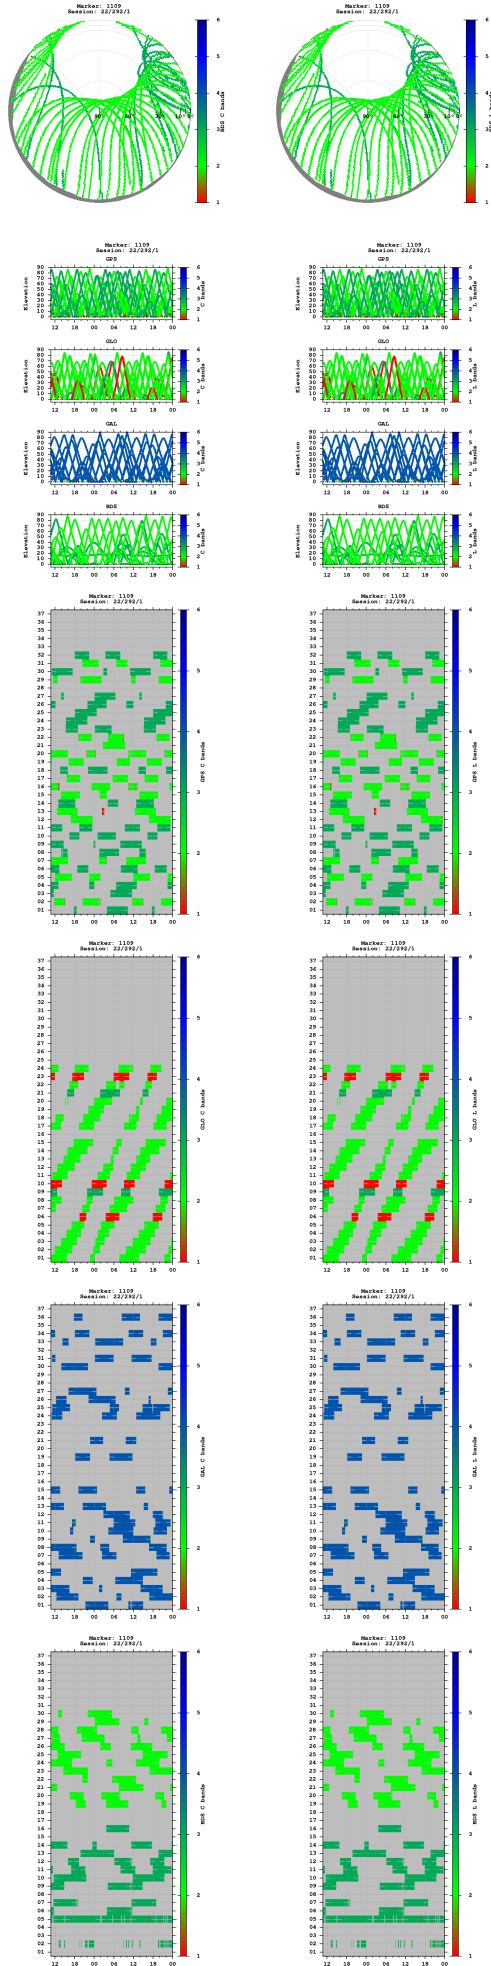


Observations

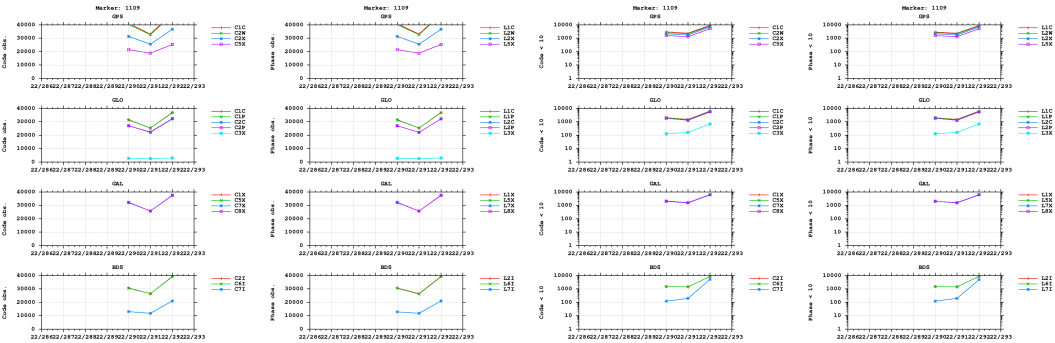


Multipath

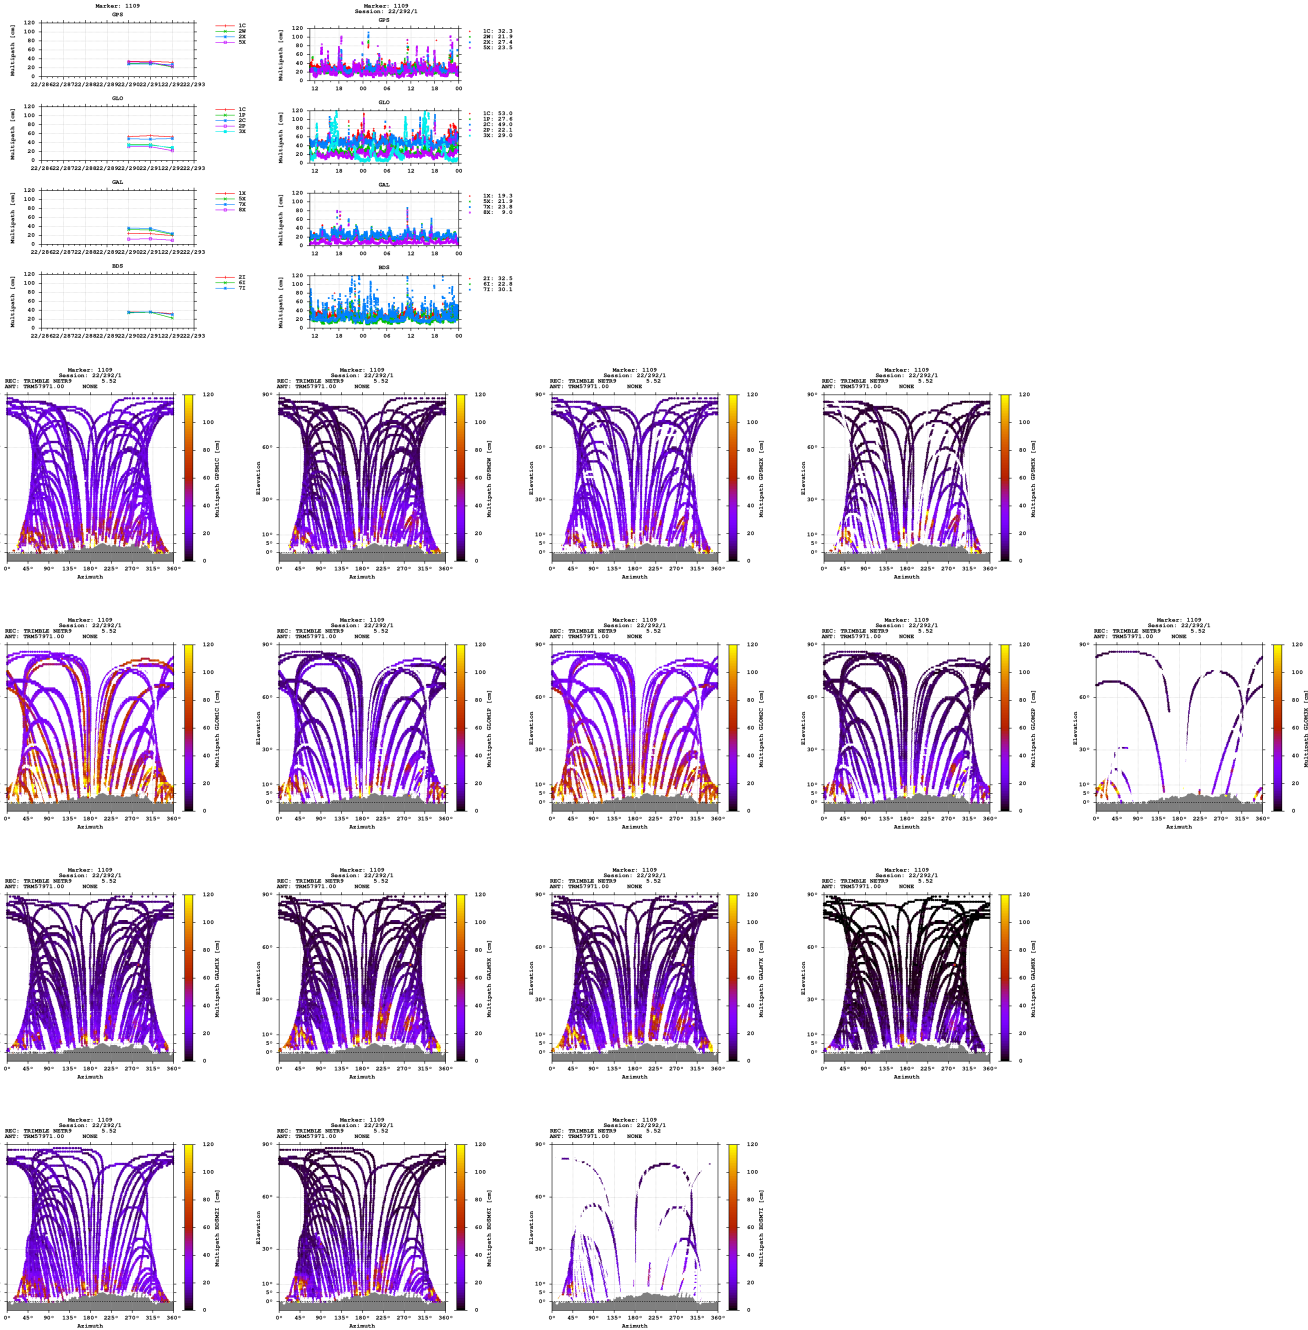


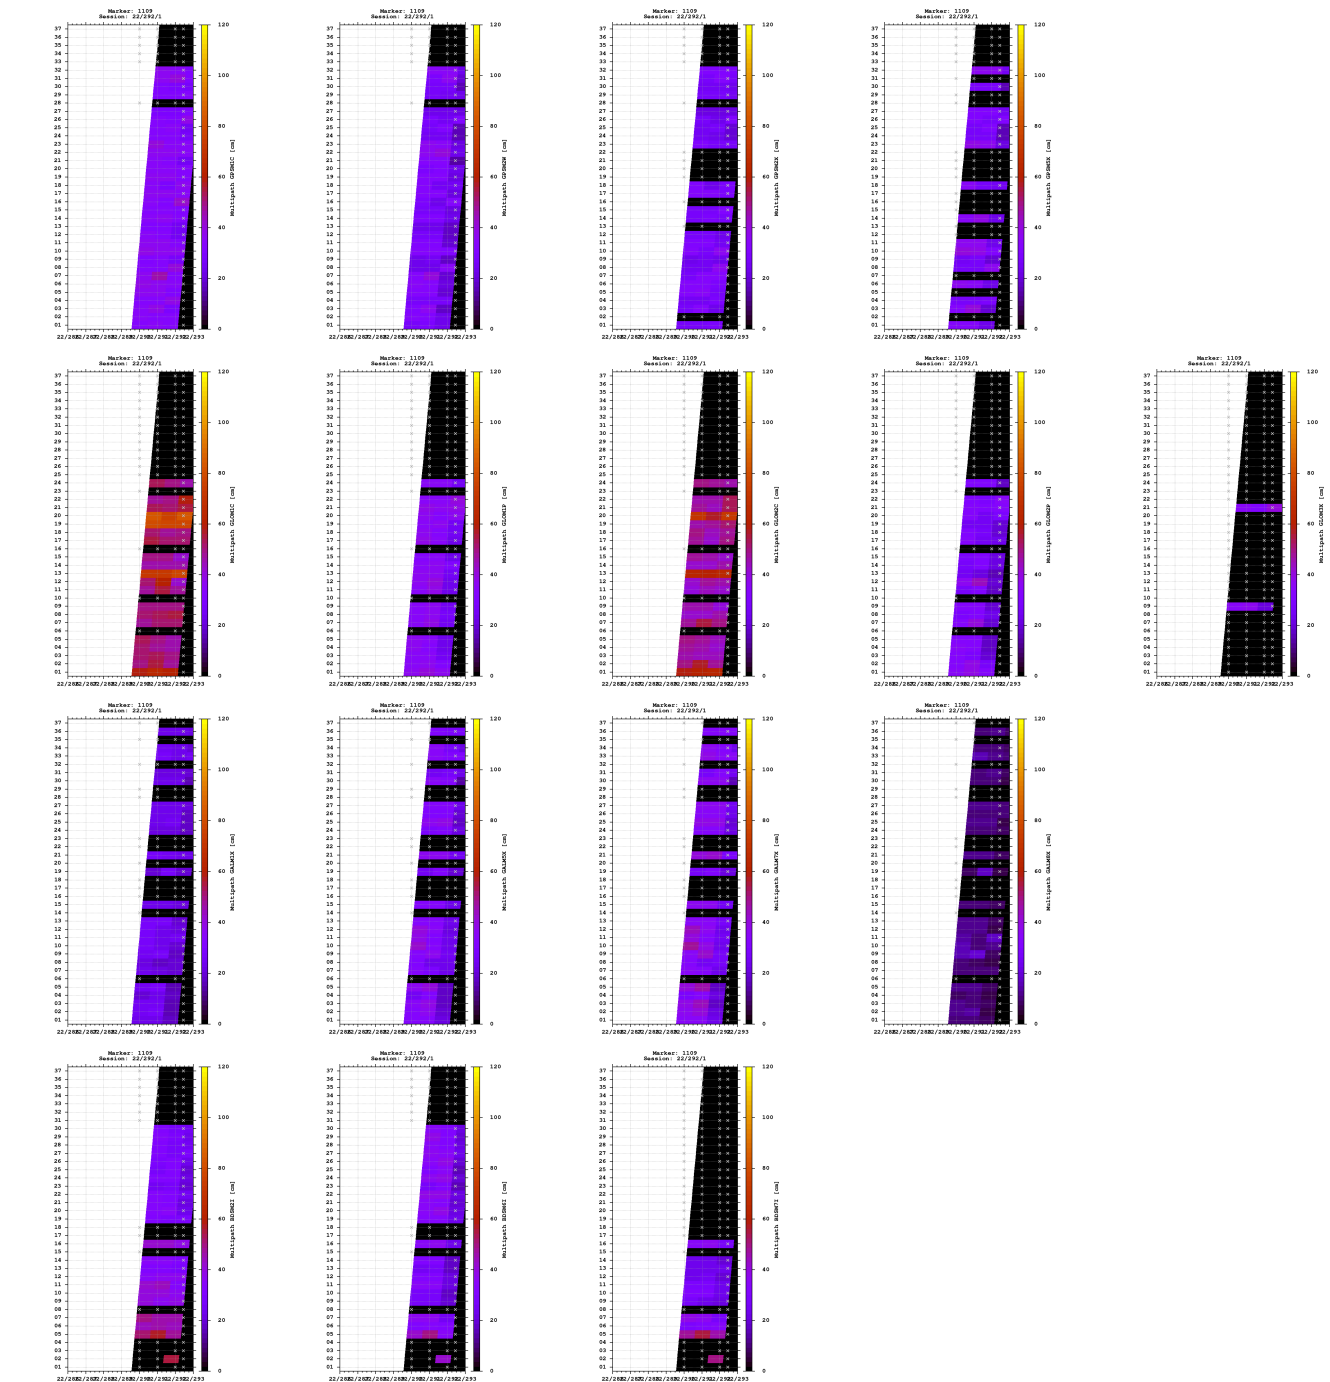


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

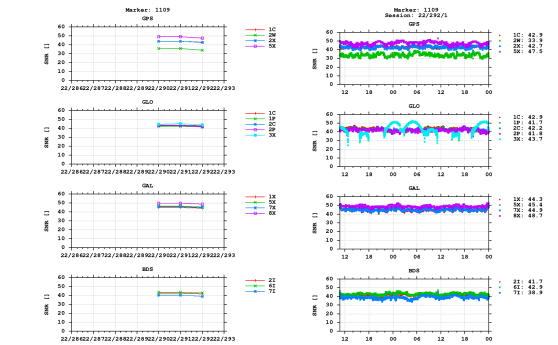


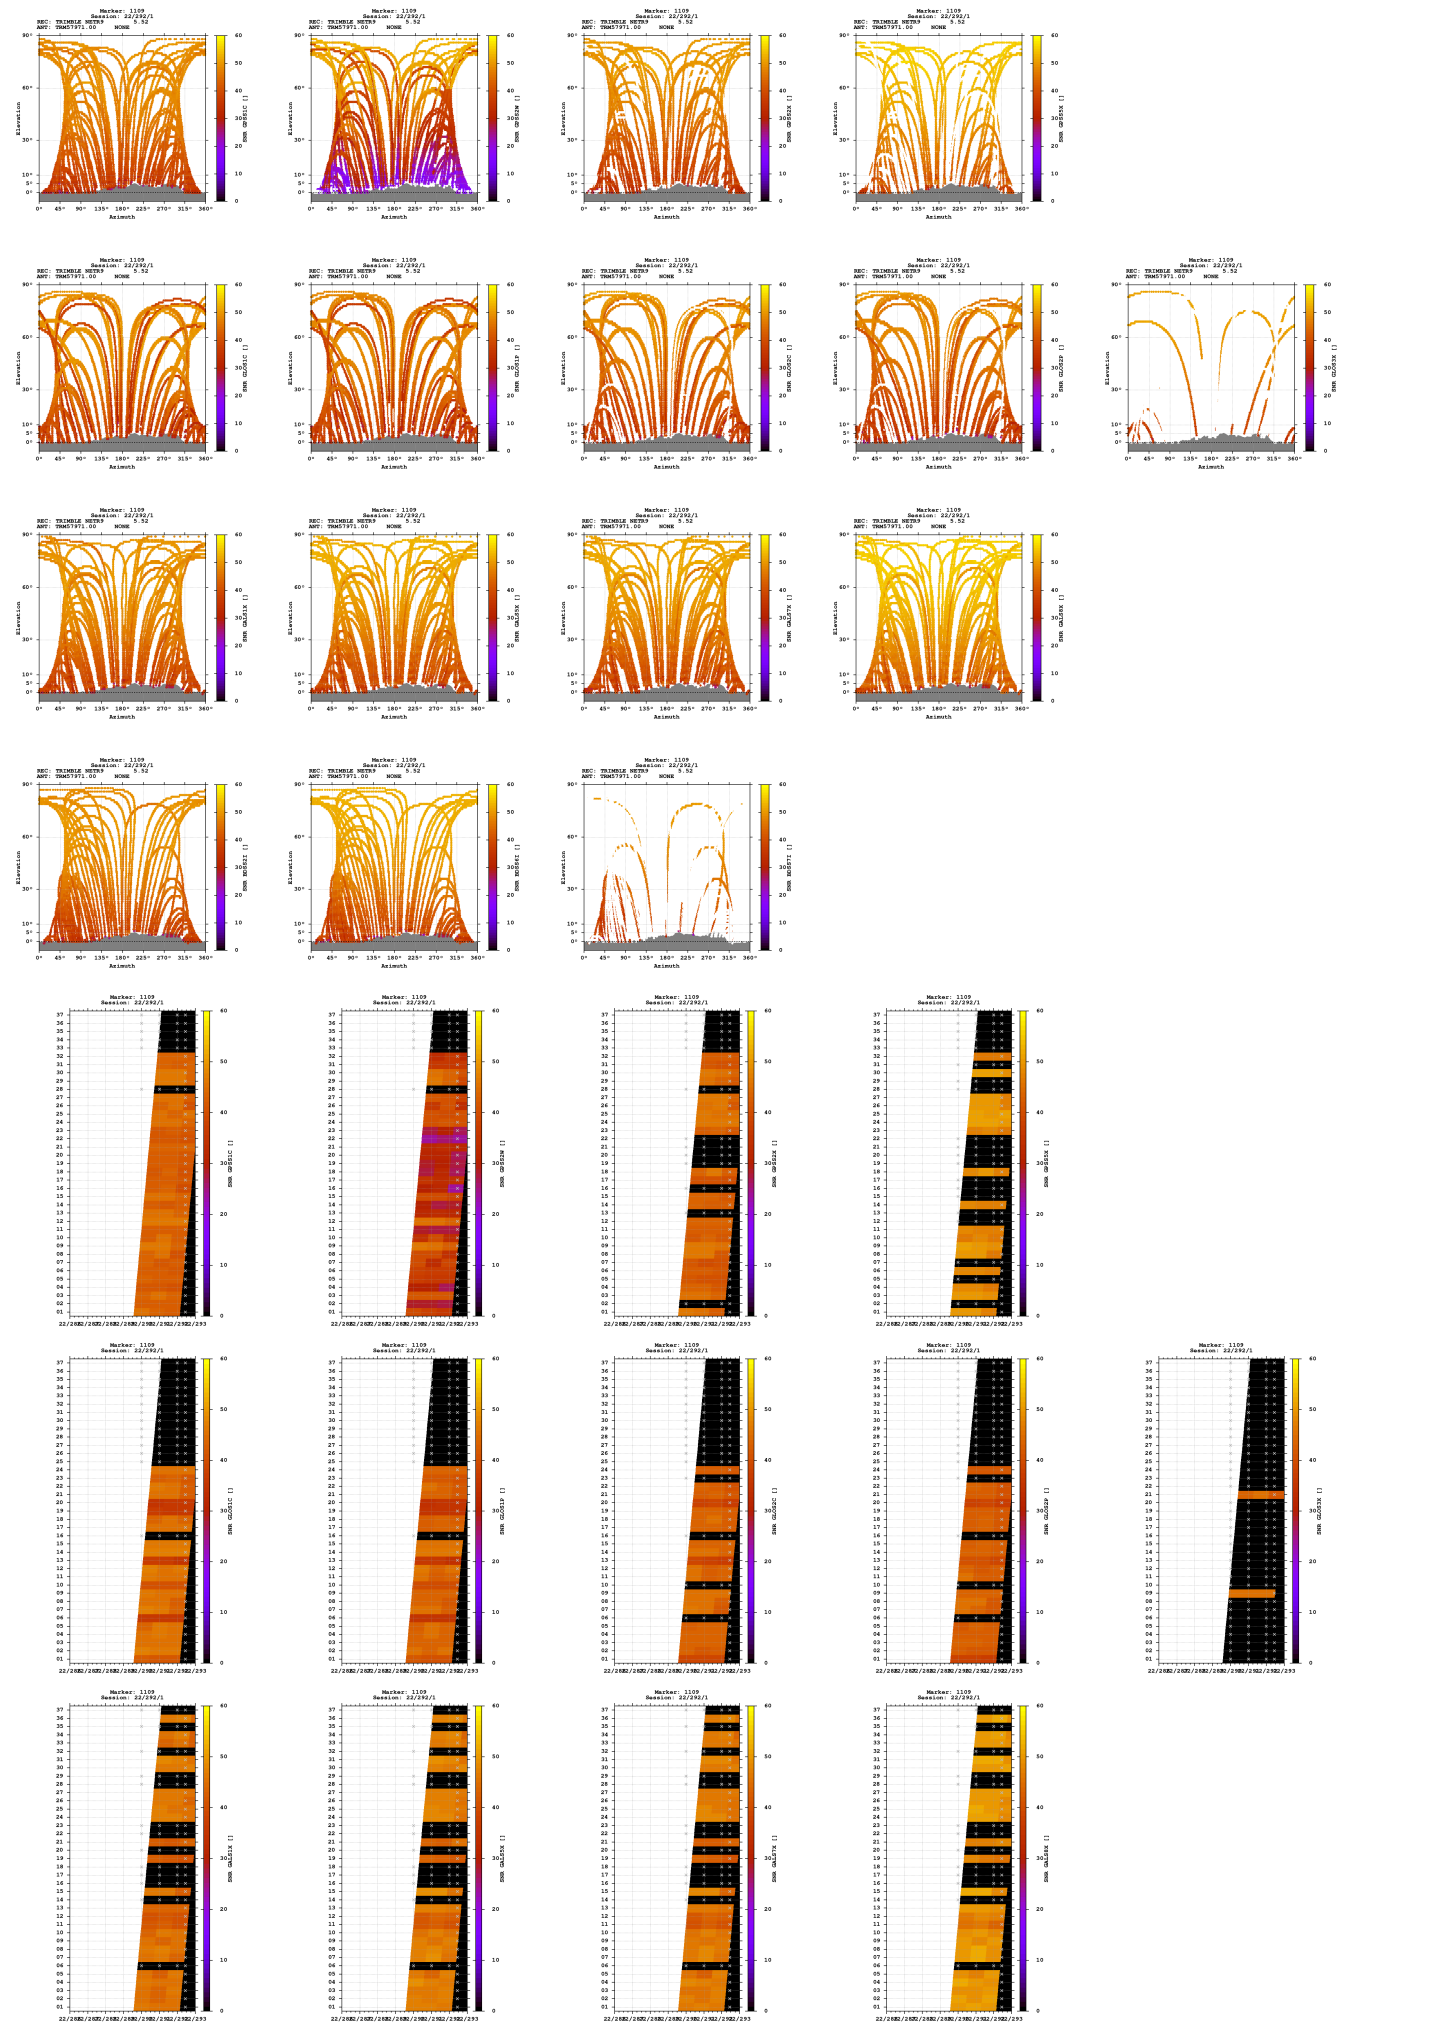

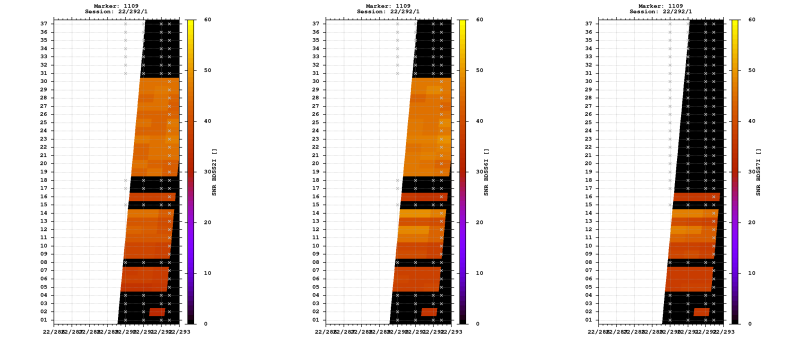


Estimates

2022-10-19 10:44:30	GPS	4288633.5650	615345.0159	4666013.0054	47.314057569	8.165228053	688.8262
2022-10-19 10:44:30	GLO	4288633.3981	615345.0941	4666012.4028	47.314054914	8.165229390	688.2788
2022-10-19 10:44:30	GAL	4288633.5260	615345.0651	4666012.9561	47.314057478	8.165228771	688.7685
2022-10-19 10:44:30	BDS	4288633.3618	615345.9434	4666014.5679	47.314067555	8.165240576	689.9278

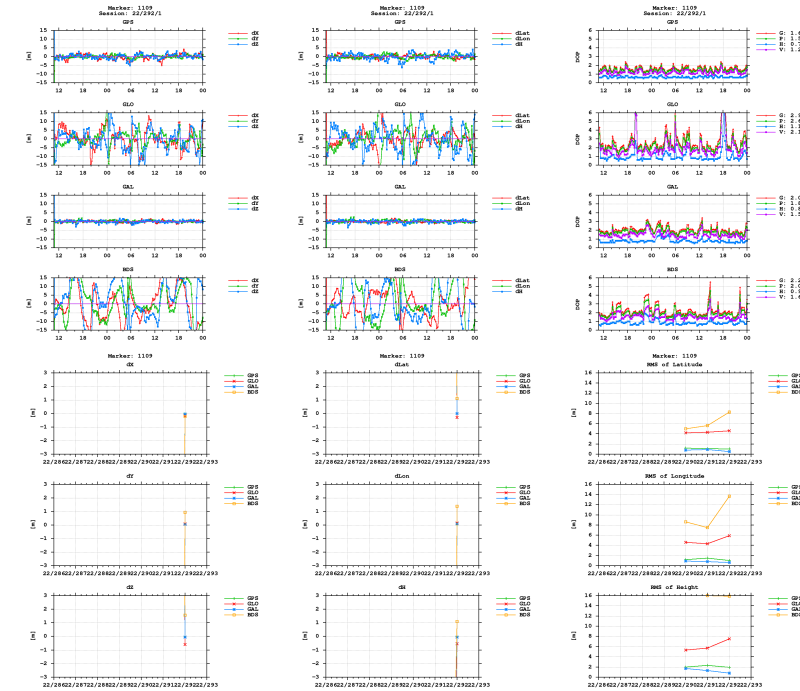

BNC



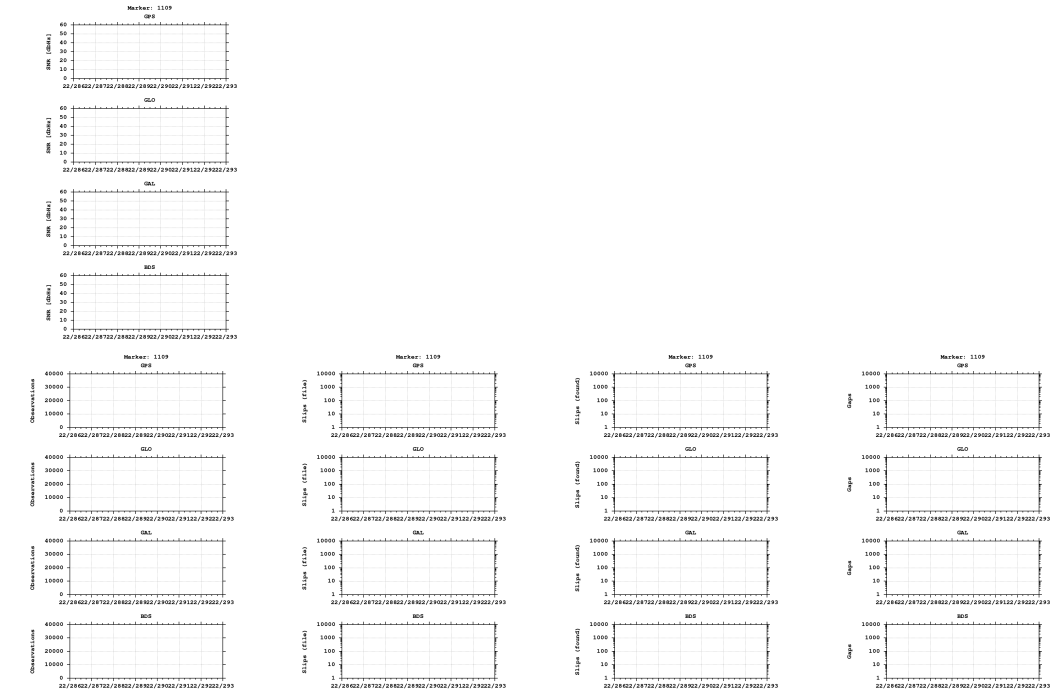

Equipment

2022-10-17 00:00:00 TRIMBLE NETR9 5.52 515 TRM57971.00 NONE 515

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)